


AERODROME GROUND
MOVEMENT CHARTGround 119.000
TWR RWY 01/19 120.800

SIMFEROPOL'

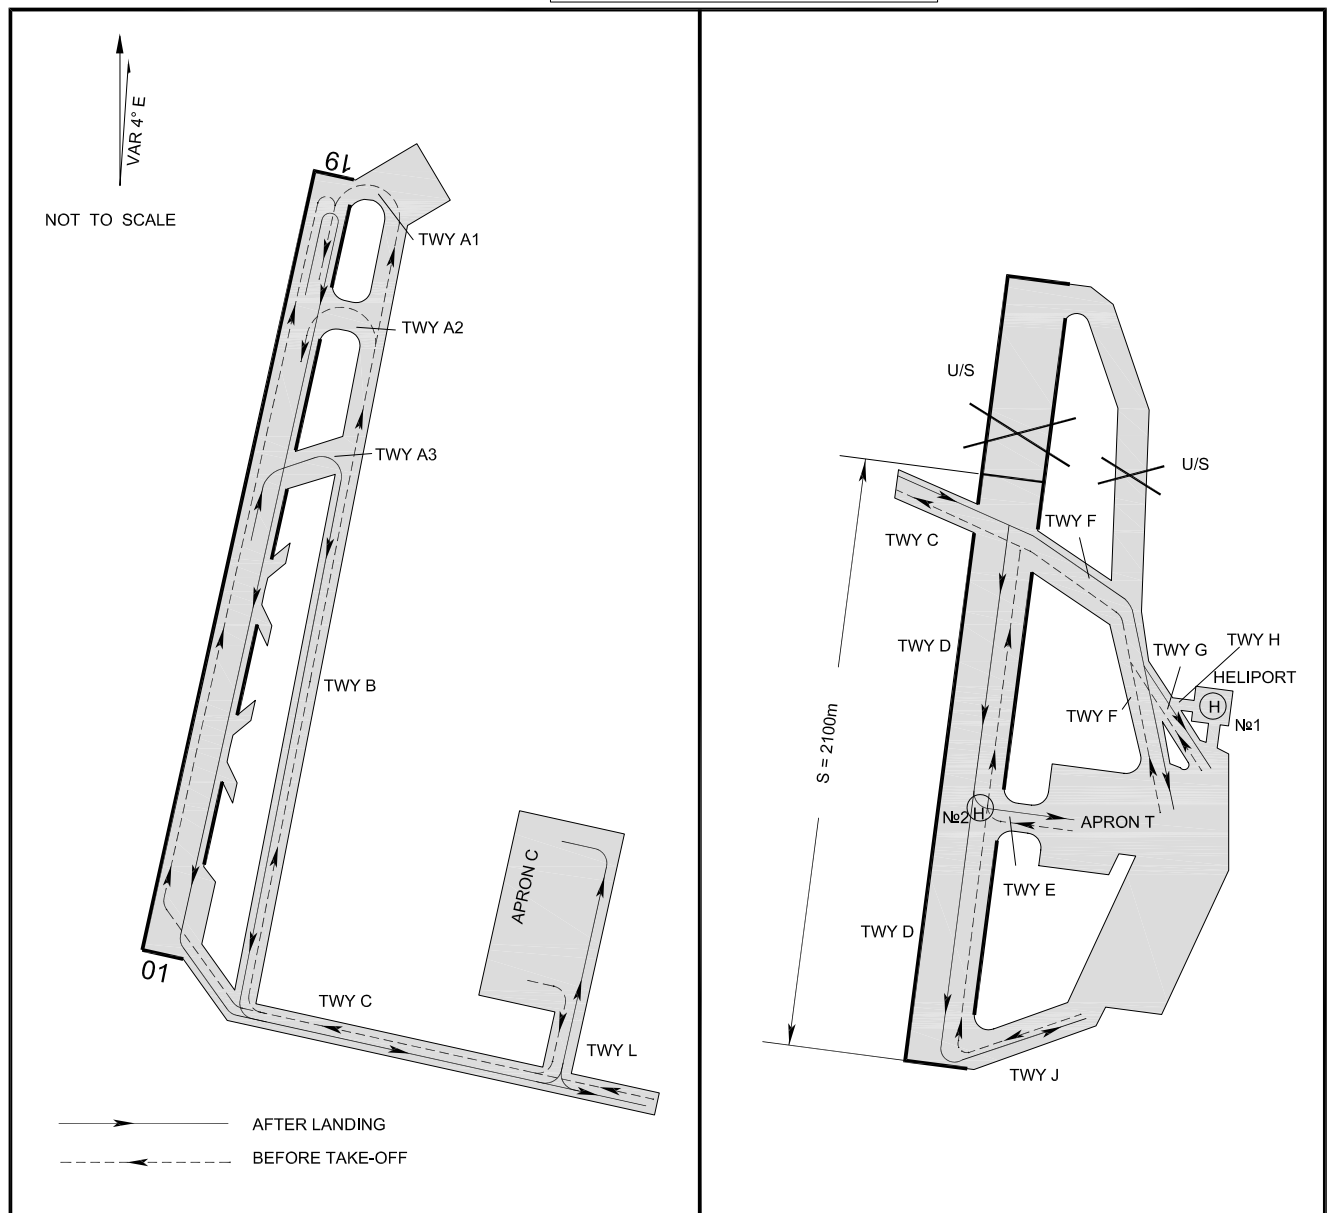

TAXIWAYS	SURFACE	STRENGTH	WIDTH
A-1; B; C	Reinforced-concrete	PCN 51/R/B/X/T	22.5 m
E	Asphalt-Concrete	PCN 16/R/B/X/T (mixed)	22.5 m
D	Asphalt-Concrete	PCN 22/R/B/X/T (mixed)	45 m
J	Asphalt-Concrete	PCN 20/R/B/X/T (mixed)	17.5 m
G	Asphalt-Concrete	PCN 32/F/C/W/T (mixed)	21 m
H	Asphalt-Concrete	PCN 20/F/C/X/T (mixed)	10.5 m
A-2; A-3, L	Reinforced-concrete	PCN 53/R/B/X/T	22.5 m
TWY F first part from apron T S=560m	Asphalt-Concrete	PCN 16/R/B/X/T (mixed)	22.5 m
TWY F second part S=474m	Reinforced concrete	PCN 29/R/B/X/T (mixed)	22 m

WARNING:

1. TWY A-2 to be used in day time only
2. Taxiing via TWY A-1; A-2; A-3, B maintain communication with TOWER controller on frequency 120.800
3. Taxiing via TWY F, G, J on inner engines

CHANGE: New chart