

List of pages in this Trip Kit

Trip Kit Index
Airport Information For URRR
Terminal Charts For URRR
Revision Letter For Cycle 17-2013
Change Notices
Notebook

General Information

Location: Rostov-NA-Donu Rus
IATA Code: ROV
Lat/Long: N47° 15.5' E039° 49.1'
Elevation: 280 ft

Airport Use: Public
Magnetic Variation: 7.7°E

Fuel Types: Jet A-1
Repair Types: Minor Airframe, Minor Engine
Customs: Yes
Airport Type: IFR
Landing Fee: Yes
Control Tower: Yes
Jet Start Unit: No
LLWS Alert: No
Beacon: No

Sunrise: 0231 Z
Sunset: 1614 Z,

Runway Information

Runway: 04
Length x Width: 8205 ft x 148 ft
Surface Type: concrete
TDZ-Elev: 249 ft
Lighting: Edge, ALS, Centerline, TDZ

Runway: 22
Length x Width: 8205 ft x 148 ft
Surface Type: concrete
TDZ-Elev: 280 ft
Lighting: Edge, ALS, Centerline

Communication Information

ATIS 132.4
ATIS 121.7 Non-English
Rostov Start Tower 124.0 Secondary
Rostov Start Tower 119.7
Rostov Taxiing Ground Control 124.0 Secondary
Rostov Taxiing Ground Control 119.0
Rostov Approach Control 128.2
Rostov Approach Control 127.1 Secondary
Rostov Approach Control 124.0 Secondary
Rostov Radar 124.0 Secondary
Rostov Radar 121.2
Rostov Transit 2 Operations 131.875 Non-English
Rostov Transit Operations 118.0 Non-English


ATIS
132.4 (Russian 121.7)

Apt Elev
280'

Alt Set: MM (hPa on request) QNH on request
Trans level: FL50 Trans alt: 3240' (3003')

(QFE)


FASAD 04 BRAVO (FS 04B)
RWY 04 ARRIVAL
BY ATC



FASAD

N47 33.3 E038 18.8
(RND R-280/D63.8)

At or above
FL190

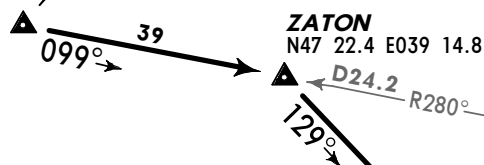

ZATON
N47 22.4 E039 14.8

D24.2 R280°

320 RN
N47 13.5 E039 46.1

ROSTOV-
NA-DONU
D (H) 114.7 RND
N47 15.1 E039 48.8



D12.1 RND
N47 09.0 E039 33.5
(RND R-232)

At 2210' (1973')

D9.9 RND
N47 08.7 E039 37.8
(RND R-222)

At 2210' (1973')

D7.0 RND
N47 10.3 E039 41.3
(RND R-219)

At 2210' (1973')

ALT/HEIGHT CONVERSION
QNH (QFE)
3240' (3003' - 900m)
2210' (1973' - 600m)

ROUTING

099° track to ZATON, turn RIGHT, 129° track to N47 09.0 E039 33.5, turn LEFT, 083° track to N47 08.7 E039 37.8, turn LEFT, 038° track to D7.0 RND.

(QFE)

N47 17.5 E039 52.1


ATIS
132.4 (Russian 121.7)

Apt Elev
280'

Alt Set: MM (hPa on request) QNH on request
Trans level: FL50 Trans alt: 3240' (3003')

(QFE)

KENEN Ø4 ALFA (KN Ø4A) RWY 04 ARRIVAL



ALT/HEIGHT CONVERSION
QNH (QFE)
3240' (3003' - 900m)
2210' (1973' - 600m)

ROSTOV-
NA-DONU
D (H) 114.7 RND
N47 15.1 E039 48.8

320 RN
N47 13.5 E039 46.1


D9.3 RND
N47 08.8 E039 38.8
(RND R-220)
(039° brg to RN)

At 2210' (1973')

OKMAN
N47 04.3 E039 17.5
Between
FL60 & FL50

D7.0 RND
N47 10.3 E039 41.3
(RND R-219)

At 2210' (1973')

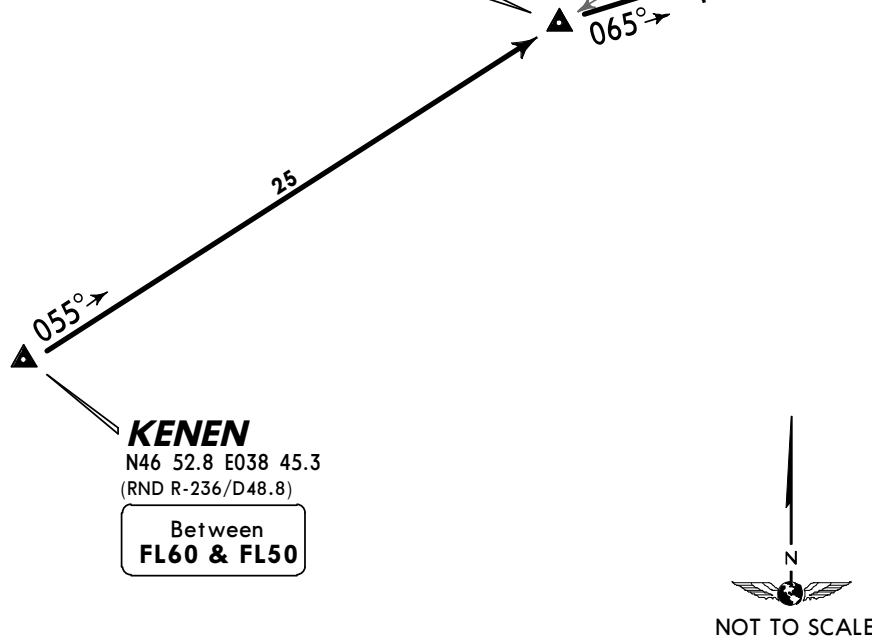

ROUTING

055° track to OKMAN, turn RIGHT, 065° track to N47 08.8 E039 38.8, turn LEFT, 038° track to D7.0 RND.


ATIS
132.4 (Russian 121.7)

Apt Elev
280'


Alt Set: MM (hPa on request) QNH on request
Trans level: FL50 Trans alt: 3240' (2960')

(QFE)

KENEN 22 ALFA (KN 22A) RWY 22 ARRIVAL



ALT/HEIGHT CONVERSION	
QNH	(QFE)
3240'	(2960' - 900m)
2580'	(2300' - 700m)
2250'	(1970' - 600m)

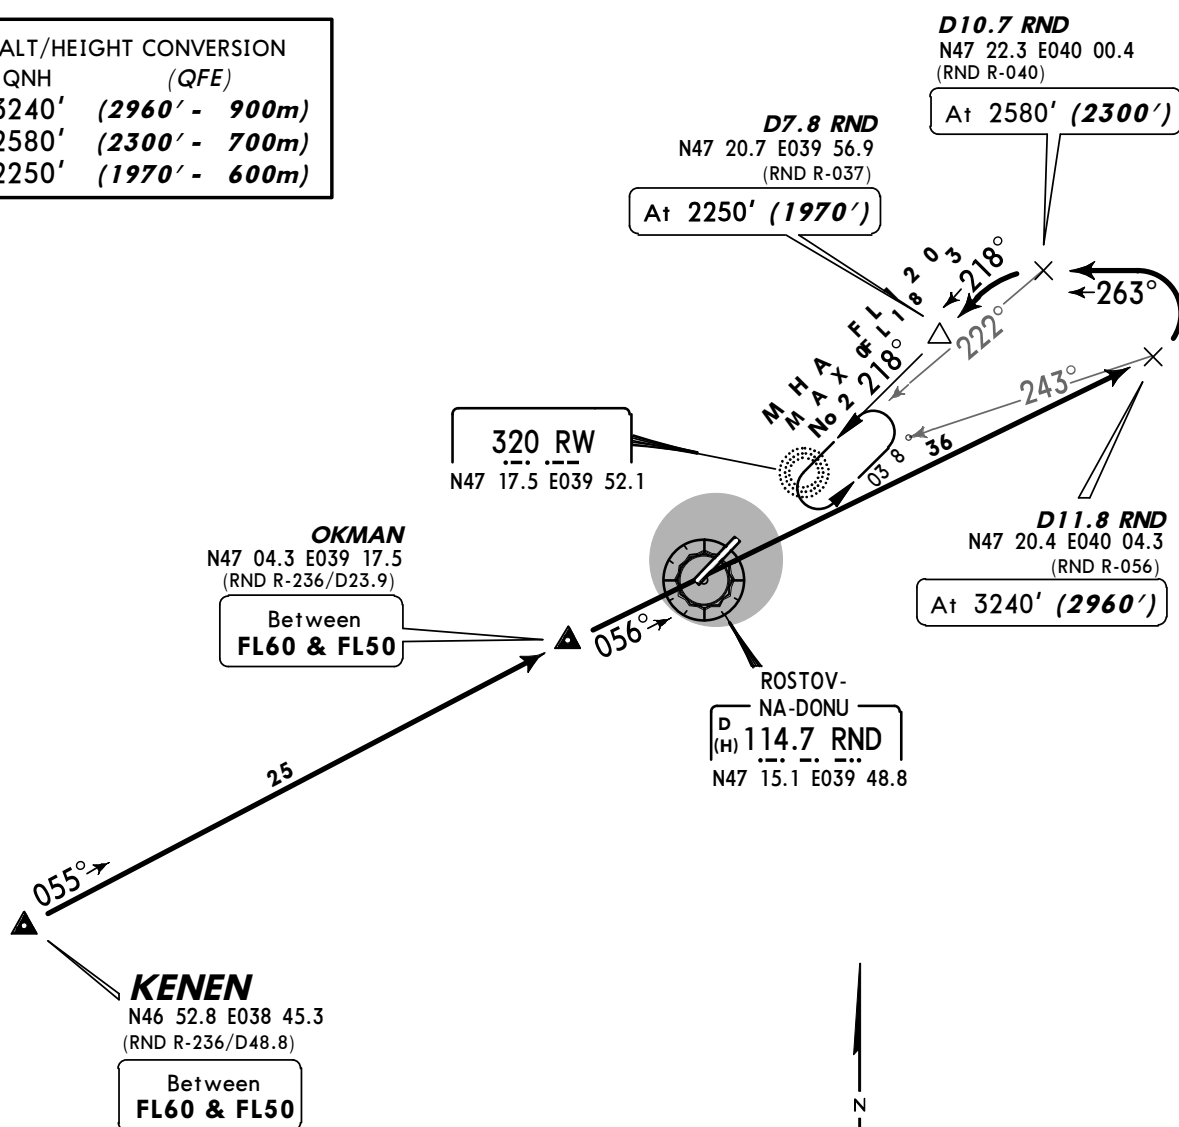

ROUTING

055° track to OKMAN, turn RIGHT, 056° track to N47 20.4 E040 04.3, turn LEFT, 263° track to N47 22.3 E040 00.4, turn LEFT, 218° track to D7.8 RND.


ATIS
132.4 (Russian 121.7)

Apt Elev
280'

Alt Set: MM (hPa on request) QNH on request
Trans level: FL50 Trans alt: 3240' (3003')

(QFE)

KONSTANTINOVSK Ø4 ALFA (KA Ø4A) RWY 04 ARRIVAL



KONSTANTINOVSK
1100 KA
N47 35.3 E041 06.9

BAGAYEVSKIY
1175 BA
N47 19.3 E040 21.6

ROSTOV-
NA-DONU
D 114.7 RND
(H) N47 15.1 E039 48.8


320 RN
N47 13.5 E039 46.1

D7.0 RND
N47 10.3 E039 41.3
(RND R-219)
At 2210' (1973')

D9.9 RND
N47 08.0
E039 38.9
(RND R-216)
At 2210' (1973')

D11.6 RND
N47 04.8 E039 40.9
At 2210' (1973')

ALT/HEIGHT CONVERSION
QNH (QFE)
3240' (3003' - 900m)
2210' (1973' - 600m)




ROUTING

235° bearing to BA, continue on N47 04.8 E039 40.9, turn RIGHT, 353° track to N47 08.0 E039 38.9, turn RIGHT, 038° track to D7.0 RND.

ATIS
132.4
(Russian 121.7)Apt Elev
280'Alt Set: MM (hPa on request) QNH on request
Trans level: FL50 Trans alt: 3240' (2960')

(QFE)

KONSTANTINOVSK 22 ALFA (KA 22A)
RWY 22 ARRIVALKONSTANTINOVSK
1100 KA
N47 35.3 E041 06.9


35


BAGAYEVSKIY
1175 BA
N47 19.3 E040 21.6No 5
MHA FL180
MAX FL180
035°

12

D12.6 RND
N47 22.3 E040 04.1
(RND R-048)
At 3240' (2960')D10.7 RND
N47 22.3 E040 00.4
(RND R-040)
At 2580' (2300')D7.8 RND
N47 20.7 E039 56.9
(RND R-037)
At 2250' (1970')No 1
MHA FL180
MAX FL180
038°320 RW
N47 17.5 E039 52.1ROSTOV-
NA-DONU
D 114.7 RND
N47 15.1 E039 48.8ALT/HEIGHT CONVERSION
QNH (QFE)
3240' (2960' - 900m)
2580' (2300' - 700m)
2250' (1970' - 600m)

ROUTING

235° bearing to BA, turn RIGHT, 277° bearing to N47 22.3 E040 04.1, turn LEFT,
263° track to N47 22.3 E040 00.4, turn LEFT, 218° track to D7.8 RND.

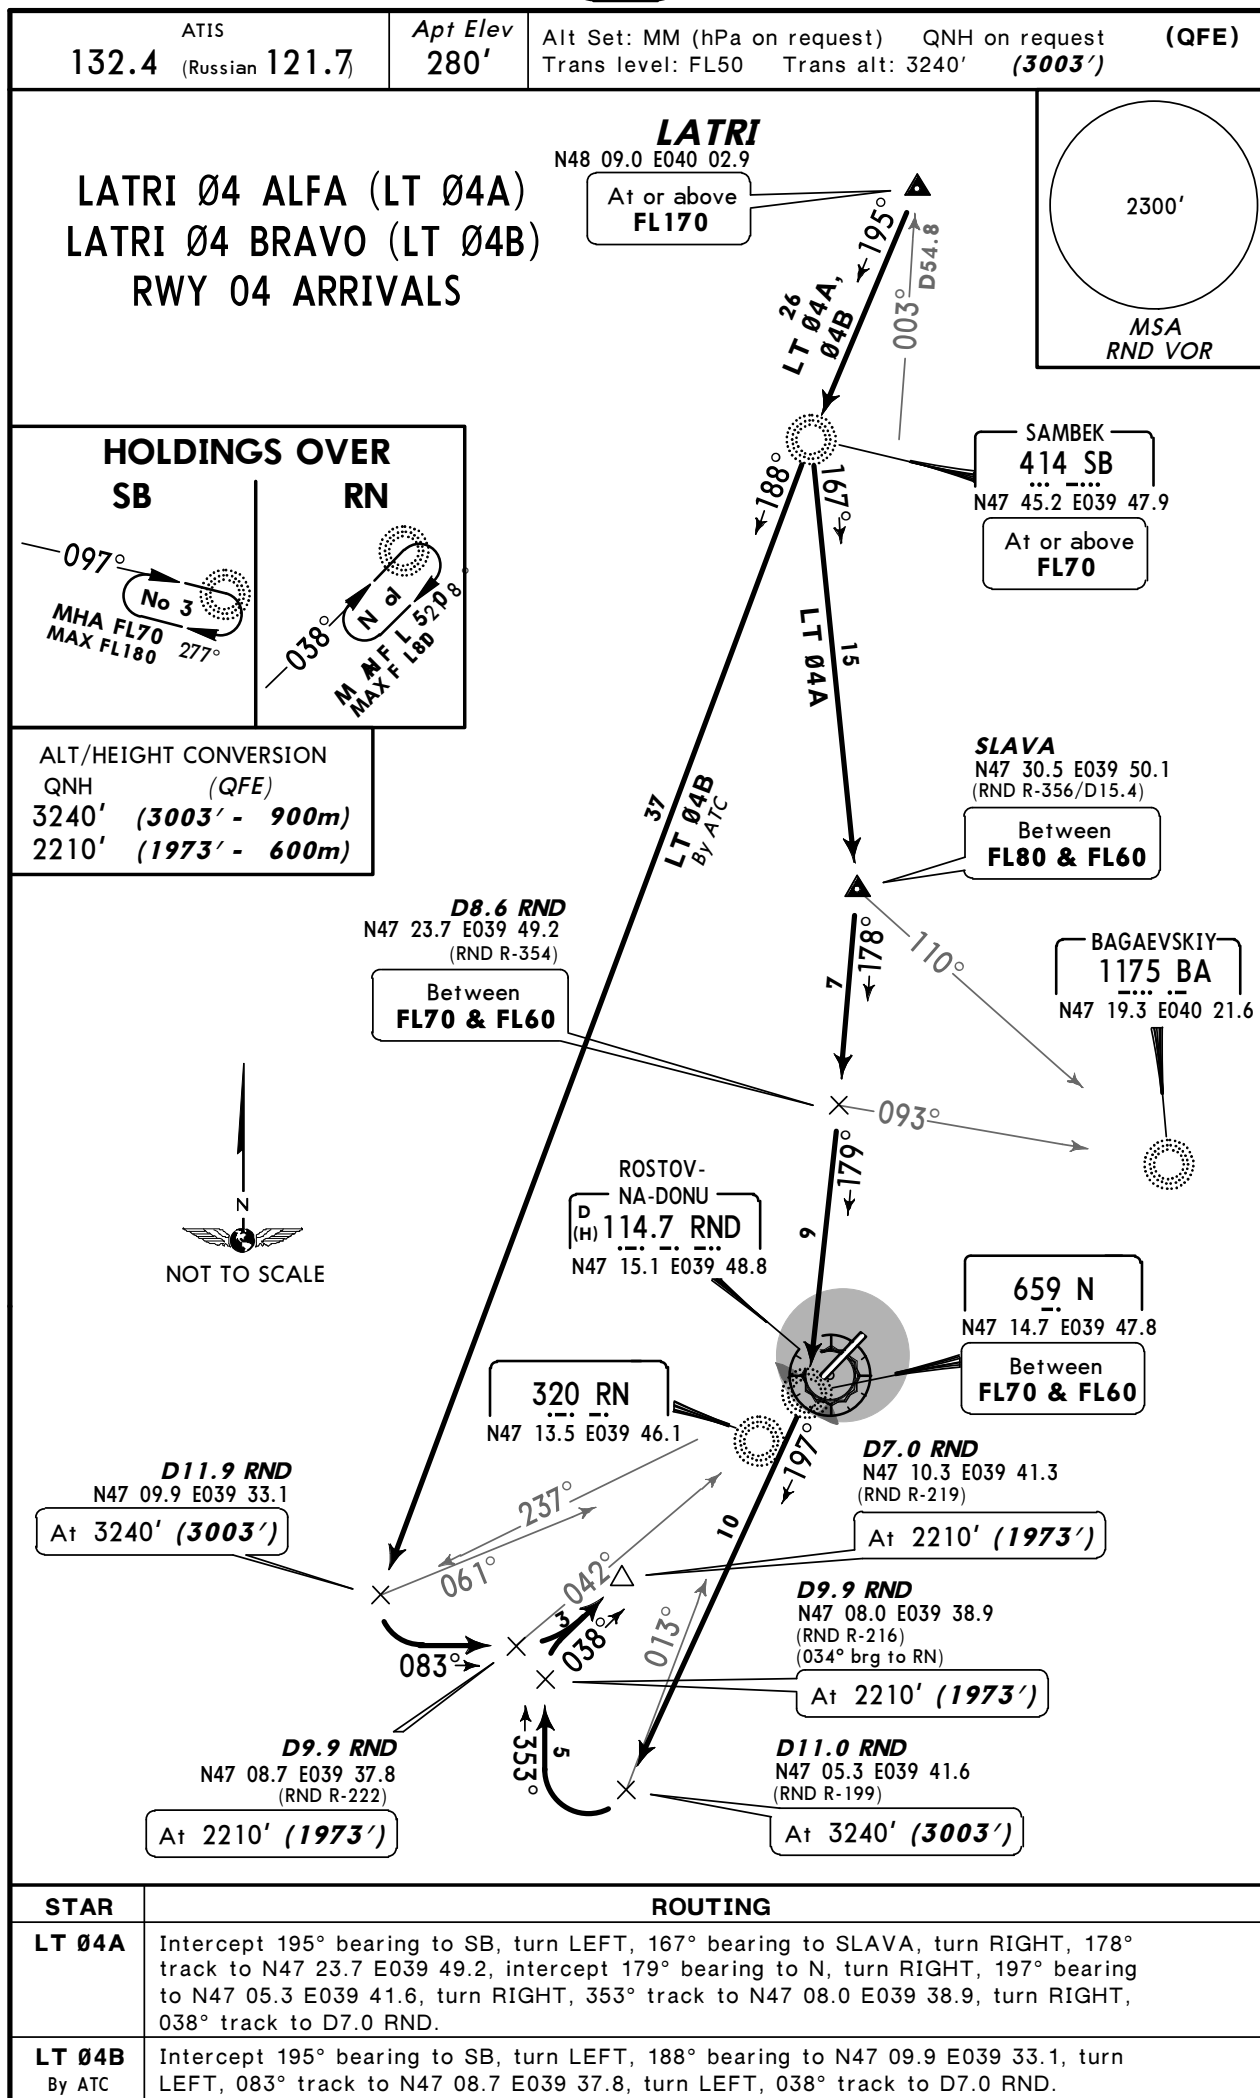


ATIS
132.4 (Russian 121.7)

Apt Elev
280'

Alt Set: MM (hPa on request) QNH on request
Trans level: FL50 Trans alt: 3240' (2960')

(QFE)

LATRI 22 ALFA (LT 22A) RWY 22 ARRIVAL



ALT/HEIGHT CONVERSION
QNH (QFE)
3240' (2960' - 900m)
2250' (1970' - 600m)

SAMBEK
414 SB
N47 45.2 E039 47.9

LATRI
N48 09.0 E040 02.9
At or above
FL170

KRASNY SULIN
486 KL
N47 53.1 E040 06.0
At or above
FL80

BEREG
N47 34.4 E040 02.0
(194° brg to RW)
At or above
FL60



D7.8 RND
N47 20.7 E039 56.9
(RND R-037)
At 2250' (1970')

D10.5 RND
N47 22.8 E039 59.3
(RND R-036)
At 2250' (1970')


320 RW
N47 17.5 E039 52.1

ROSTOV-NA-DONU
D(H) 114.7 RND
N47 15.1 E039 48.8

BAGAEVSKIY
1175 BA
N47 19.3 E040 21.6

ROUTING

Intercept 165° bearing to KL, turn RIGHT, 181° bearing via BEREG to N47 22.8 E039 59.3, turn RIGHT, 218° track to D7.8 RND.

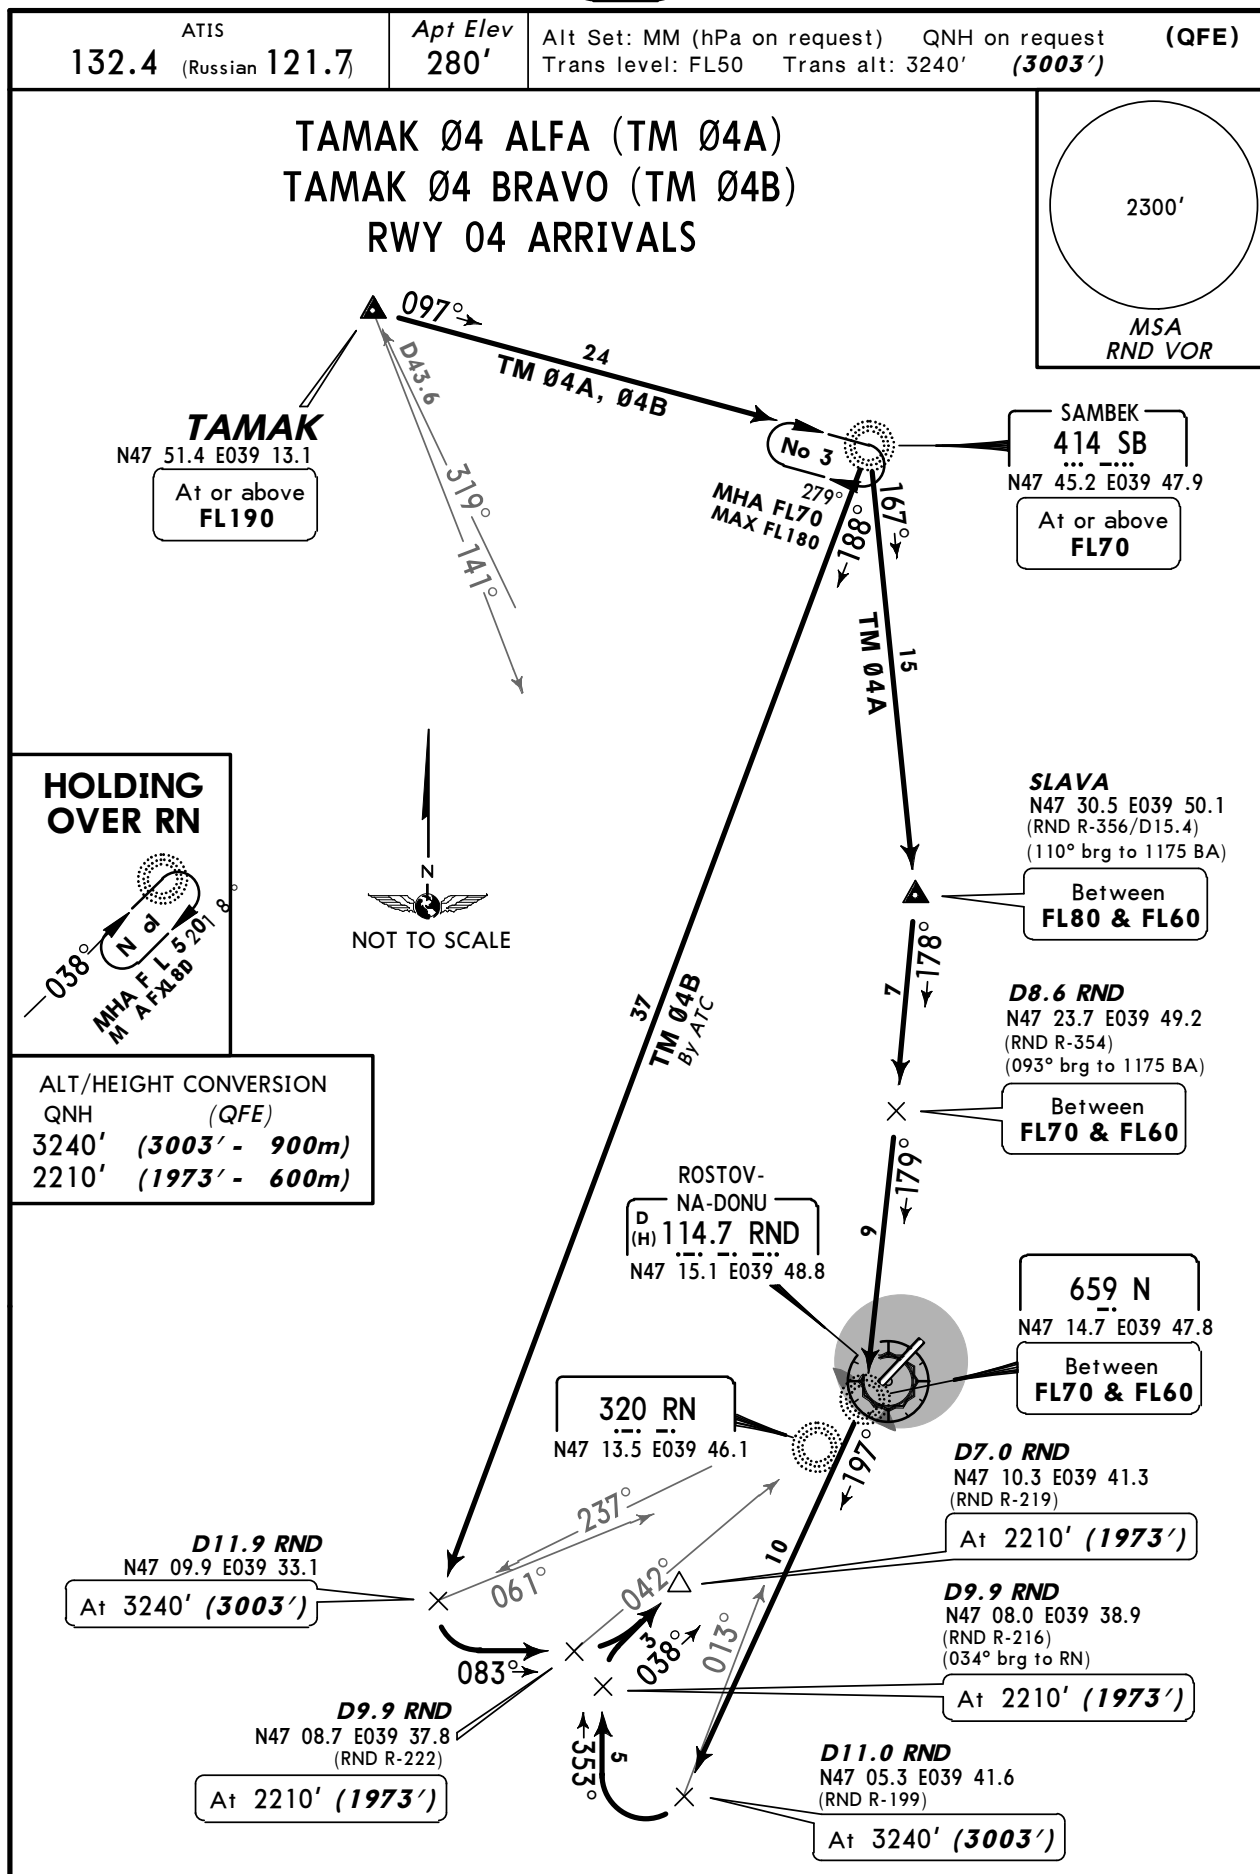

STAR	ROUTING
TM Ø4A	Intercept 097° bearing to SB, turn RIGHT, 167° bearing to SLAVA, turn RIGHT, 178° track to N47 23.7 E039 49.2, intercept 179° bearing to N, turn RIGHT, 197° bearing to N47 05.3 E039 41.6, turn RIGHT, 353° track to N47 08.0 E039 38.9, turn RIGHT, 038° track to D7.0 RND.
TM Ø4B By ATC	Intercept 097° bearing to SB, turn RIGHT, 188° bearing to N47 09.9 E039 33.1, turn LEFT, 083° track to N47 08.7 E039 37.8, turn LEFT, 038° track to D7.0 RND.


ATIS
132.4 (Russian 121.7)

Apt Elev
280'

Alt Set: MM (hPa on request) QNH on request
Trans level: FL50 Trans alt: 3240' (2960')

(QFE)

TAMAK 22 ALFA (TM 22A) RWY 22 ARRIVAL



TAMAK

N47 51.4 E039 13.1

At or above
FL190

SAMBEK
414 SB

N47 45.2 E039 47.9

At or above
FL70



No 3

MHA FL70
MAX FL180

BEREG

N47 34.4 E040 02.0
(194° brg to RW)
(131° brg to 1175 BA)

At or above
FL60



ALT/HEIGHT CONVERSION

QNH	(QFE)
3240'	(2960' - 900m)
2250'	(1970' - 600m)

D7.8 RND
N47 20.7 E039 56.9
(RND R-037)


At 2250' (1970')

D10.5 RND

N47 22.8 E039 59.3
(RND R-036)

At 2250' (1970')

320 RW
N47 17.5 E039 52.1



ROSTOV-
NA-DONU
D (H) 114.7 RND
N47 15.1 E039 48.8

ROUTING

Intercept 097° bearing to SB, turn RIGHT, 132° bearing to BEREG, turn RIGHT, 181° track to N47 22.8 E039 59.3, turn RIGHT, 218° track to D7.8 RND.



ATIS
132.4 (Russian 121.7)

Apt Elev
280'

Alt Set: MM (hPa on request) QNH on request
Trans level: FL50 Trans alt: 3240' (3003')

(QFE)

YEGORLYK Ø4 ALFA (ER Ø4A)
RWY 04 ARRIVAL

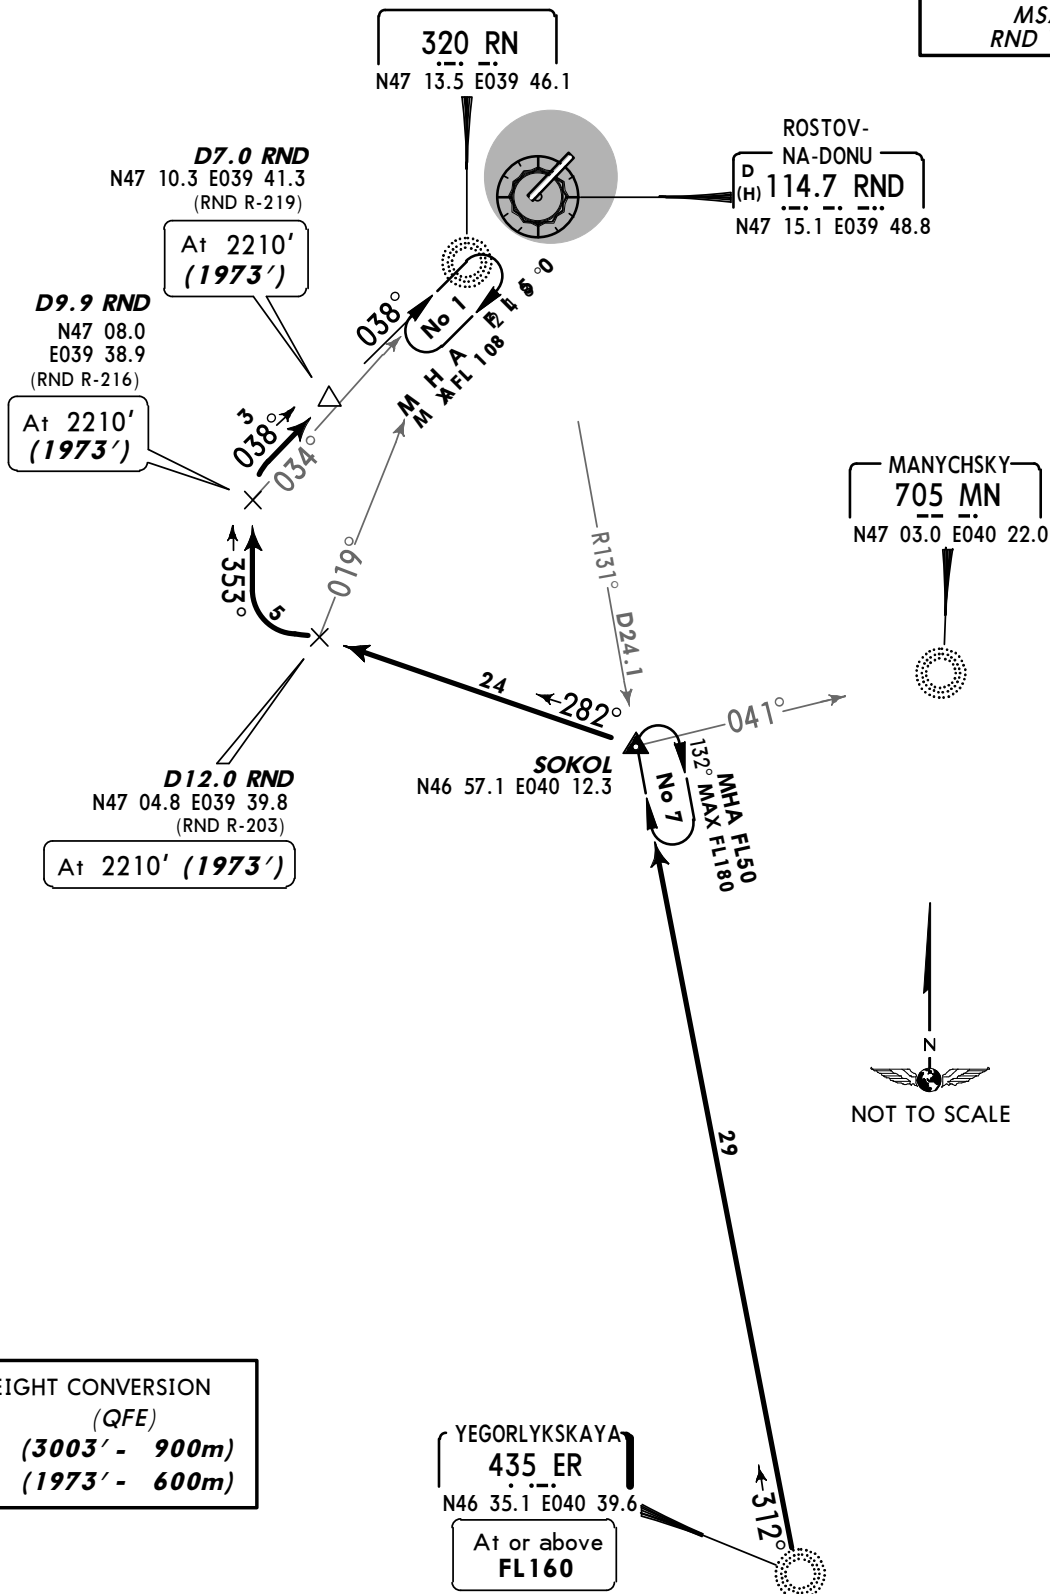

ALT/HEIGHT CONVERSION
QNH (QFE)
3240' (3003' - 900m)
2210' (1973' - 600m)

ROUTING

312° bearing to SOKOL, turn LEFT, 282° track to N47 04.8 E039 39.8, turn RIGHT, 353° track to N47 08.0 E039 38.9, turn RIGHT, 038° track to D7.0 RND.

ATIS
132.4 (Russian 121.7)

Apt Elev
280'

Alt Set: MM (hPa on request) QNH on request
Trans level: FL50 Trans alt: 3240' (2960')

(QFE)

YEGORLYK 22 ALFA (ER 22A) RWY 22 ARRIVAL

2300'

MSA
RND VOR

D7.8 RND
N47 20.7 E039 56.9
(RND R-037)

At 2250' (1970')

D10.7 RND
N47 22.3 E040 00.4
(RND R-040)

At 2580' (2300')

D12.9 RND
N47 21.8 E040 04.9
(RND R-051)

At 3240' (2960')



ROSTOV-
NA-DONU
D(H) 114.7 RND
N47 15.1 E039 48.8

320 RW
N47 17.5 E039 52.1

MANYCHSKY
705 MN
N47 03.0 E040 22.0

MHA FL50
MAX FL80
No 6



ALT/HEIGHT CONVERSION
QNH (QFE)
3240' (2960' - 900m)
2580' (2300' - 700m)
2250' (1970' - 600m)

YEGORLYKSKAYA
435 ER
N46 35.1 E040 39.6

At or above
FL160

ROUTING



330° bearing to MN, turn LEFT, 321° bearing to N47 21.8 E040 04.9, turn LEFT, 263° track to N47 22.3 E040 00.4, turn LEFT, 218° track to D7.8 RND.

ATIS
132.4
(Russian 121.7)

Apt Elev
280'

Alt Set: MM (hPa on request) QNH on request (QFE)
Trans level: FL50 Trans alt: 3240' **(2960')**
Approach from BA is carried out in accordance with the established pattern.

OUT-OF-TURN EXIT FROM HOLDING PATTERN TO APPROACH RWYS 04, 22

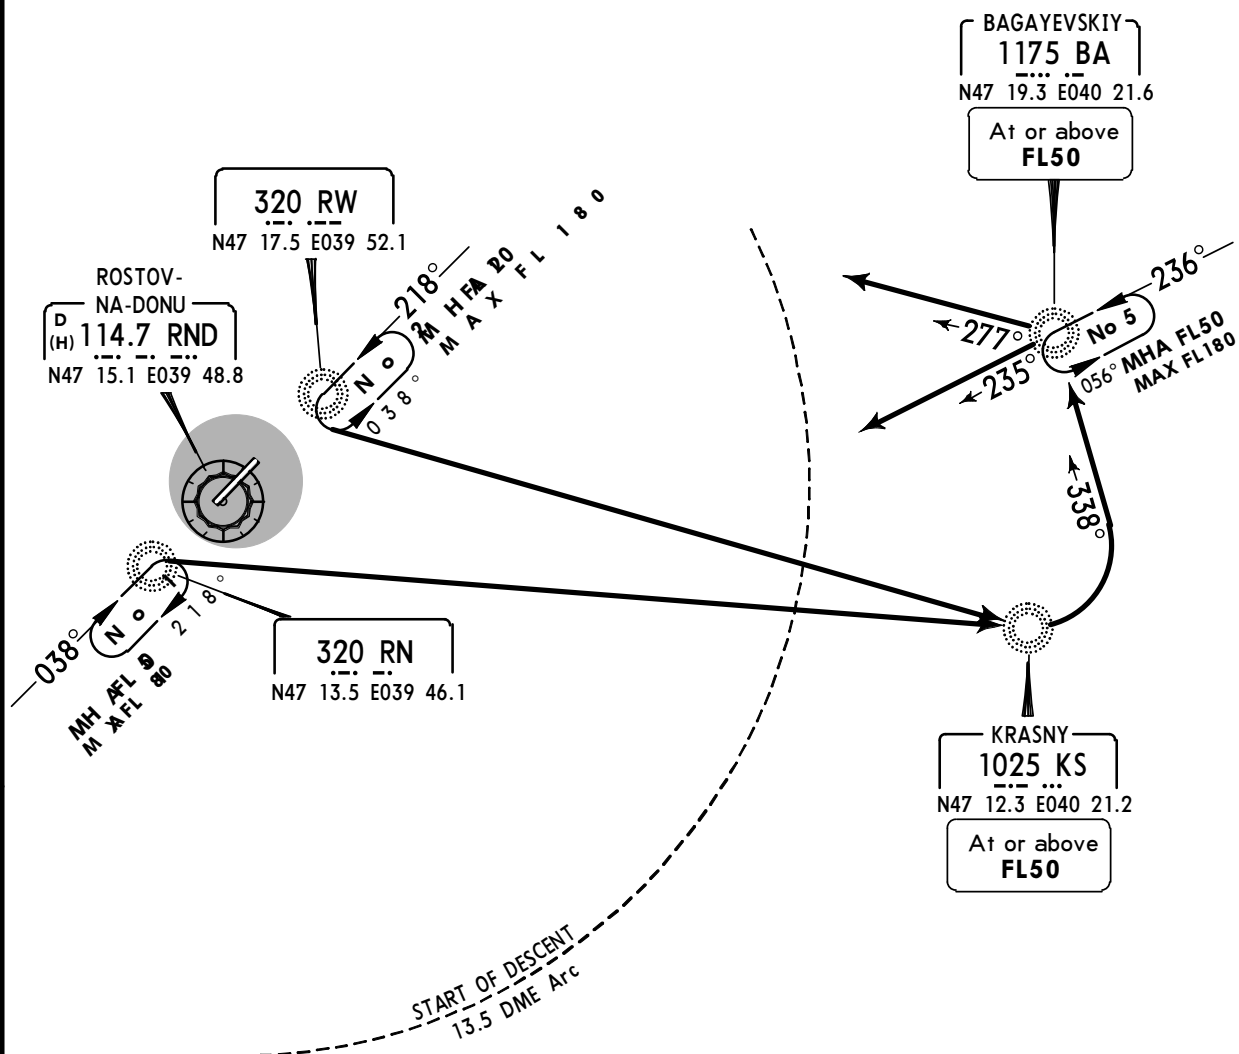

Direct distance to
Rostov-Na-Donu Apt from:
BA **22NM**




ALT/HEIGHT CONVERSION
QNH (QFE)
3240' (2960' - 900m)

ATIS
132.4 (Russian 121.7)


Apt Elev
280'

Alt Set: MM (hPa on request) QNH on request (QFE)
Trans level: FL50 Trans alt (hgt): 3240' (3003')

DM 04B
RWY 04 ARRIVAL
BY ATC
FOR RUSSIAN USERS OF AIRSPACE




ALT/HEIGHT CONVERSION
QNH (QFE)
3240' (3003' - 900m)
2210' (1973' - 600m)

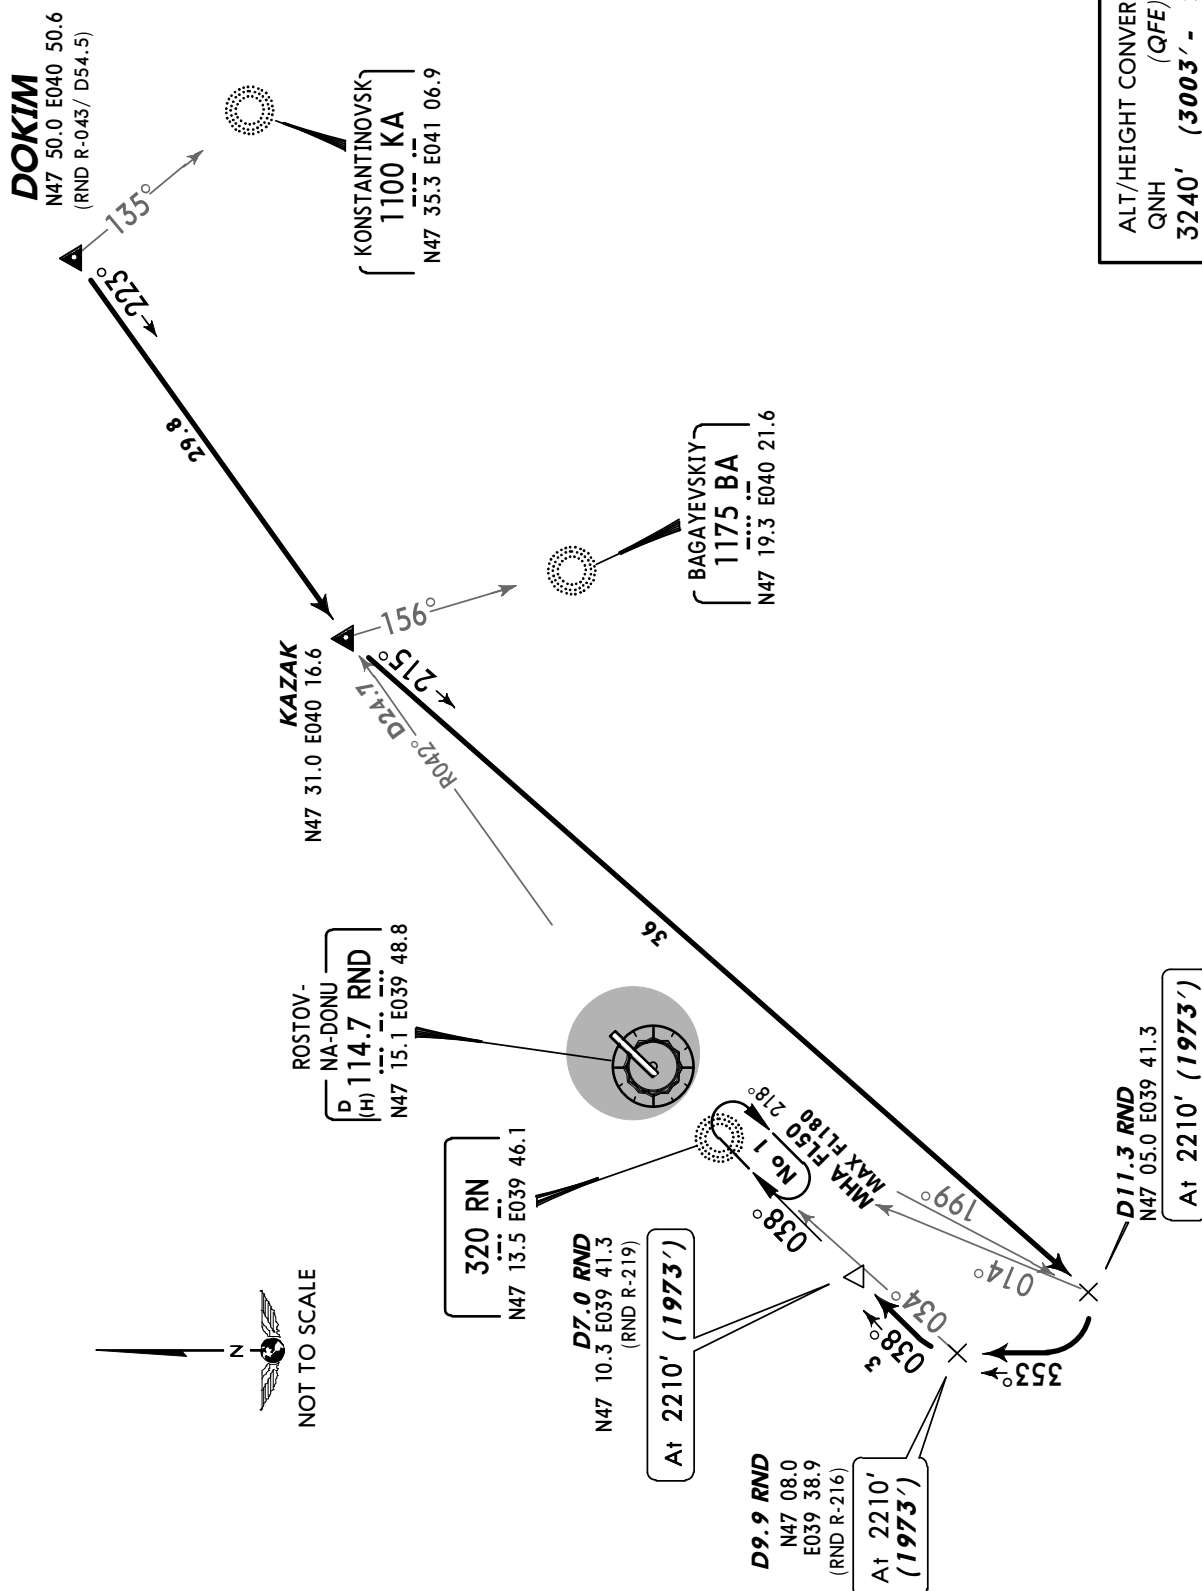



ATIS
132.4 (Russian 121.7)
Apt Elev
280'
Alt Set: MM (hPa on request) QNH on request (QFE)
Trans level: FL50 Trans alt (hgt): 3240' (2960')

DM 22B
RWY 22 ARRIVAL
BY ATC
FOR RUSSIAN USERS OF AIRSPACE



ALT/HEIGHT CONVERSION
QNH (QFE)
3240' (2960' - 900m)
2250' (1970' - 600m)

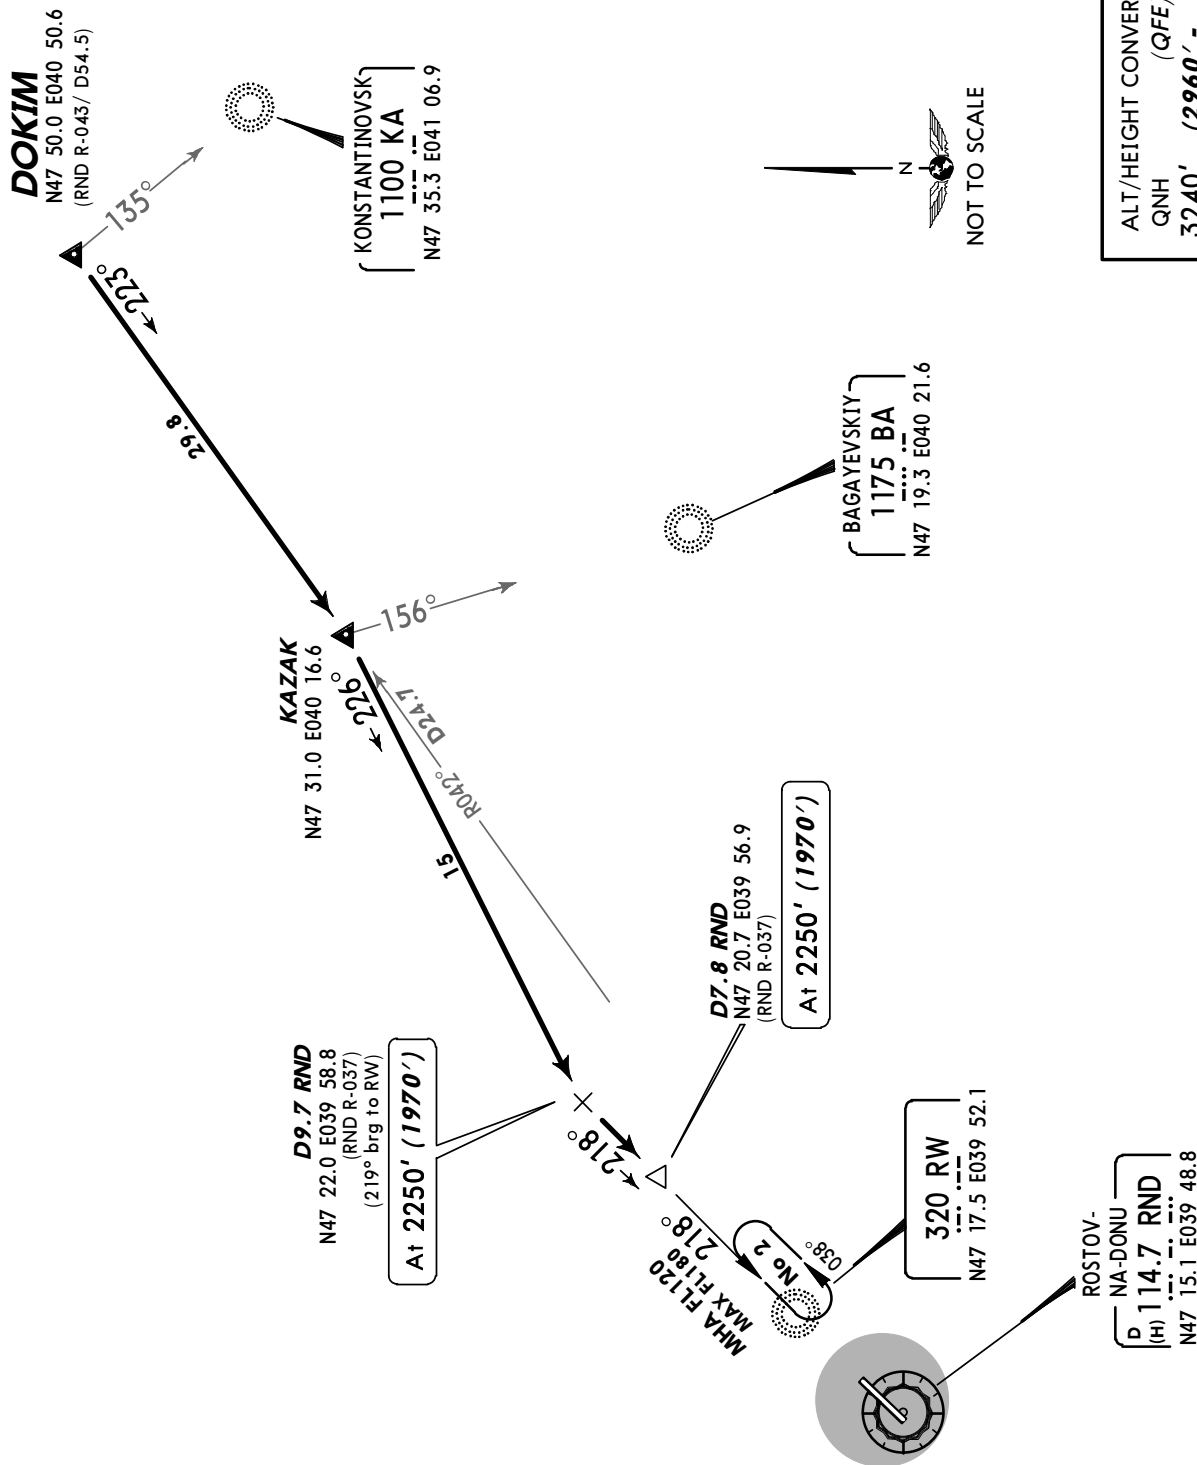

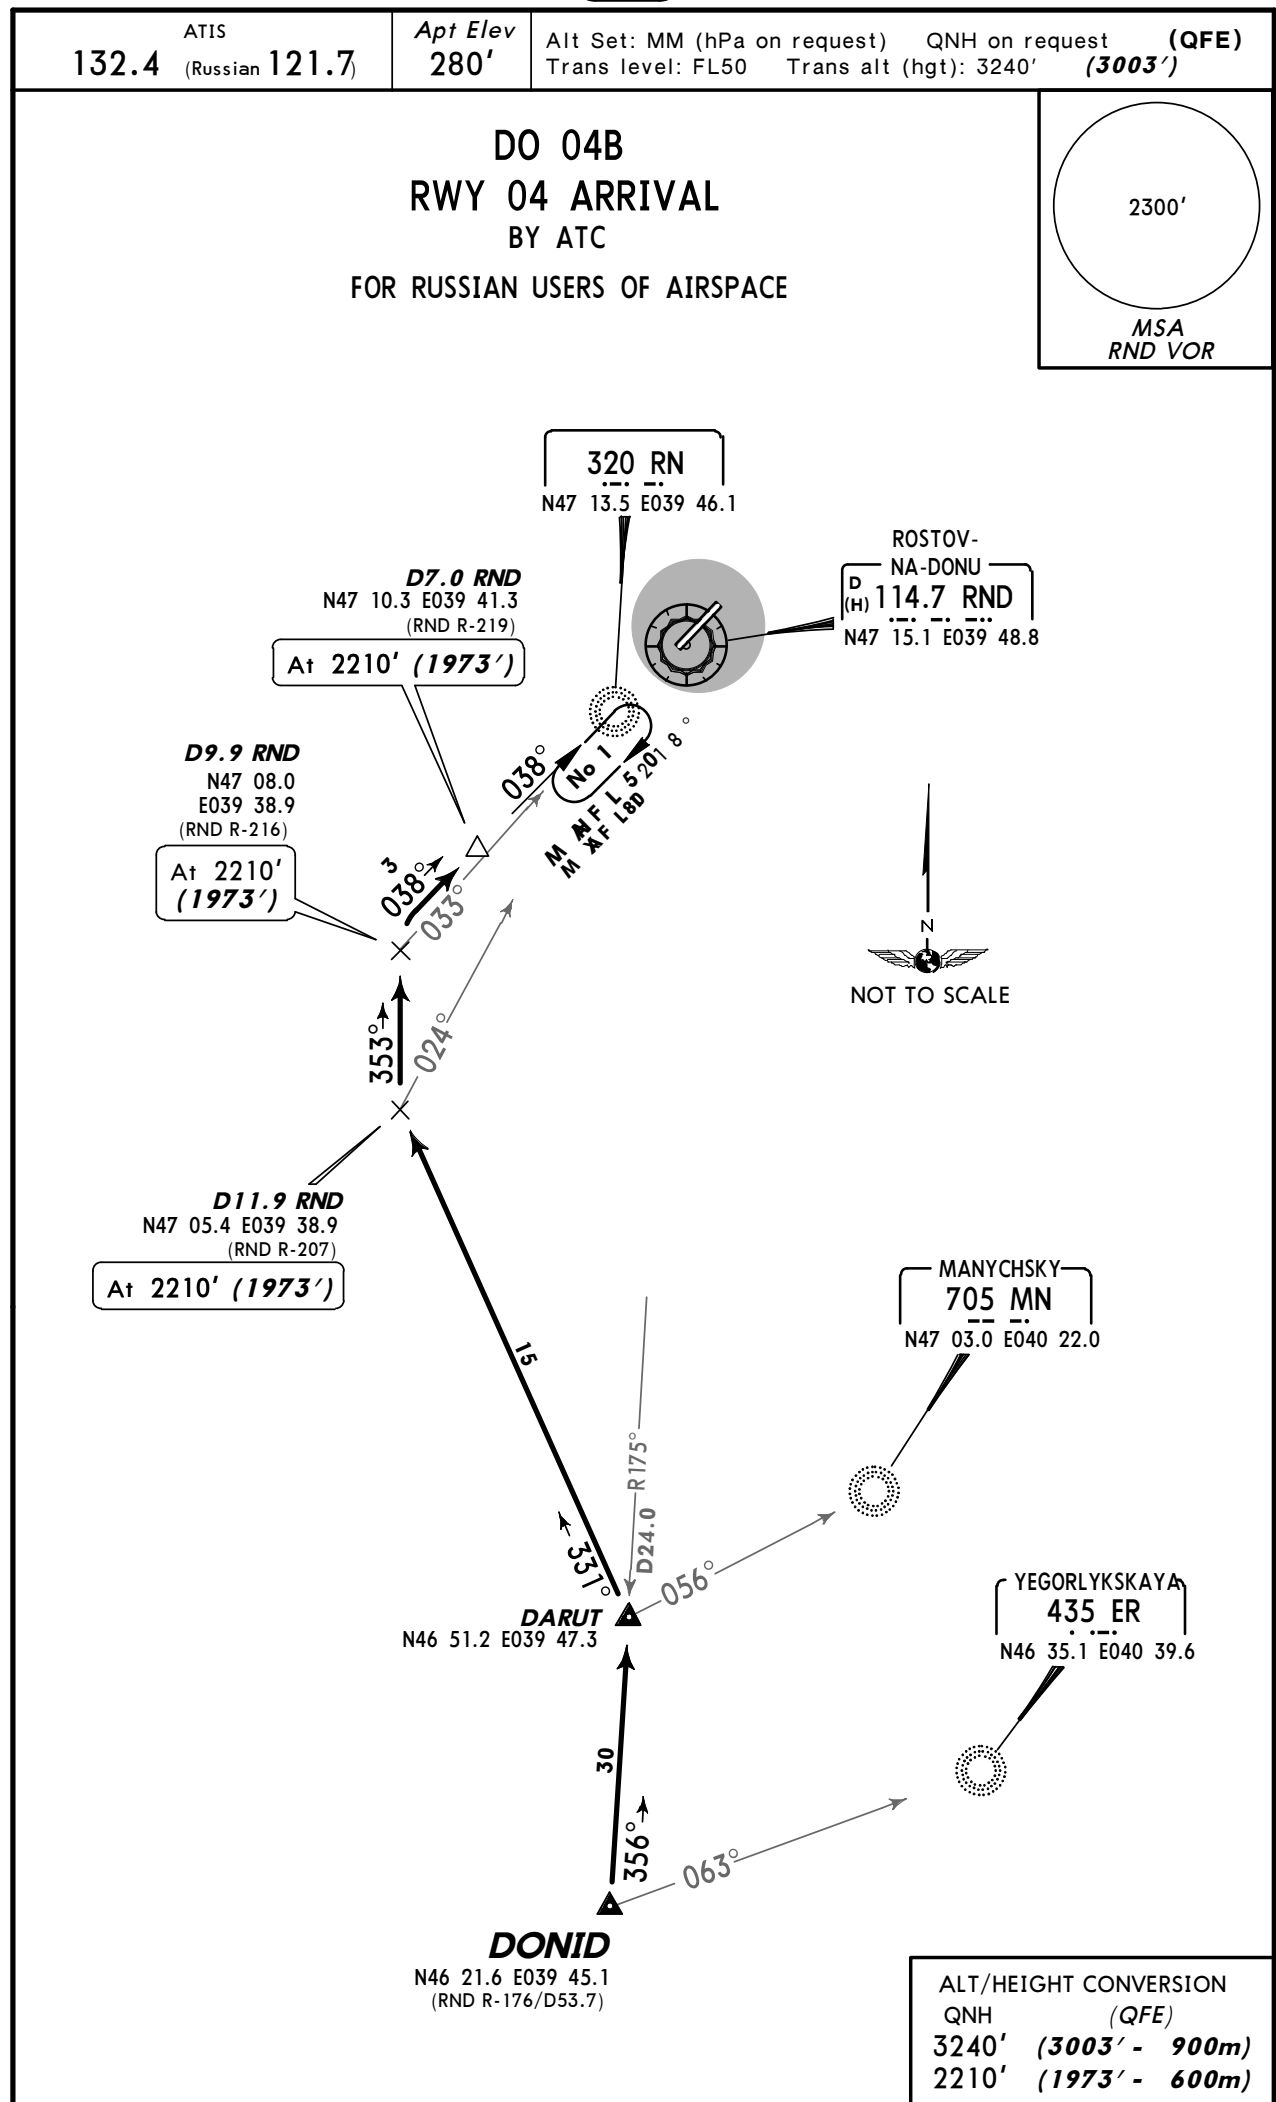



ATIS
132.4
(Russian 121.7)

Apt Elev
280'

Alt Set: MM (hPa on request) QNH on request (QFE)
Trans level: FL50 Trans alt (hgt): 3240' (2960')

DO 22B
RWY 22 ARRIVAL
BY ATC

FOR RUSSIAN USERS OF AIRSPACE

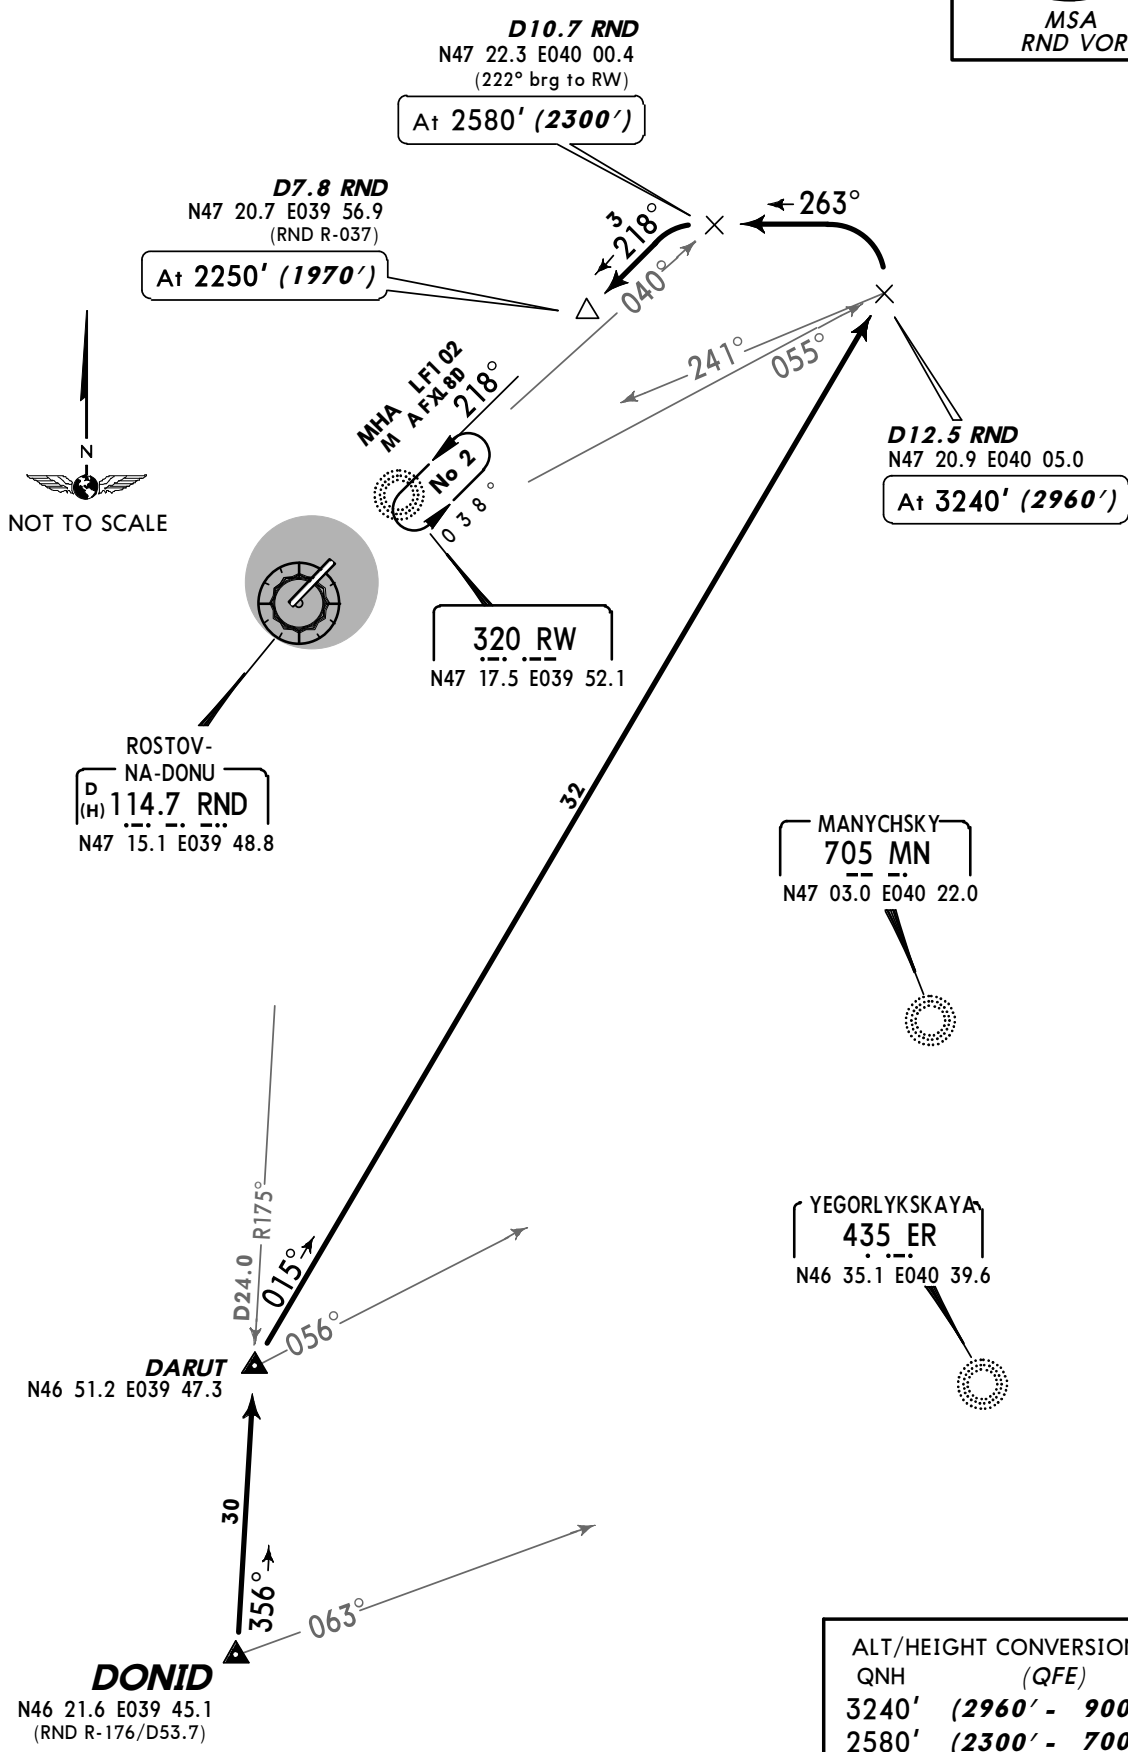



ALT/HEIGHT CONVERSION	
QNH	(QFE)
3240'	(2960' - 900m)
2580'	(2300' - 700m)
2250'	(1970' - 600m)

Apt Elev
280'


Alt Set: MM (hPa on request) QNH on request (QFE)
Trans level: FL50 Trans alt (hgt): 3240' (3003')

ATIS
132.4 (Russian 121.7)

GI 04B
RWY 04 ARRIVAL
BY ATC
FOR RUSSIAN USERS OF AIRSPACE

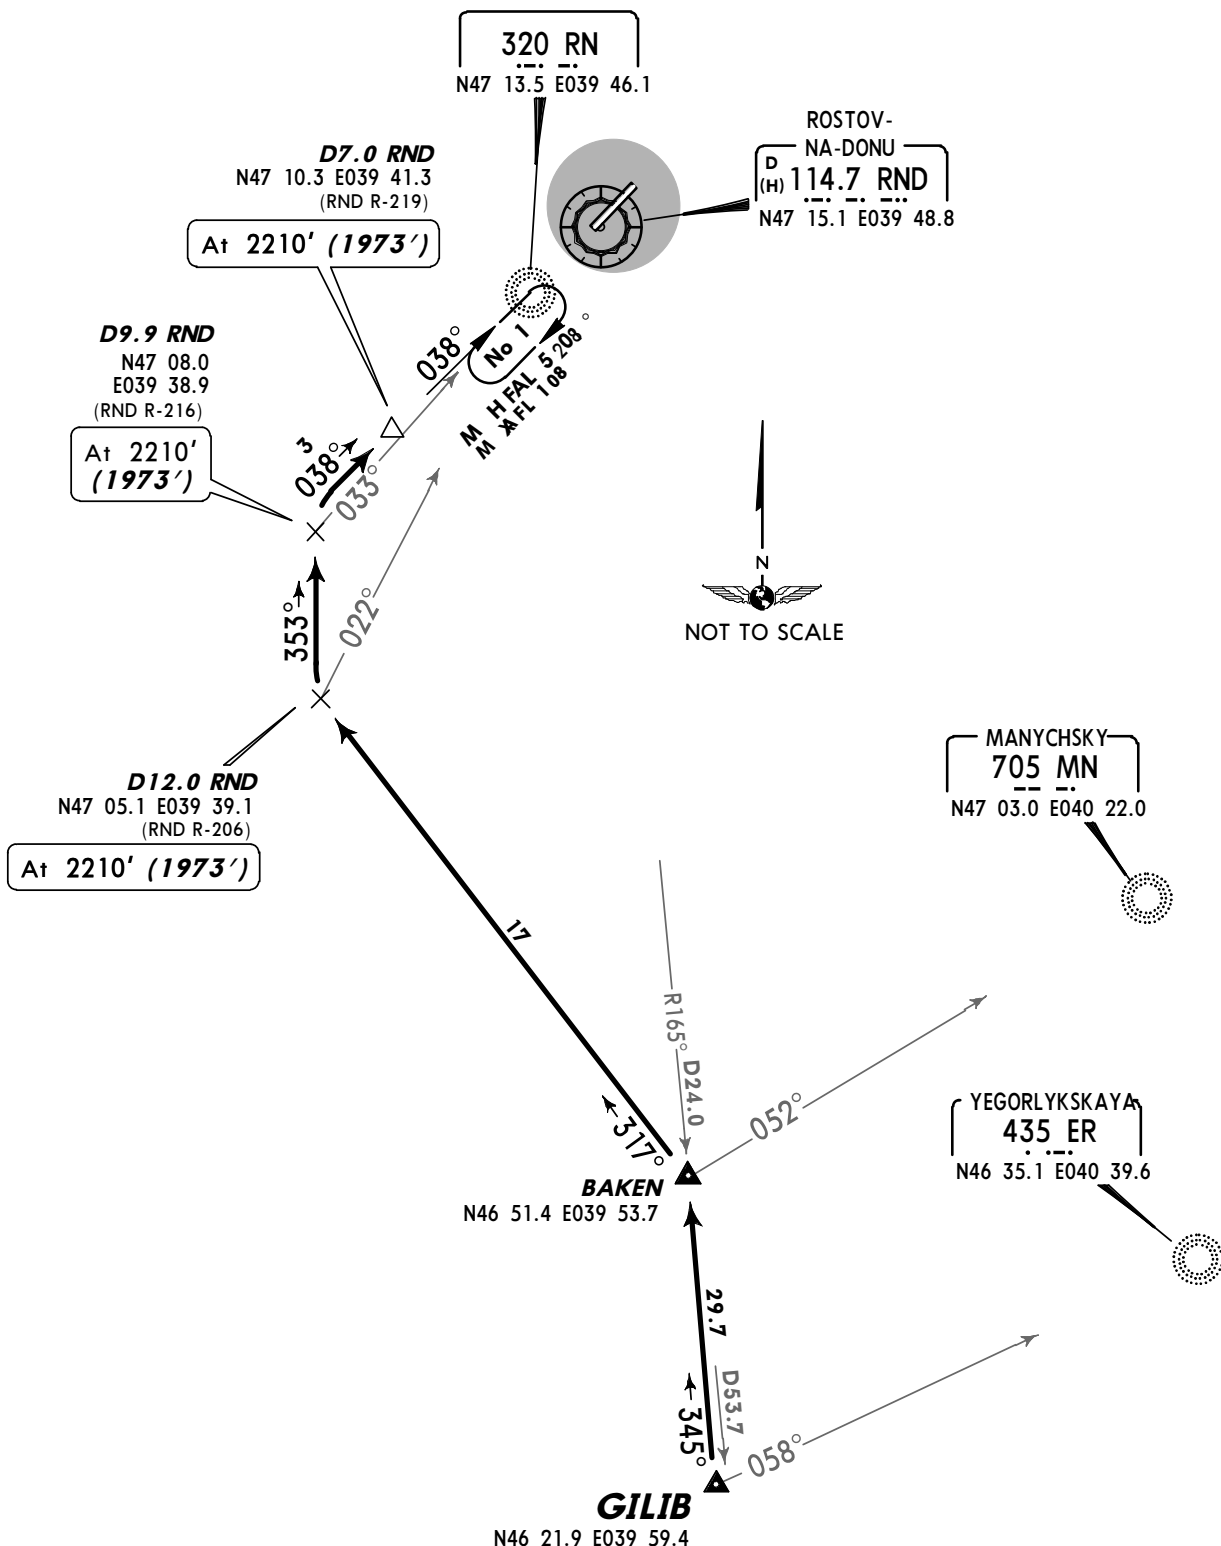

ALT/HEIGHT CONVERSION	
QNH	(QFE)
3240'	(3003' - 900m)
2210'	(1973' - 600m)


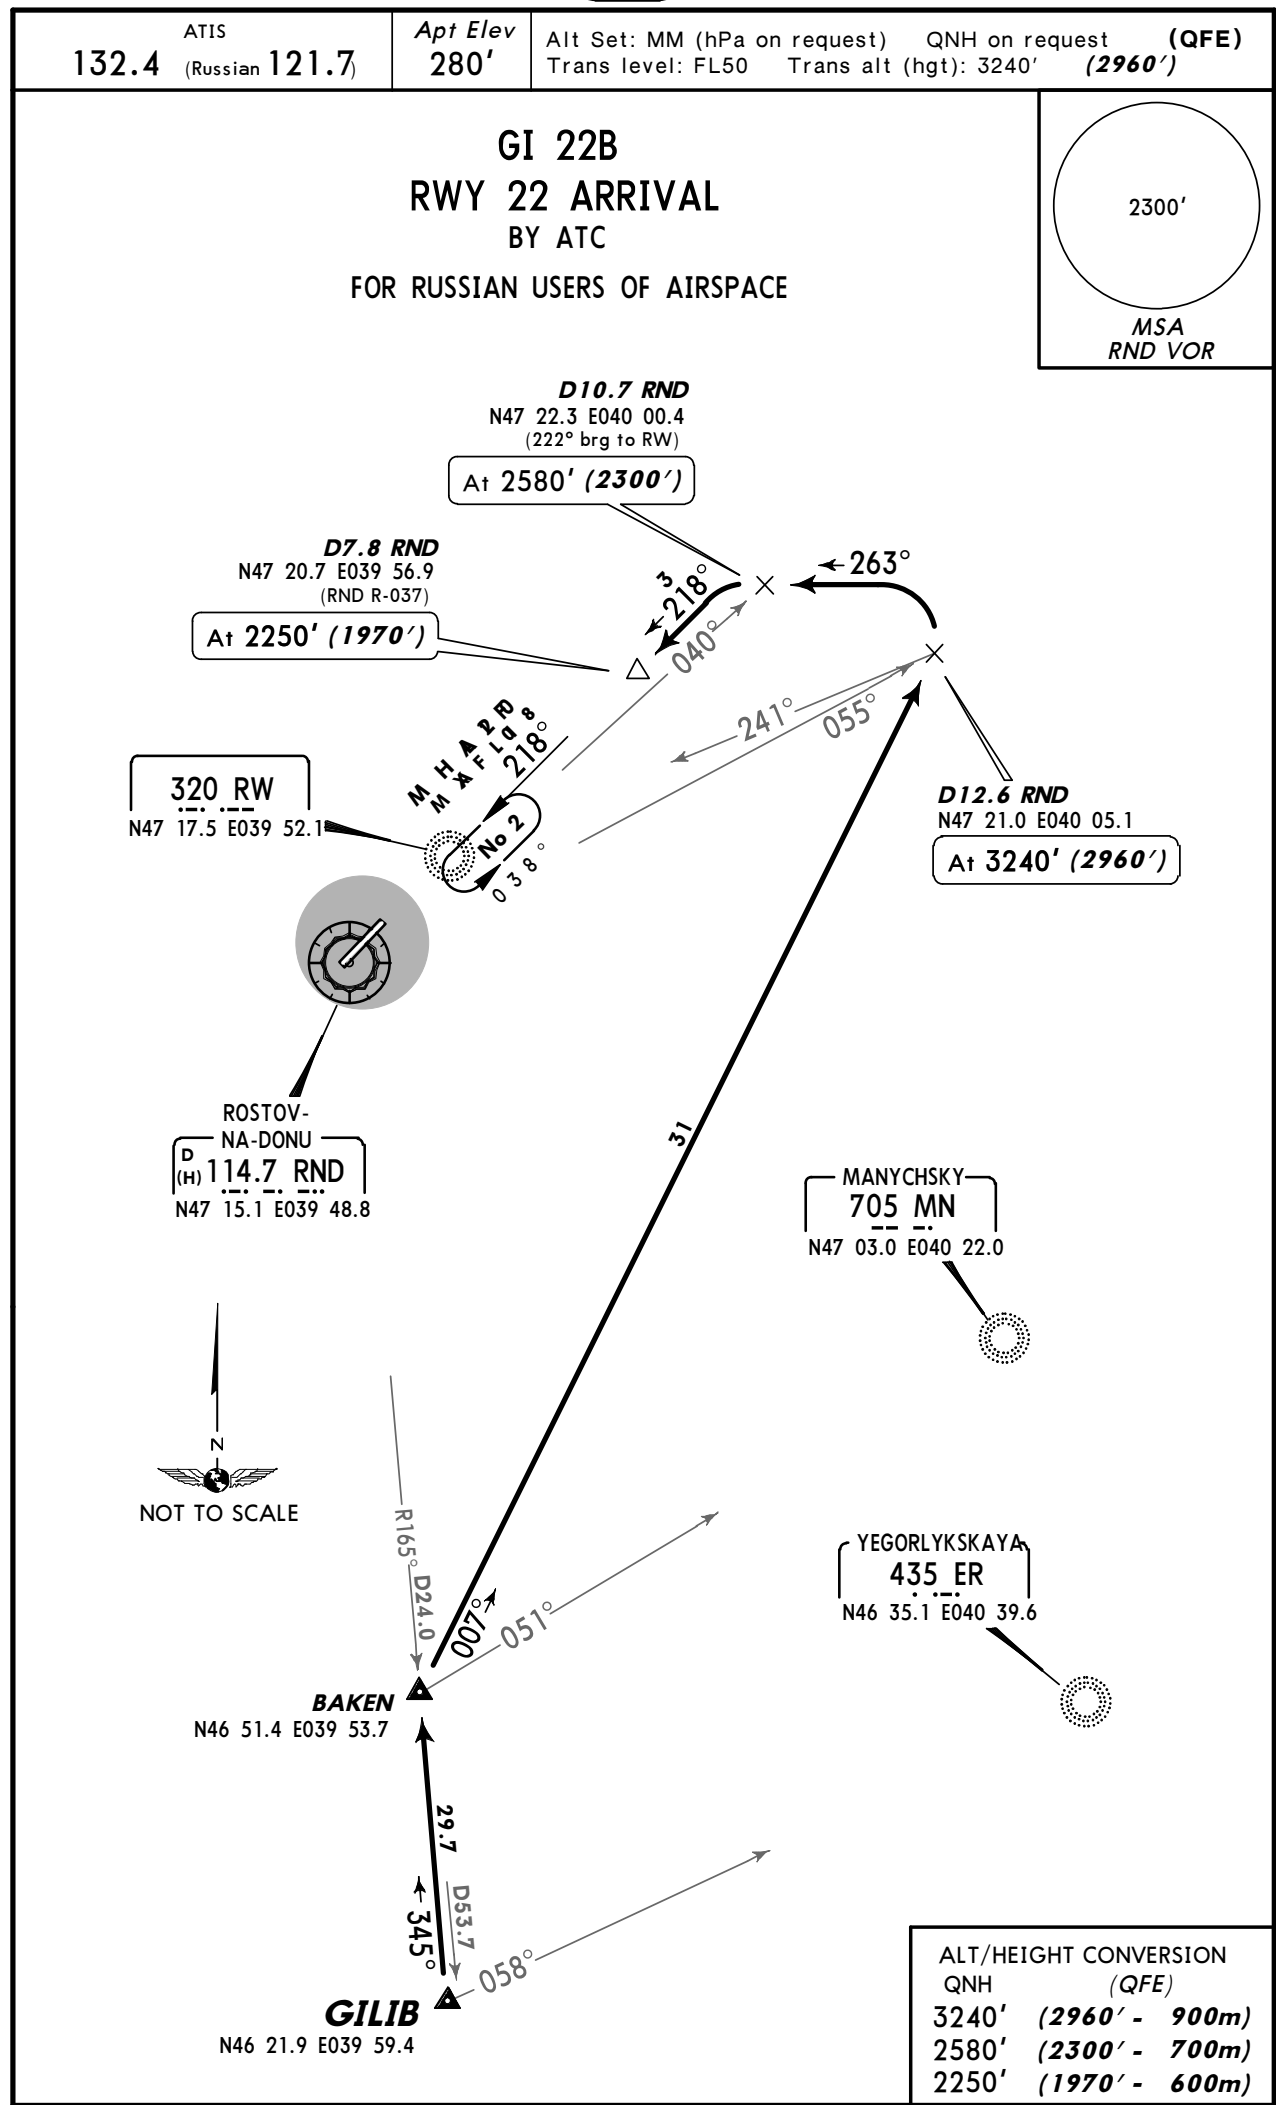


ATIS
132.4 (Russian 121.7)

Apt Elev
280'

Alt Set: MM (hPa on request) QNH on request (QFE)
Trans level: FL50 Trans alt (hgt): 3240' (3003')

KI 04B
RWY 04 ARRIVAL
BY ATC
FOR RUSSIAN USERS OF AIRSPACE

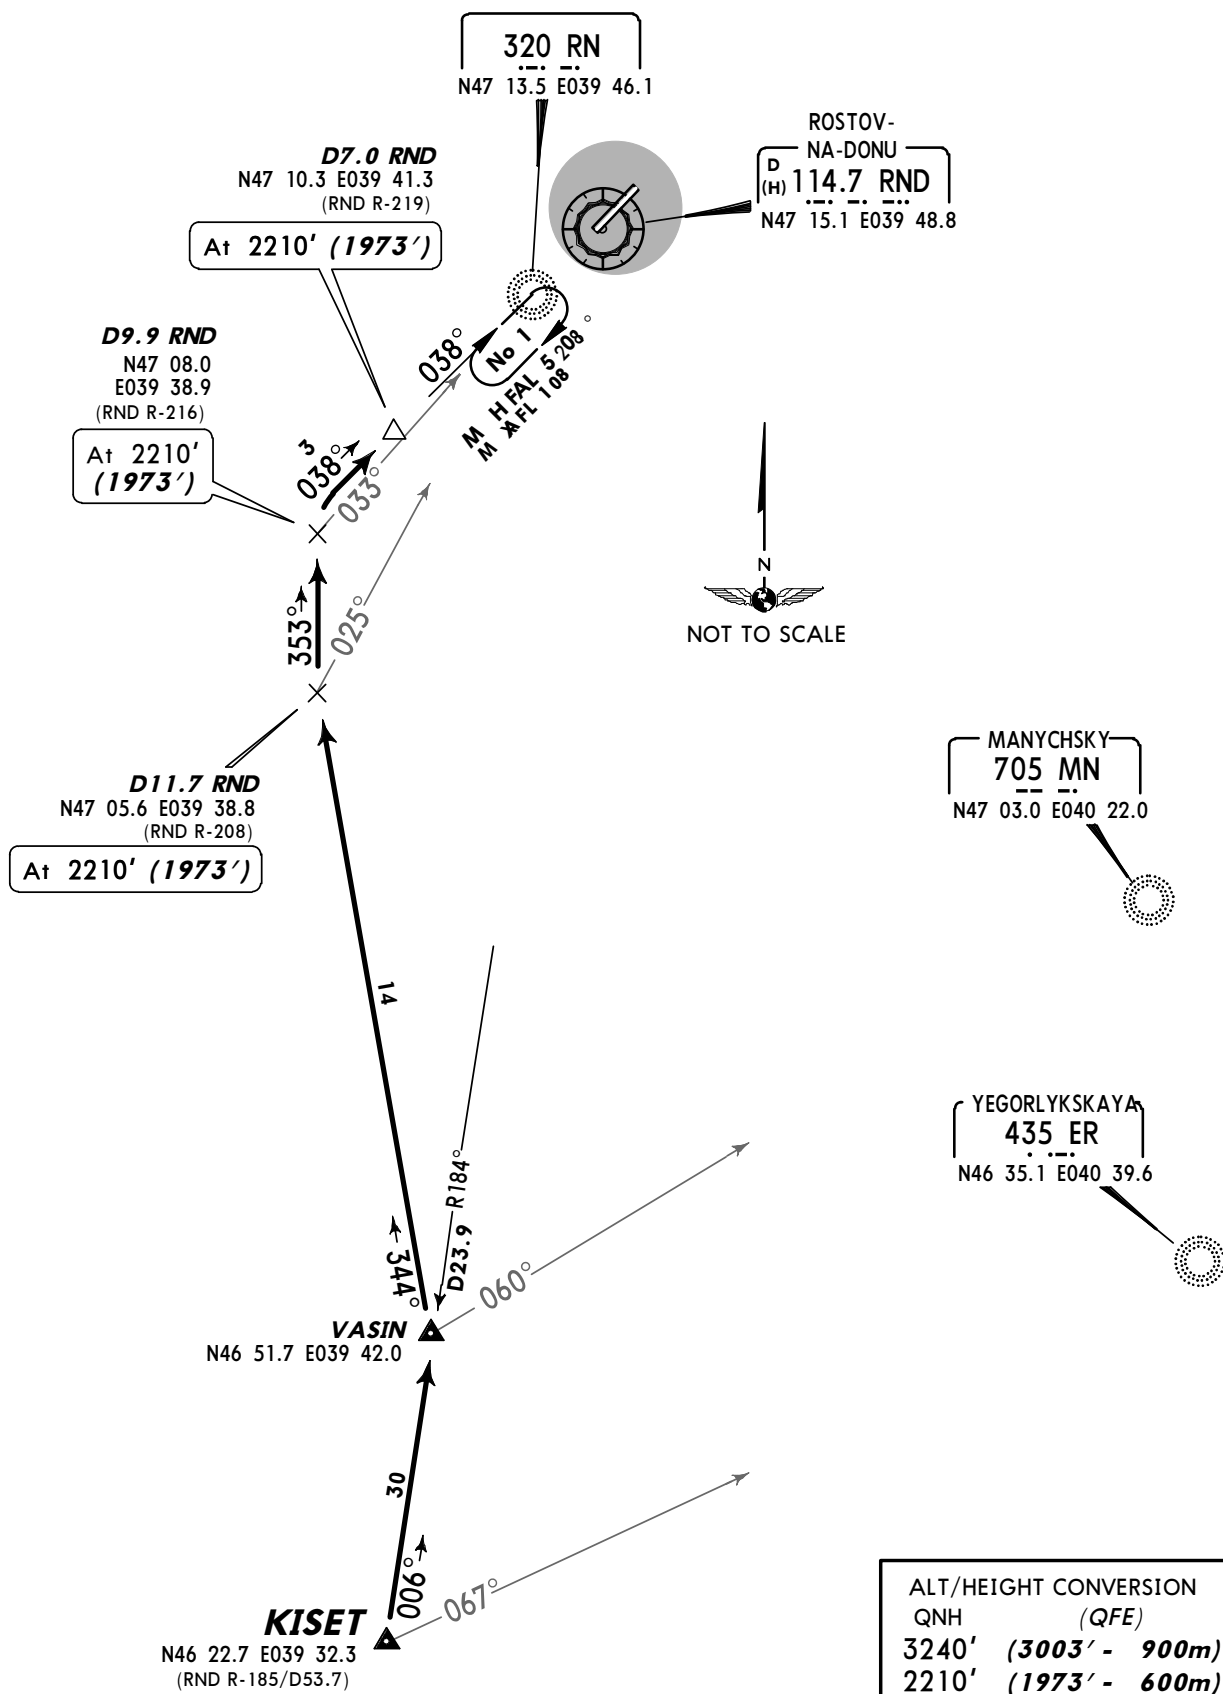



ATIS
132.4 (Russian 121.7)

Apt Elev
280'

Alt Set: MM (hPa on request) QNH on request (QFE)
Trans level: FL50 Trans alt (hgt): 3240' (2960')

KI 22B RWY 22 ARRIVAL BY ATC

FOR RUSSIAN USERS OF AIRSPACE

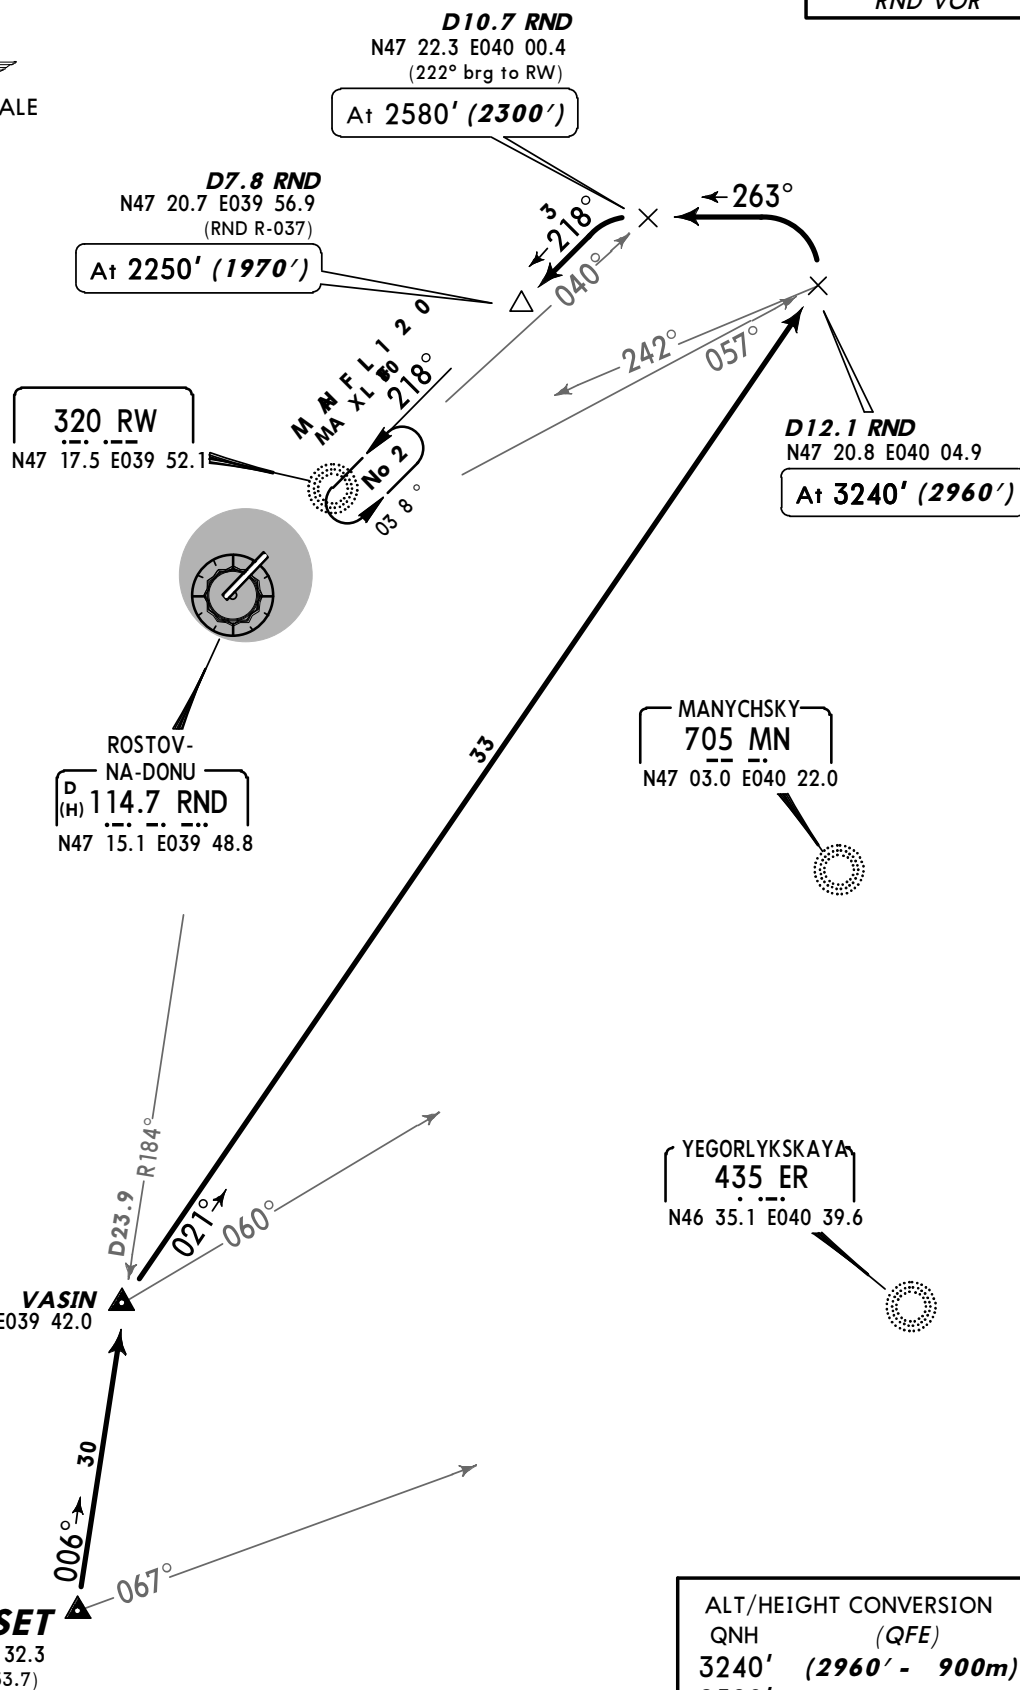



ALT/HEIGHT CONVERSION	
QNH	(QFE)
3240'	(2960' - 900m)
2580'	(2300' - 700m)
2250'	(1970' - 600m)

ATIS
132.4 (Russian 121.7)

Apt Elev
280'

Alt Set: MM (hPa on request) QNH on request (QFE)
Trans level: FL50 Trans alt (hgt): 3240' (3003')

TR 04B
RWY 04 ARRIVAL
BY ATC
FOR RUSSIAN USERS OF AIRSPACE

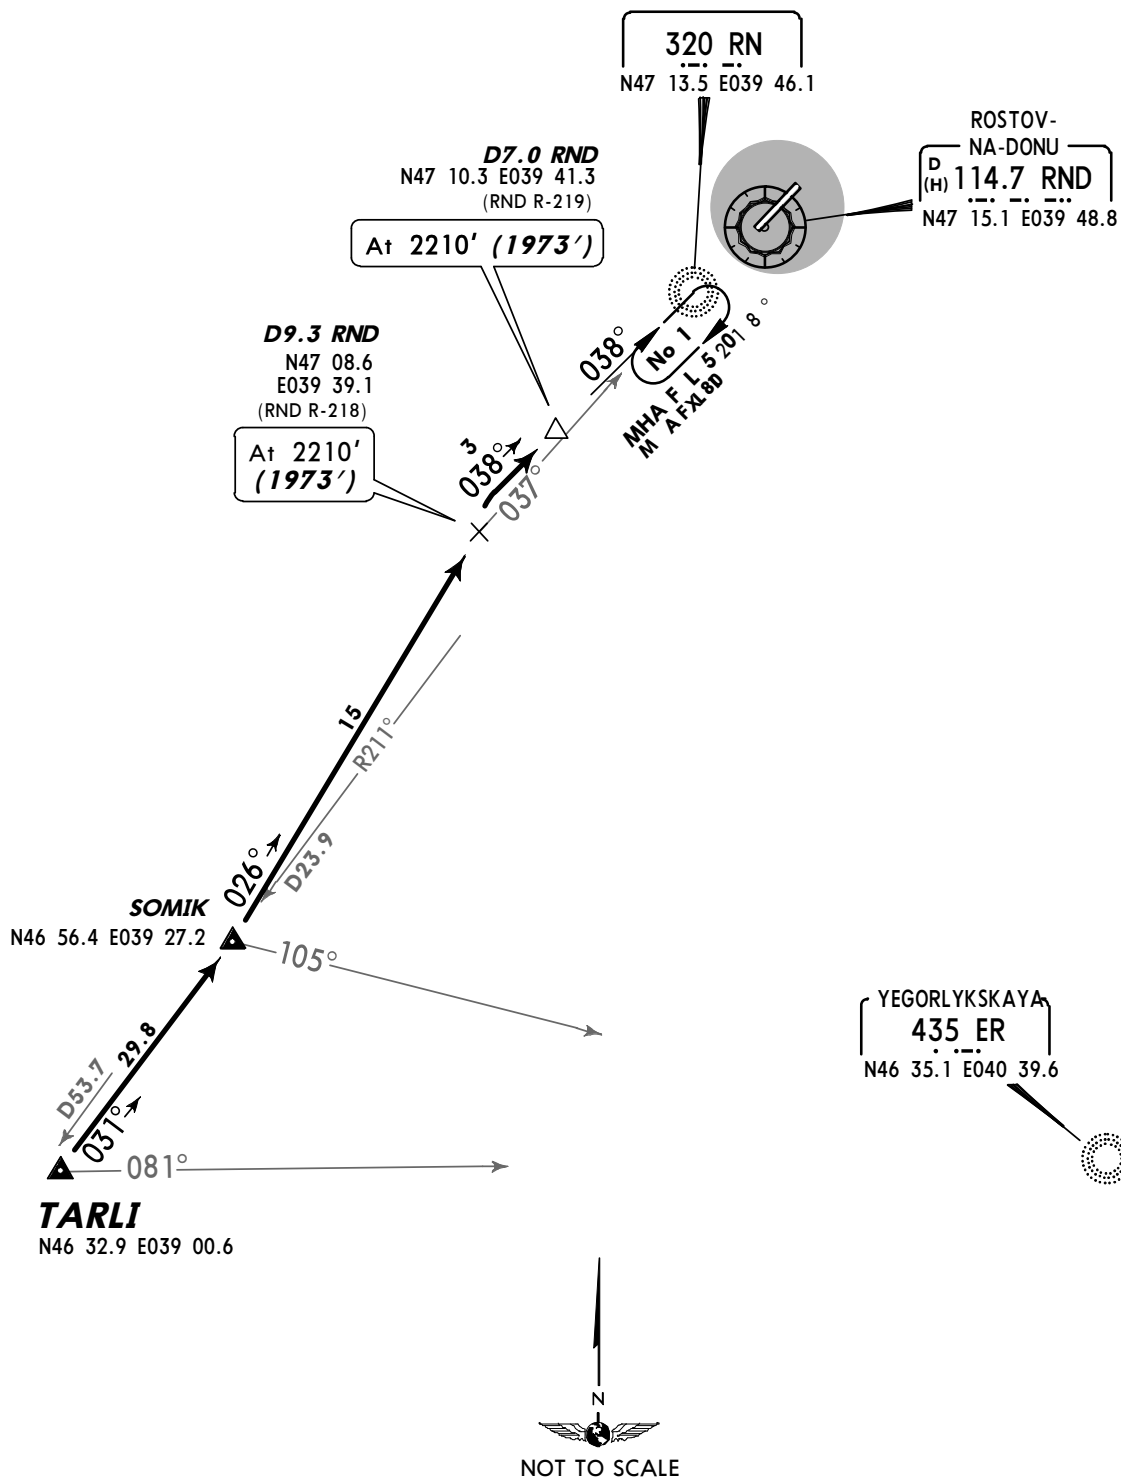



ALT/HEIGHT CONVERSION	
QNH	(QFE)
3240'	(3003' - 900m)
2210'	(1973' - 600m)

ATIS
132.4 (Russian 121.7)

Apt Elev
280'

Alt Set: MM (hPa on request) QNH on request (QFE)
Trans level: FL50 Trans alt (hgt): 3240' (2960')

TR 22B
RWY 22 ARRIVAL
BY ATC
FOR RUSSIAN USERS OF AIRSPACE

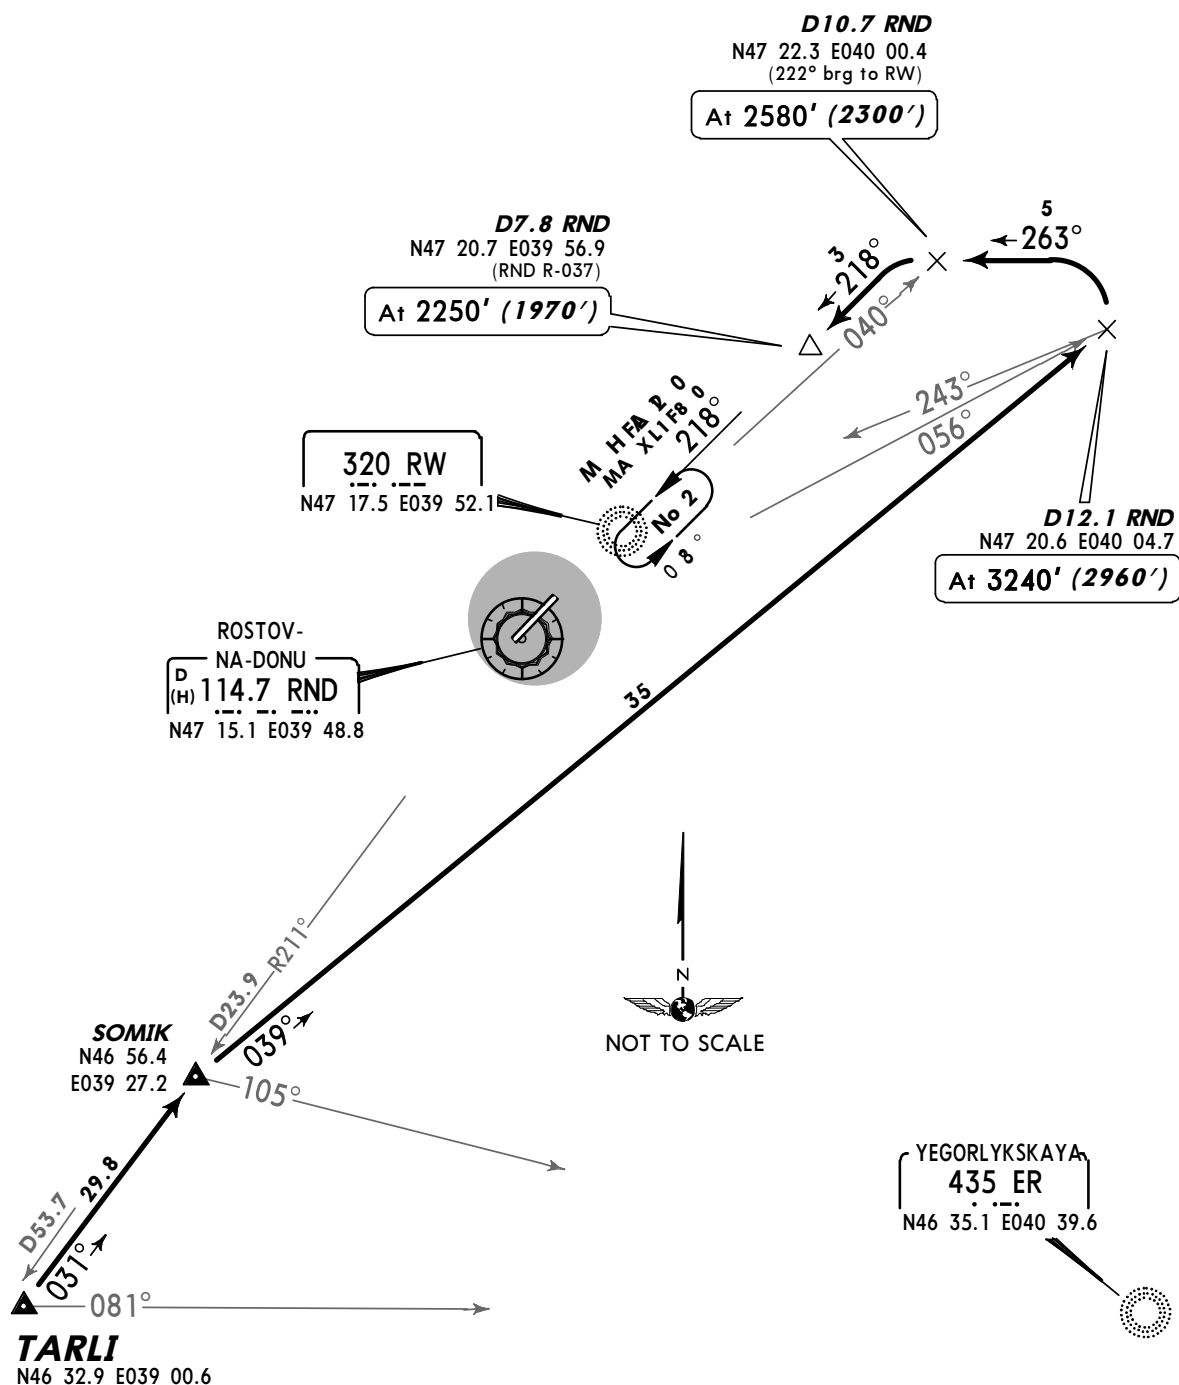


ALT/HEIGHT CONVERSION	
QNH	(QFE)
3240'	(2960' - 900m)
2580'	(2300' - 700m)
2250'	(1970' - 600m)

SID	ROUTING
DR 2A	Climb straight ahead, at or above 1110' (830') turn LEFT, intercept 006° bearing to RW, turn LEFT, 347° bearing via SLAVA direct to SB, turn RIGHT, 016° bearing to DERIB.
DR 2B By ATC	Climb straight ahead to 940' (660'), turn LEFT, intercept 001° bearing to RW, turn LEFT, 347° bearing via SLAVA direct to SB, turn RIGHT, 016° bearing to DERIB.

ROSTOV
Radar
121.2Apt Elev
280'

QNH on request (QFE) Trans level: FL50 Trans alt: 3240' (2960')

1. Aircraft should take-off with noise abatement procedures according to Flight Manual.
2. Immediately after take-off contact ROSTOV Radar.
3. Crossings at AWY entry points by ATC.

DERIB 2 DELTA (DR 2D)
DERIB 2 GOLF (DR 2G)
RWY 22 DEPARTURES

DERIB
N47 55.6 E039 54.5
At or above
FL80

SAMBEK
414 SB
N47 45.2 E039 47.9
At or above
FL70

ALT/HEIGHT CONVERSION	QNH	(QFE)
2090'	(1810' - 550m)	
2750'	(2470' - 750m)	
3240'	(2960' - 900m)	

SLAVA
N47 30.5 E039 50.1
Between
FL60 & FL80

BAGAEVSKIY
1175 BA
N47 19.3 E040 21.6

D6.7 RND
N47 10.5 E039 41.6
(RND R-219)

DR 2G
Turn at or above
2090' (1810')

MINIMUM RADIUS
2.6 ①

D10.0 RND
N47 08.2 E039 38.2
(RND R-219)

At or above
2750' (2470')

320 RW
N47 17.5 E039 52.1
Between
FL60 & FL80

ROSTOV-NA-DONU
D (H) 114.7 RND
N47 15.1 E039 48.8

MANYCHSKY
705 MN
N47 03.0 E040 22.0

①

KT	135	162	189	216	243
Bank-DEG	06	08	11	14	18

SID

ROUTING

DR 2D

Climb straight ahead, at or above 2750' (2470') turn LEFT, intercept 026° bearing to RW, turn LEFT, 347° bearing via SLAVA direct to SB, turn RIGHT, 016° bearing to DERIB.

DR 2G

By ATC

Climb straight ahead, at or above 2090' (1810') turn RIGHT, intercept 008° bearing to SB, turn RIGHT, 016° bearing to DERIB.

Apt Elev
280'

QNH on request **(QFE)**
Trans level: FL50 Trans alt: 3240' **(3003')**
1. Immediately after take-off contact ROSTOV Radar.
2. Crossings at AWY entry points by ATC.

2300'

MSA
RND VOR

FASAD
N47 33.3 E038 18.8
(RND R-280/ D63.8)

At or above
FL190

SAMBEK
414 SB
... ..
N47 45.2 E039 47.9

ZATON
N47 22.4 E039 14.8

At 900'
(663')

ROSTOV-
NA-DONU
D
(H) 114.7 RND
N47 15.1 E039 48.8

ALT/HEIGHT CONVERSION
QNH (QFE)
900' (663' - 200m)
3240' (3003' - 900m)

This SID requires a minimum climb gradient of 4.5%.

Gnd speed-KT	75	100	150	200	250	300
4.5% V/V(fpm)	342	456	684	911	1139	1367


Climb straight ahead to 900' (663'), turn LEFT, 271° track to ZATON, turn RIGHT, 279° track to FASAD.

ROSTOV Radar
121.2

Apt Elev
280'

QNH on request (QFE) Trans level: FL50 Trans alt: 3240' (2960')
1. Aircraft should take-off with noise abatement procedures according to Flight Manual.
2. Immediately after take-off contact ROSTOV Radar.
3. Crossings at AWY entry points by ATC.

FASAD 2 BRAVO (FS 2B)
RWY 22 DEPARTURE
BY ATC




SAMBEK
414 SB
N47 45.2 E039 47.9

FASAD

N47 33.3 E038 18.8
(RND R-280/ D63.8)

At or above
FL190

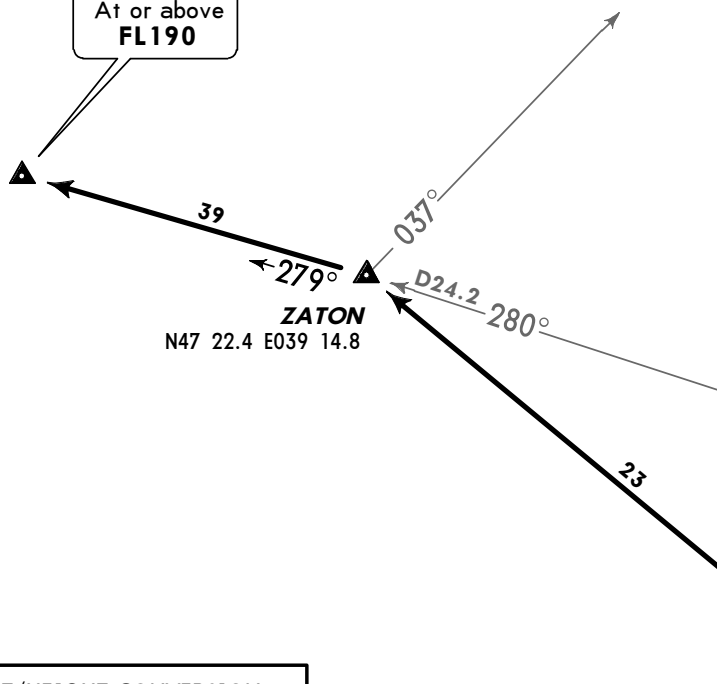

ROSTOV-
NA-DONU
D (H) 114.7 RND
N47 15.1 E039 48.8

MINIMUM
RADIUS
2.6 ①

D6.7 RND
N47 10.5 E039 41.6
(RND R-219)

At or above
2090' (1810')

ALT/HEIGHT CONVERSION
QNH (QFE)
2090' (1810' - 550m)
3240' (2960' - 900m)

This SID requires a minimum climb gradient
of
4.5%.



Gnd speed-KT	75	100	150	200	250	300
4.5% V/V(fpm)	342	456	684	911	1139	1367

KT	135	162	189	216	243
Bank-DEG	06	08	11	14	18

ROUTING

Climb straight ahead, at or above 2090' (1810'), turn RIGHT 302° track to ZATON, turn LEFT, 279° track to FASAD.

GINSA 1 ALFA (GN 1A)
RWY 04 DEPARTURE

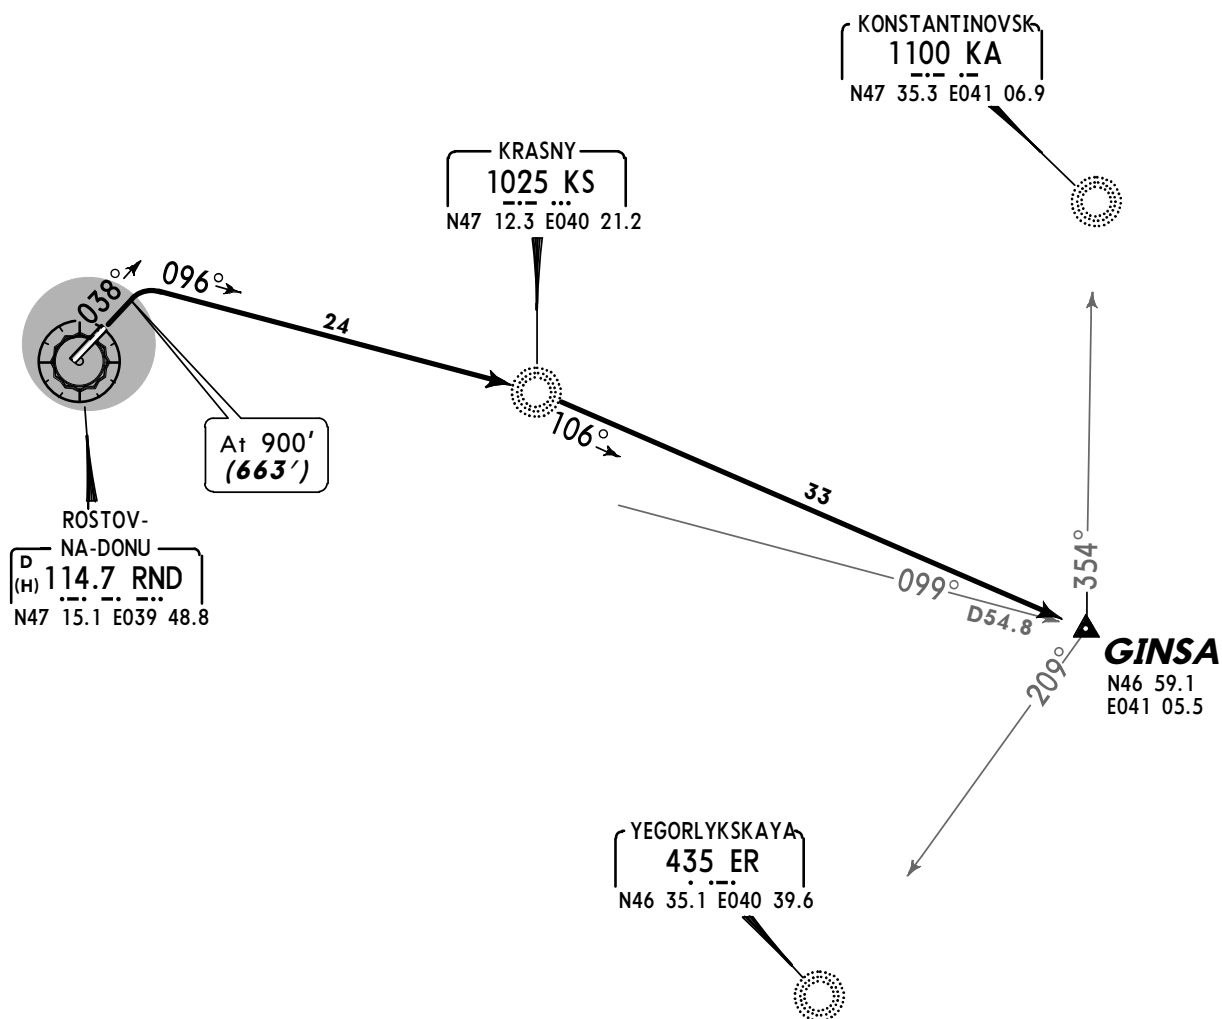

ALT/HEIGHT CONVERSION
QNH (QFE)
900' (663' - 200m)
3240' (3003' - 900m)

Gnd speed-KT	75	100	150	200	250	300
5.5% V/V(fpm)	418	557	835	1114	1392	1671


Climb straight ahead to 900' (663'), turn RIGHT, intercept 096° bearing to KS, turn RIGHT, 106° bearing to GINSA.

ROSTOV Radar
121.2

Apt Elev
280'

QNH on request (QFE) Trans level: FL50 Trans alt: 3240' (2960')
1. Aircraft should take-off with noise abatement procedures according to Flight Manual.
2. Immediately after take-off contact ROSTOV Radar.
3. Crossings at AWY entry points by ATC.


GINSA 2 ALFA (GN 2A) RWY 22 DEPARTURE



ROSTOV-
NA-DONU
D
(H) 114.7 RND
N47 15.1 E039 48.8

KRASNY
1025 KS
N47 12.3 E040 21.2

KONSTANTINOVSK
1100 KA
N47 35.3 E041 06.9



YEGORLYKSKAYA
435 ER
N46 35.1 E040 39.6

GINSA
N46 59.1
E041 05.5

This SID requires a minimum climb gradient of 4.8%.

Gnd speed-KT	75	100	150	200	250	300
4.8% V/V(fpm)	365	486	729	972	1215	1458

ALT/HEIGHT CONVERSION	
QNH	(QFE)
940'	(660' - 200m)
3240'	(2960' - 900m)



ROUTING

Climb straight ahead to 940' (660'), turn LEFT, intercept 081° bearing to KS, turn RIGHT, 106° bearing to GINSA.

ROSTOV Radar
121.2Apt Elev
280'

QNH on request (QFE)
Trans level: FL50 Trans alt: 3240' (3003')
1. Immediately after take-off contact ROSTOV
Radar.
2. Crossings at AWY entry points by ATC.

2300'

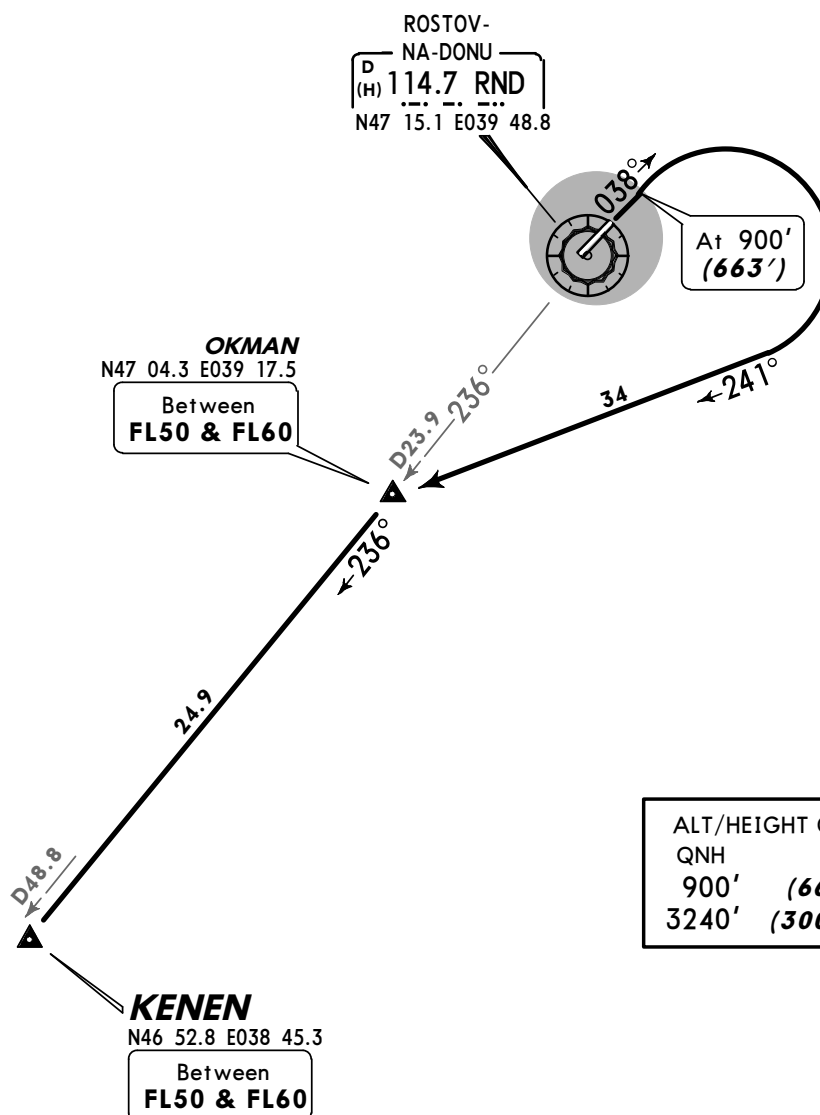MSA
RND VORKENEN 1 ALFA (KN 1A)
RWY 04 DEPARTURE


ROUTING

Climb straight ahead to 900' (663'), turn RIGHT, 241° track to OKMAN, turn LEFT, 236° track to KENEN.

ROSTOV Radar
121.2Apt Elev
280'

QNH on request (**QFE**) Trans level: FL50 Trans alt: 3240' (**2960'**)

1. Aircraft should take-off with noise abatement procedures according to Flight Manual.
2. Immediately after take-off contact ROSTOV Radar.
3. Crossings at AWY entry points by ATC.

KENEN 2 ALFA (KN 2A)
RWY 22 DEPARTURE

ROSTOV-
NA-DONU
D
(H) 114.7 RND
N47 15.1 E039 48.8

At 940'
(660')

OKMAN
N47 04.3 E039 17.5
(RND R-236/D23.9)

Between
FL50 & FL60


KENEN
N46 52.8 E038 45.3
(RND R-236/D48.8)


Between
FL50 & FL60

ALT/HEIGHT CONVERSION	
QNH	(QFE)
940'	(660' - 200m)
3240'	(2960' - 900m)

ROUTING

Climb straight ahead to 940' (660'), turn RIGHT, 237° track to OKMAN, turn LEFT, 236° track to KENEN.

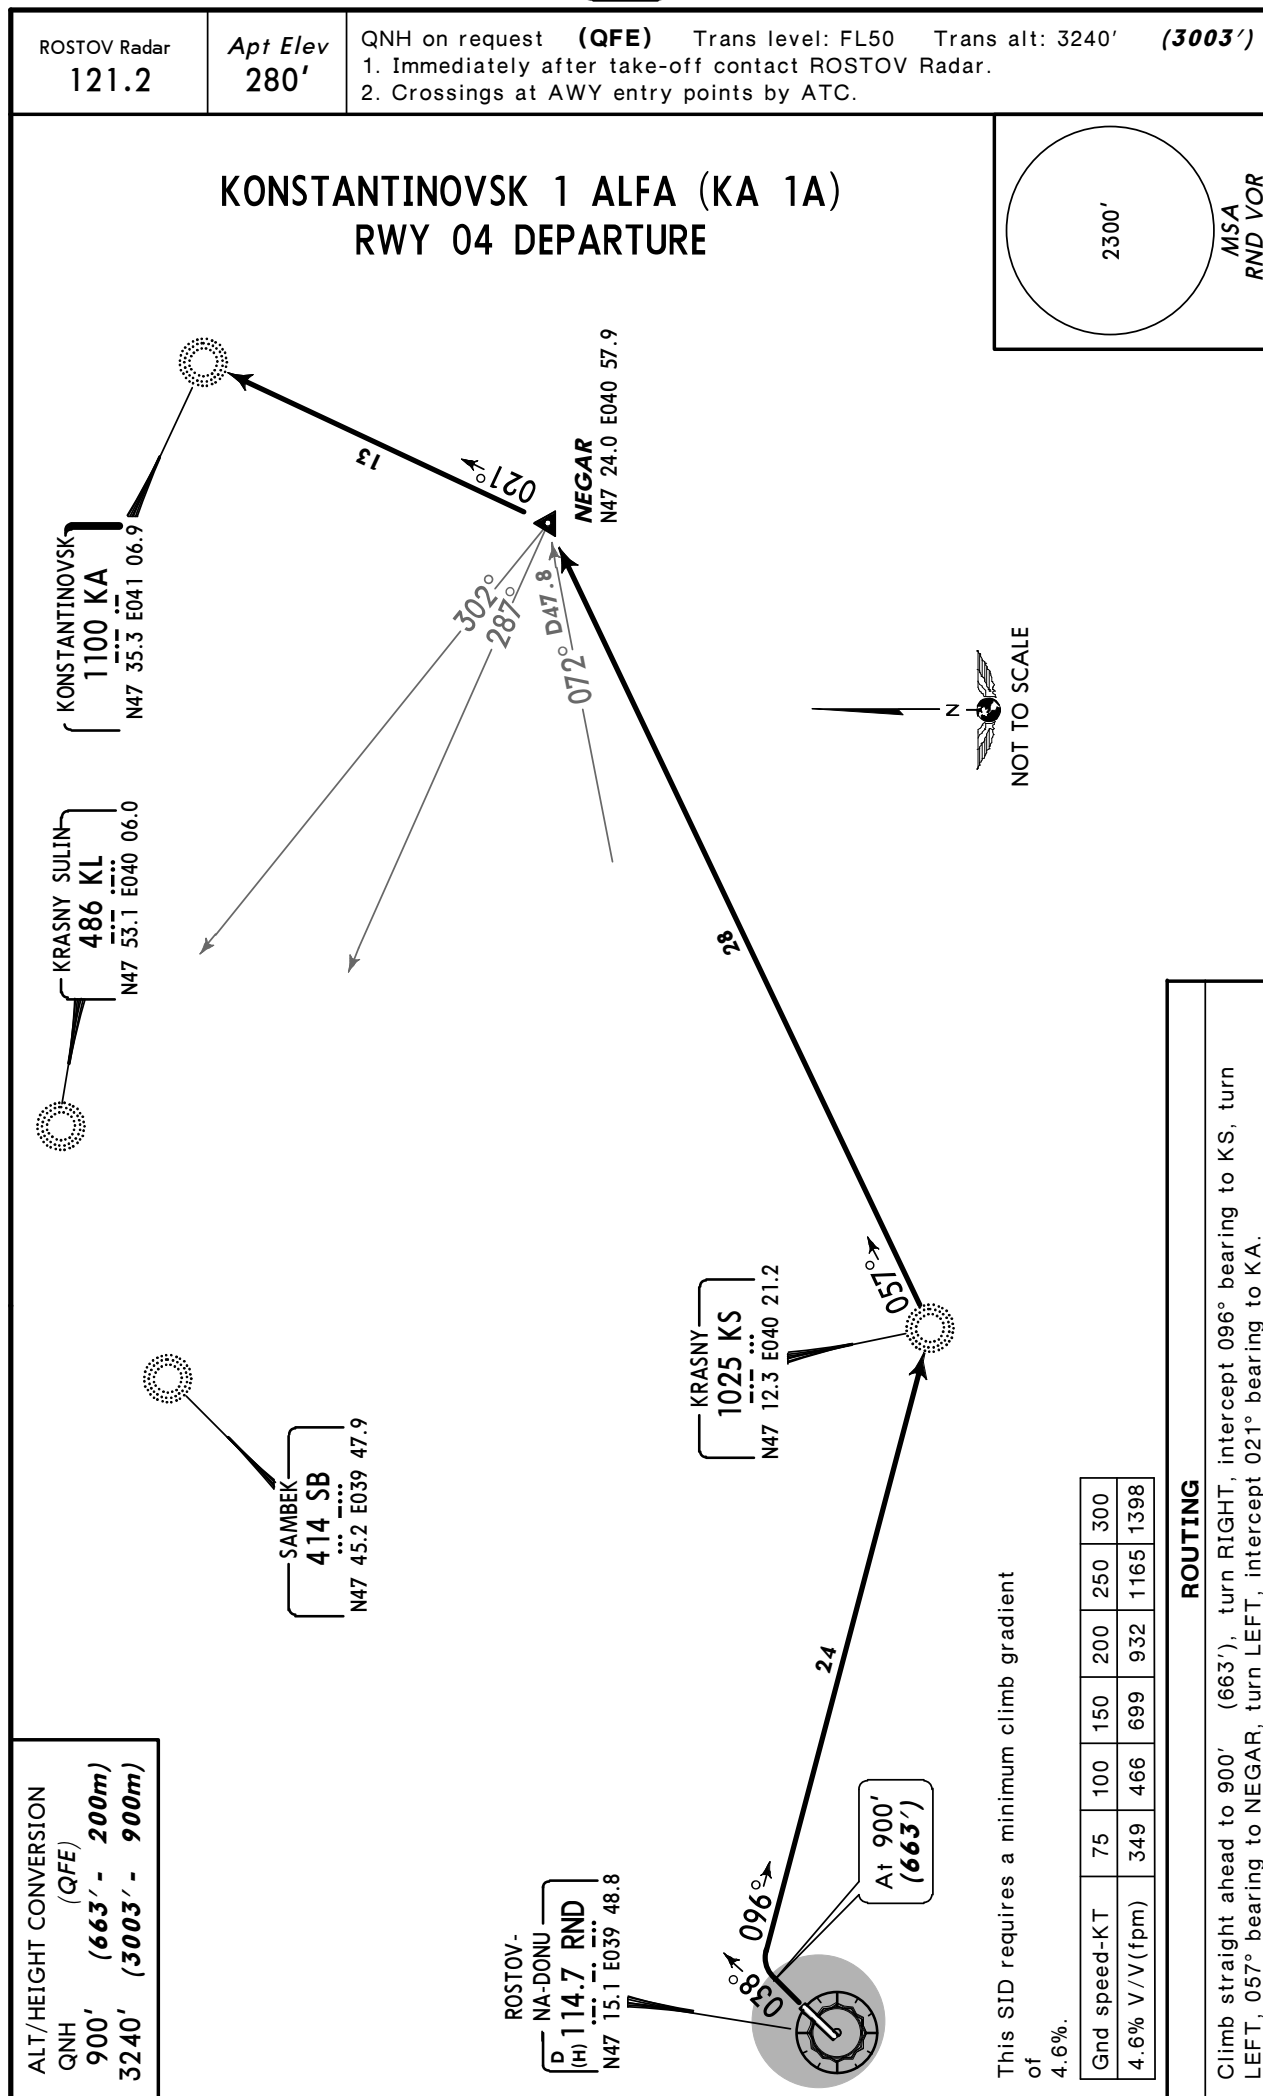


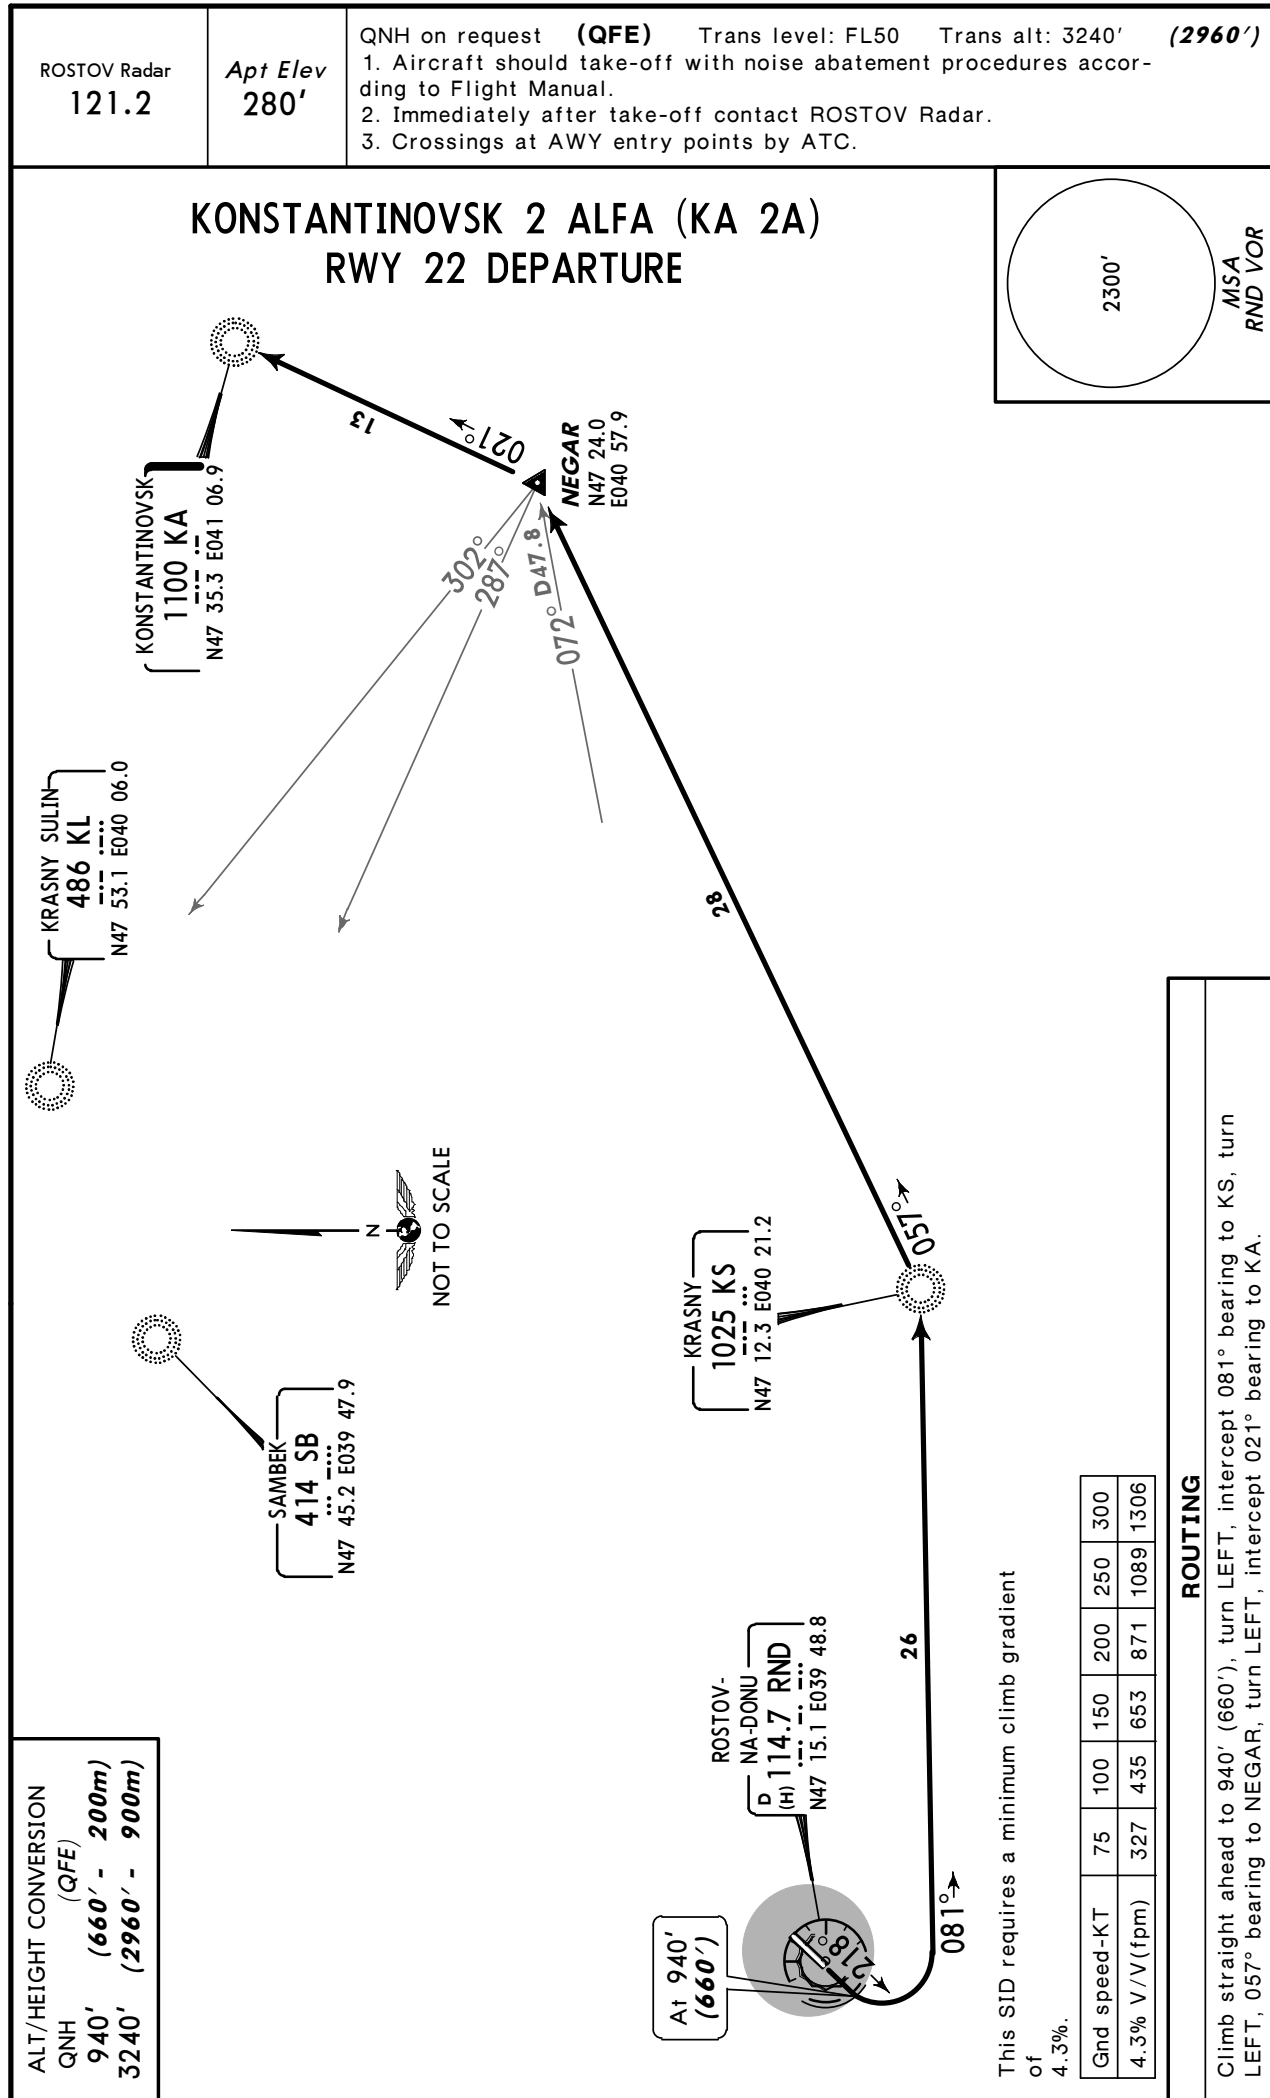

QNH on request **(QFE)** Trans level: FL50 Trans alt: 3240' **(3003')**
 1. Immediately after take-off contact ROSTOV Radar.
 2. Crossings at AWY entry points by ATC.

2300'

MSA
RND VOR

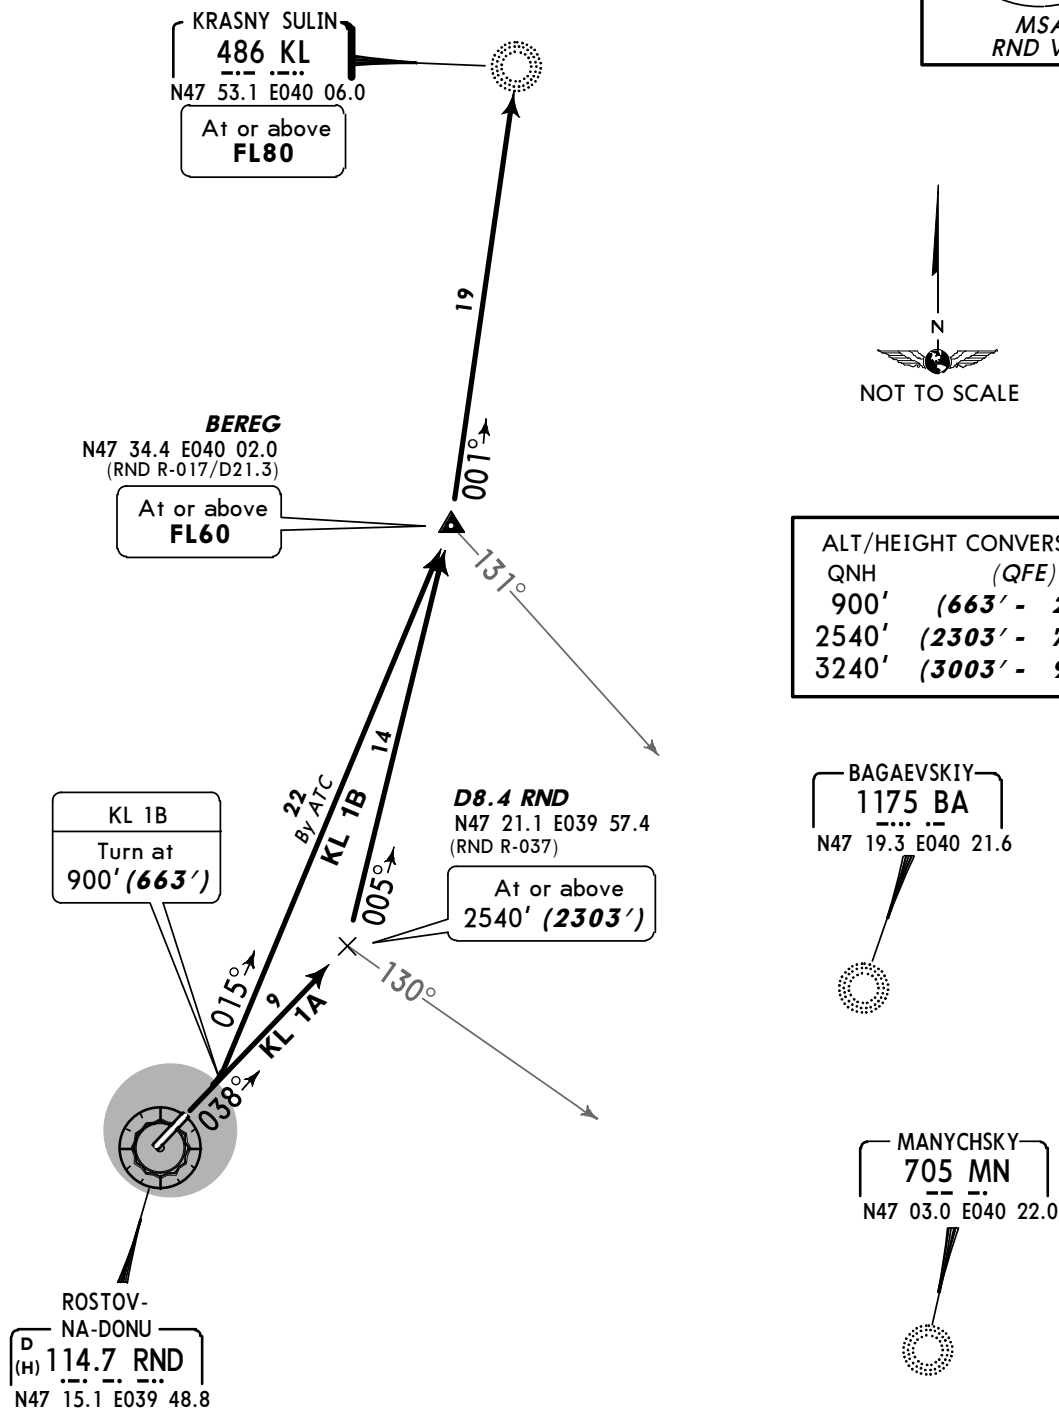

This SID requires a minimum climb gradient of 4.1% until passing BEREG.


Gnd speed-KT	75	100	150	200	250	300
4.1% V/V(fpm)	311	415	623	830	1038	1246

SID	ROUTING
KL 1A	Climb straight ahead, at or above 2540' (2303'), turn LEFT, 005° track to BREG, turn LEFT, intercept 001° bearing to KL.
KL 1B By ATC	Climb straight ahead to 900' (663'), turn LEFT, 015° track to BREG, turn LEFT, intercept 001° bearing to KL.

ROSTOV Radar
121.2Apt Elev
280'

QNH on request (QFE)
Trans level: FL50 Trans alt: 3240' (3003')
1. Immediately after take-off contact ROSTOV Radar.
2. Crossings at AWY entry points by ATC.

2300'

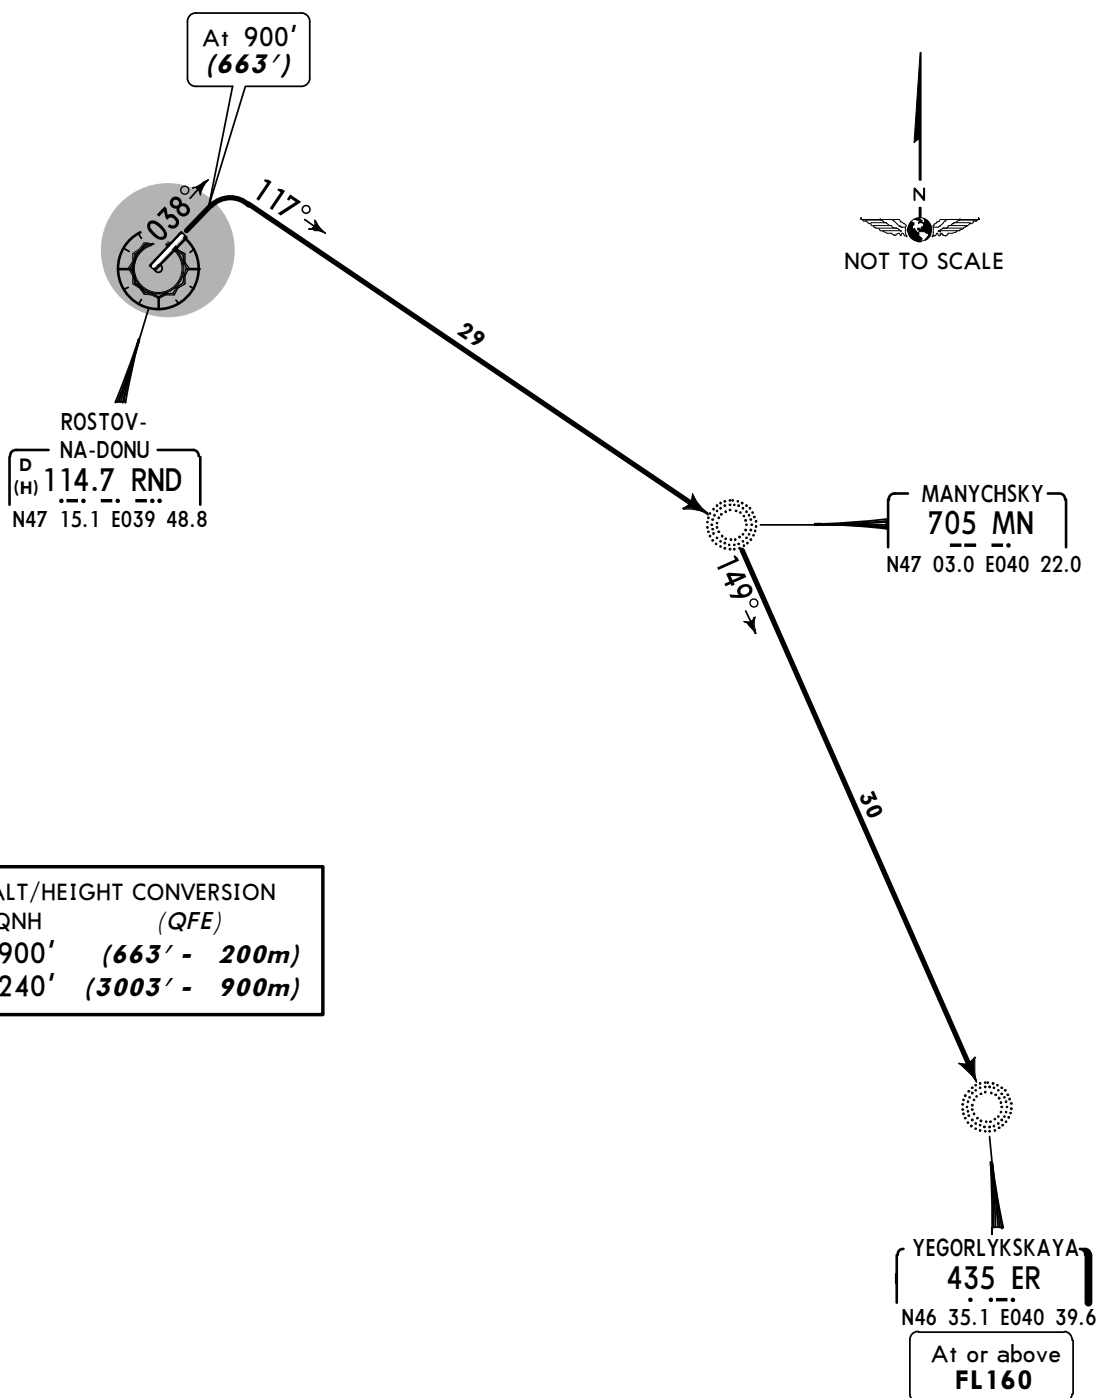MSA
RND VORYEGORLYK 1 ALFA (ER 1A)
RWY 04 DEPARTURE

ROUTING

Climb straight ahead to 900' (663'), turn RIGHT, intercept 117° bearing to MN, turn RIGHT, 149° bearing to ER.

QNH on request (QFE) Trans level: FL50 Trans alt: 3240' (2960')
1. Aircraft should take-off with noise abatement procedures according to Flight Manual.
2. Immediately after take-off contact ROSTOV Radar.
3. Crossings at AWY entry points by ATC.


ROSTOV Radar
121.2

Apt Elev
280'

YEGORLYK 2 ALFA (ER 2A) RWY 22 DEPARTURE

2300'

MSA
RND VOR

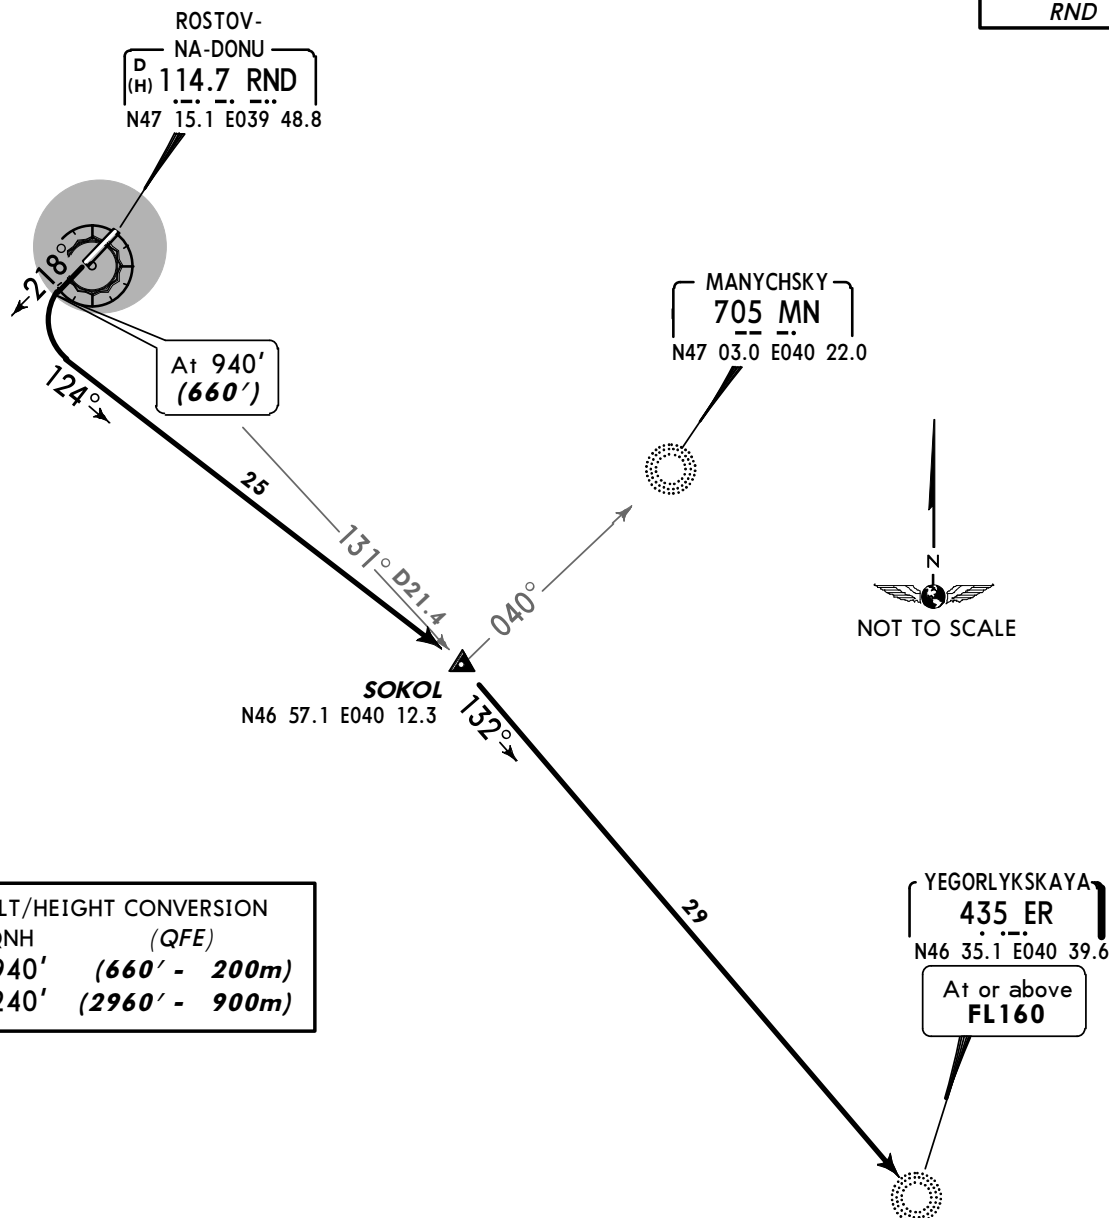

ALT/HEIGHT CONVERSION
QNH (QFE)
940' (660' - 200m)
3240' (2960' - 900m)

This SID requires a minimum climb gradient
of
4.3%.

Gnd speed-KT	75	100	150	200	250	300
4.3% V/V(fpm)	327	435	653	871	1089	1306

ROUTING



Climb straight ahead to 940' (660'), turn LEFT, 124° track to SOKOL, turn RIGHT, intercept 132° bearing to ER.

QNH on request **(QFE)** Trans level: FL50
Trans alt (hgt): 3240' **(3003')**

1. Immediately after take-off contact ROSTOV Radar.
2. Crossings at AWY entry points by ATC.

2300'

MSA
RND VOR

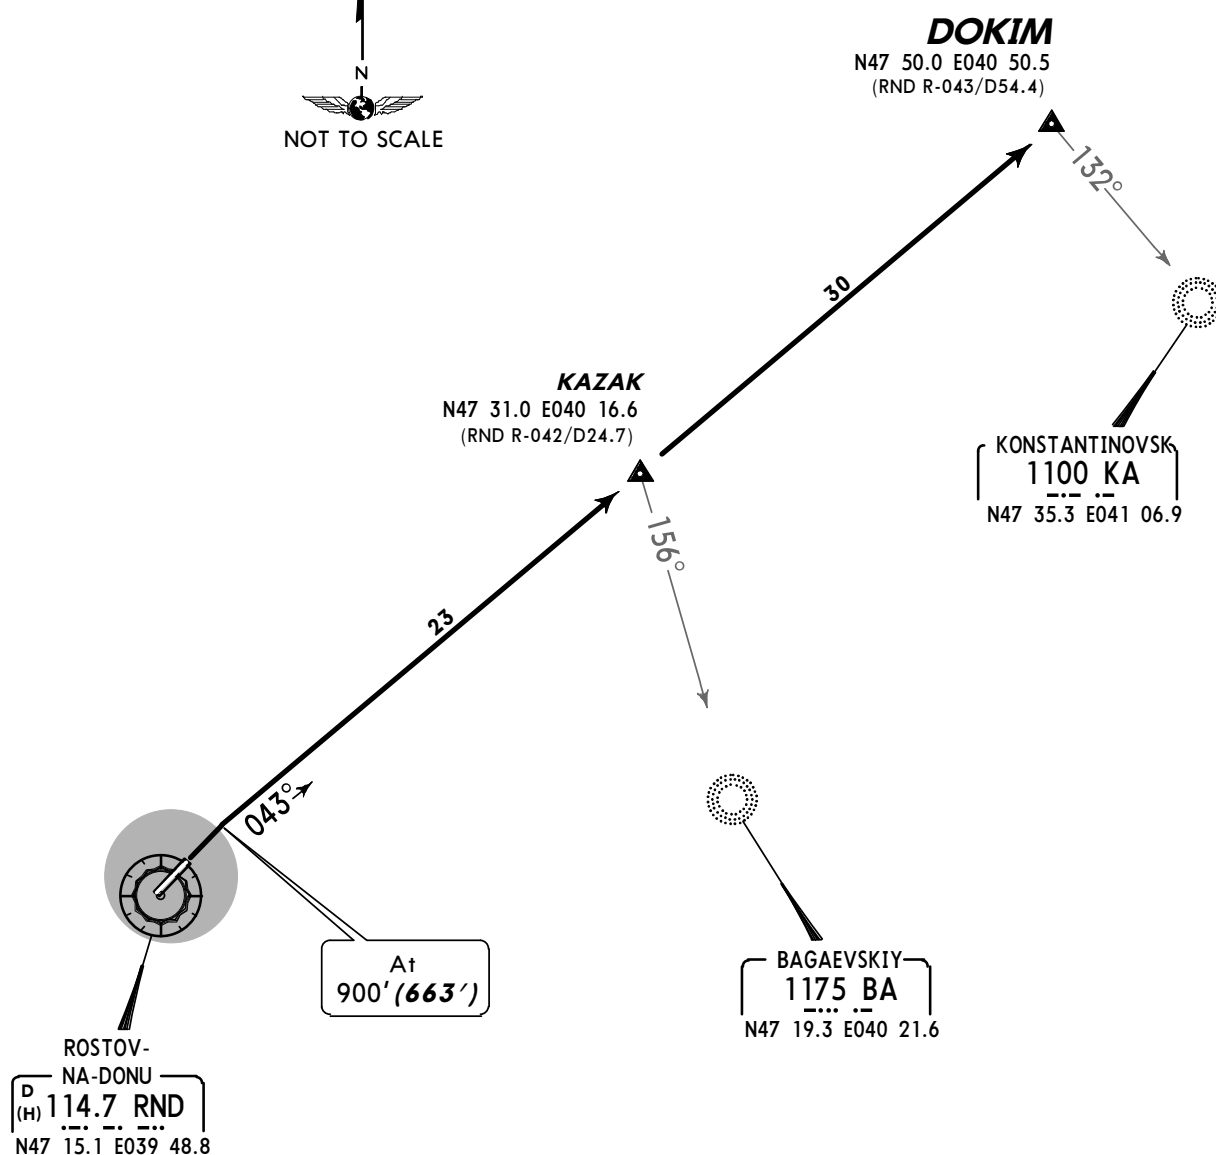

ALT/HEIGHT CONVERSION
QNH (QFE)
900' (663' - 200m)
3240' (3003' - 900m)




ROSTOV Radar
121.2

Apt Elev
280'


QNH on request (QFE) Trans level: FL50
Trans alt (hgt): 3240' (2960')
1. Aircraft should take-off with noise abatement procedures according to Flight MANUAL.
2. Immediately after take-off contact ROSTOV Radar.
3. Crossings at AWY entry points by ATC.

DM 2B
RWY 22 DEPARTURE
BY ATC

FOR RUSSIAN USERS OF AIRSPACE

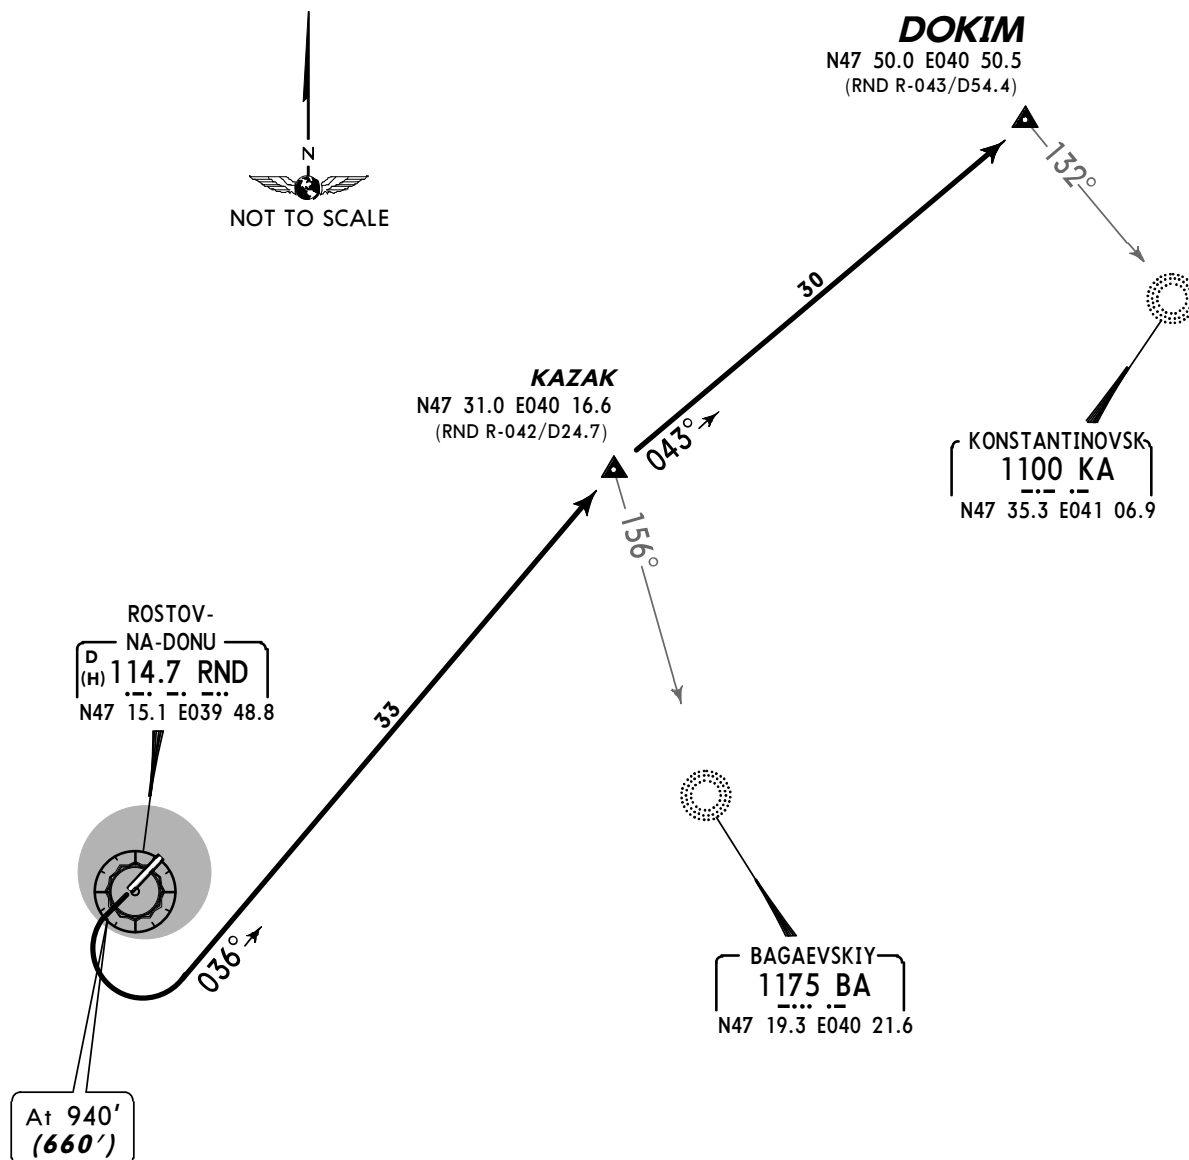

ALT/HEIGHT CONVERSION	
QNH	(QFE)
940'	(660' - 200m)
3240'	(2960' - 900m)

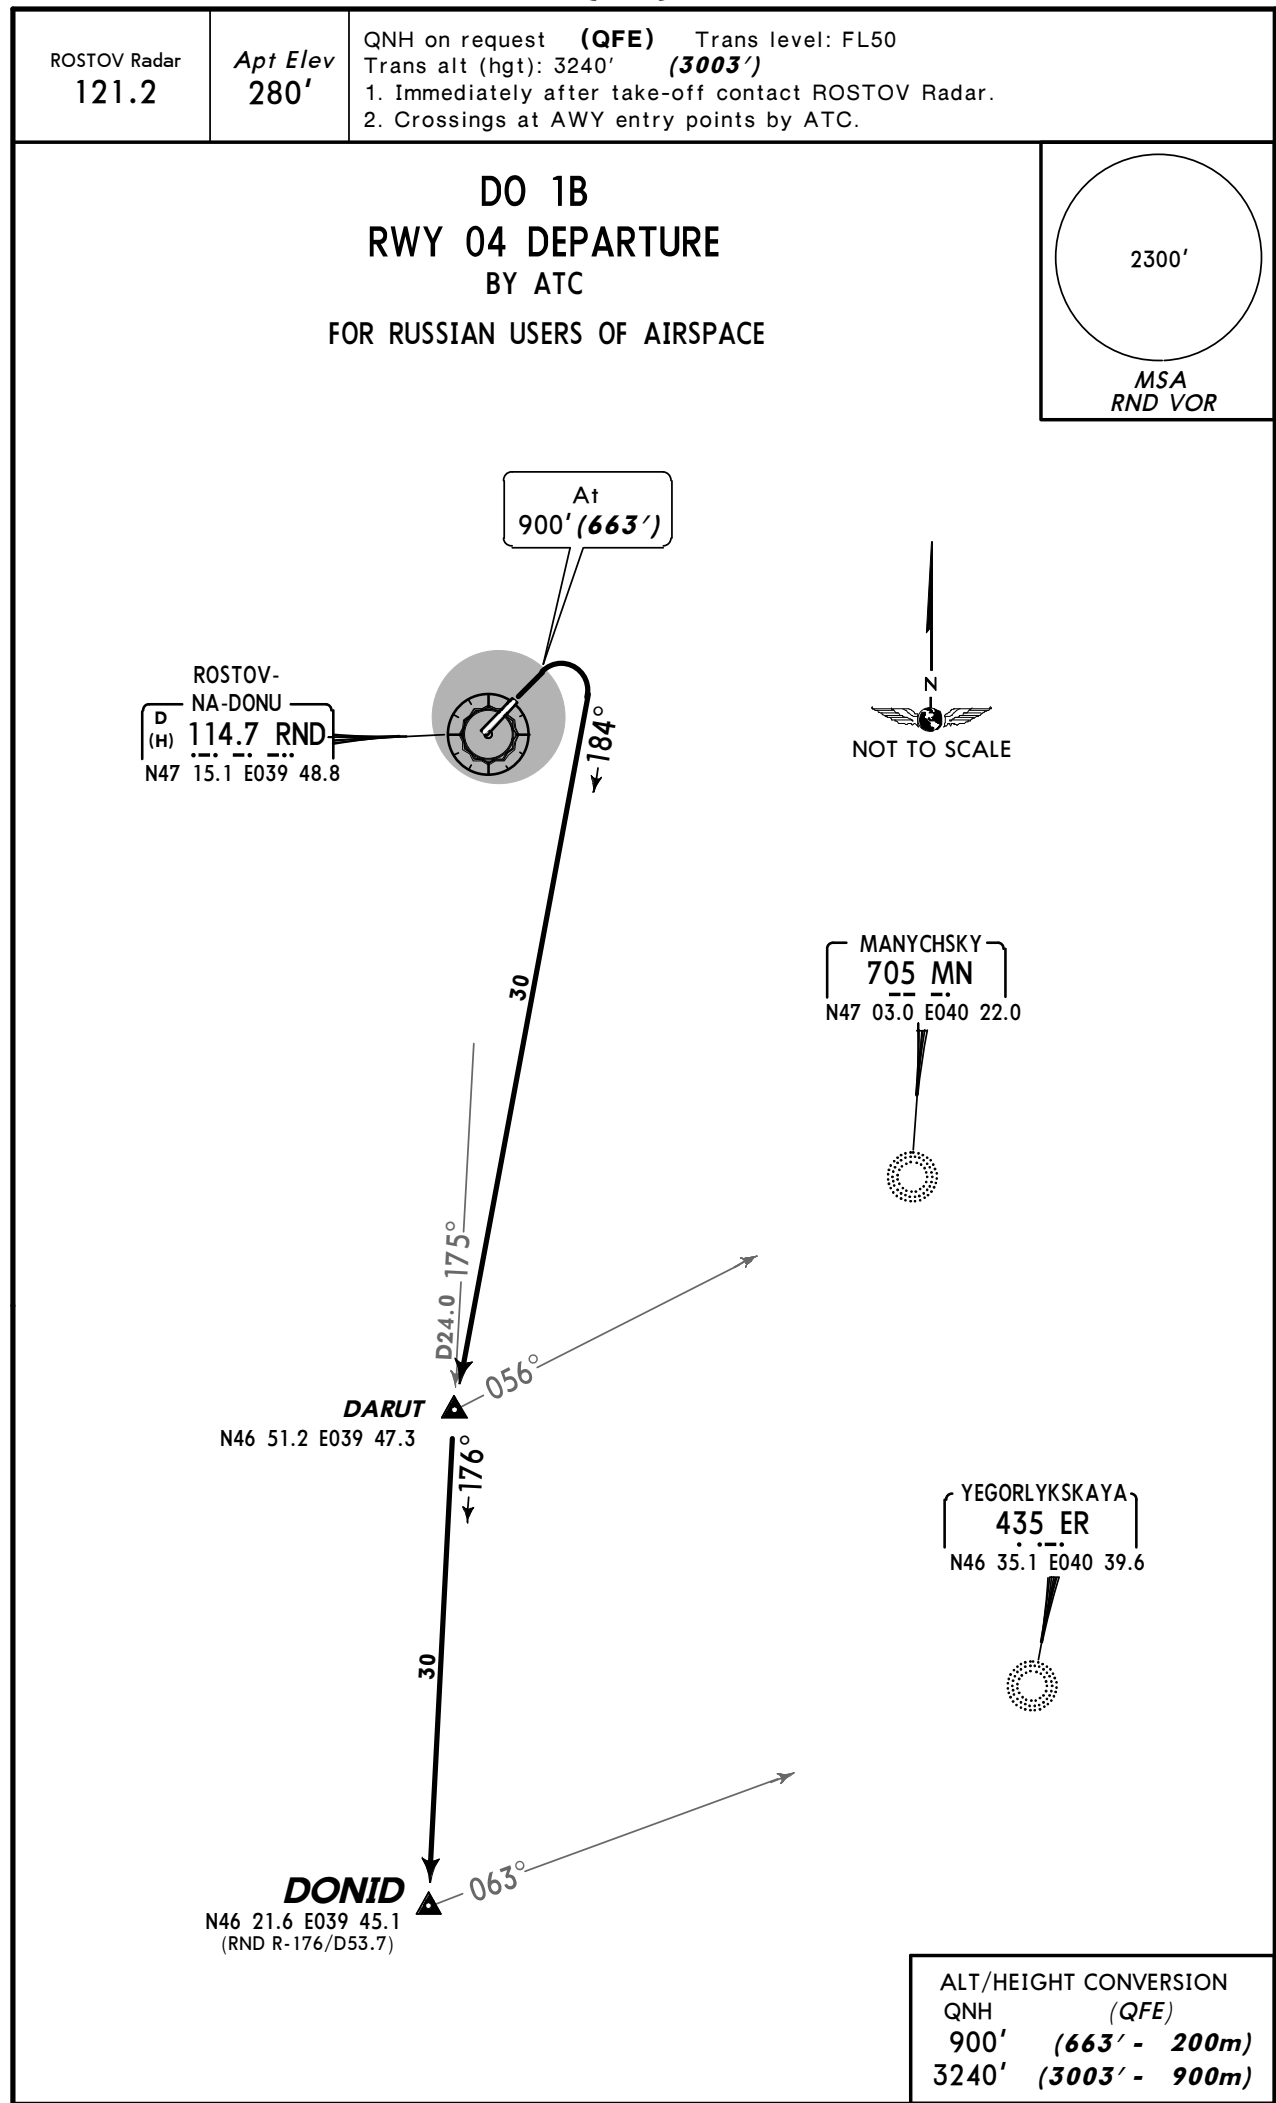


ROSTOV Radar
121.2

Apt Elev
280'


QNH on request (QFE) Trans level: FL50
Trans alt (hgt): 3240' (2960')
1. Aircraft should take-off with noise abatement procedures according to Flight MANUAL.
2. Immediately after take-off contact ROSTOV Radar.
3. Crossings at AWY entry points by ATC.

DO 2B
RWY 22 DEPARTURE
BY ATC

FOR RUSSIAN USERS OF AIRSPACE



ROSTOV-
NA-DONU
D
(H) 114.7 RND
N47 15.1 E039 48.8



At 940'
(660')



MANYCHSKY
705 MN
N47 03.0 E040 22.0



DARUT
N46 51.2 E039 47.3
(RND R-175/D24.0)

DARUT

171°
176°

25

30

DONID
N46 21.6 E039 45.1
(RND R-176/D53.7)


DONID

056°
063°

YEGORLYKSKAYA
435 ER
N46 35.1 E040 39.6



ALT/HEIGHT CONVERSION
QNH (QFE)
940' (660' - 200m)
3240' (2960' - 900m)

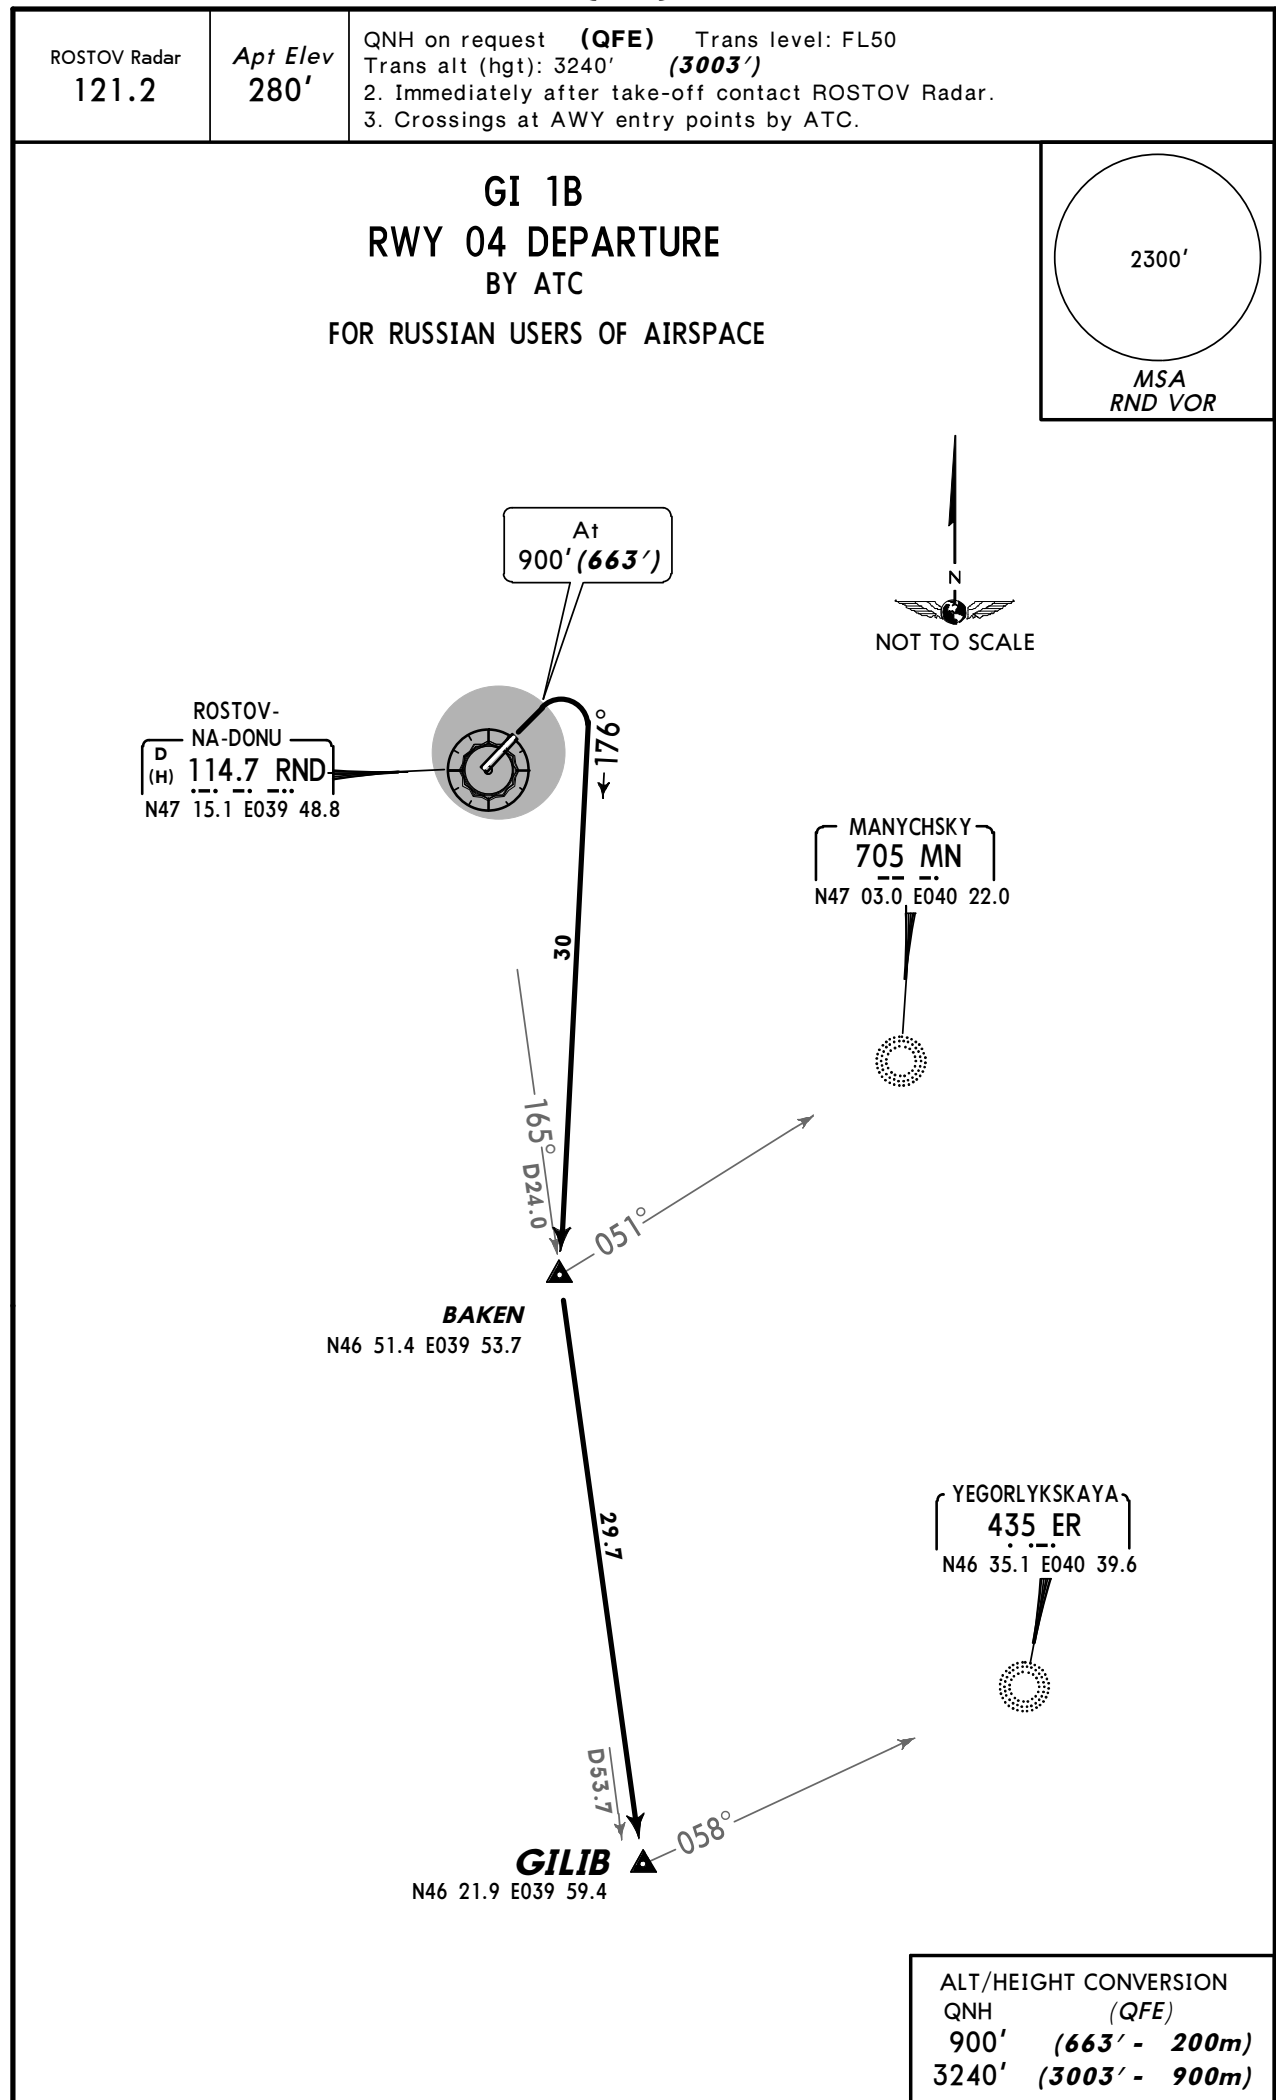

ROSTOV Radar
121.2

Apt Elev
280'

QNH on request (QFE) Trans level: FL50

Trans alt (hgt): 3240' (2960')

1. Aircraft should take-off with noise abatement procedures according to Flight MANUAL.

2. Immediately after take-off contact ROSTOV Radar.

3. Crossings at AWY entry points by ATC.

GI 2B
RWY 22 DEPARTURE
BY ATC

FOR RUSSIAN USERS OF AIRSPACE

2300'

MSA
RND VOR

ROSTOV-
NA-DONU
D
(H) 114.7 RND
N47 15.1 E039 48.8

At 940'
(660')



MANYCHSKY
705 MN
N47 03.0 E040 22.0

BAKEN
N46 51.4 E039 53.7

YEGORLYKSKAYA
435 ER
N46 35.1 E040 39.6

GILIB
N46 21.9 E039 59.4

ALT/HEIGHT CONVERSION	
QNH	(QFE)
940'	(660' - 200m)
3240'	(2960' - 900m)


ROSTOV Radar
121.2

Apt Elev
280'

QNH on request (QFE) Trans level: FL50
Trans alt (hgt): 3240' (3003')
1. Immediately after take-off contact ROSTOV Radar.
2. Crossings at AWY entry points by ATC.

KI 1B
RWY 04 DEPARTURE
BY ATC

FOR RUSSIAN USERS OF AIRSPACE



ROSTOV-
NA-DONU
D
(H) 114.7 RND
N47 15.1 E039 48.8

At
900' (663')

MANYCHSKY
705 MN
N47 03.0 E040 22.0

VASIN
N46 51.7 E039 42.0

YEGORLYKSKAYA
435 ER
N46 35.1 E040 39.6

KISET
N46 22.7 E039 32.3
(RND R-185/D53.7)


ALT/HEIGHT CONVERSION
QNH (QFE)
900' (663' - 200m)
3240' (3003' - 900m)

ROSTOV Radar
121.2

Apt Elev
280'

QNH on request (QFE) Trans level: FL50
Trans alt (hgt): 3240' (2960')
1. Aircraft should take-off with noise abatement procedures according to Flight MANUAL.
2. Immediately after take-off contact ROSTOV Radar.
3. Crossings at AWY entry points by ATC.

KI 2B
RWY 22 DEPARTURE
BY ATC
FOR RUSSIAN USERS OF AIRSPACE



ROSTOV-
NA-DONU
D (H) 114.7 RND
N47 15.1 E039 48.8

At 940'
(660')



MANYCHSKY
705 MN
N47 03.0 E040 22.0

VASIN
N46 51.7 E039 42.0

YEGORLYKSKAYA
435 ER
N46 35.1 E040 39.6

KISET
N46 22.7 E039 32.3
(RND R-185/D53.7)


ALT/HEIGHT CONVERSION
QNH (QFE)
900' (660' - 200m)
3240' (2960' - 900m)

QNH on request **(QFE)** Trans level: FL50
Trans alt (hgt): 3240' **(3003')**

1. Immediately after take-off contact ROSTOV Radar.
2. Crossings at AWY entry points by ATC.

2300'

MSA
RND VOR

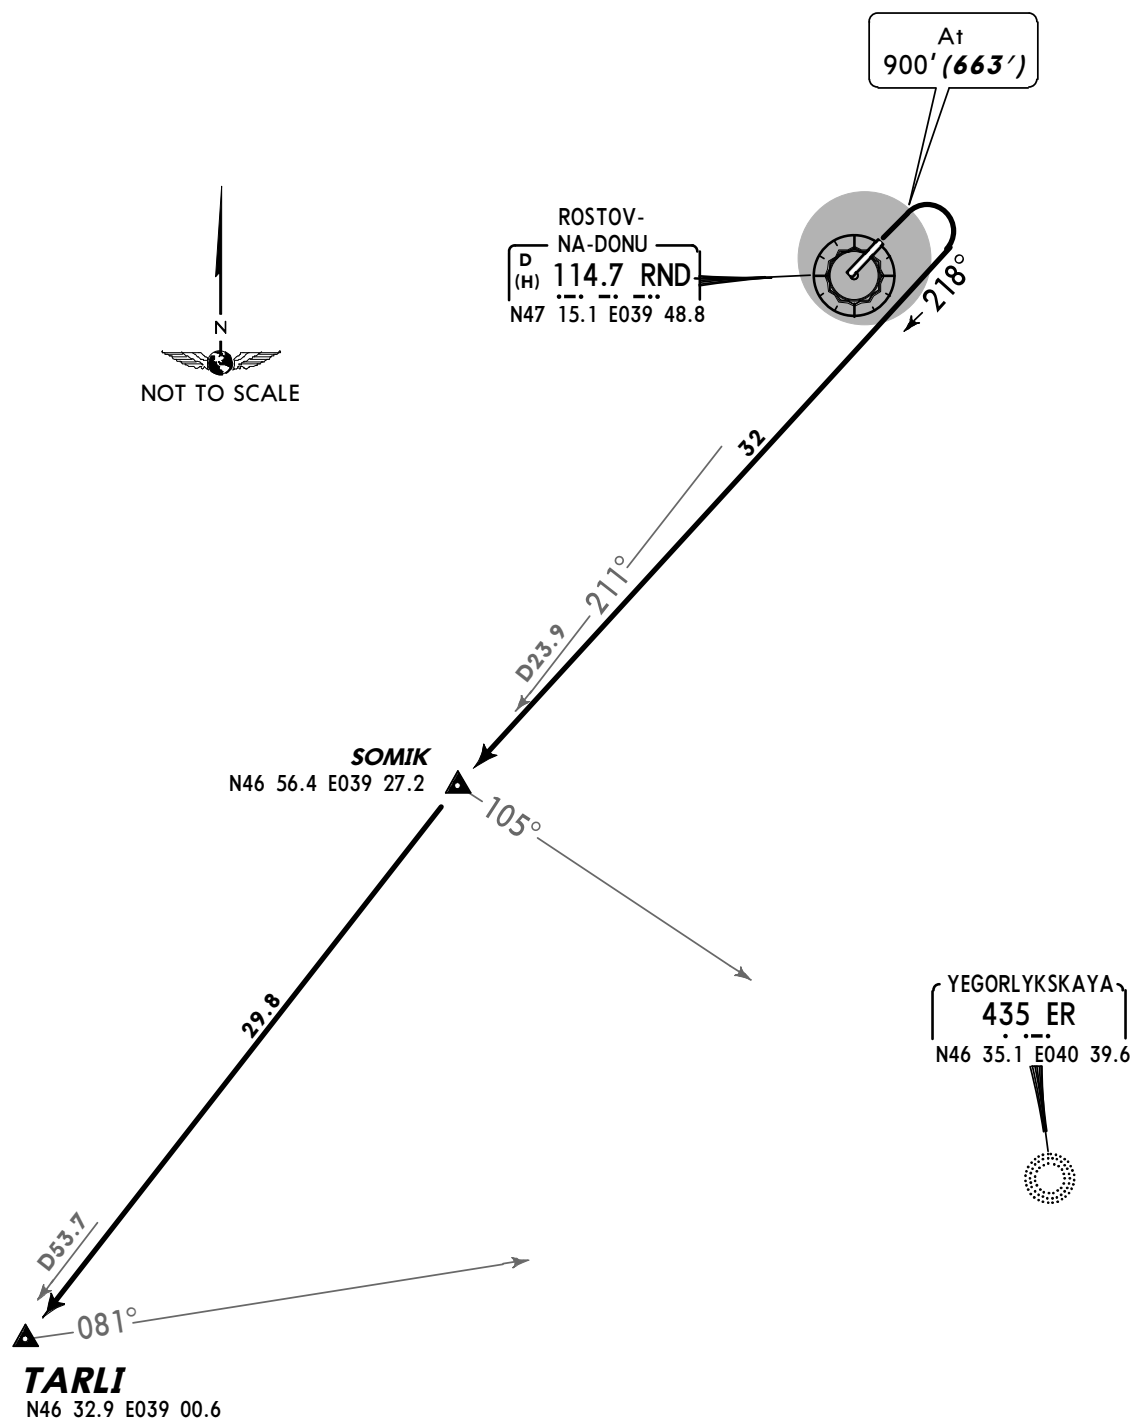

ALT/HEIGHT CONVERSION
QNH (QFE)
900' (663' - 200m)
3240' (3003' - 900m)

ROSTOV Radar
121.2

Apt Elev
280'

QNH on request (QFE) Trans level: FL50

Trans alt (hgt): 3240' (2960')



1. Aircraft should take-off with noise abatement procedures according to Flight MANUAL.

2. Immediately after take-off contact ROSTOV Radar.


3. Crossings at AWY entry points by ATC.

TR 2B
RWY 22 DEPARTURE
BY ATC

FOR RUSSIAN USERS OF AIRSPACE



ROSTOV-
NA-DONU
D 114.7 RND
(H)
N47 15.1 E039 48.8



At 940'
(660')

SOMIK
N46 56.4 E039 27.2
(RND R-211/D23.9)

YEGORLYKSKAYA
435 ER
N46 35.1 E040 39.6



TARLI
N46 32.9 E039 00.6
(RND R-211/D53.7)

ALT/HEIGHT CONVERSION
QNH (QFE)
940' (660' - 200m)
3240' (2960' - 900m)

NOISE ABATEMENT

ARRIVALS

APPROACH PHASE

Noise abatement procedures shall be executed by all ACFT.

If special meteorological conditions are present in arrival and approach sectors, ATS unit may at its own discretion or by a pilot in command's request deviate from the provisions given below, if it is necessary for safety reasons.

Restrictions

During instrument as well as visual approach flying below the ILS glide path angle is not allowed.

Between 2300-0700LT when appropriate meteorological and air conditions are available, landing shall be carried out on RWY 22.

Landing with a tail wind component is allowed when tail wind component is according to norms established in Flight Manual for specified ACFT type.

DEPARTURES

TAKE-OFF AND CLIMBING PHASE

Noise abatement procedures shall be executed by all ACFT during take-off on 218° heading.

Noise abatement procedures shall not be executed at the expense of reduction of flight safety and in case of engine failure during take-off, wind shear, moderate turbulence or icing.

Restrictions

Take-off with a tail wind component is allowed when tail wind component is according to norms established in Flight Manual for specified ACFT type.

During take-off on 038° heading and exit from TMA via BEREG climb straight ahead to 2540' (2303'), turn LEFT to BEREG with a minimum climb gradient of 4.1% until crossing BEREG.

During take-off on 218° heading and exit from TMA via SLAVA climb straight ahead to 1110' (830'), turn LEFT to LOM with minimum radius of 1.5 NM and with a minimum climb gradient of 7.7% until crossing LOM.

During take-off on 218° heading and exit from TMA via RIGHT turn climb straight ahead to 2090' (1810'), RIGHT turn with minimum radius of 2.6 NM.

Special procedures on take-off heading 218°

Take-off and climbing to 1760' (1480')

Take-off power

Take-off flaps

V₂ + 11 to 22 KT

At or above 940' (660') turn with 25° bank

Reduce engine power to a minimum while maintaining positive rate of climb

At 1760' (1480')

V₂ + 11 to 22 KT

Between 1760' (1480') - 3240' (2960')

At 3240' (2960')

Accelerate to IAS of wing devices retraction

Retract wing devices

Further climb as per Flight Manual

Between 2300-0700LT when appropriate meteorological and air conditions are available, take-off shall be carried out on RWY 04 and landing on RWY 22.


URRR/ROV
Apt Elev 280'
N47 15.5 E039 49.1

17 MAY 13

10-9

Eff 30 May

JEPPesen ROSTOV-NA-DONU, RUSSIA
ROSTOV-NA-DONU

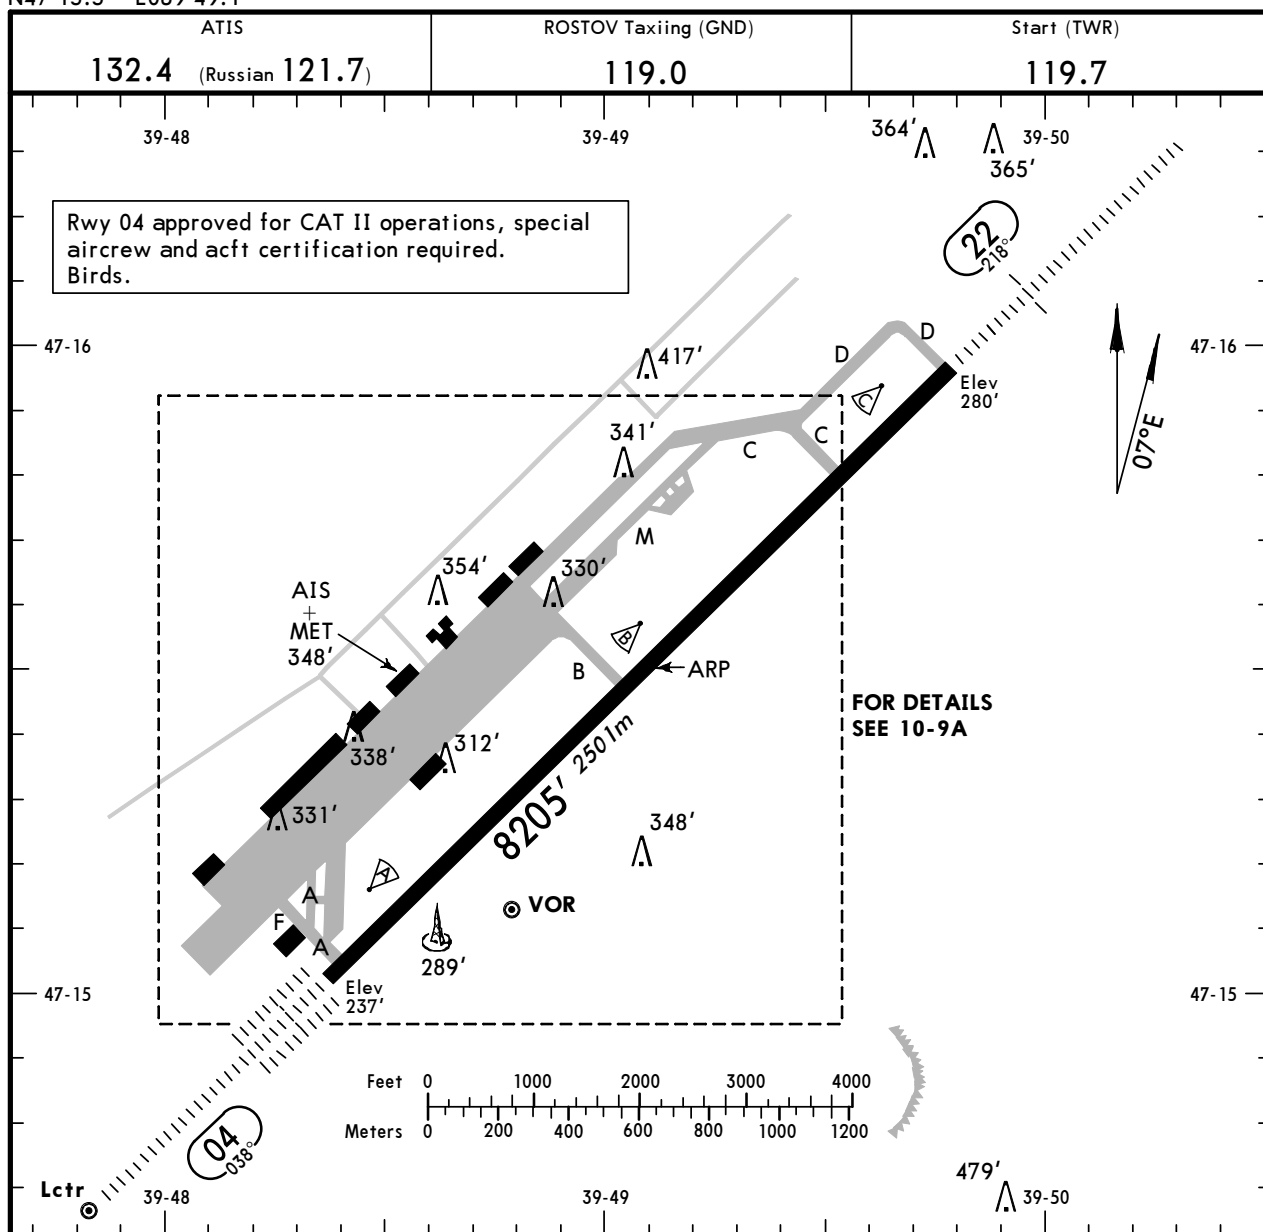

ADDITIONAL RUNWAY INFORMATION

						USABLE LENGTHS				
						LANDING BEYOND		TAKE-OFF	WIDTH	
RWY						Threshold	Glide Slope			
04	HIRL (60m)	CL (15m)	HIALS-II	TDZ ②	RVR		7172' 2186m	③	148' 45m	
22 ①	HIRL (60m)	CL (15m)	HIALS ②		RVR		6321' 1927m			

① Last third of rwy slippery when wet.

② PAPI-L (angle 2.67°)

③ TAKE-OFF RUN AVAILABLE

RWY 04:

From rwy head 8205' (2501m)
twy B int 4593' (1400m)

RWY 22:

From rwy head 8205' (2501m)
twy C int 6562' (2000m)
twy B int 3609' (1100m)

TAKE-OFF

AIR CARRIER (JAA)
All Rwys


LVP must be in force

	RL & CL	RCLM (DAY only) or RL	RCLM (DAY only) or RL
A			
B	200m (150m)	250m	400m
C			
D	250m (200m)	300m	

CHANGES: Intersection TORAs added. LVP transferred to 10-9A.

© JEPPESEN, 2000, 2013. ALL RIGHTS RESERVED.

NOT TO SCALE

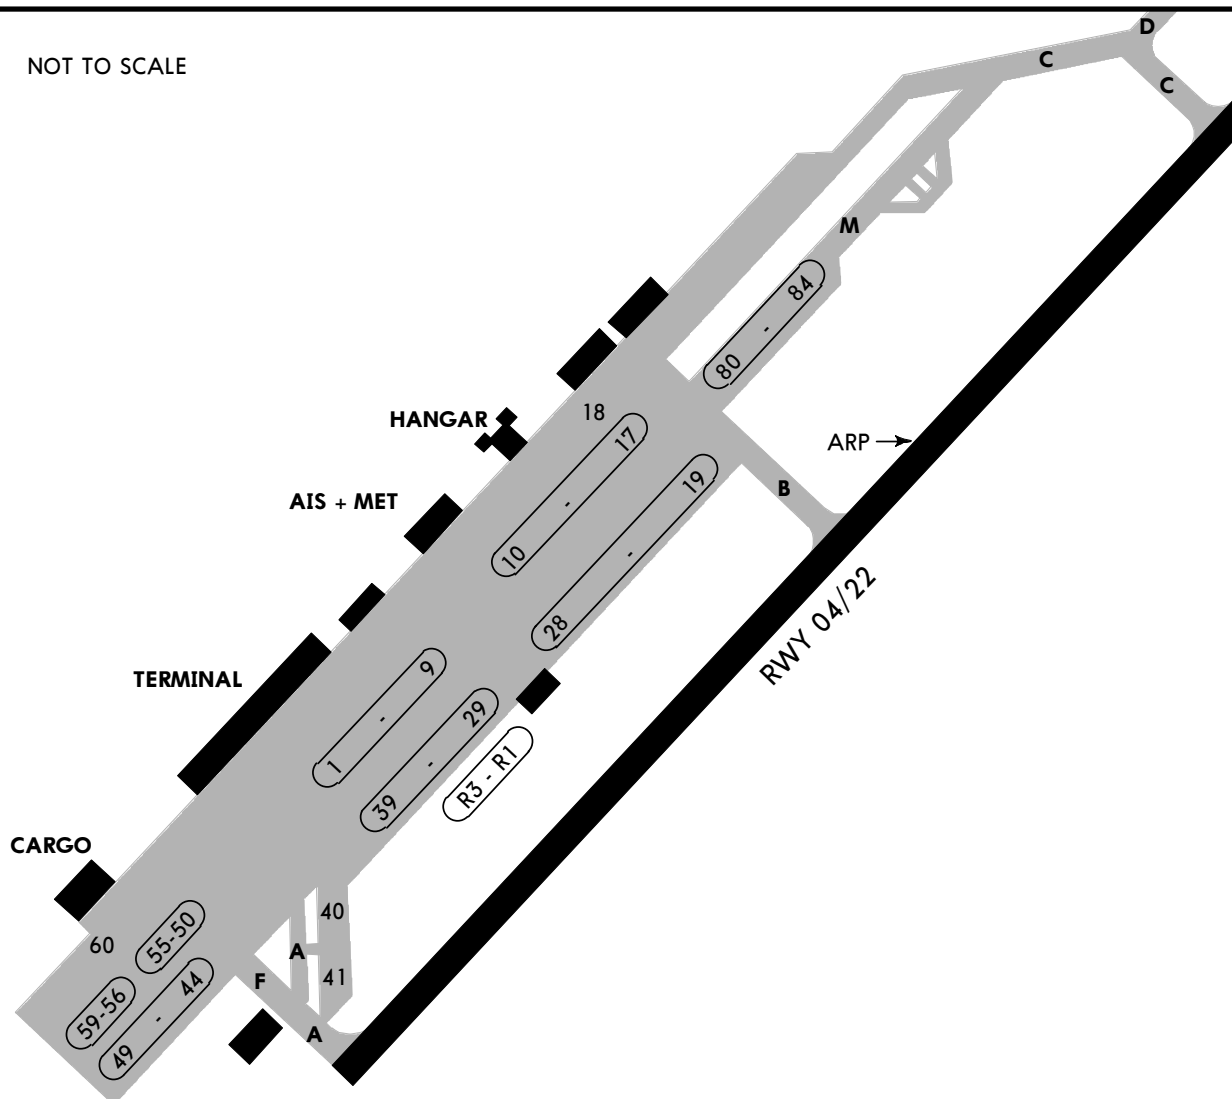

When leaving stands 1, 2 and 44 thru 47 by towing, start-up to be carried out on Twys A, F or on apron in front of stands 29 thru 39.

Stands 16 thru 28 are cul-de-sacs.

Stands 16 thru 18: Enter/exit by towing.

Stands 19 thru 28 and 80 thru 84: Enter by towing.

Stands 1 thru 41, 44 thru 47, 50 thru 59 and 80 thru 84 available for helicopters.

Taxiing via Twys B, C, M and along apron shall be carried out along twy centerline at minimum speed.

Taxiing along Twy B with inner engines only.

Taxiing of acft with a wingspan more than 126'/38.6m and diameter of the main rotor more than 85'/26m from stand 3 to Twy B, along Twy M, along Twy C from Twy M to Twy D, between stands 1 and 44 when either of them is occupied, is prohibited.

Taxiing into/out of stand 50 via stand 51 or vice versa is allowed for acft with a wingspan of 98'/30m or less, or with the diameter of the main rotor less than 72'/22m.

B737-300 acft: taxiing into stand 1 shall be carried out under own engines power. Taxiing out of stand 1 by towing.

Taxiing on apron and twys with FOLLOW-ME only, when visibility is less than 400m.

LOW VISIBILITY PROCEDURES

Procedures are applied when RVR is less than 550m.

After landing, pilots must report vacated of the runway and ILS critical area.

FOLLOW-ME guides arriving acft after leaving ILS critical area to the stand, departing acft from the stand to rwy holding position line.

INS COORDINATES			
STAND No.	COORDINATES	STAND No.	COORDINATES
1	N47 15.2 E039 48.2	38, 39	N47 15.2 E039 48.3
2 ❶	N47 15.3 E039 48.3	40, 41	N47 15.1 E039 48.3
2 ❷	N47 15.2 E039 48.3	44	N47 15.2 E039 48.2
3 thru 5	N47 15.3 E039 48.3	45 ❶	N47 15.2 E039 48.2
6, 7	N47 15.3 E039 48.4	45 ❷	N47 15.1 E039 48.2
8	N47 15.4 E039 48.4	46 ❶	N47 15.1 E039 48.1
9 thru 11	N47 15.4 E039 48.5	46 ❷	N47 15.1 E039 48.2
12	N47 15.4 E039 48.6	47	N47 15.1 E039 48.1
13 thru 15	N47 15.5 E039 48.6	48	N47 15.1 E039 48.1
16 ❶	N47 15.5 E039 48.6	49	N47 15.1 E039 48.0
16 ❷	N47 15.5 E039 48.7	49	N47 15.1 E039 48.1
17	N47 15.5 E039 48.7	50	N47 15.2 E039 48.2
18	N47 15.5 E039 48.6	51 ❶	N47 15.2 E039 48.1
19 thru 21	N47 15.5 E039 48.8	51 ❷	N47 15.2 E039 48.2
22 thru 24	N47 15.5 E039 48.7	52 thru 54	N47 15.2 E039 48.1
25	N47 15.4 E039 48.7	55 ❶	N47 15.1 E039 48.1
26 thru 28	N47 15.4 E039 48.6	55 ❷	N47 15.2 E039 48.0
29 thru 31	N47 15.3 E039 48.5	56 thru 59	N47 15.1 E039 48.0
32 ❶	N47 15.3 E039 48.4	80 thru 82	N47 15.6 E039 48.9
32 ❷	N47 15.3 E039 48.5	83, 84	N47 15.6 E039 49.0
33 thru 35	N47 15.3 E039 48.4		
36 ❶	N47 15.3 E039 48.4		
36 ❷	N47 15.2 E039 48.4		
37 ❶	N47 15.2 E039 48.3		
37 ❷	N47 15.2 E039 48.4		

- ❶ Stand direction NW
 ❷ Stand direction SE

STRAIGHT-IN RWY		A	B	C	D
04	CAT 2 ILS	337' (100')	337' (100')	337' (100')	337' (100')
		RA 110' R350m	RA 110' R350m	RA 110' R350m	RA 110' R350m
	ILS	437' (200')	437' (200')	437' (200')	437' (200')
	<i>FULL</i>	R550m	R550m	R550m	R550m
	<i>Limited</i>	R750m	R750m	R750m	R750m
	<i>ALS out</i>	R1200m	R1200m	R1200m	R1200m
	LOC	NOT AUTH	NOT AUTH	NOT AUTH	NOT AUTH
	2 NDB ①	660' (423')	660' (423')	660' (423')	660' (423')
	with D5.7/Radar	R1300m	R1300m	R1300m	R1300m
	<i>ALS out</i>	R1500m	R1500m	R2000m	R2000m
	2 NDB ①	1000' (763')	1000' (763')	1000' (763')	1000' (763')
	w/o D5.7/Radar	C2900m	C2900m	C2900m	C2900m
	<i>ALS out</i>	C3600m	C3600m	C3600m	C3600m
	RN NDB ①	730' (493')	730' (493')	730' (493')	730' (493')
	with D5.7/Radar	R1500m	R1500m	R1500m	R1500m
	<i>ALS out</i>	R1500m	R1500m	C2300m	C2300m
	RN NDB ①	1000' (763')	1000' (763')	1000' (763')	1000' (763')
	w/o D5.7/Radar	C2900m	C2900m	C2900m	C2900m
	<i>ALS out</i>	C3600m	C3600m	C3600m	C3600m
	N Lctr ①	850' (613')	850' (613')	850' (613')	850' (613')
22	with D5.7/Radar	R1500m	R1500m	C2100m	C2100m
	<i>ALS out</i>	R1500m	R1500m	C2400m	C2400m
	N Lctr	1400' (1163')	1400' (1163')	1400' (1163')	1400' (1163')
	w/o D5.7/Radar	C4800m	C4800m	C5000m	C5000m
	<i>ALS out</i>	C5000m	C5000m	C5000m	C5000m
	ILS	480' (200')	480' (200')	480' (200')	480' (200')
	<i>FULL</i>	R550m	R550m	R550m	R550m
	<i>Limited</i>	R750m	R750m	R750m	R750m
	<i>ALS out</i>	R1200m	R1200m	R1200m	R1200m
	LOC	NOT AUTH	NOT AUTH	NOT AUTH	NOT AUTH
	2 NDB ①	740' (460')	740' (460')	740' (460')	740' (460')
		R1400m	R1400m	R1400m	R1400m
	<i>ALS out</i>	R1500m	R1500m	C2100m	C2100m
	RW NDB ①	790' (510')	790' (510')	790' (510')	790' (510')
		R1500m	R1500m	R1600m	R1600m
	<i>ALS out</i>	R1500m	R1500m	C2400m	C2400m
	W Lctr ①	790' (510')	790' (510')	790' (510')	790' (510')
	with D6.5/Radar	R1500m	R1500m	R1600m	R1600m
	<i>ALS out</i>	R1500m	R1500m	C2400m	C2400m
	W Lctr	1070' (790')	1070' (790')	1070' (790')	1070' (790')
	w/o D6.5/Radar	C3100m	C3100m	C3300m	C3300m
	<i>ALS out</i>	C3800m	C3800m	C4000m	C4000m


① Continuous Descent Final Approach


TAKE-OFF RWY 04, 22

	LVP must be in Force				RCLM (DAY only) or RL	NIL (DAY only)
	Approved Operators HIRL, CL & mult. RVR req	RL, CL & mult. RVR req	RL & CL	RCLM (DAY only) or RL		
A						
B	125m	150m	200m	250m	400m	500m
C						
D	150m	200m	250m	300m		



CHANGES: NDB minimums.

© JEPPESSEN, 2009, 2012. ALL RIGHTS RESERVED.

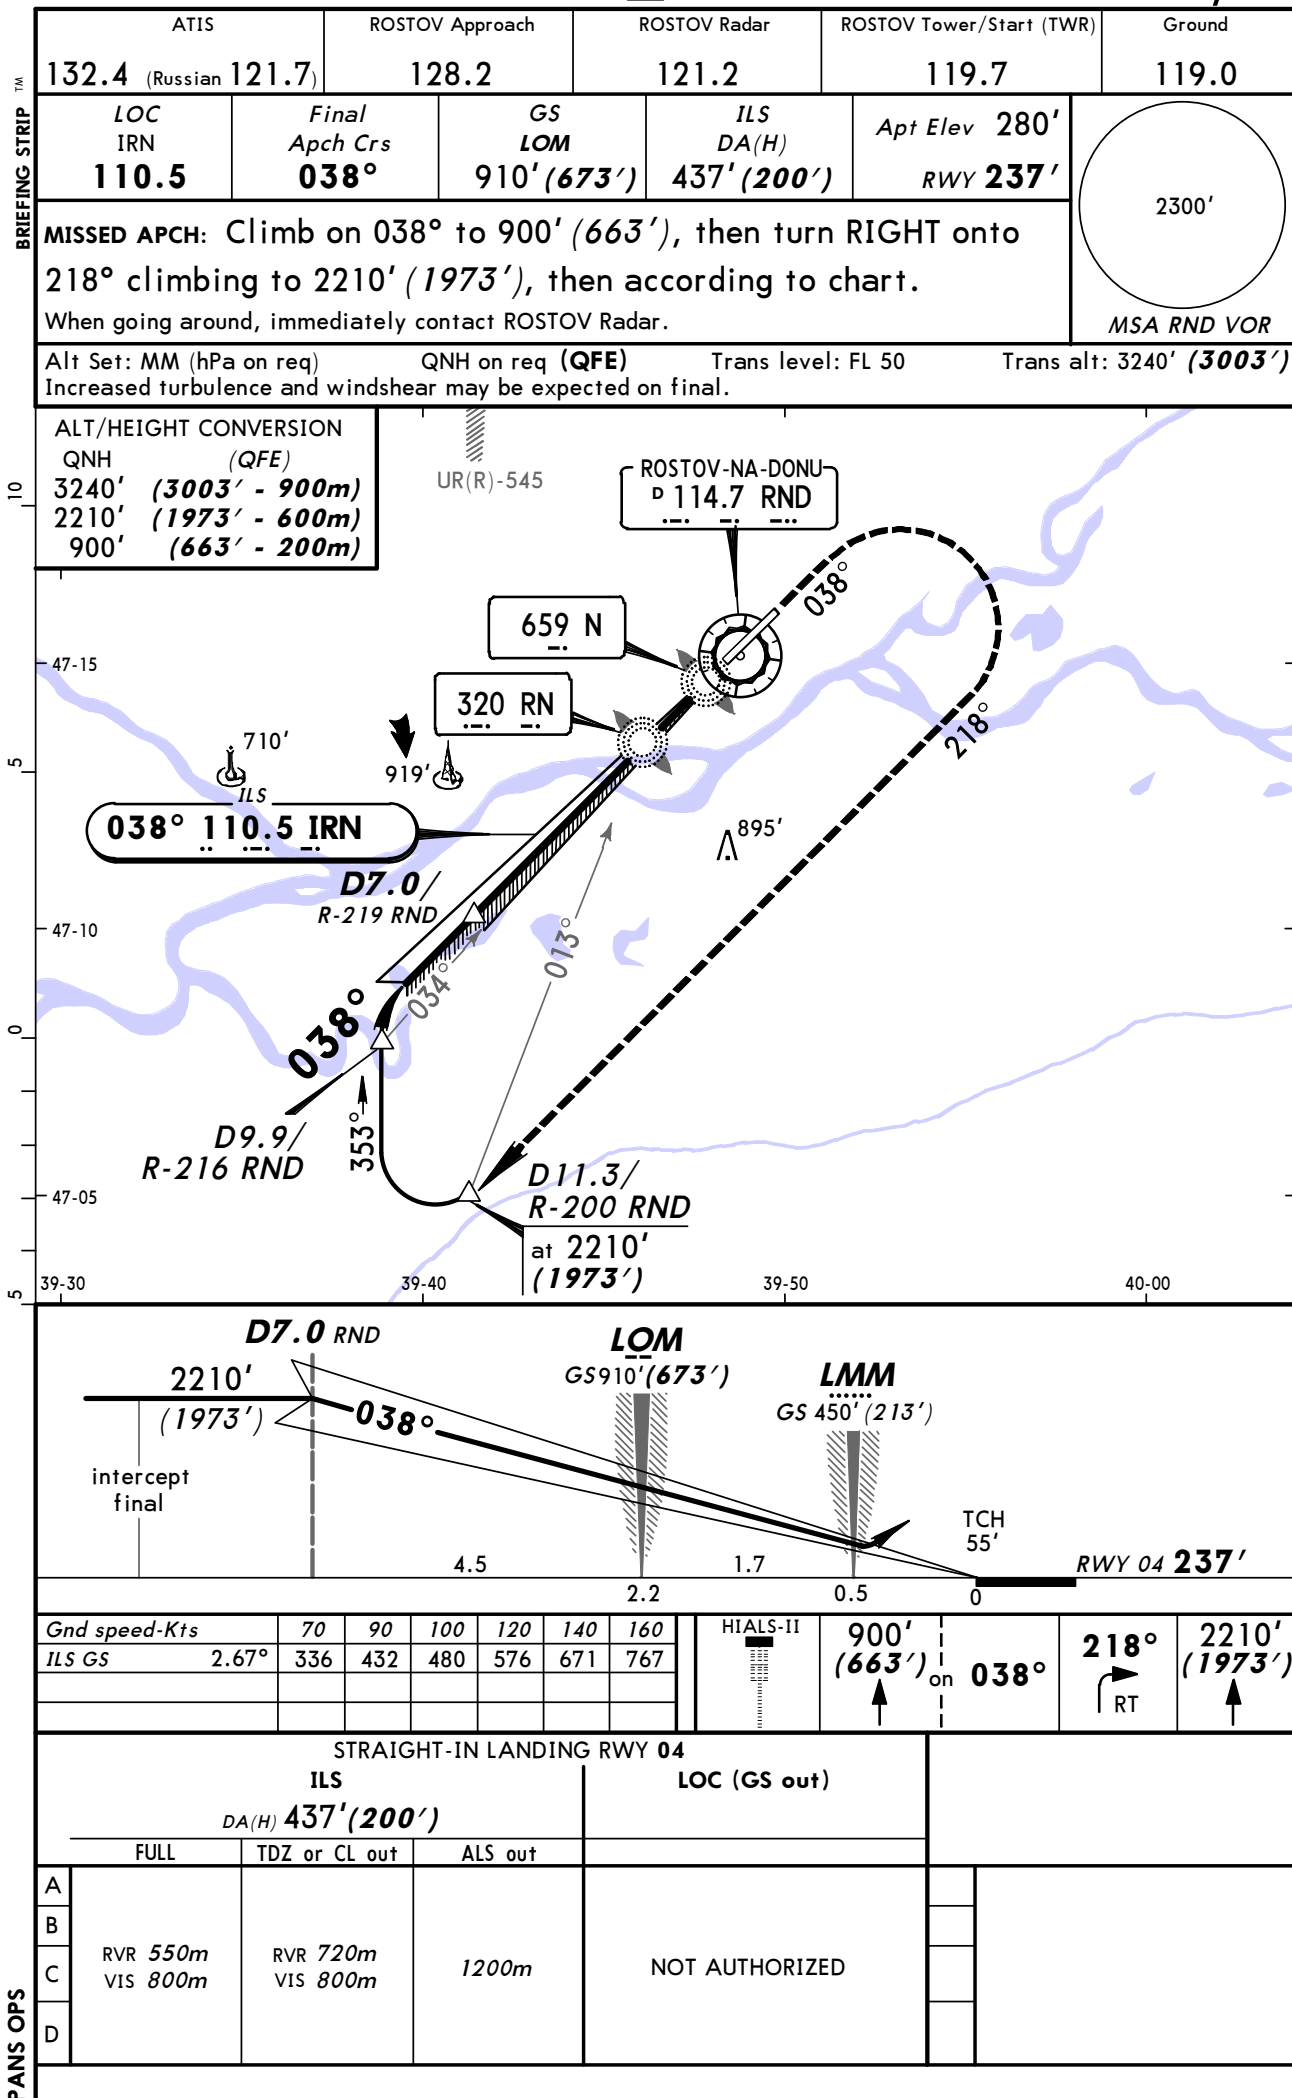

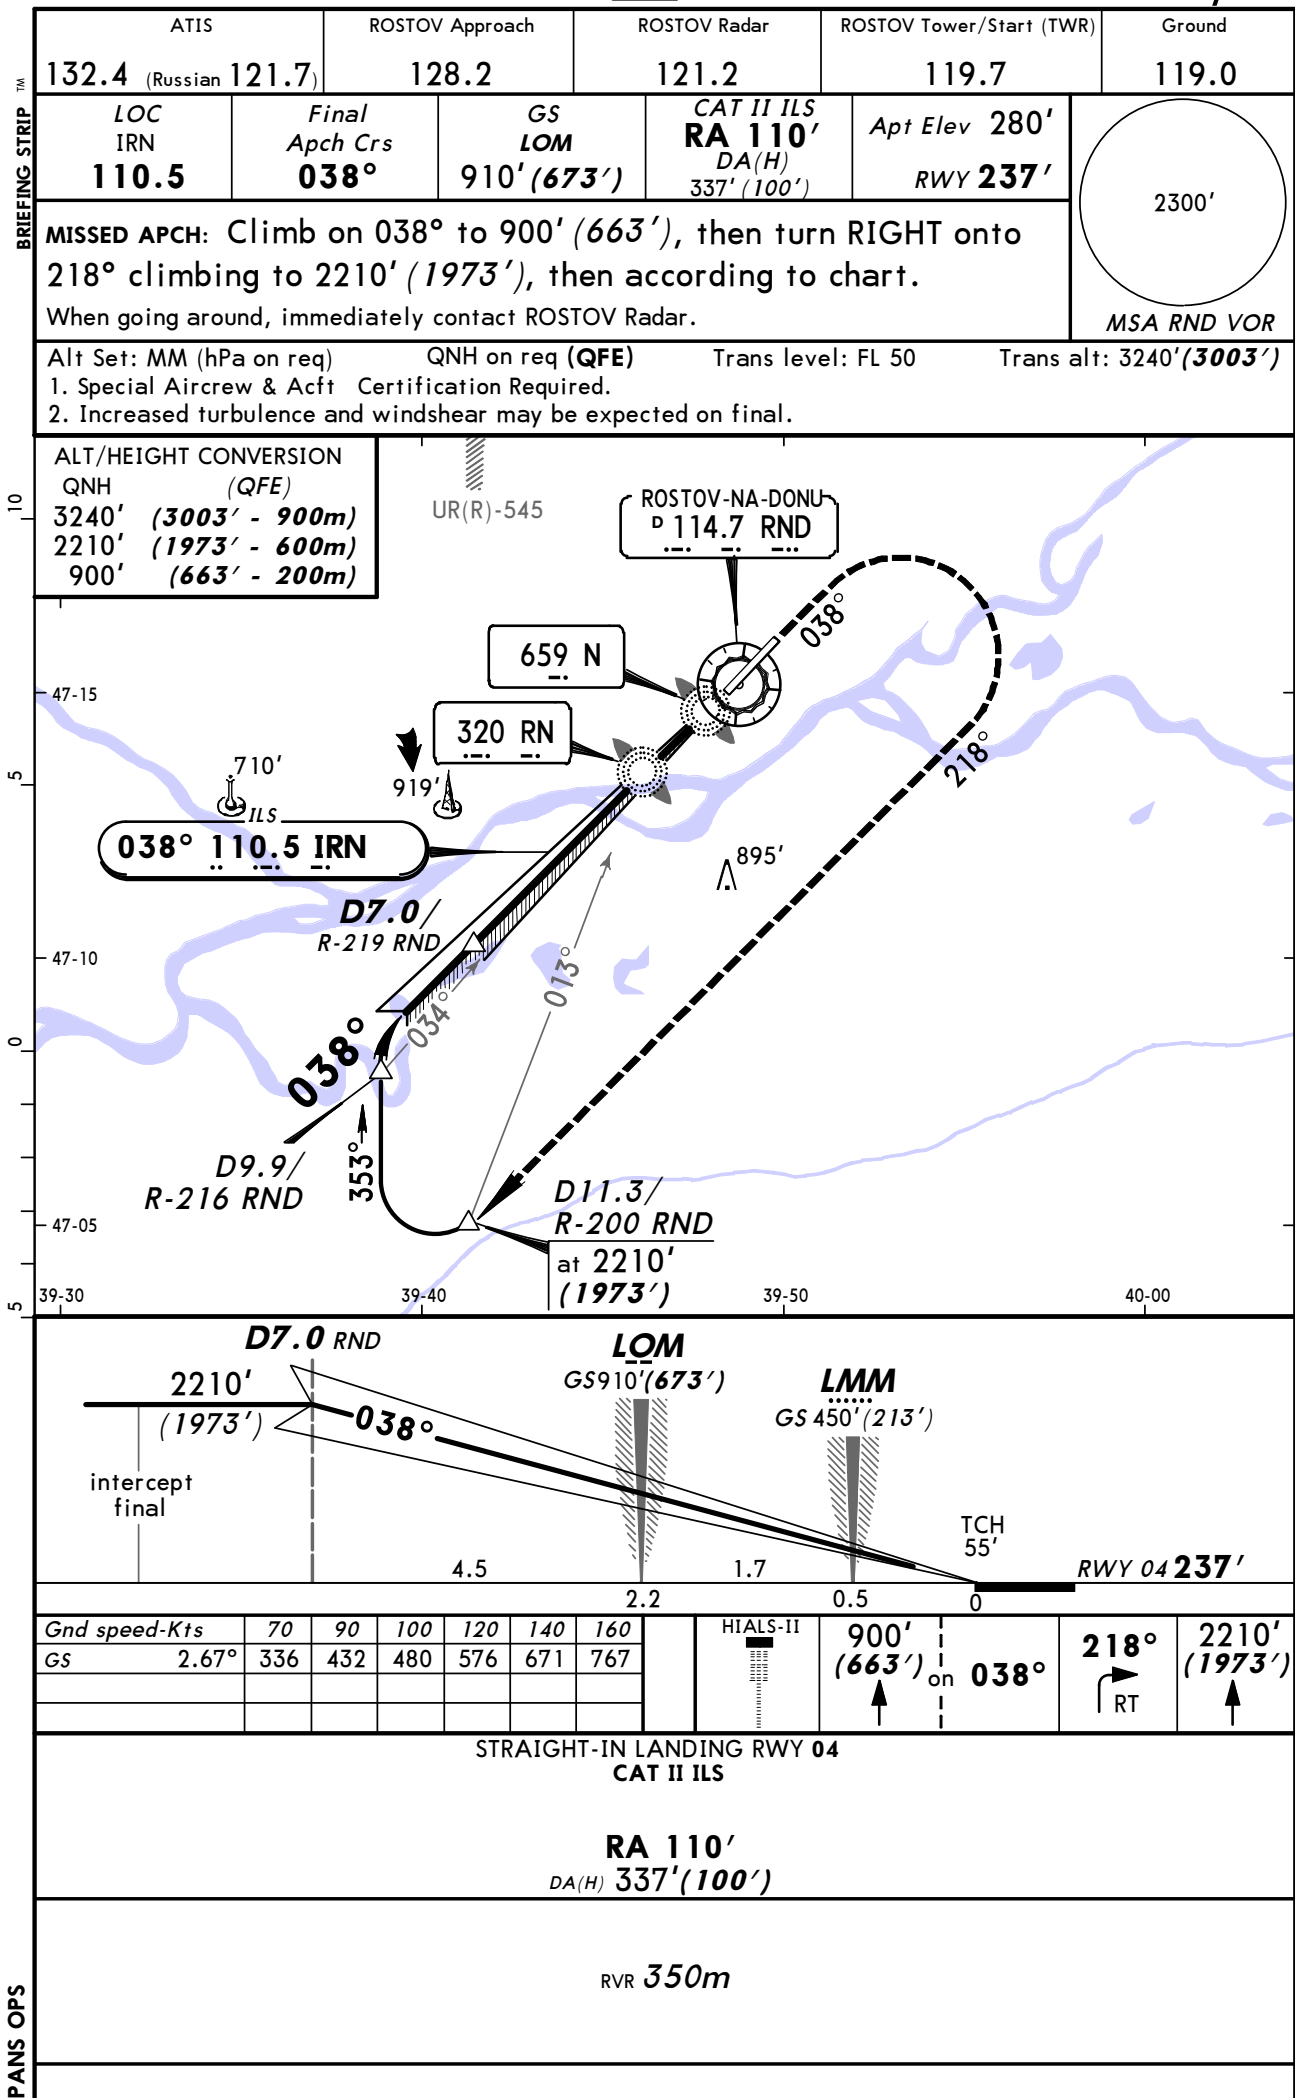

ATIS	ROSTOV Approach	ROSTOV Radar	ROSTOV Tower/Start (TWR)	Ground
132.4 (Russian 121.7)	128.2	121.2	119.7	119.0
LOC IRW 110.3	Final Aptch Crs 218°	GS LOM 969' (689')	ILS DA(H) 480' (200')	Apt Elev 280' RWY 280'
MISSED APCH: Climb to 940' (660'), then turn LEFT onto 080° to KS NDB climbing to 2250' (1970'), then as directed.				2300' MSA RND VOR
Alt Set: MM (hPa on req) QNH on req (QFE) Trans level: FL 50 Trans alt: 3240' (2960') Increased turbulence and windshear may be expected on final.				

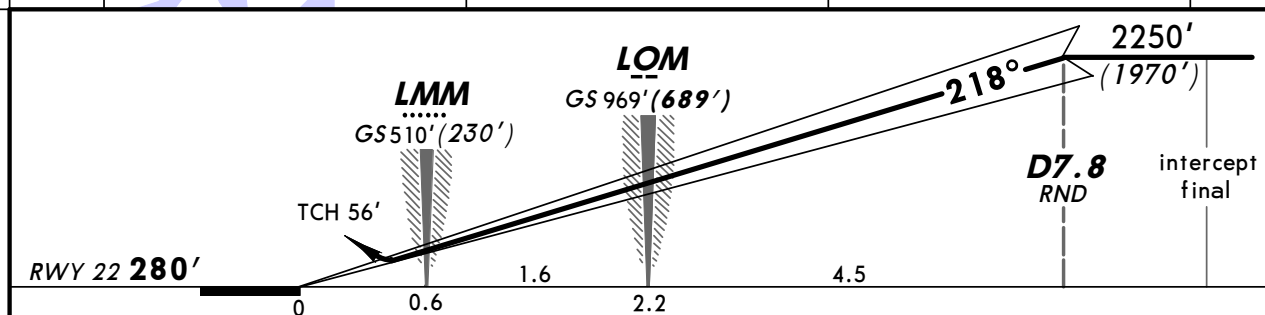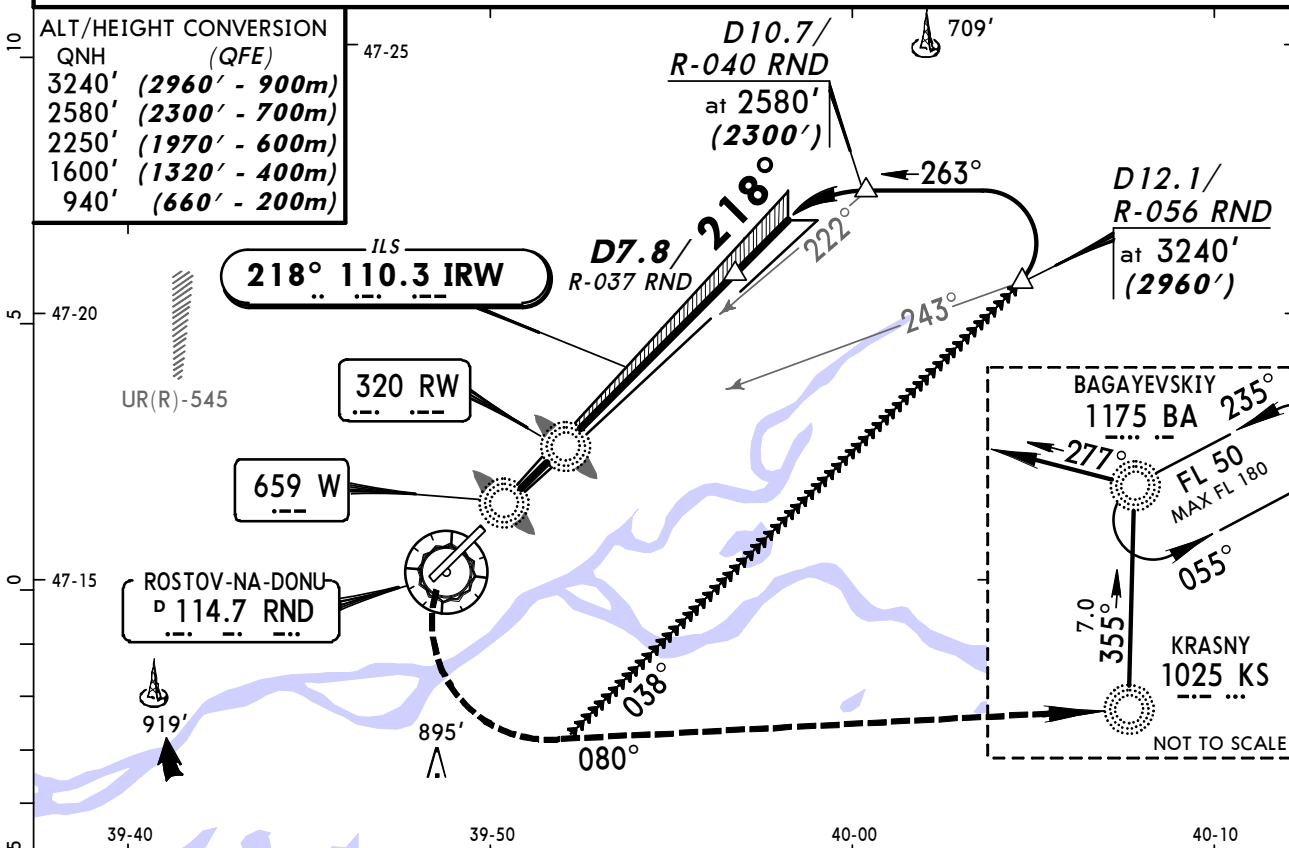


Gnd speed-Kts	70	90	100	120	140	160	HIALS	940' (660')	080°	2250' (1970')	KS 1025
ILS GS	2.67°	336	432	480	576	671	767		LT		


STRAIGHT-IN LANDING RWY 22					
ILS			LOC (GS out)		
DA(H) 480'(200')					
FULL		ALS out			
A	RVR 720m VIS 800m	1200m	NOT AUTHORIZED		
B					
C					
D					

BRIEFING STRIP™

ATIS		ROSTOV Approach		ROSTOV Radar		ROSTOV Tower/Start (TWR)		Ground	
132.4 (Russian 121.7)		128.2		121.2		119.7		119.0	
NDB RW 320		Final Apch Crs 218°		Minimum Alt D6.5 2250' (1970')		MDA(H) Refer to Minimums		Apt Elev 280' RWY 280'	
MISSED APCH: Climb to 940' (660'), then turn LEFT onto 083° to KS NDB climbing to 2250' (1970'), then as directed.								2300' MSA RND VOR	
Alt Set: MM (hPa on req) QNH on req (QFE) Trans level: FL 50 Trans alt: 3240' (2960') Increased turbulence and windshear may be expected on final.									

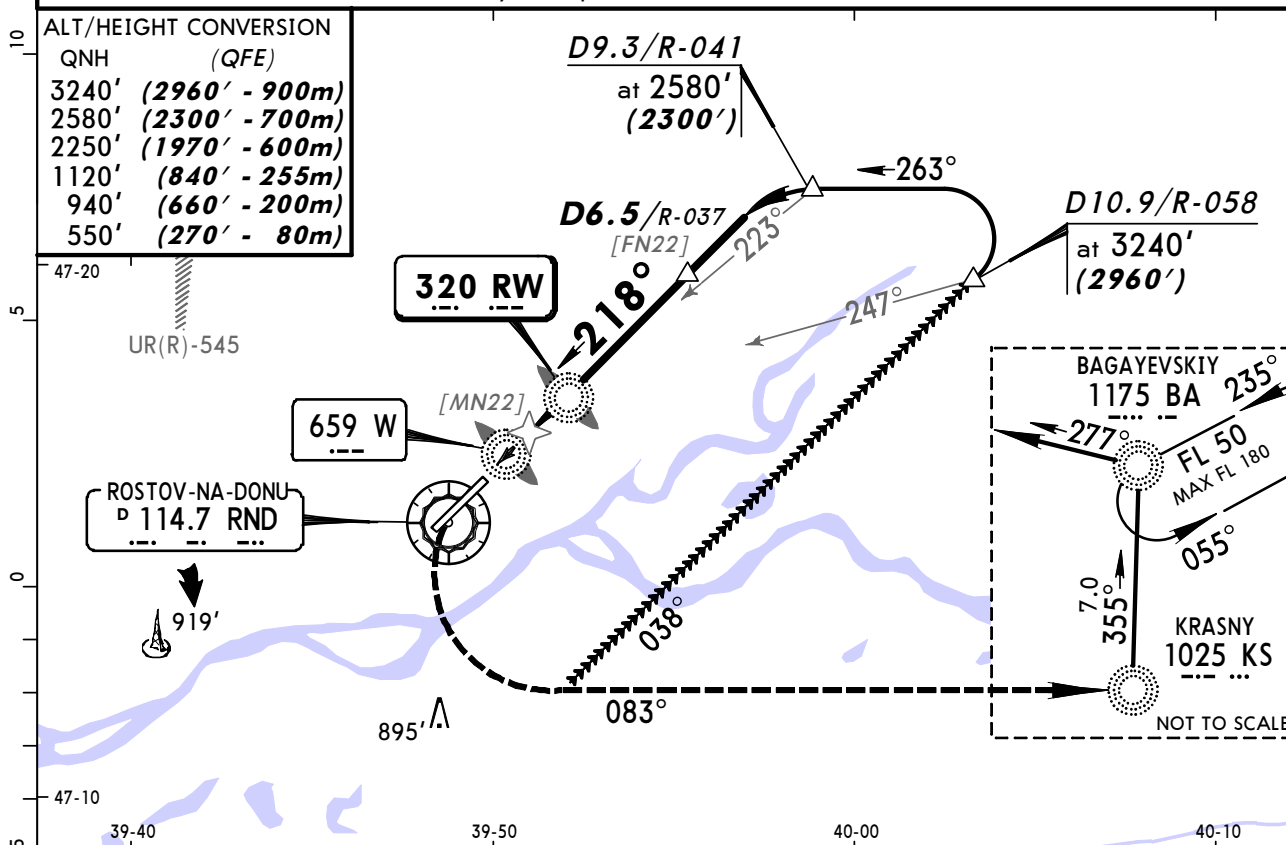

Pass LMM not below 550' (270').

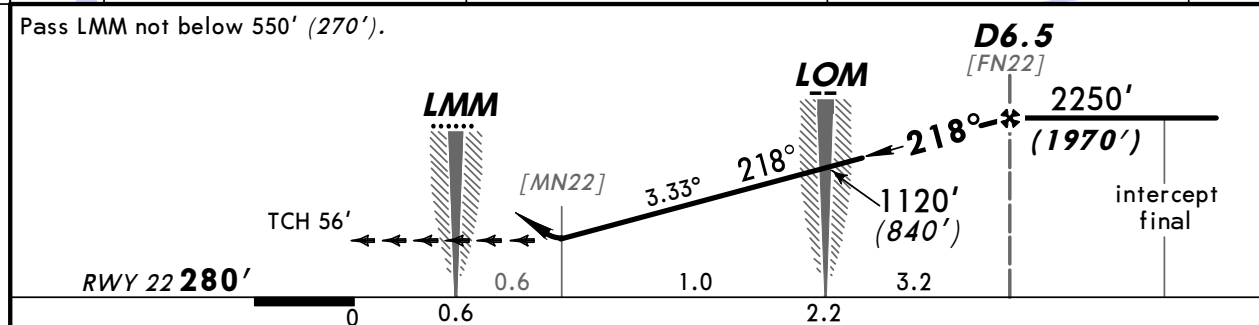

Gnd speed-Kts	70	90	100	120	140	160	HIALS	940' (660')	083°	2250' (1970')	KS 1025
Descent Angle	3.33°	412	530	589	707	825	943		LT		

2 NDB		RW NDB		STRAIGHT-IN LANDING RWY 22		W Lctr	
MDA(H) 740' (460')		MDA(H) 790' (510')		With D6.5/Radar		W/o D6.5/Radar	
ALS out		ALS out		ALS out		ALS out	
A							
B	1200m	RVR 1800m VIS 2000m	1500m	2300m	1500m	2300m	3200m
C			RVR 1500m VIS 1600m	2400m	RVR 1500m VIS 1600m	2400m	3200m 3800m
D	RVR 1800m VIS 2000m	2400m	RVR 1800m VIS 2000m		RVR 1800m VIS 2000m		3600m 4000m



Chart changes since cycle 16-2013

ADD = added chart, REV = revised chart, DEL = deleted chart.

ACT	PROCEDURE IDENT	INDEX	REV DATE	EFF DATE
-----	-----------------	-------	----------	----------

ROSTOV-NA-DONU, (ROSTOV-NA-DONU - URRR)

TERMINAL CHART CHANGE NOTICES

No Chart Change Notices for Airport URRR