

List of pages in this Trip Kit

Trip Kit Index
Airport Information For UKLL
Terminal Charts For UKLL
Revision Letter For Cycle 17-2013
Change Notices
Notebook

General Information

Location: L'viv Ukr
IATA Code: LWO
Lat/Long: N49° 48.6' E023° 57.5'
Elevation: 1077 ft

Airport Use: Public
Magnetic Variation: 5.5°E

Fuel Types: Jet A-1
Repair Types: Major Airframe, Major Engine
Customs: Yes
Airport Type: IFR
Landing Fee: Yes
Control Tower: Yes
Jet Start Unit: No
LLWS Alert: No
Beacon: No

Sunrise: 0330 Z
Sunset: 1722 Z,

Runway Information

Runway: 13
Length x Width: 10843 ft x 148 ft
Surface Type: concrete
TDZ-Elev: 1069 ft
Lighting: Edge, ALS, Centerline, TDZ
Displaced Threshold: 1345 ft

Runway: 31
Length x Width: 10843 ft x 148 ft
Surface Type: concrete
TDZ-Elev: 1074 ft
Lighting: Edge, ALS, Centerline, TDZ
Displaced Threshold: 394 ft

Communication Information


ATIS 128.7
ATIS 124.7 Non-English
L'viv Start Tower 124.0
L'viv Tower 128.0
L'viv Ground Control 119.0

Apt Elev
1077'

Alt Set: hPa (MM on request)

Trans level: By ATC Trans alt: 10010'

This chart may only be used for cross-checking of altitudes assigned while under RADAR control.



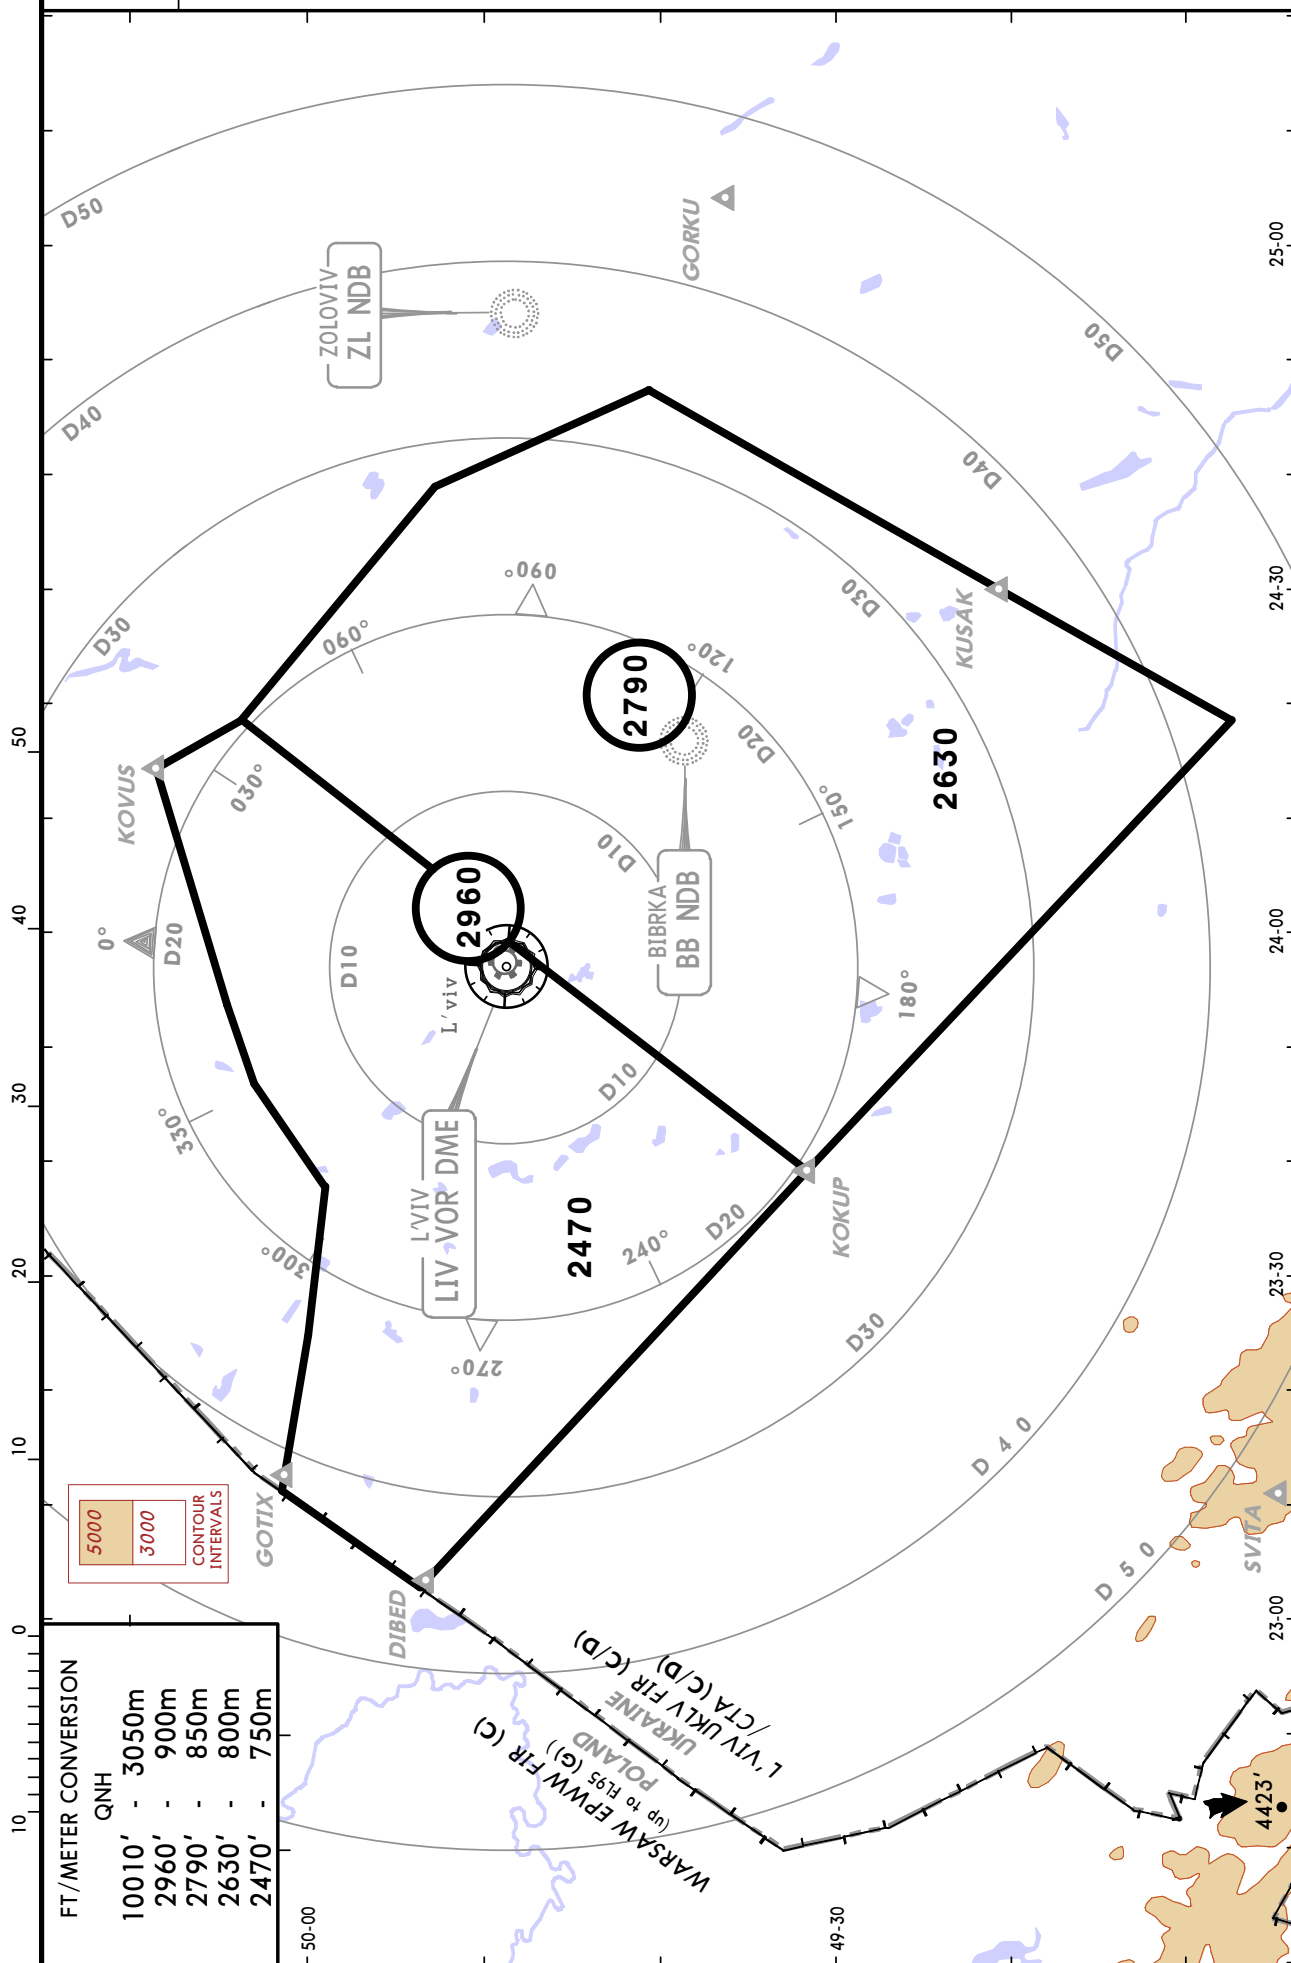


ATIS
128.7 (Russian 124.7)


Apt Elev
1077'

Alt Set: hPa (MM on request)
Trans level: By ATC Trans alt: 10010'



ADBAN ONE CHARLIE (ADBAN 1C) [ADBA1C]
GORKU ONE CHARLIE (GORKU 1C) [GORK1C]
KOVUS THREE CHARLIE (KOVUS 3C) [KOVU3C]
KUSAK SIX CHARLIE (KUSAK 6C) [KUSA6C]
RWY 13 ARRIVALS

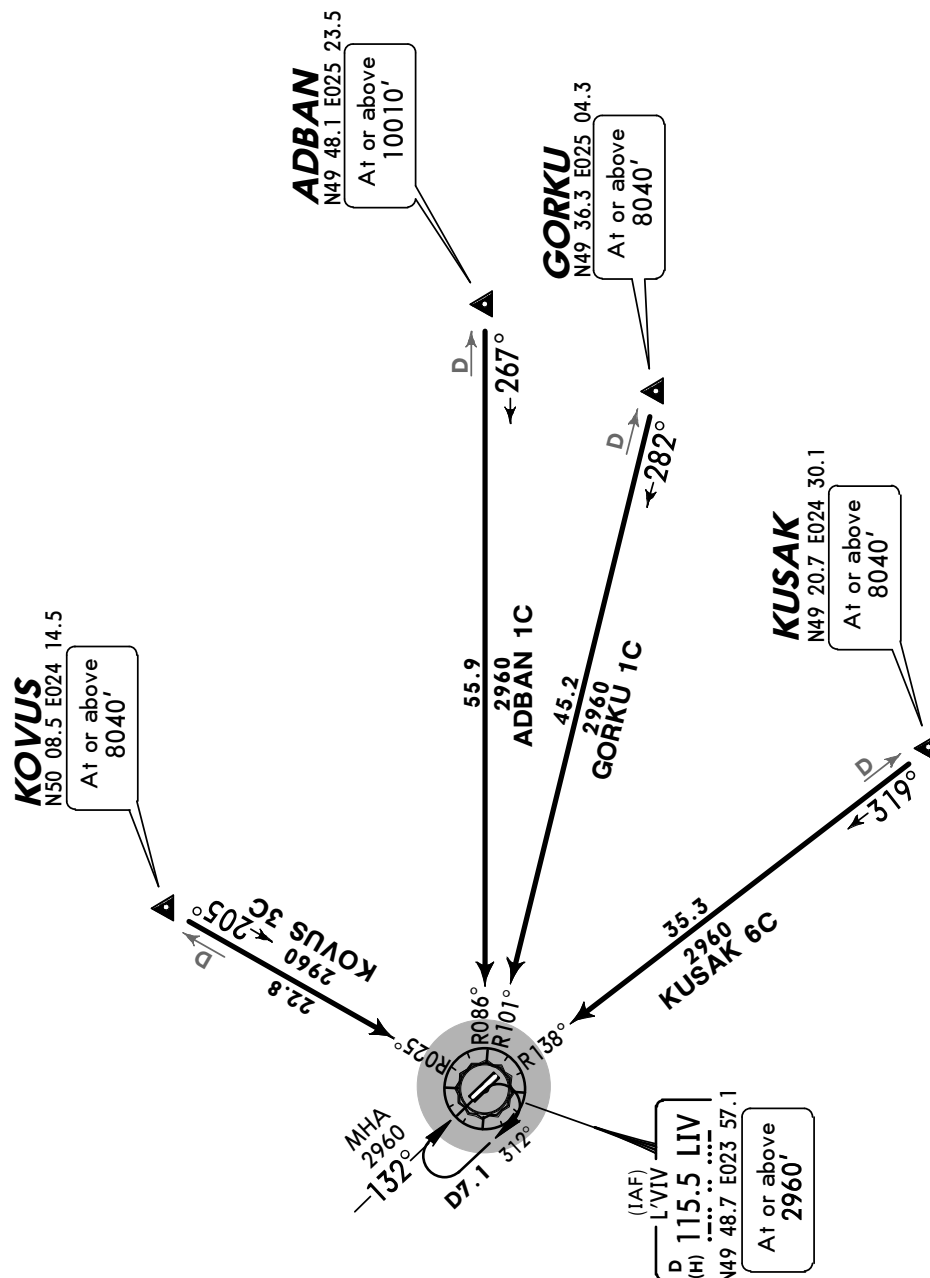

ATIS
128.7 (Russian 124.7)
Apt Elev
1077'
Alt Set: hPa (MM on request)
Trans level: By ATC Trans alt: 10010'




**ADBAN ONE DELTA (ADBAN 1D) [ADBA1D]
GORKU ONE DELTA (GORKU 1D) [GORK1D]
KUSAK SIX DELTA (KUSAK 6D) [KUSA6D]
RWY 31 ARRIVALS**

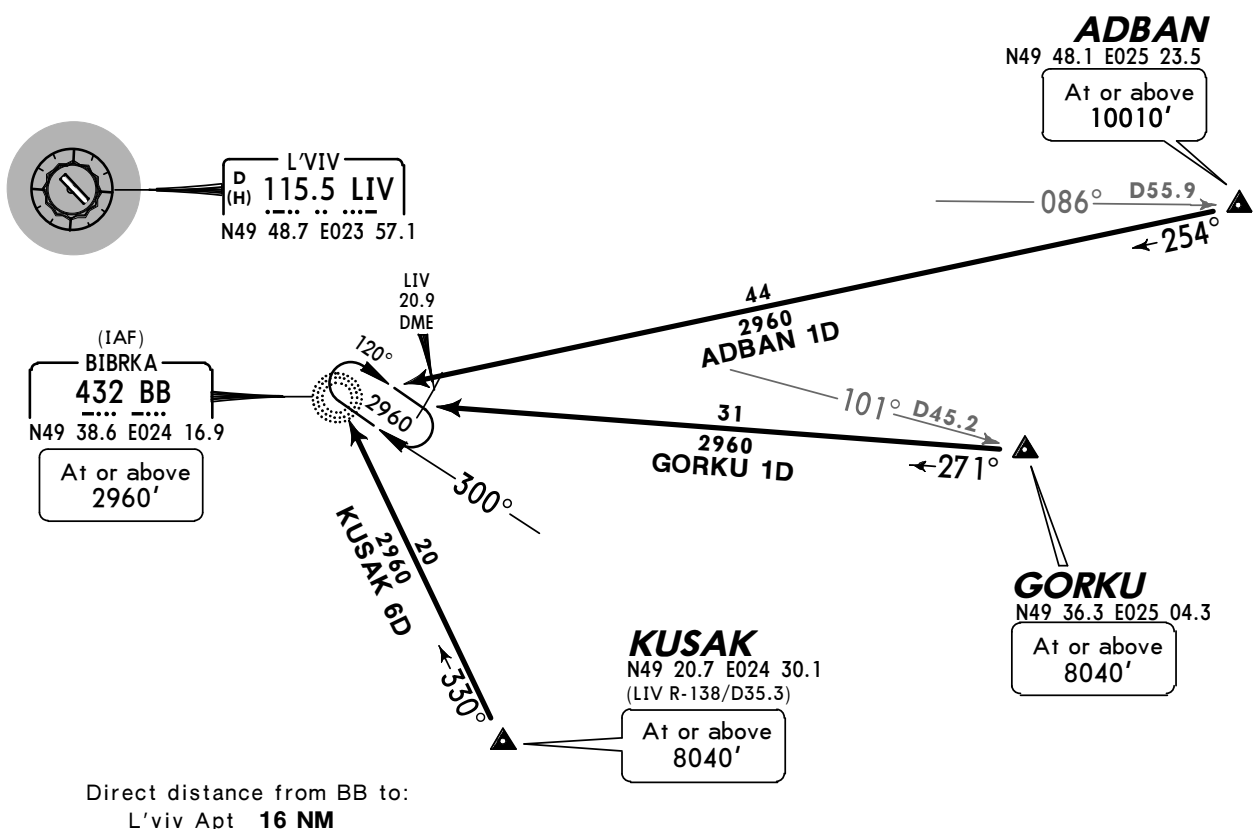



FT/METER CONVERSION	
QNH	
10010'	- 3050m
8040'	- 2450m
2960'	- 900m

STAR	ROUTING
ADBAN 1D	Intercept 254° bearing to BB.
GORKU 1D	Intercept 271° bearing to BB.
KUSAK 6D	Intercept 330° bearing to BB.

ATIS
128.7 (Russian 124.7)Apt Elev
1077'Alt Set: hPa (MM on request)
Trans level: By ATC Trans alt: 10010'


KOKUP THREE CHARLIE (KOKUP 3C) [KOKU3C]
SVITA ONE CHARLIE (SVITA 1C) [SVIT1C]
TEPNA ONE CHARLIE (TEPNA 1C) [TEPN1C]
RWY 13 ARRIVALS

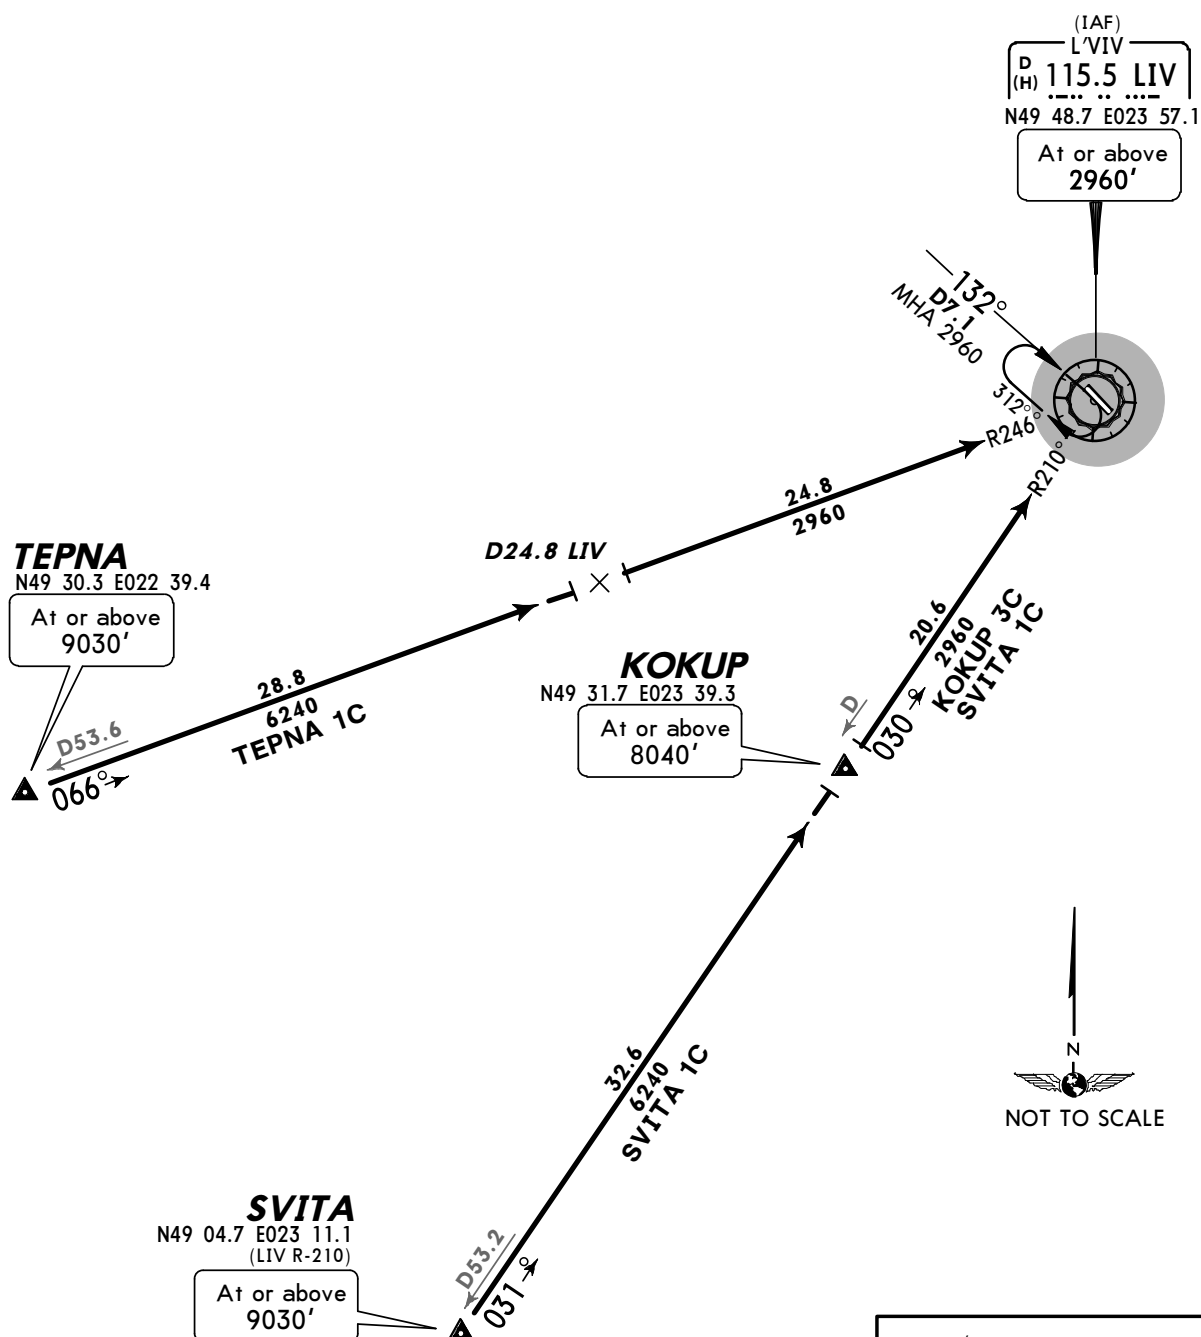


ATIS
128.7 (Russian 124.7)Apt Elev
1077'Alt Set: hPa (MM on request)
Trans level: By ATC Trans alt: 10010'

SVITA ONE DELTA (SVITA 1D) [SVIT1D]
SVITA ONE ECHO (SVITA 1E) [SVIT1E]
TEPNA ONE DELTA (TEPNA 1D) [TEPN1D]
TEPNA ONE ECHO (TEPNA 1E) [TEPN1E]
RWY 31 ARRIVALS

Direct distance from BB to:
L'viv Apt 16 NM



L'VIV
D (H) 115.5 LIV
N49 48.7 E023 57.1

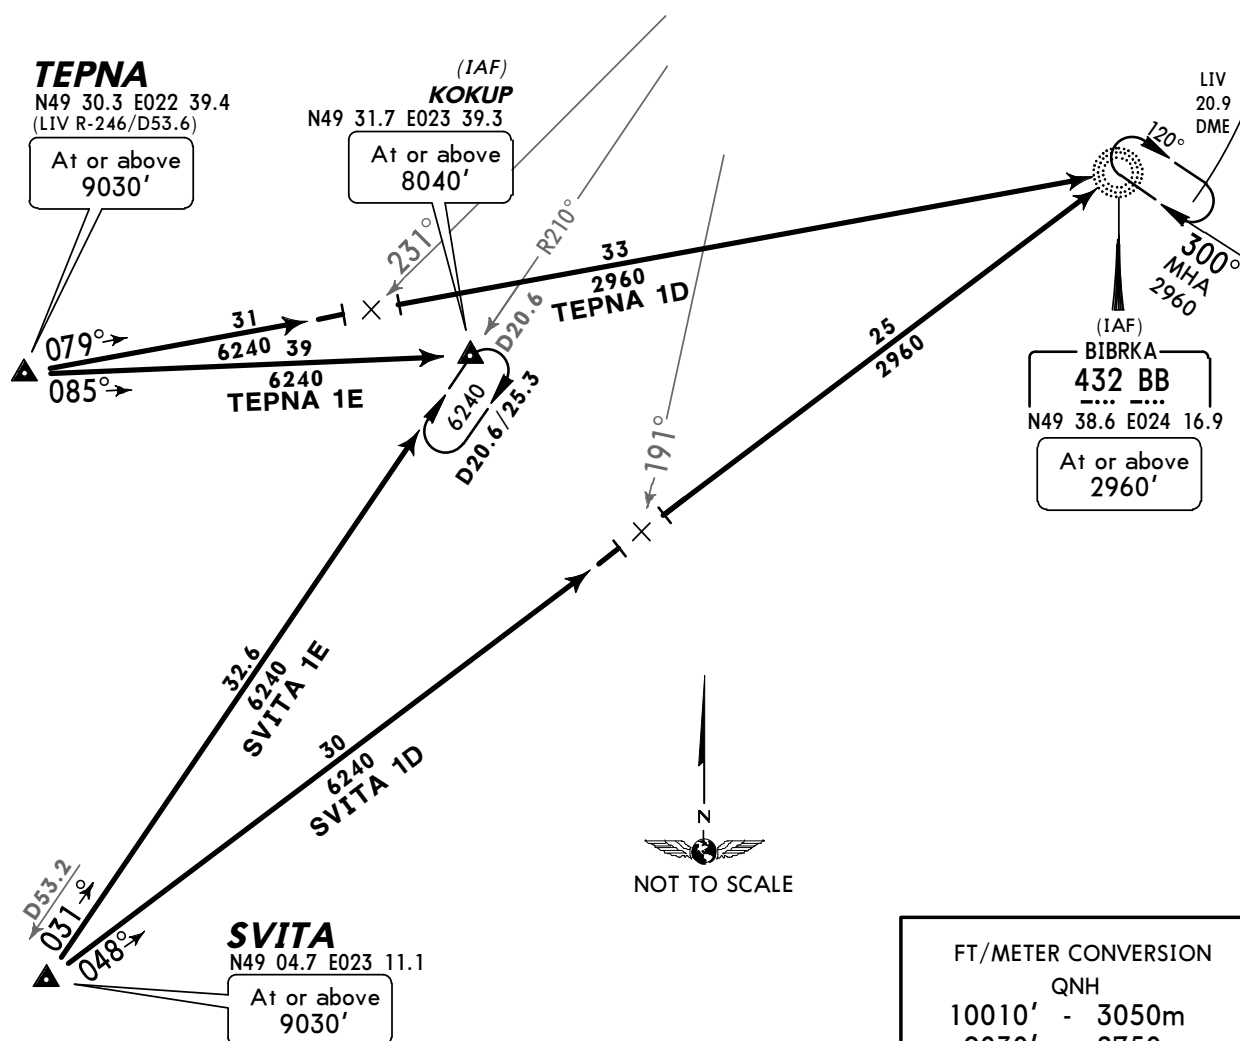


FT/METER CONVERSION	
QNH	
10010'	- 3050m
9030'	- 2750m
8040'	- 2450m
6240'	- 1900m
2960'	- 900m


ATIS
128.7 (Russian 124.7)

Apt Elev
1077'

Alt Set: hPa (MM on request)
Trans level: By ATC Trans alt: 10010'




DIBED SIX CHARLIE (DIBED 6C) [DIBE6C]
ROLKA ONE CHARLIE (ROLKA 1C) [ROLK1C]
RWY 13 ARRIVALS

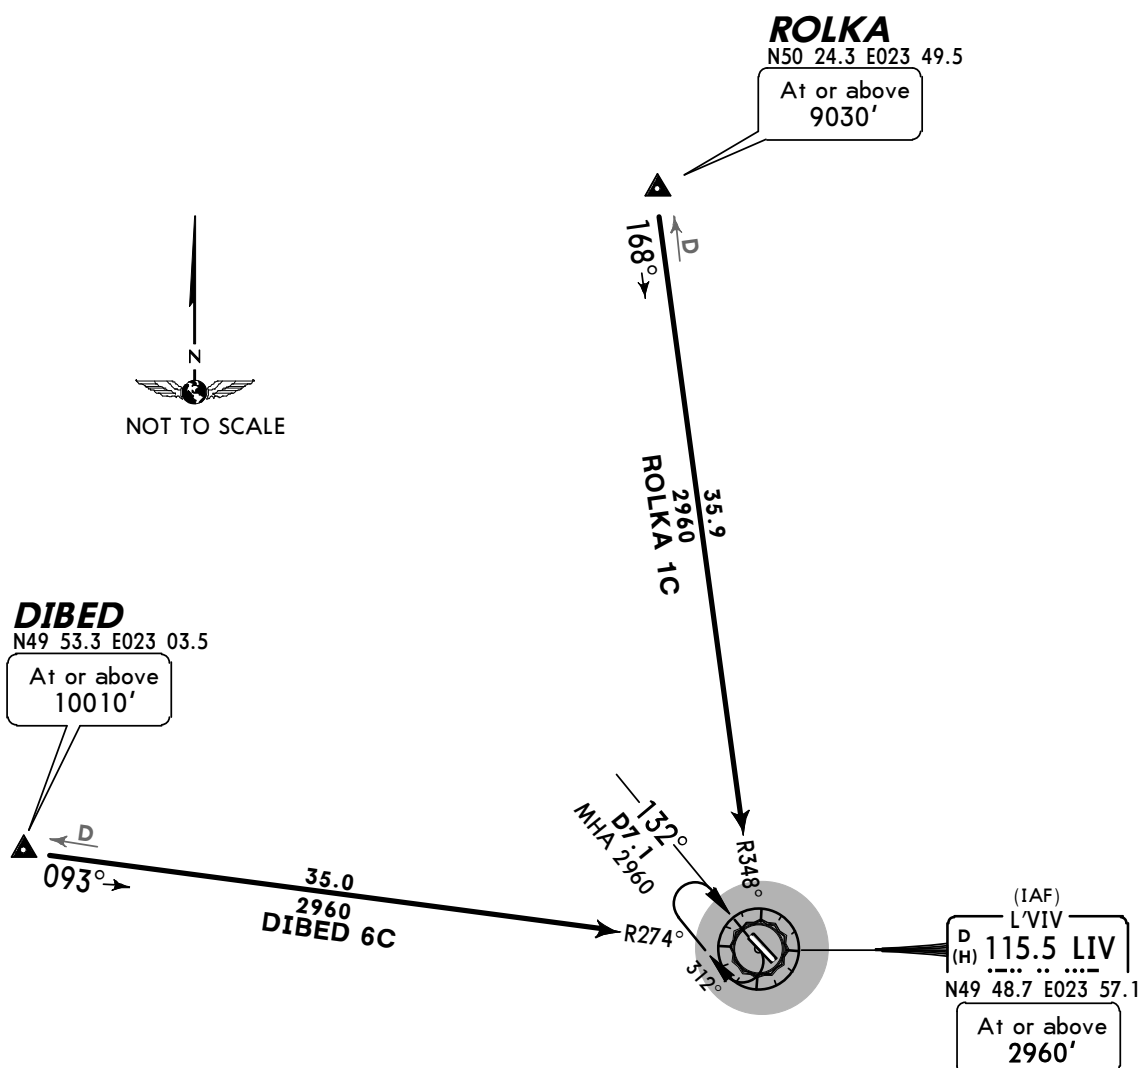



FT/METER CONVERSION
QNH
10010' - 3050m
9030' - 2750m
2960' - 900m


STAR	ROUTING
DIBED 6C	Intercept LIV R-274 inbound to LIV.
ROLKA 1C	Intercept LIV R-348 inbound to LIV.


© JEPPESEN, 2012. ALL RIGHTS RESERVED.

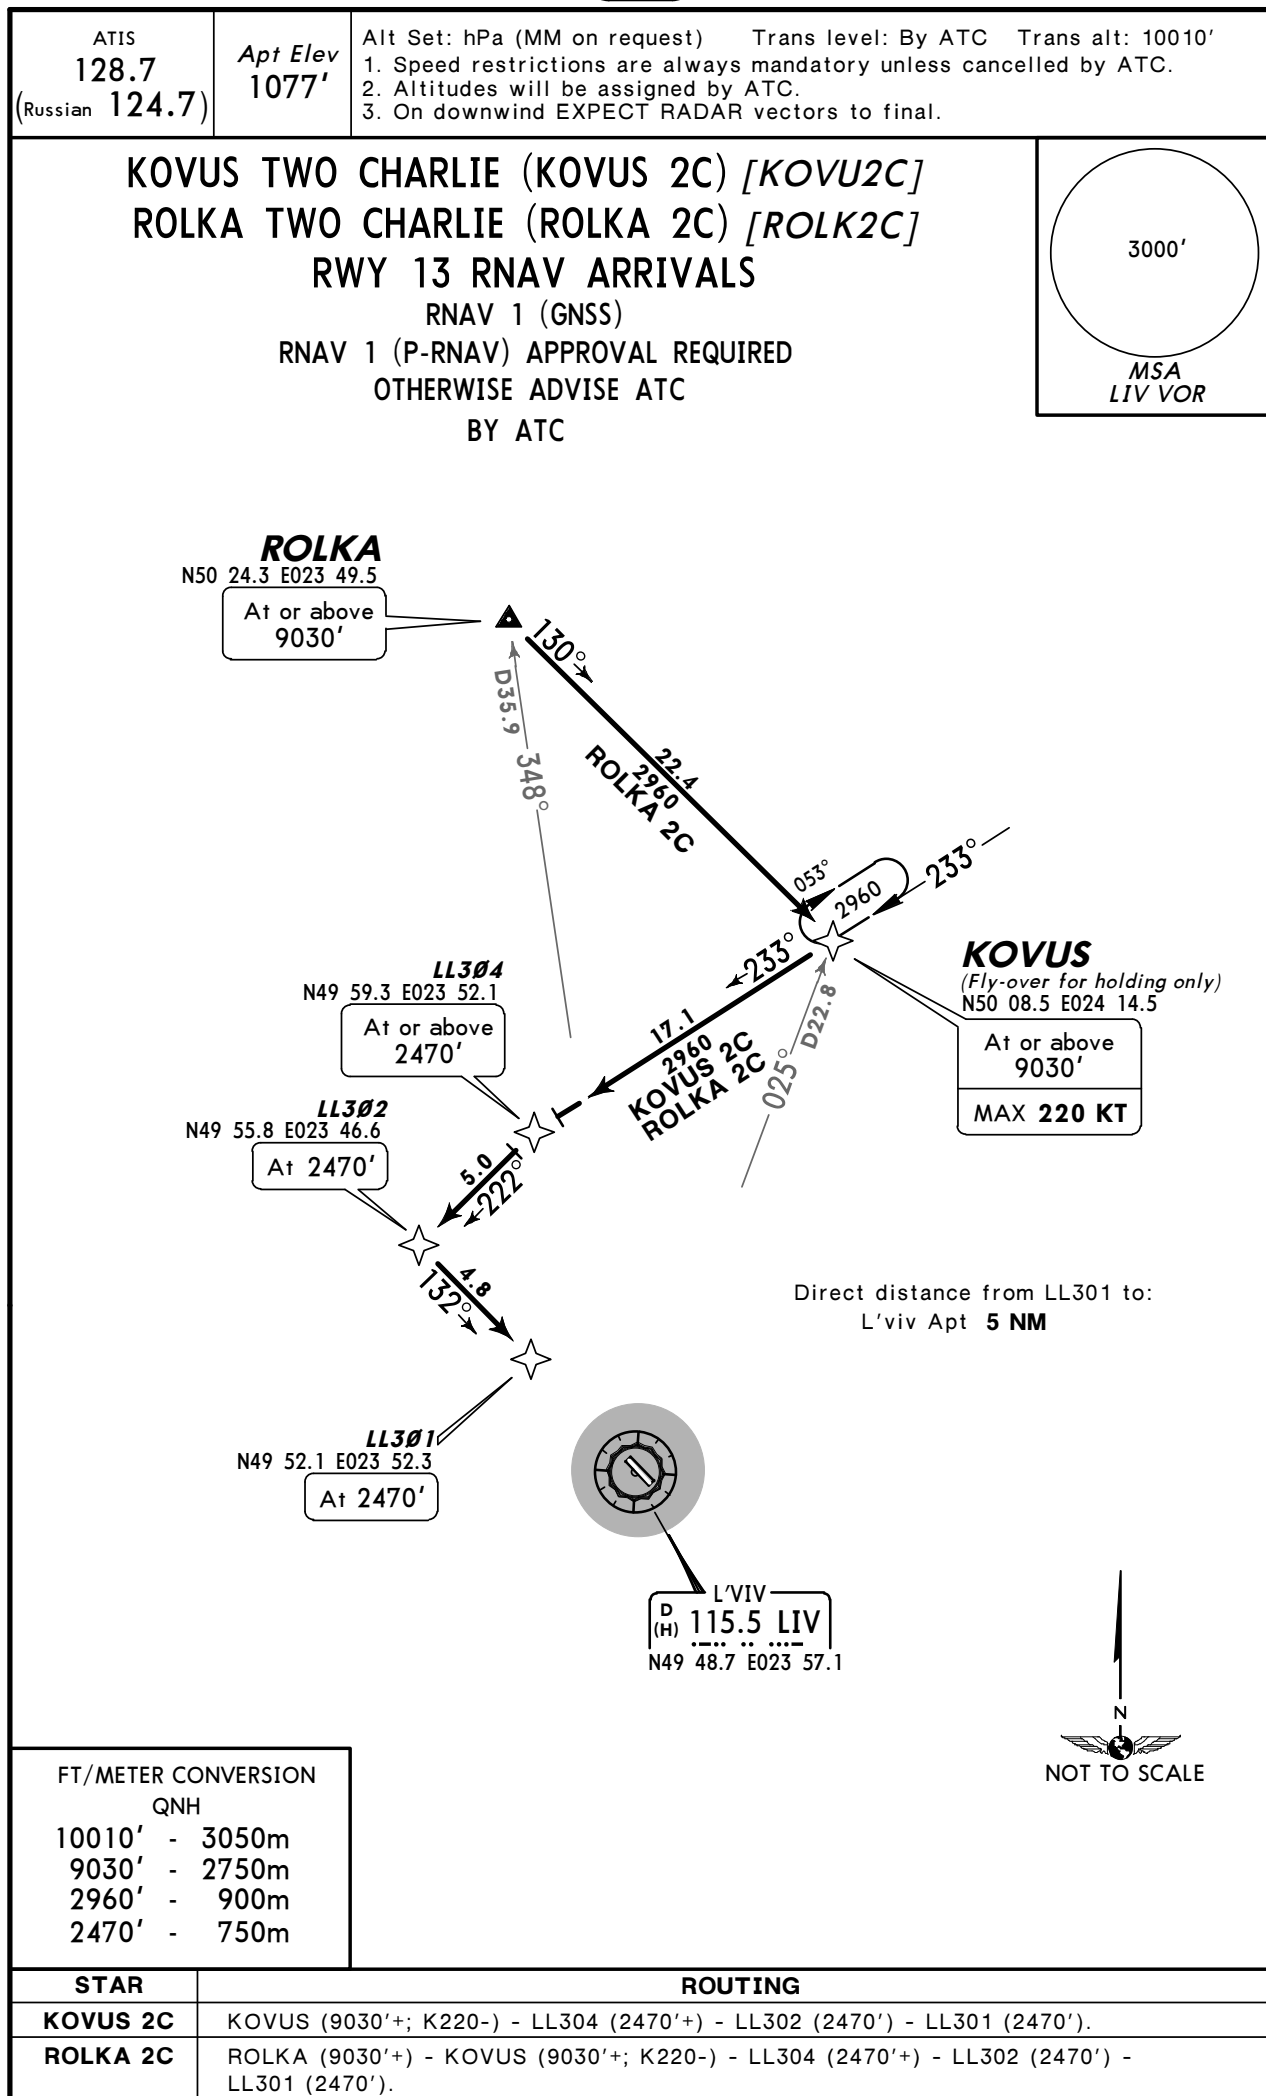

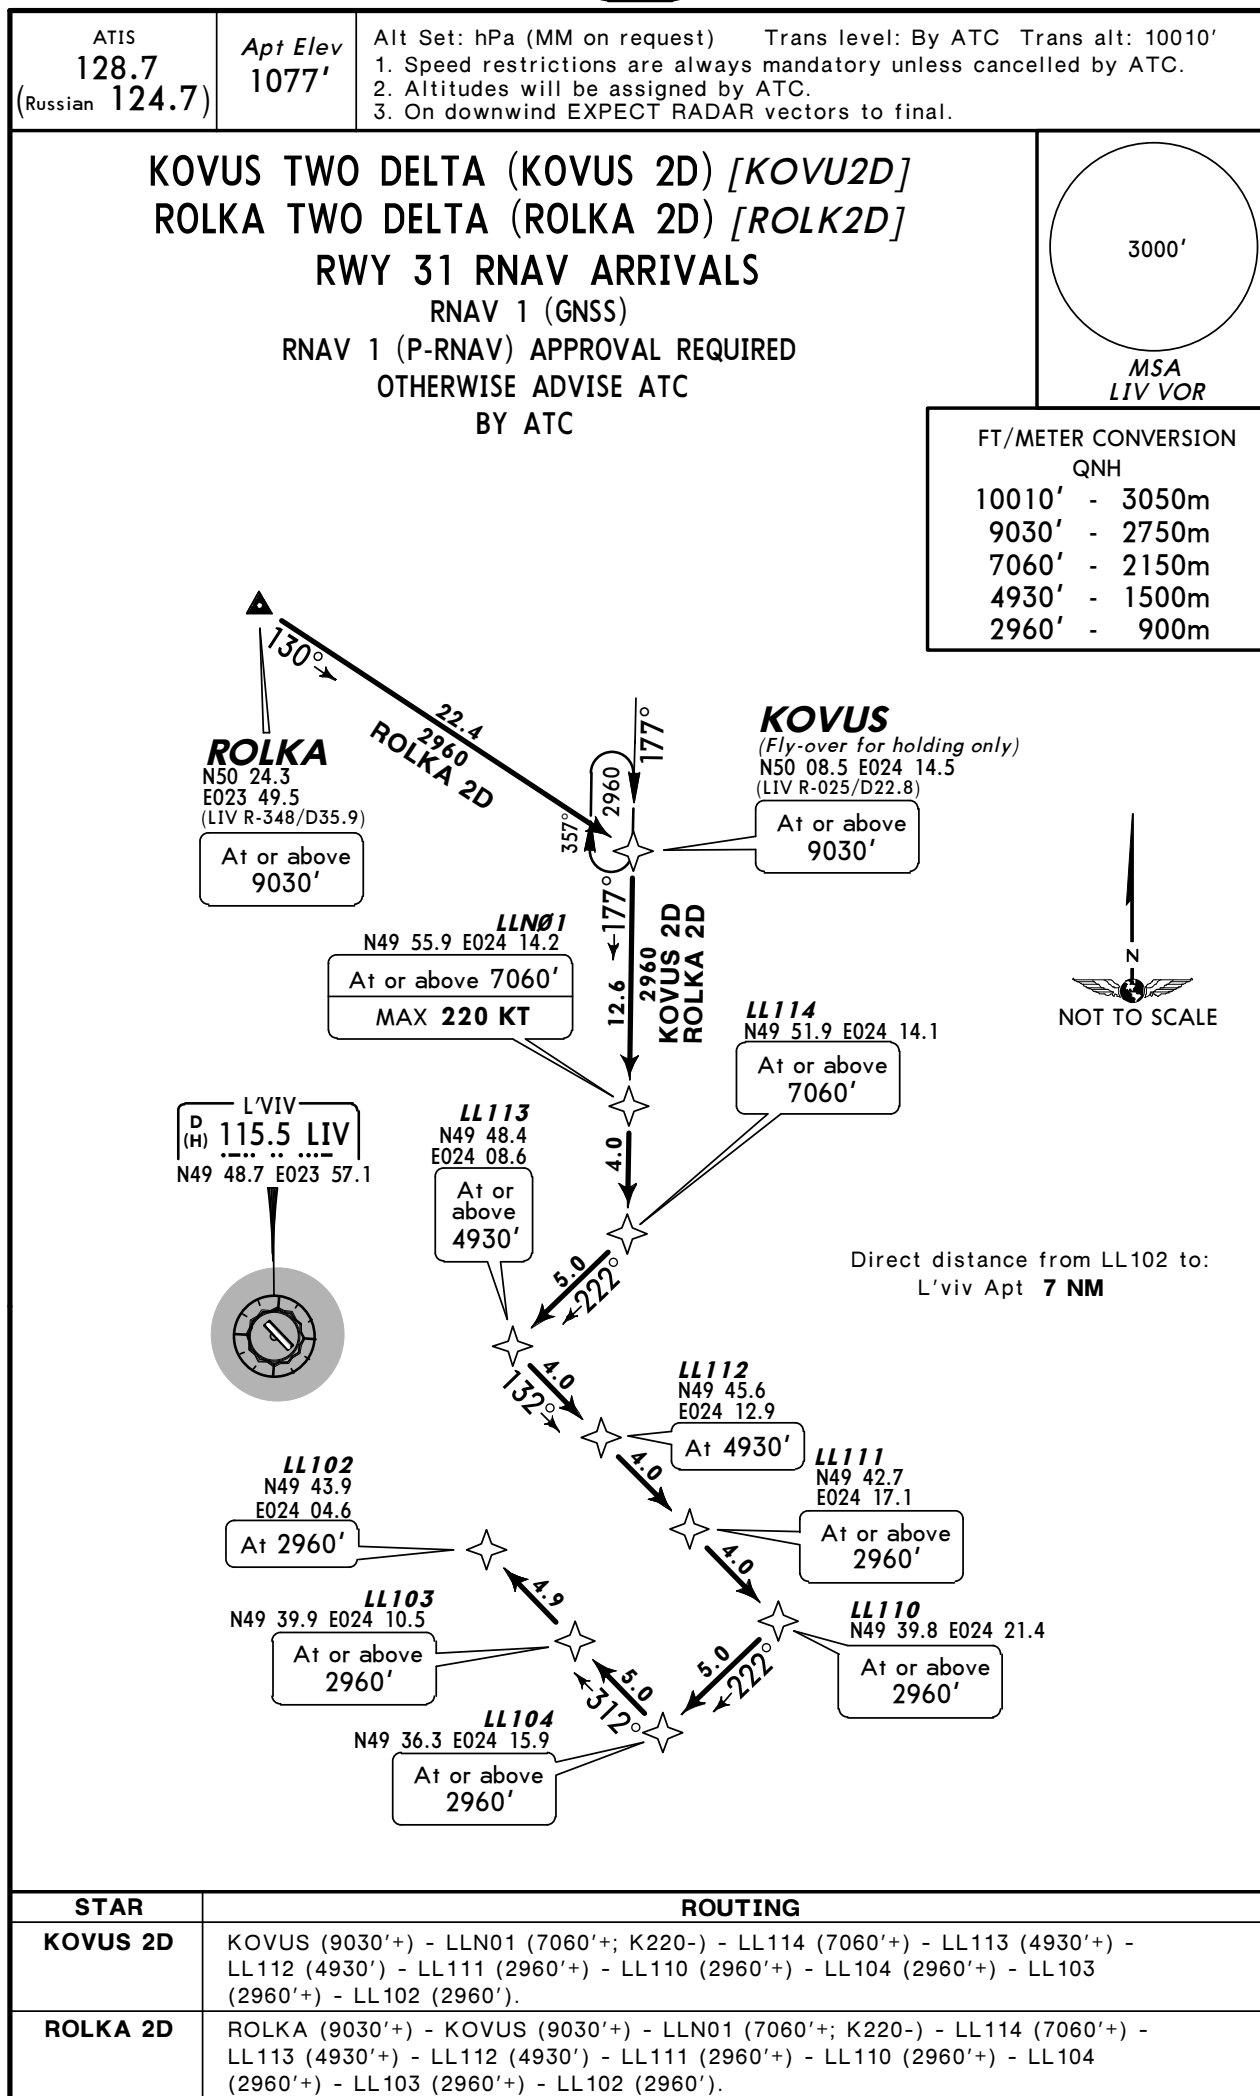

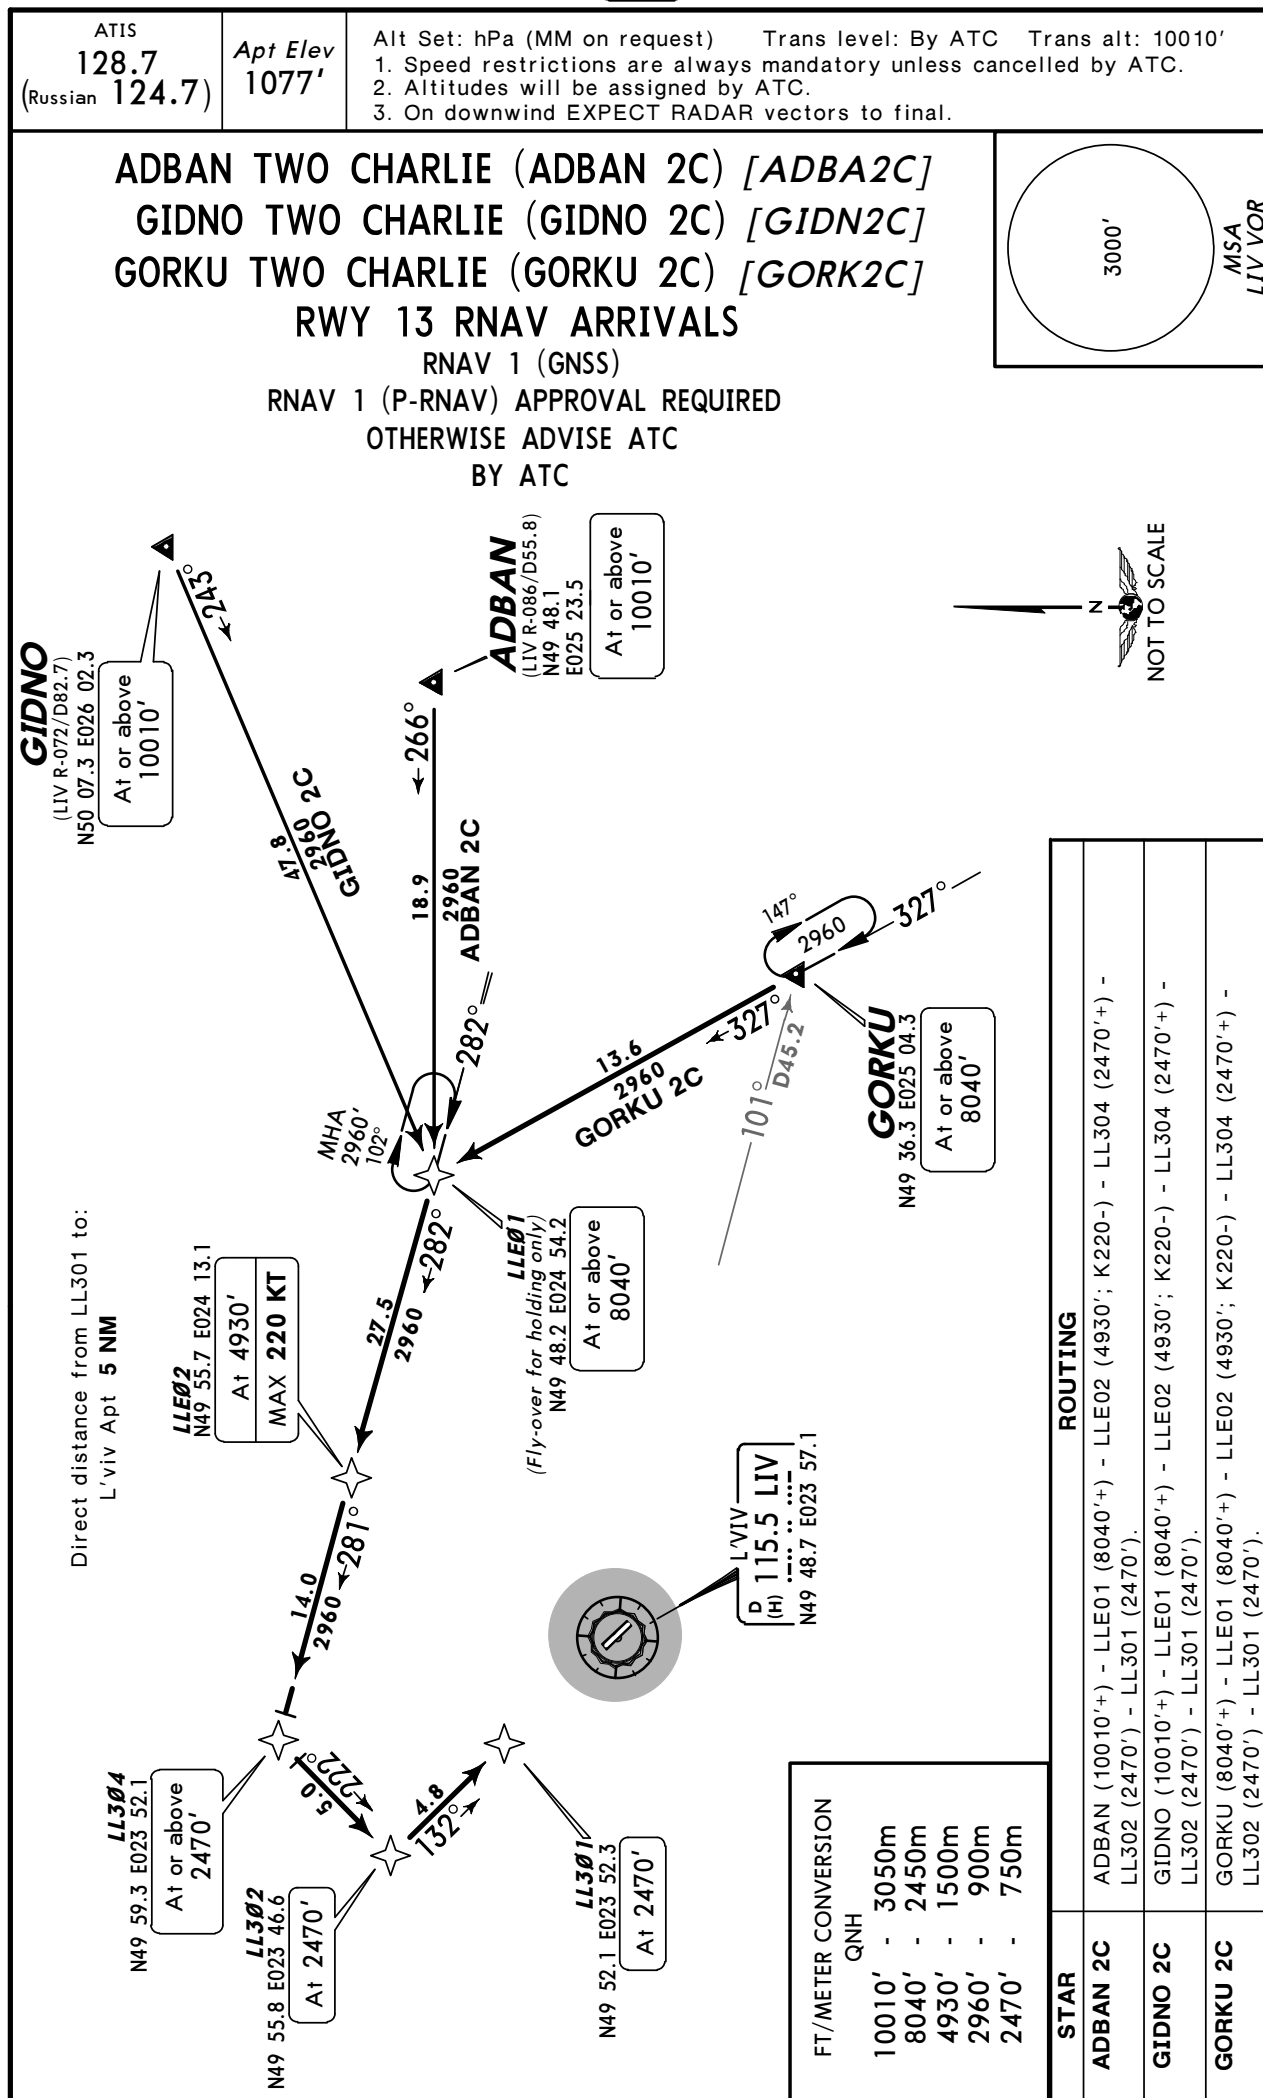

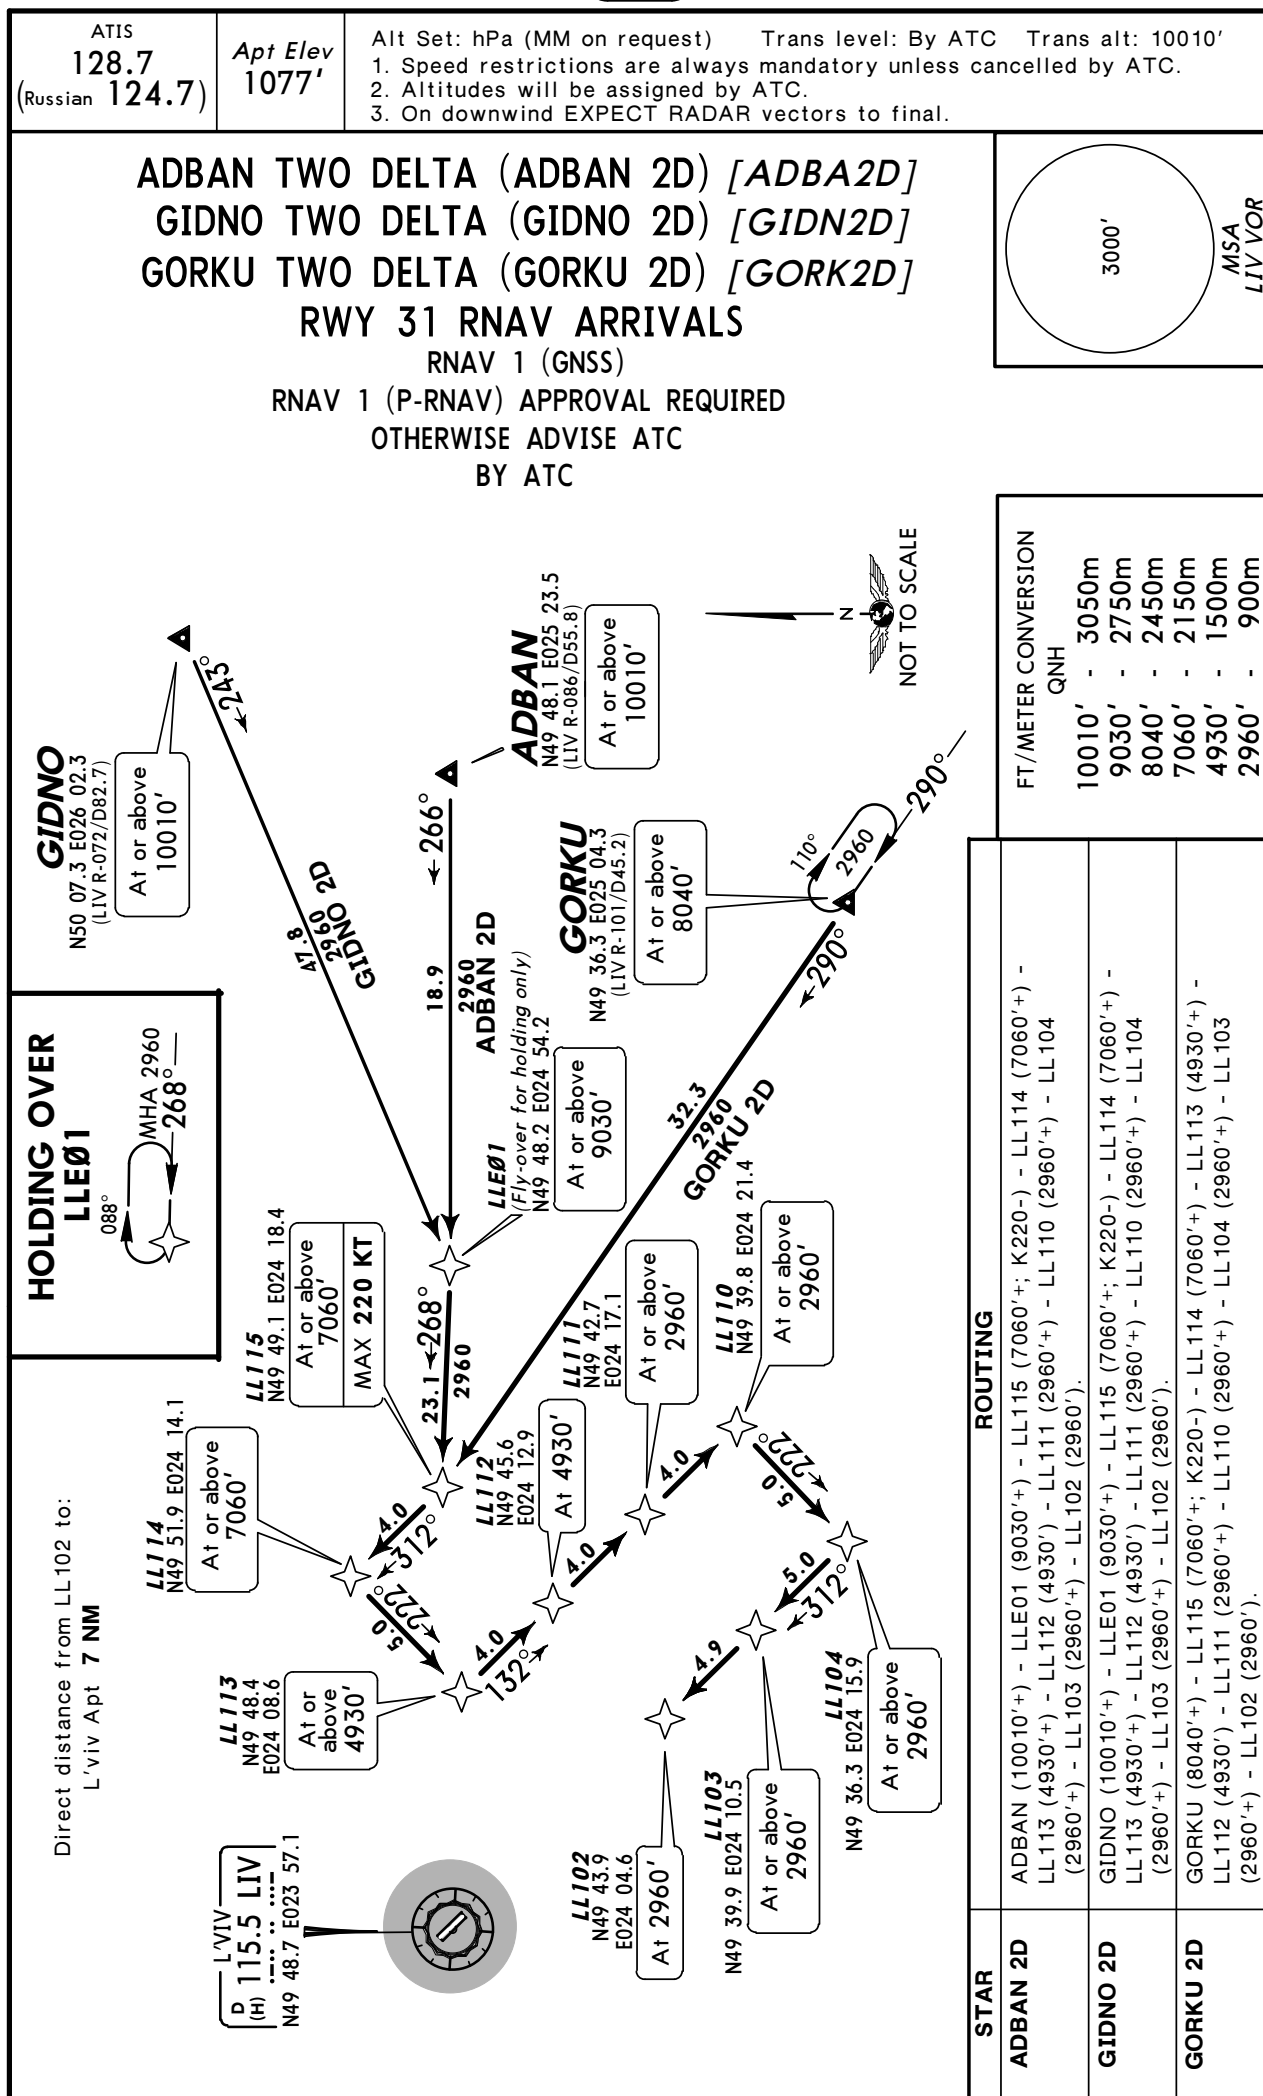

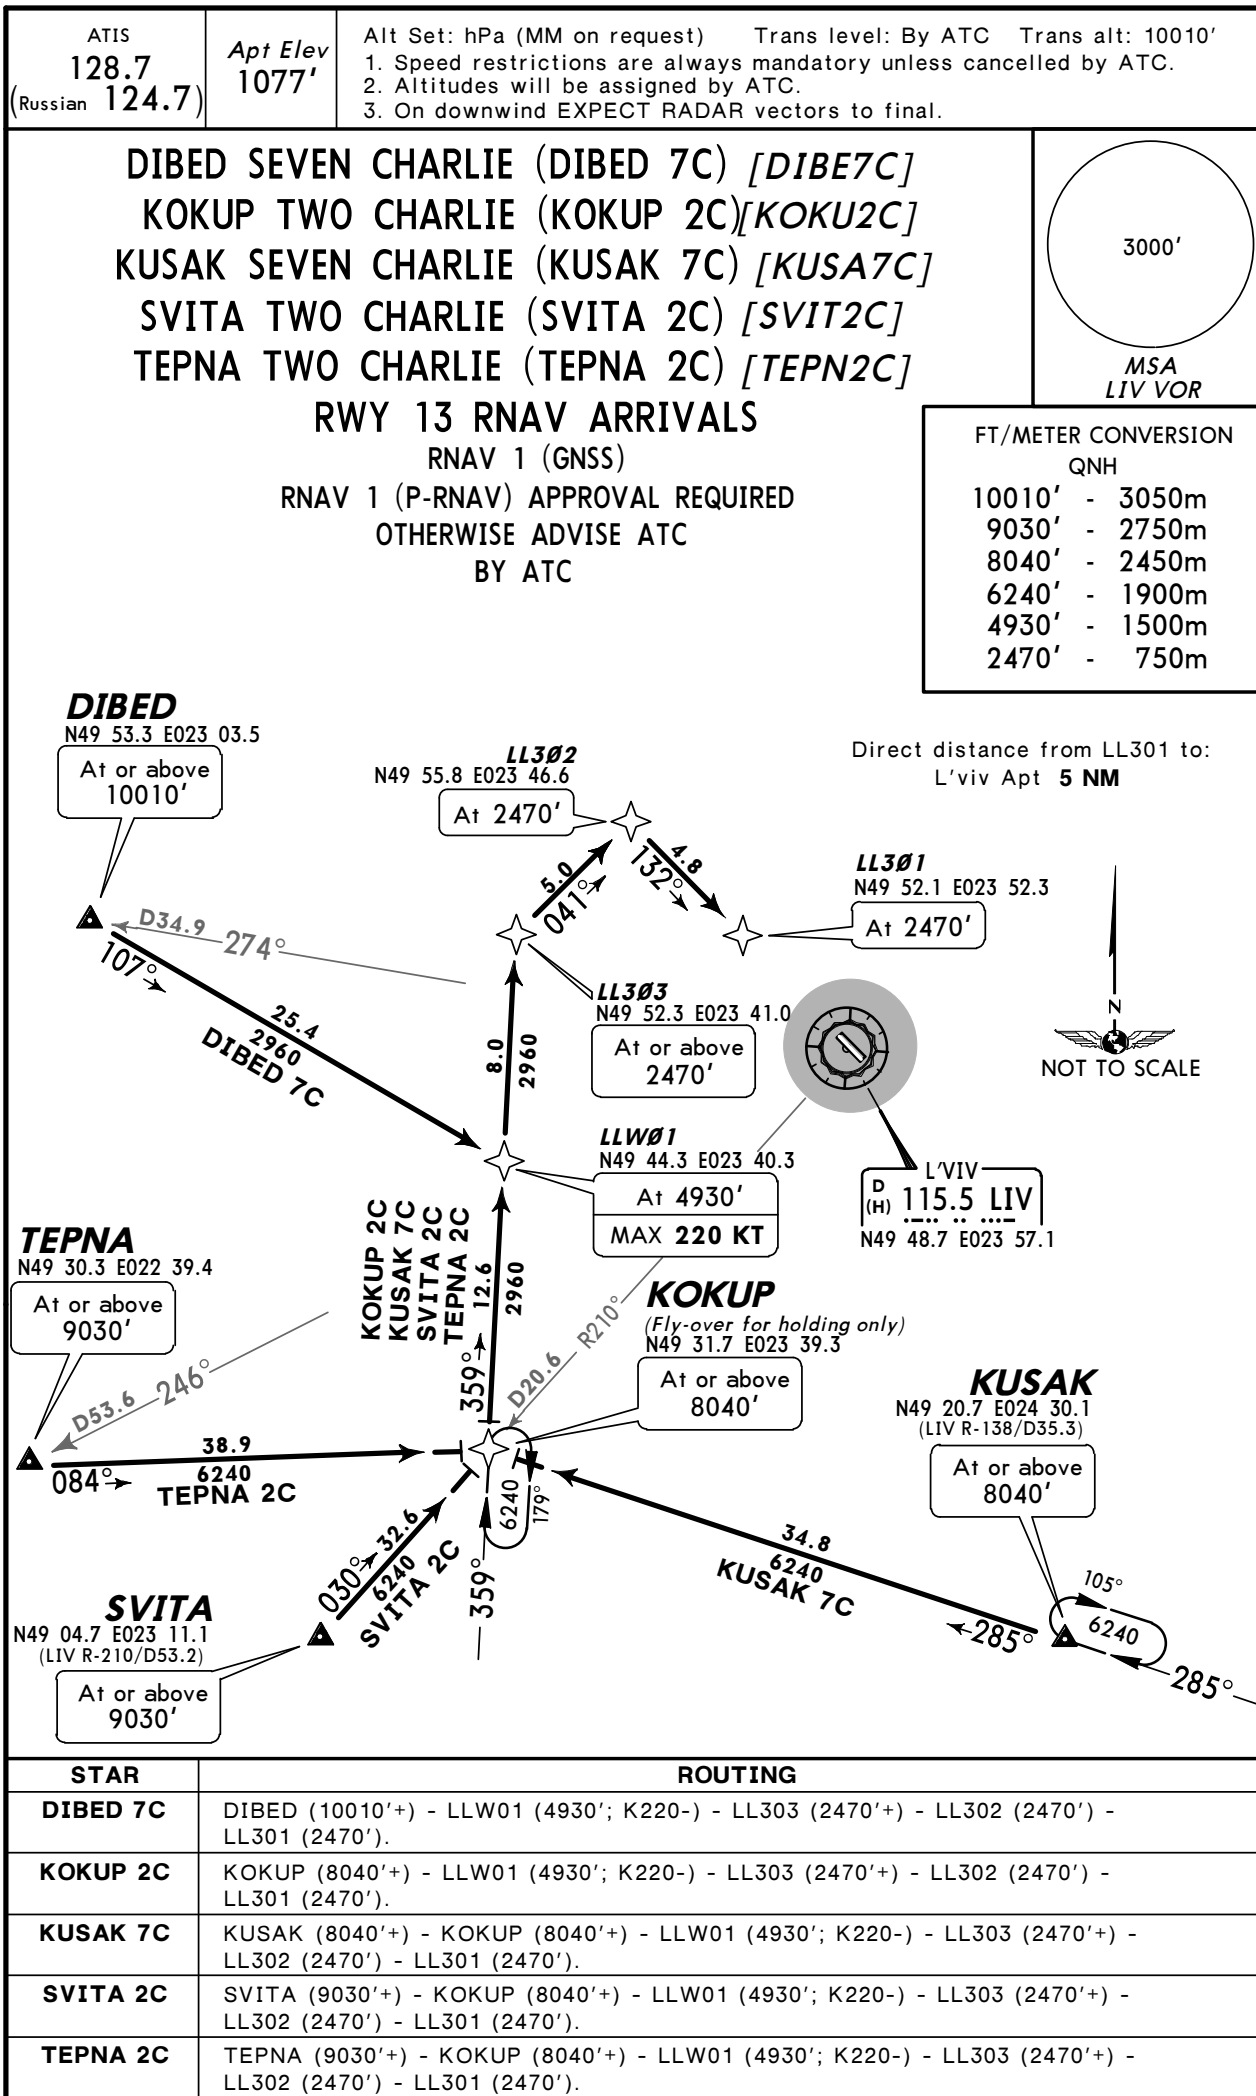

© JEPPESEN, 2012. ALL RIGHTS RESERVED.


Apt Elev
1077'

Trans level: By ATC Trans alt: 10010'

ADBAN ONE ALFA (ADBAN 1A) [ADBA1A]
GIDNO ONE ALFA (GIDNO 1A) [GIDN1A]
GORKU ONE ALFA (GORKU 1A) [GORK1A]
KOVUS ONE ALFA (KOVUS 1A) [KOVU1A]
KUSAK SIX ALFA (KUSAK 6A) [KUSA6A]
RWY 13 DEPARTURES

3000'

MSA
LIV VOR

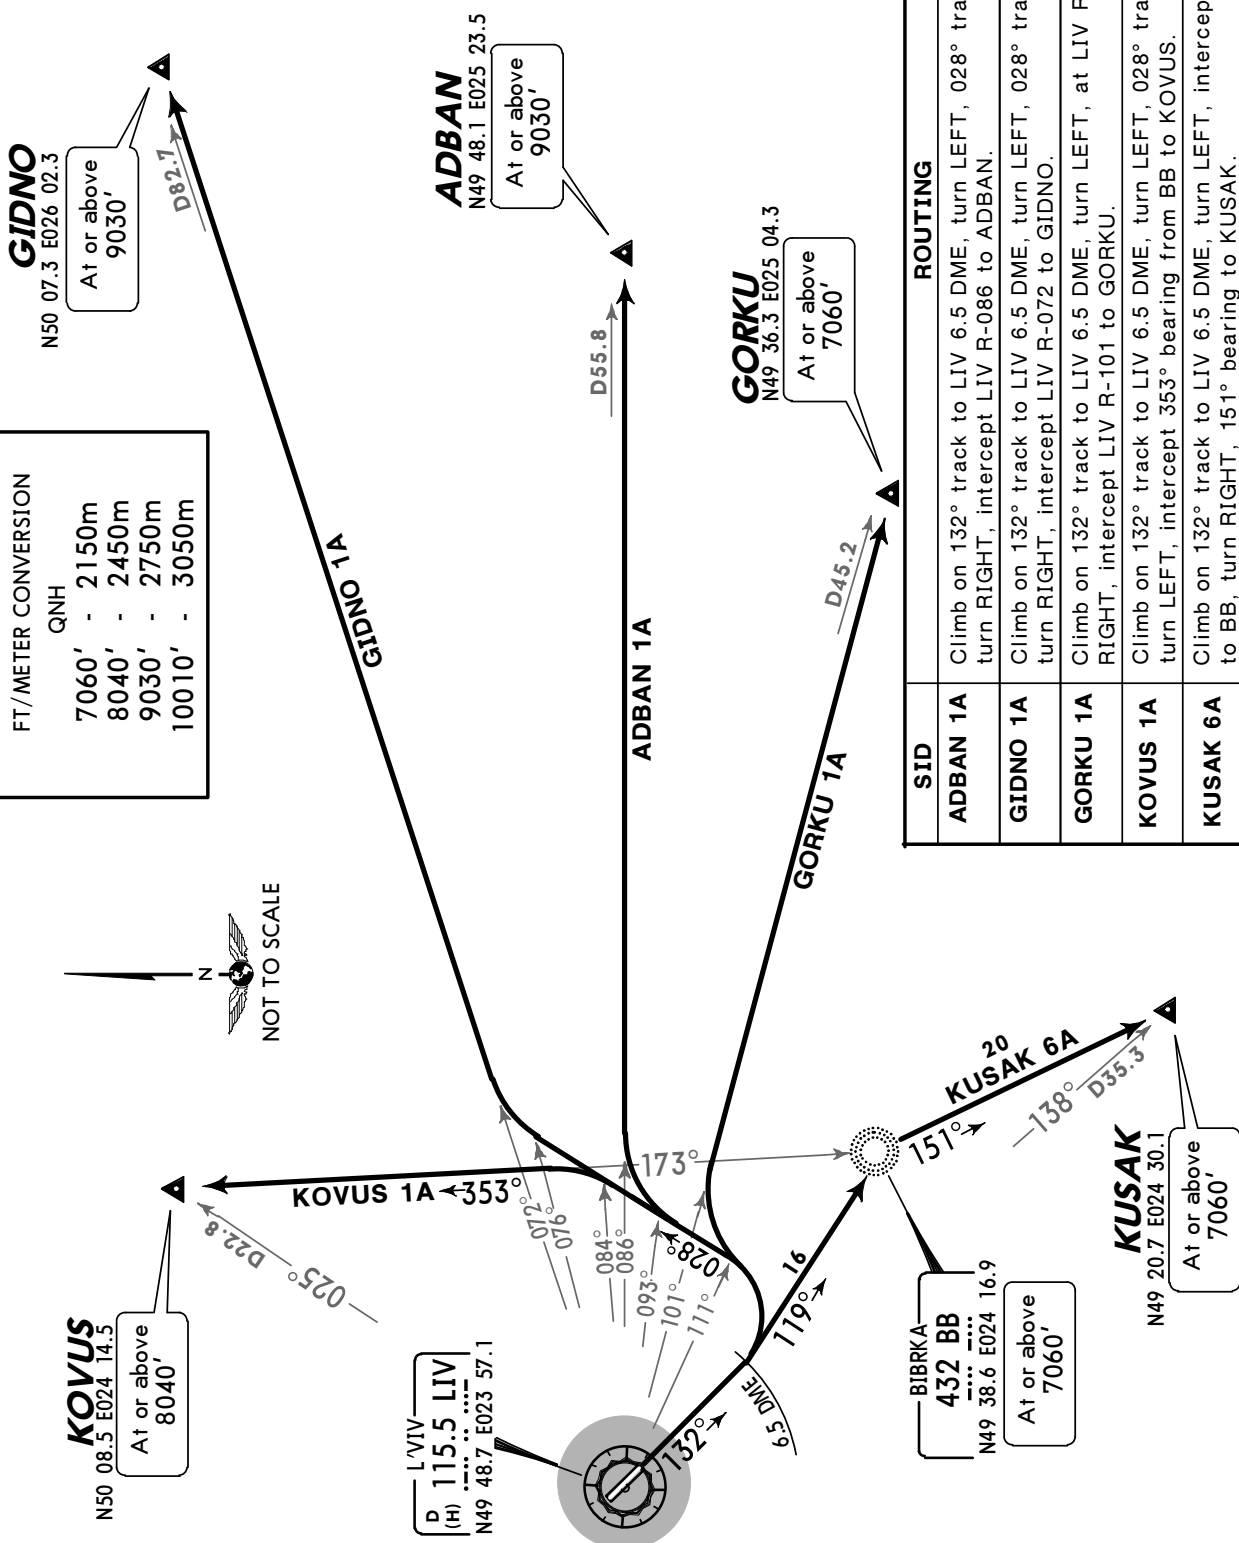


Apt Elev
1077'

Trans level: By ATC Trans alt: 10010'

3000'

MSA
L'VIV VOR

ADBAN ONE BRAVO (ADBAN 1B) [ADBA1B]
GIDNO ONE BRAVO (GIDNO 1B) [GIDN1B]
GORKU ONE BRAVO (GORKU 1B) [GORK1B]
KOVUS ONE BRAVO (KOVUS 1B) [KOVU1B]
KUSAK SIX BRAVO (KUSAK 6B) [KUSA6B]
RWY 31 DEPARTURES

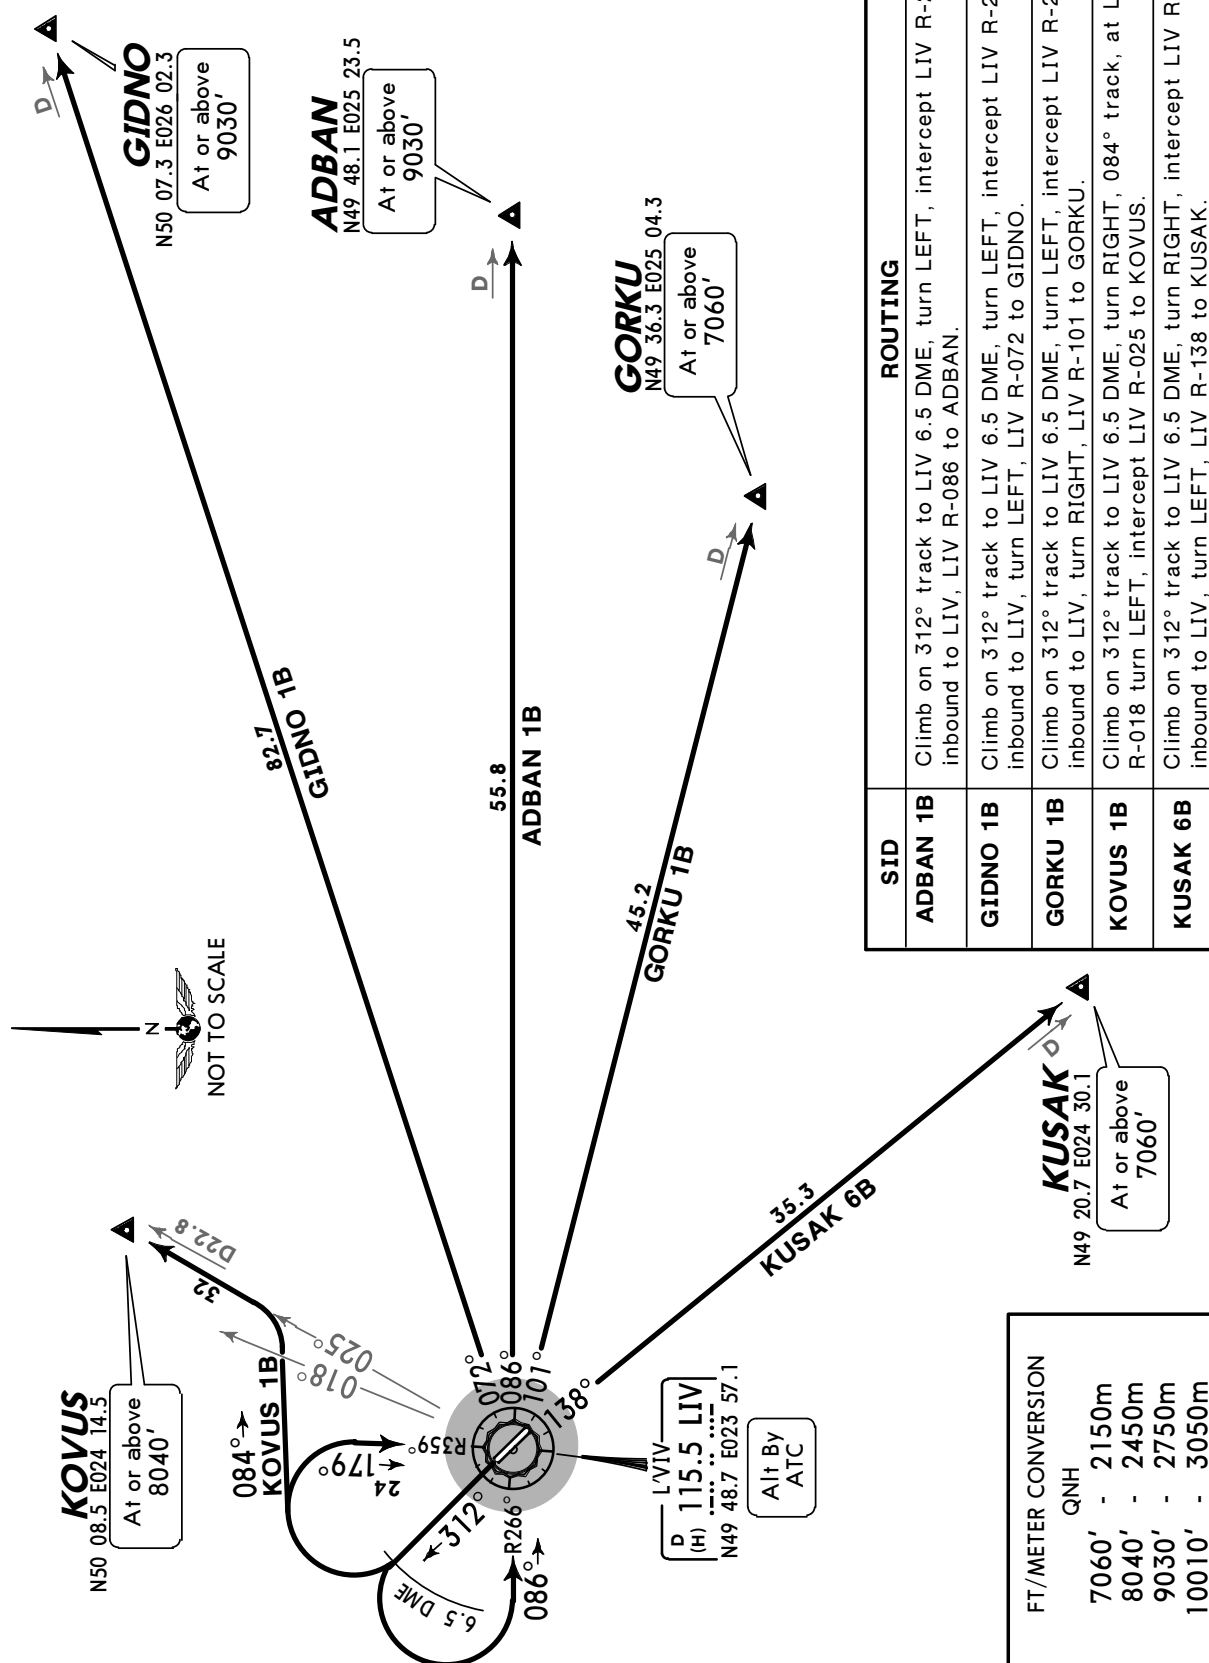

Apt Elev
1077'

Trans level: By ATC Trans alt: 10010'

3000'

MSA
LIV VOR

DIBED SIX ALFA (DIBED 6A) [DIBE6A]
DIBED SIX ECHO (DIBED 6E) [DIBE6E]
GOTIX THREE ALFA (GOTIX 3A) [GOTI3A]
KOKUP THREE ALFA (KOKUP 3A) [KOKU3A]
SVITA ONE ALFA (SVITA 1A) [SVIT1A]
RWY 13 DEPARTURES

GOTIX
N50 01.3
E023 12.7At or above
10010'

UK(R)-411

D16.2 LIVWhen UK(R)-411
active
At or above
FL160L'VIV
D (H) 115.5 LIV
N49 48.7 E023 57.1Alt By
ATC**DIBED**

N49 53.3 E023 03.5

At or above
10010'

NOT TO SCALE

FT/METER CONVERSION

QNH

6070' - 1850m
7060' - 2150m
10010' - 3050m

SVITA

N49 04.7 E023 11.1

At or above
10010'**KOKUP**

N49 31.7 E023 39.3

At or above
6070'**BIBRKA**
432 BB

N49 38.6 E024 16.9

At or above
7060'**SVITA 1A****GOTIX 3A**

This SID requires a minimum climb gradient
of
7% up to FL160 when UK(R)-411 active.


Gnd speed-KT	75	100	150	200	250	300
7% V/V (fpm)	532	709	1063	1418	1772	2127

If unable to comply advise ATC.

SID	ROUTING
DIBED 6A	Climb on 132° track to LIV 3.8 DME, turn RIGHT, intercept 283° bearing from BB to DIBED.
DIBED 6E	Climb on 132° track to LIV 6.5 DME, turn LEFT, intercept LIV R-085 inbound to LIV, turn RIGHT, LIV R-274 to DIBED.
GOTIX 3A	Climb on 132° track to LIV 6.5 DME, turn LEFT, intercept LIV R-085 inbound to LIV, turn RIGHT, LIV R-290 to GOTIX.
KOKUP 3A	Climb on 132° track to LIV 6.5 DME, turn RIGHT, 183° track, at LIV R-151 turn RIGHT, intercept 250° bearing from BB to KOKUP.
SVITA 1A	Climb on 132° track to LIV 6.5 DME, turn LEFT, intercept 119° bearing to BB, turn RIGHT, 229° bearing to SVITA.


Apt Elev
1077'

Trans level: By ATC Trans alt: 10010'




DIBED SIX BRAVO (DIBED 6B) [DIBE6B]
GOTIX THREE BRAVO (GOTIX 3B) [GOTI3B]
KOKUP THREE BRAVO (KOKUP 3B) [KOKU3B]
SVITA ONE BRAVO (SVITA 1B) [SVIT1B]
RWY 31 DEPARTURES

FT/METER CONVERSION
QNH
6070' - 1850m
10010' - 3050m

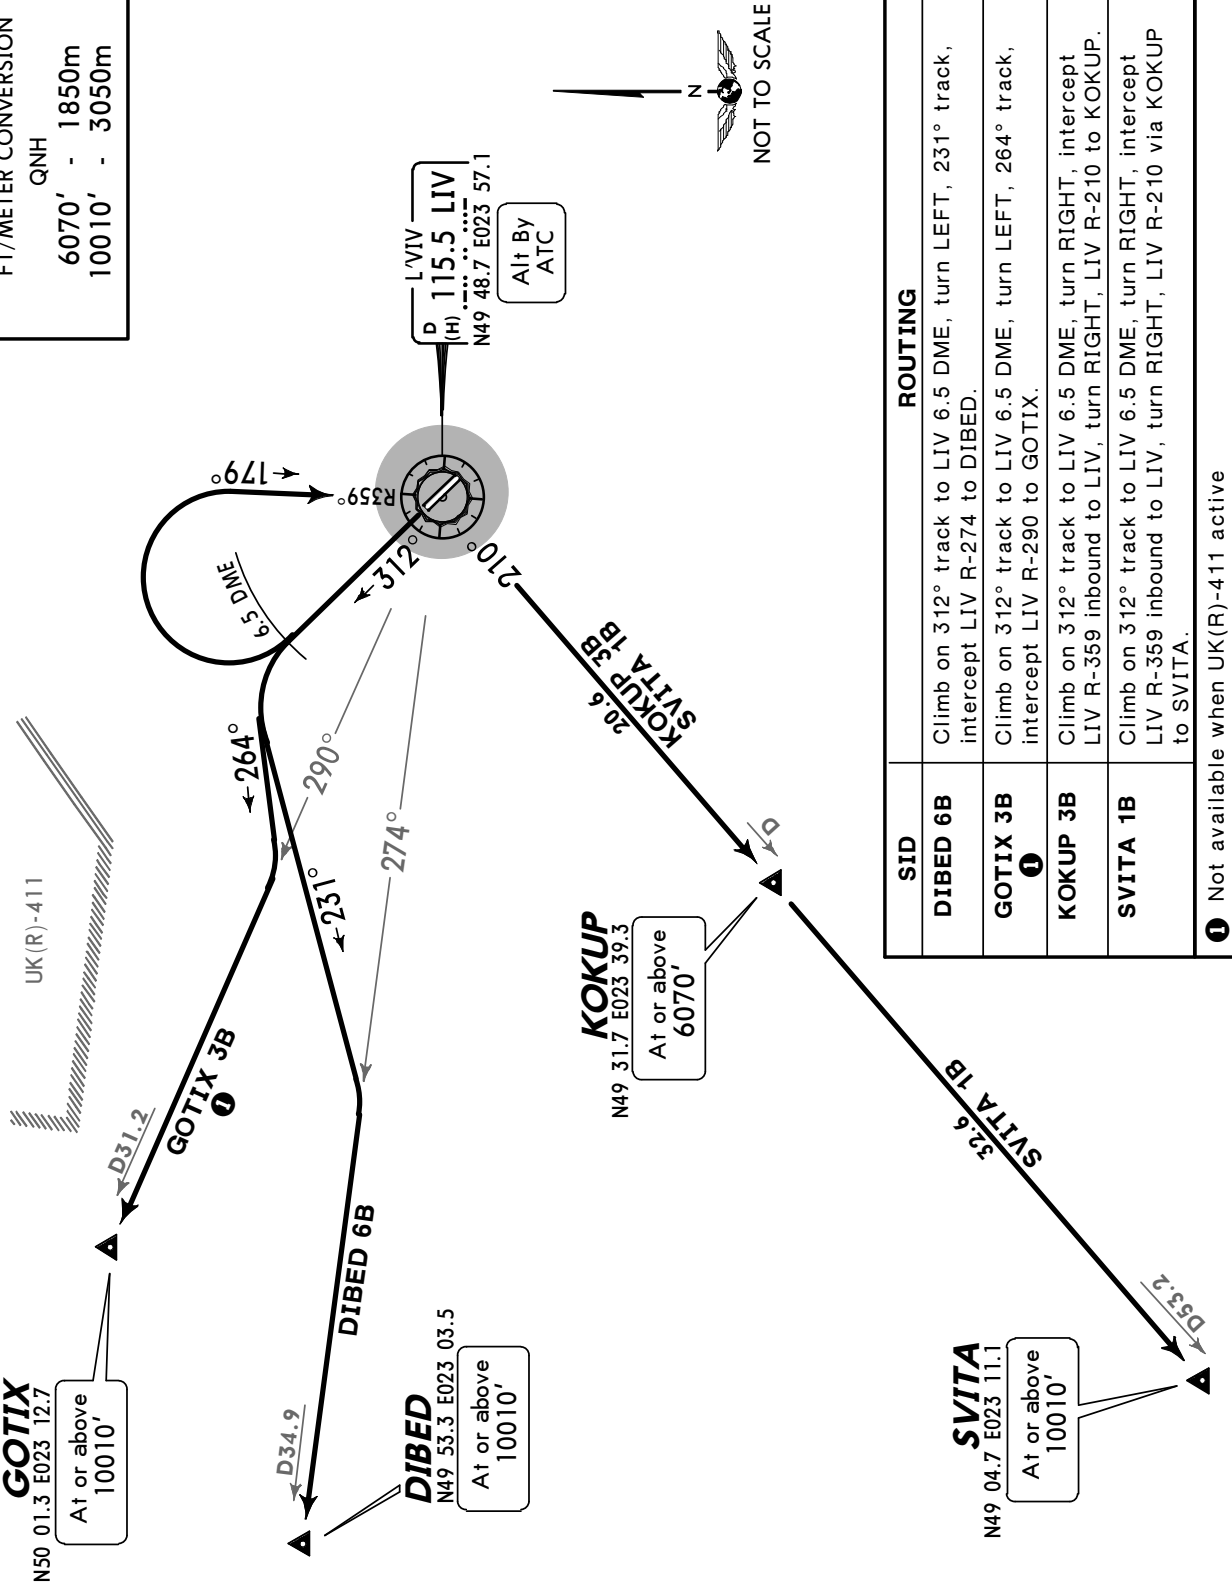

Apt Elev
1077'


Trans level: By ATC Trans alt: 10010'



ADBAN TWO ALFA (ADBAN 2A) [ADBA2A]
GIDNO TWO ALFA (GIDNO 2A) [GIDN2A]
GORKU TWO ALFA (GORKU 2A) [GORK2A]
KOVUS TWO ALFA (KOVUS 2A) [KOVU2A]
KUSAK SEVEN ALFA (KUSAK 7A) [KUSA7A]
RWY 13 RNAV DEPARTURES

RNAV 1 (GNSS)

RNAV 1 (P-RNAV) APPROVAL REQUIRED, OTHERWISE ADVISE ATC

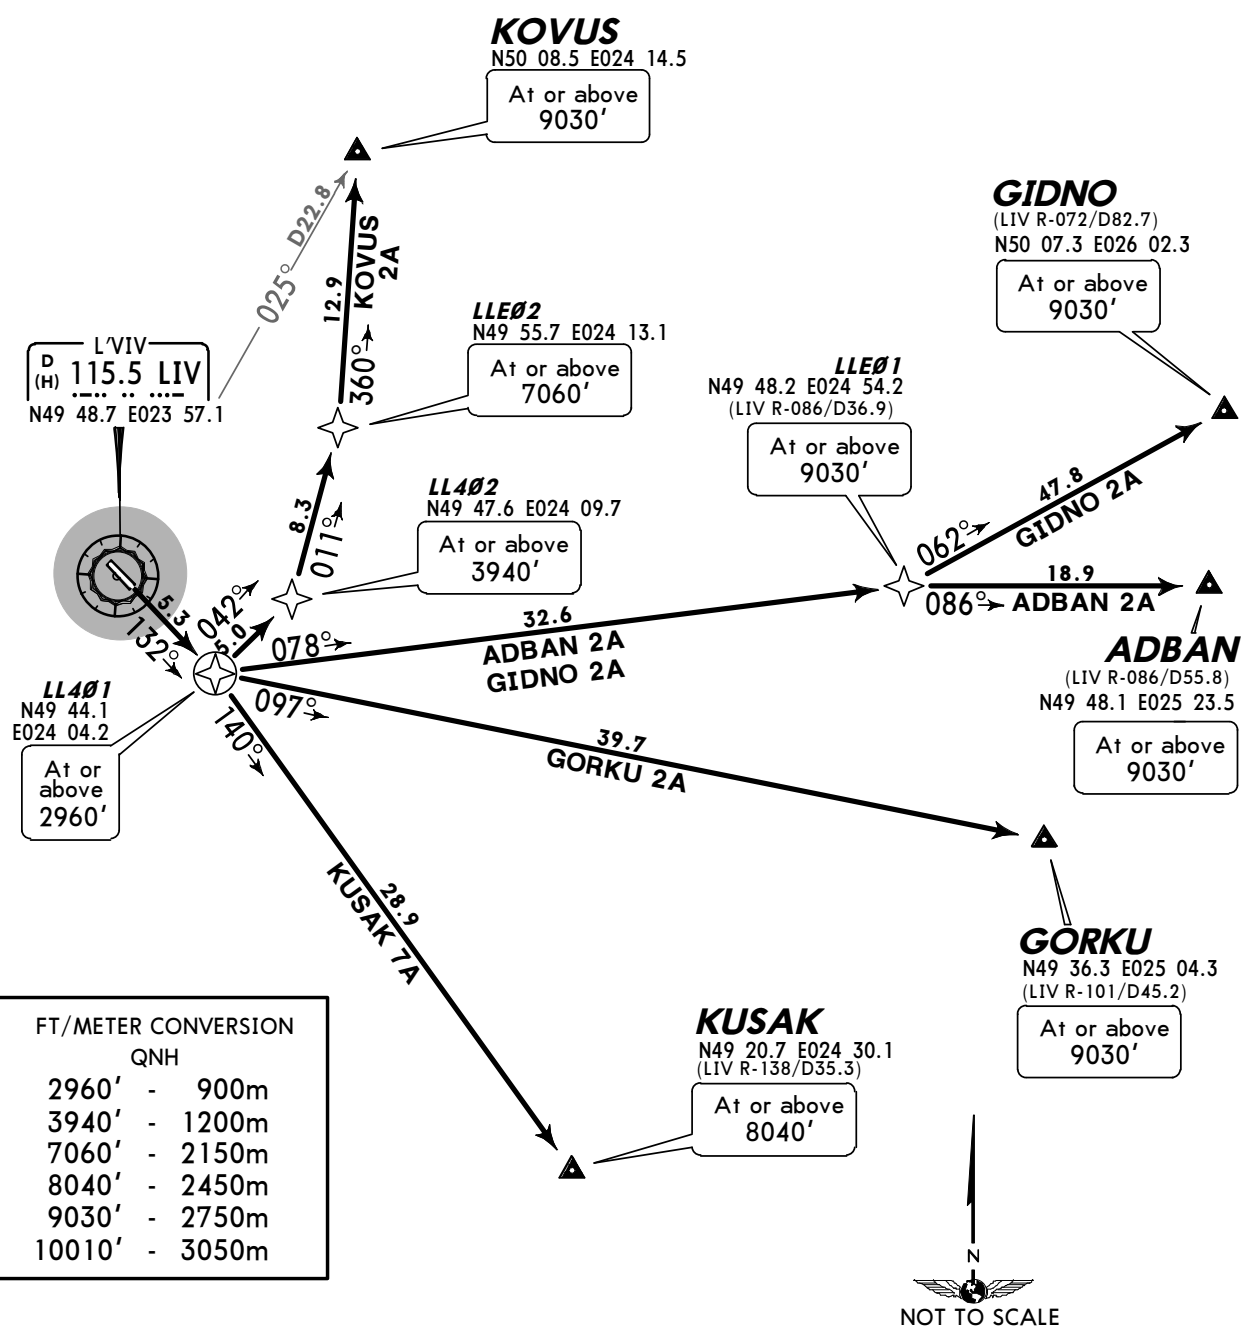

FT/METER CONVERSION

QNH

2960'	-	900m
3940'	-	1200m
7060'	-	2150m
8040'	-	2450m
9030'	-	2750m
10010'	-	3050m

SID	ROUTING
ADBAN 2A	LL401 (2960'+) - LLE01 (9030'+) - ADBAN (9030'+).
GIDNO 2A	LL401 (2960'+) - LLE01 (9030'+) - GIDNO (9030'+).
GORKU 2A	LL401 (2960'+) - GORKU (9030'+).
KOVUS 2A	LL401 (2960'+) - LL402 (3940'+) - LLE02 (7060'+) - KOVUS (9030'+).
KUSAK 7A	LL401 (2960'+) - KUSAK (8040'+).

Apt Elev
1077'

Trans level: By ATC Trans alt: 10010'


3000'

MSA
LIV VOR

ADBAN TWO BRAVO (ADBAN 2B) [ADBA2B]
GIDNO TWO BRAVO (GIDNO 2B) [GIDN2B]
GORKU TWO BRAVO (GORKU 2B) [GORK2B]
KOVUS TWO BRAVO (KOVUS 2B) [KOVU2B]
KUSAK SEVEN BRAVO (KUSAK 7B) [KUSA7B]
RWY 31 RNAV DEPARTURES

RNAV 1 (GNSS)

RNAV 1 (P-RNAV) APPROVAL REQUIRED, OTHERWISE ADVISE ATC

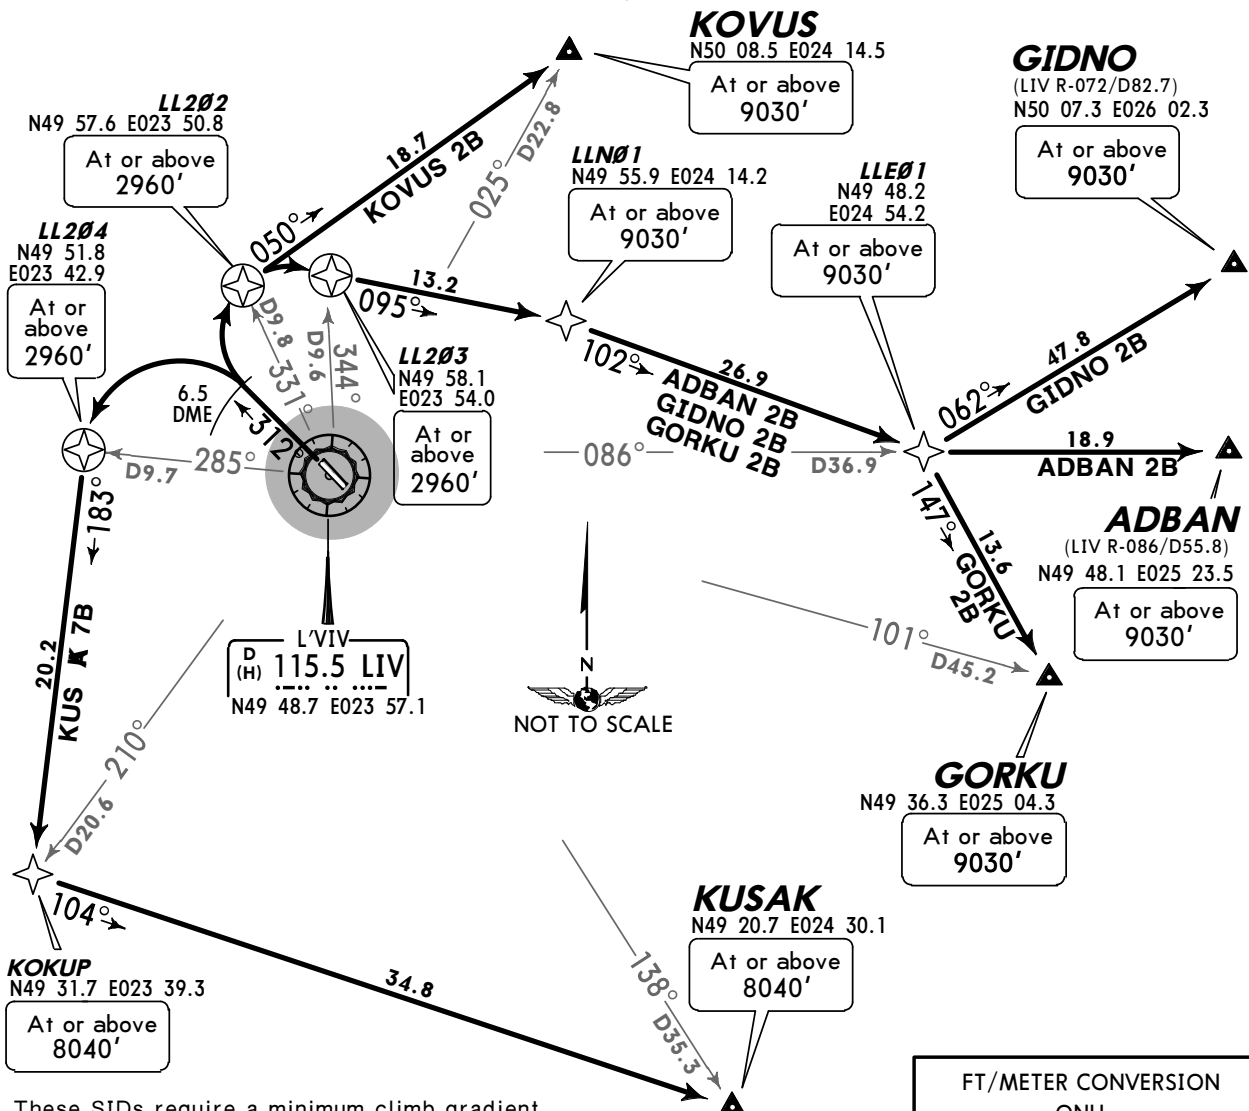

These SIDs require a minimum climb gradient of 7% up to 2960'.

Gnd speed-KT	75	100	150	200	250	300
7% V/V (fpm)	532	709	1063	1418	1772	2127

FT/METER CONVERSION	
QNH	
2960'	- 900m
8040'	- 2450m
9030'	- 2750m
10010'	- 3050m

SID	INITIAL CLIMB (CONVENTIONAL)
ADBAN 2B, GIDNO 2B, GORKU 2B	On runway track to LIV 6.5 DME, turn RIGHT to LL203.
KOVUS 2B	On runway track to LIV 6.5 DME, turn RIGHT to LL202.
KUSAK 7B	On runway track to LIV 6.5 DME, turn LEFT to LL204.
SID	ROUTING
ADBAN 2B	LL203 (2960'+) - LLN01 (9030'+) - LLE01 (9030'+) - ADBAN (9030'+).
GIDNO 2B	LL203 (2960'+) - LLN01 (9030'+) - LLE01 (9030'+) - GIDNO (9030'+).
GORKU 2B	LL203 (2960'+) - LLN01 (9030'+) - LLE01 (9030'+) - GORKU (9030'+).
KOVUS 2B	LL202 (2960'+) - KOVUS (9030'+).
KUSAK 7B	LL204 (2960'+) - KOKUP (8040'+) - KUSAK (8040'+).

Apt Elev
1077'

Trans level: By ATC Trans alt: 10010'


3000'

MSA
LIV VOR

DIBED SEVEN ALFA (DIBED 7A) [DIBE7A]
GOTIX FOUR ALFA (GOTIX 4A) [GOTI4A]
KOKUP FOUR ALFA (KOKUP 4A) [KOKU4A]
SVITA TWO ALFA (SVITA 2A) [SVIT2A]
RWY 13 RNAV DEPARTURES

RNAV 1 (GNSS)

RNAV 1 (P-RNAV) APPROVAL REQUIRED, OTHERWISE ADVISE ATC

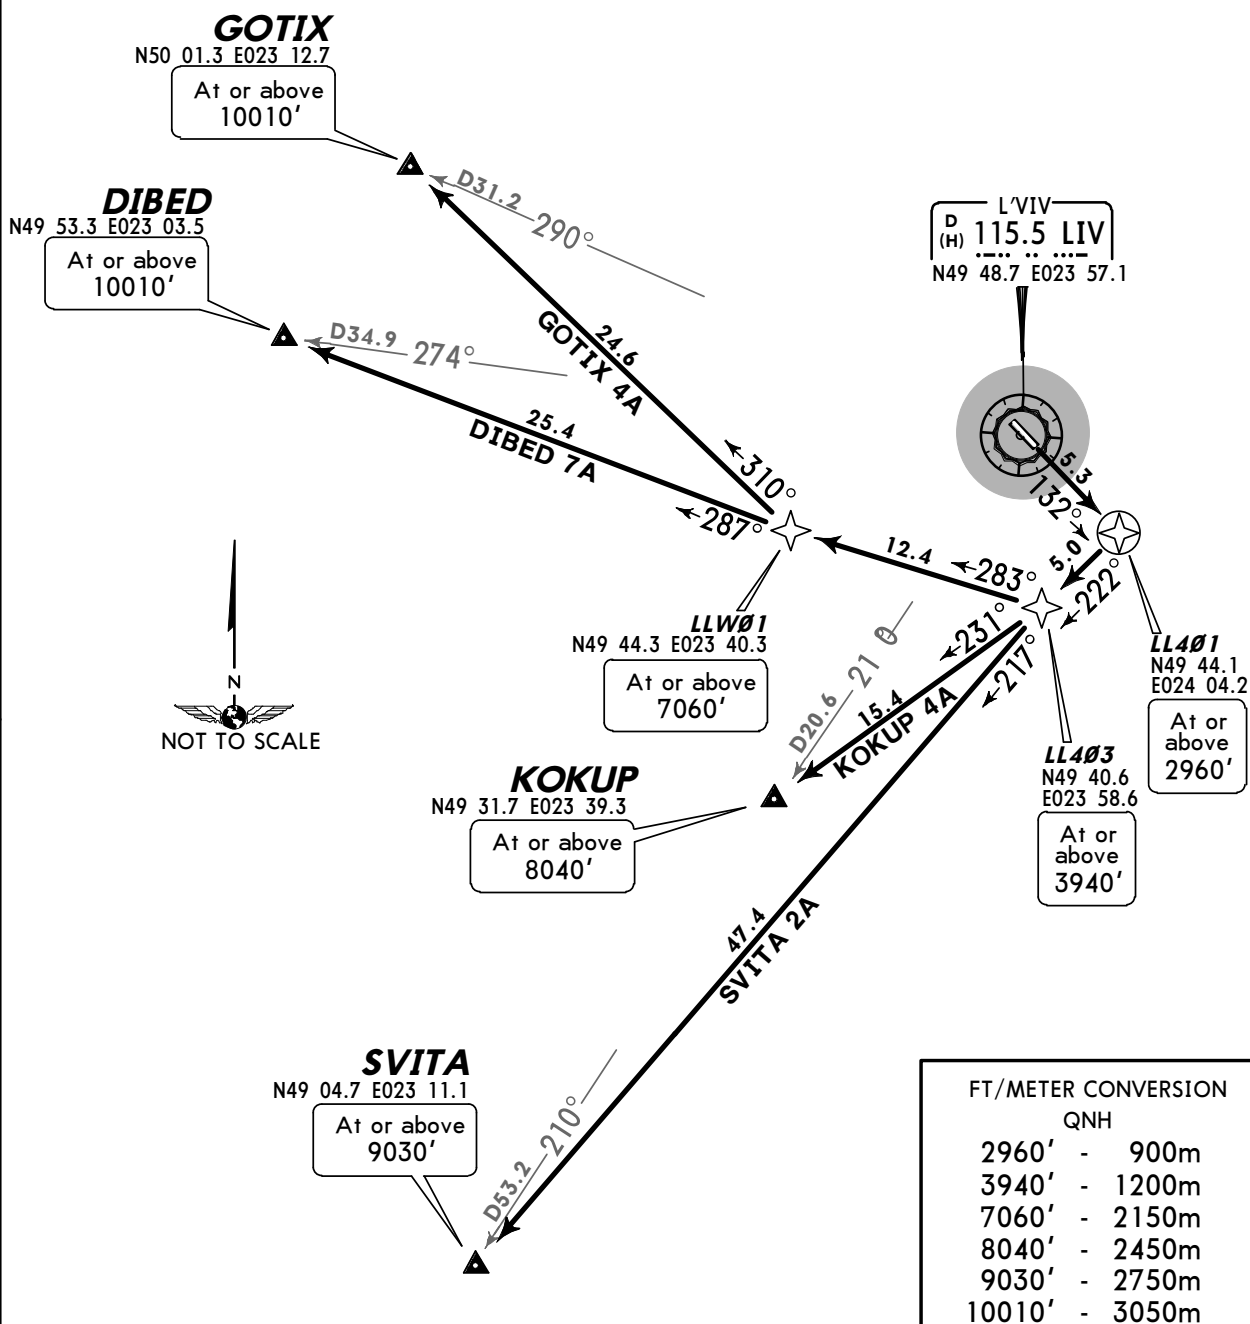

SID	ROUTING
DIBED 7A	LL401 (2960'+) - LL403 (3940'+) - LLW01 (7060'+) - DIBED (10010'+).
GOTIX 4A	LL401 (2960'+) - LL403 (3940'+) - LLW01 (7060'+) - GOTIX (10010'+).
KOKUP 4A	LL401 (2960'+) - LL403 (3940'+) - KOKUP (8040'+).
SVITA 2A	LL401 (2960'+) - LL403 (3940'+) - SVITA (9030'+).

Apt Elev
1077'

Trans level: By ATC Trans alt: 10010'


3000'

MSA
LIV VOR

DIBED SEVEN BRAVO (DIBED 7B) [DIBE7B]
GOTIX FOUR BRAVO (GOTIX 4B) [GOTI4B]
KOKUP FOUR BRAVO (KOKUP 4B) [KOKU4B]
SVITA TWO BRAVO (SVITA 2B) [SVIT2B]
RWY 31 RNAV DEPARTURES

RNAV 1 (GNSS)

RNAV 1 (P-RNAV) APPROVAL REQUIRED, OTHERWISE ADVISE ATC

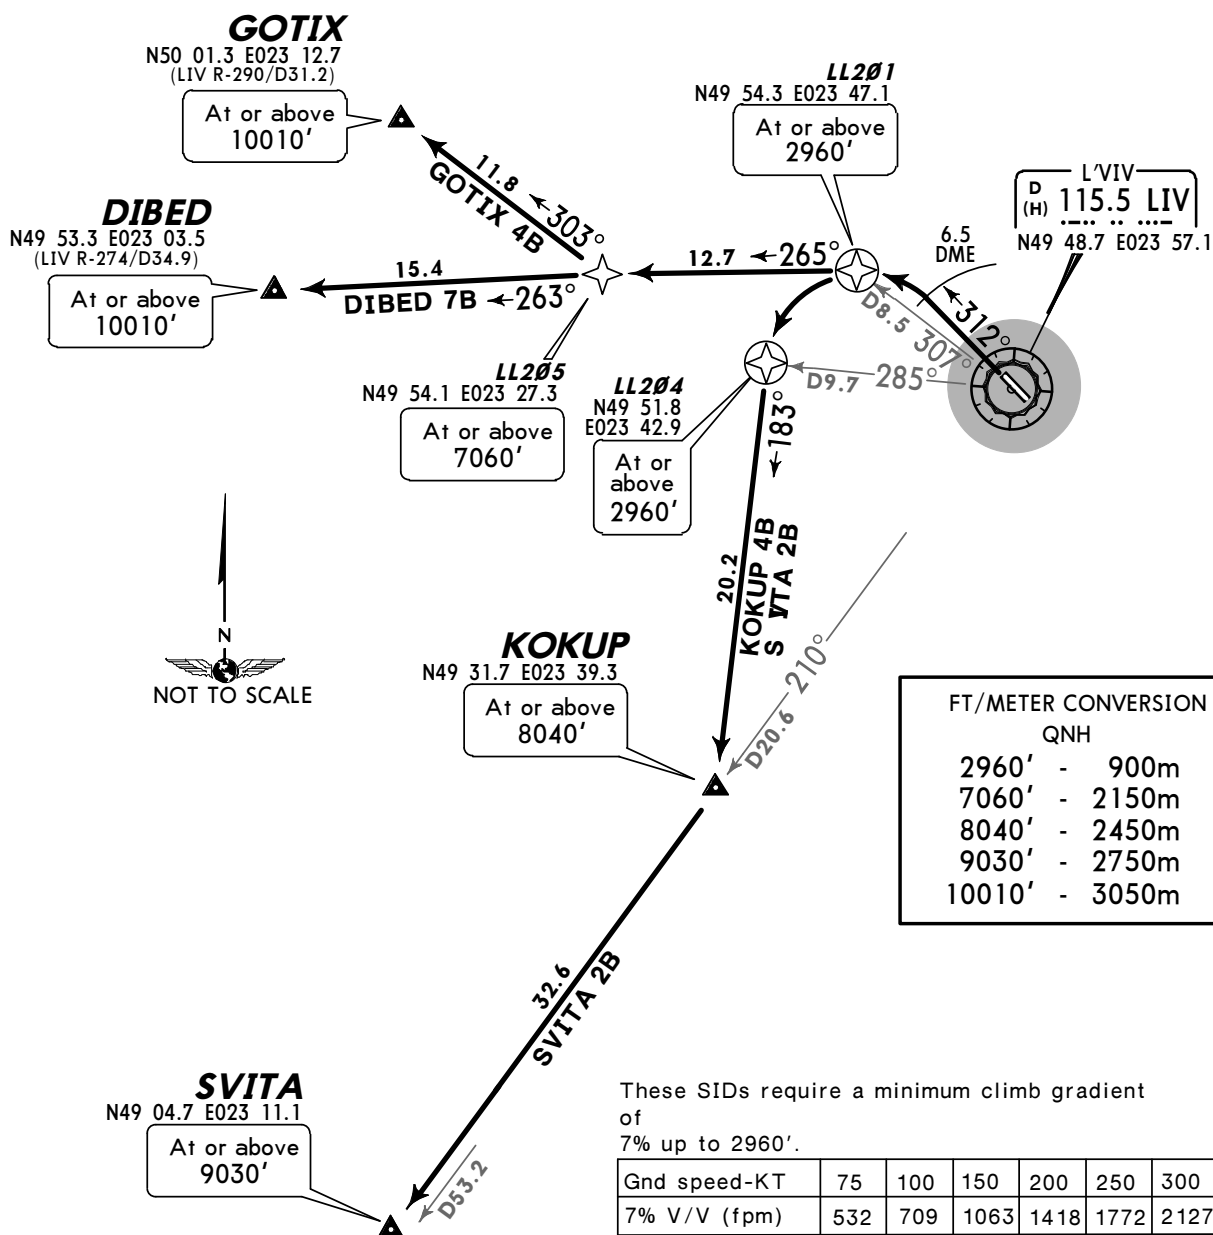

SID

INITIAL CLIMB (CONVENTIONAL)

DIBED 7B, GOTIX 4B

On runway track to LIV 6.5 DME, turn LEFT to LL201.

KOKUP 4B, SVITA 2B

On runway track to LIV 6.5 DME, turn LEFT to LL204.

SID

ROUTING

DIBED 7B

LL201 (2960'+) - LL205 (7060'+) - DIBED (10010'+).

GOTIX 4B

LL201 (2960'+) - LL205 (7060'+) - GOTIX (10010'+).

KOKUP 4B

LL204 (2960'+) - KOKUP (8040'+).

SVITA 2B

LL204 (2960'+) - KOKUP (8040'+) - SVITA (9030'+).

NOISE ABATEMENT

GENERAL


| Flights over the city below 2960' are prohibited.

| Special noise abatement procedure is performed during take-off and landing:
The first turn after take-off is performed at an altitude of 1420' and at a distance of 3.8NM when flying to DIBED;
when flying to DIBED, GOTIX by LEFT turn or 6.5NM in the direction of exit scheme.

UKLL/LWO
Apt Elev **1077'**
N49 48.6 E023 57.5

JEPPESEN
30 NOV 12 **10-9** Eff 13 Dec

L'VIV, UKRAINE
L'VIV

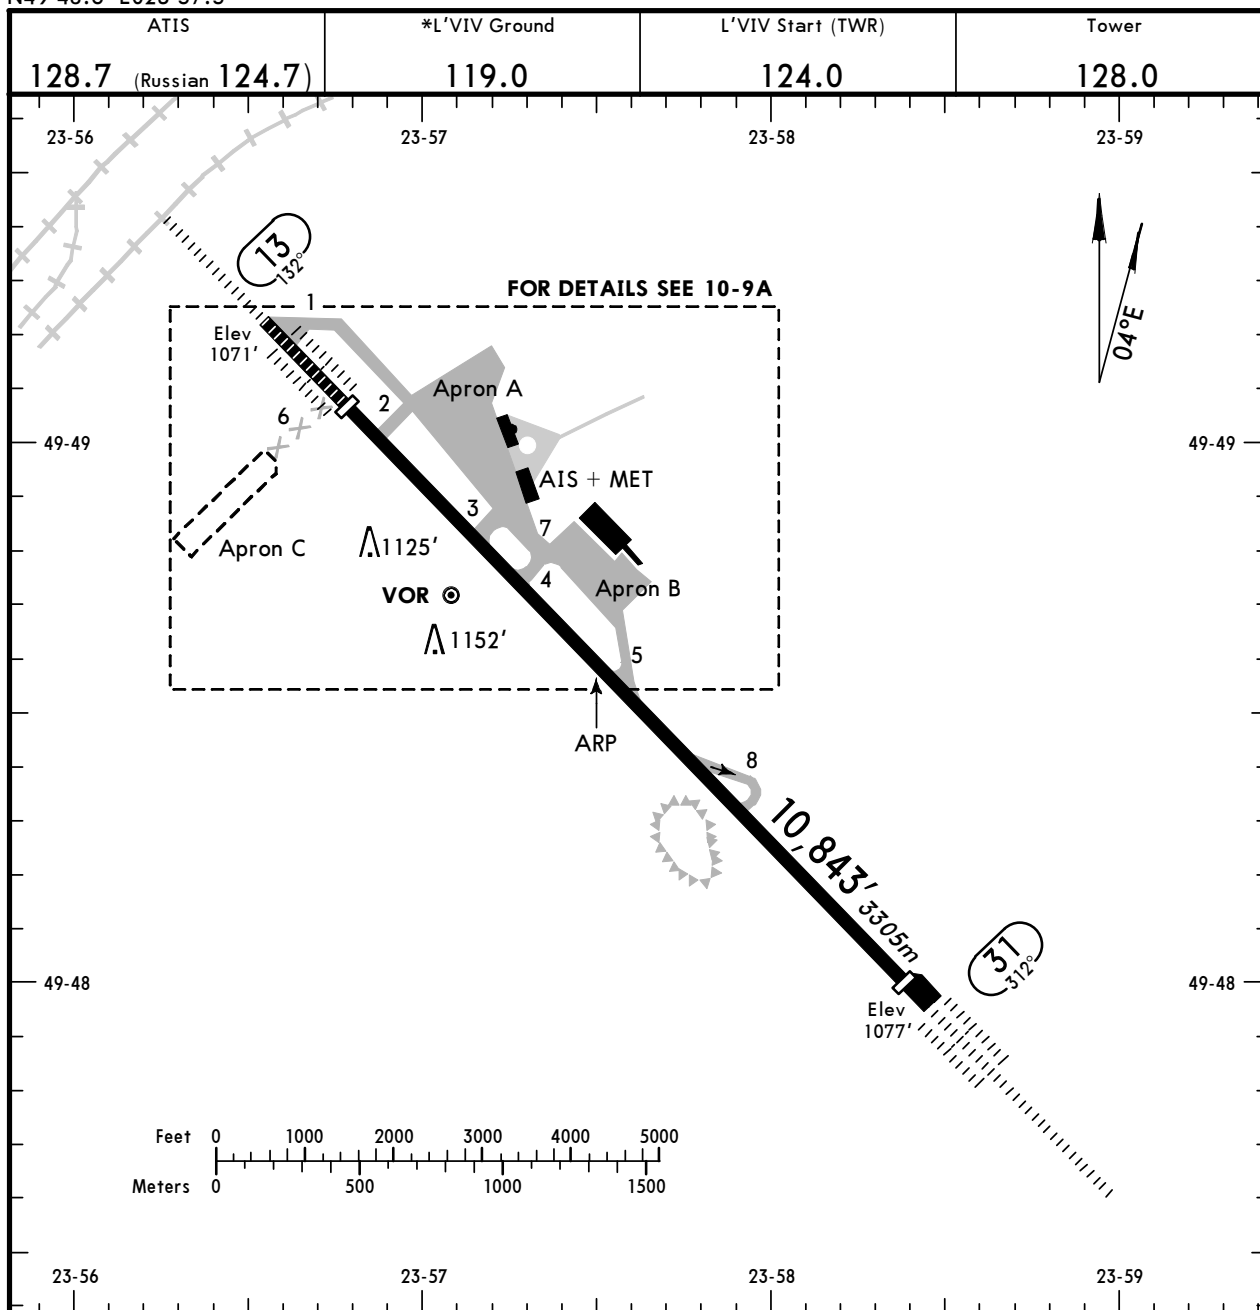

ADDITIONAL RUNWAY INFORMATION						
RWY					USABLE LENGTHS	
					LANDING BEYOND	
					Threshold	TAKE-OFF
13					9498' 2895m	8526' 2599m
31	HIRL (60m)	CL (15m)	HIALS-II	TDZ ① RVR	10,449' 3185m	9689' 2953m
						10,384' 3165m


① PAPI-L (angle 3.0°)

JAR-OPS

TAKE-OFF ①

	All Rwys				
	LVP must be in force				
	Approved Operators HIRL, CL & mult. RVR req	RL, CL & mult. RVR req	RL & CL	RCLM (DAY only) or RL	RCLM (DAY only) or RL
A					
B	125m	150m	200m	250m	400m
C					
D	150m	200m	250m	300m	500m

① Operators applying U.S. Ops Specs: CL required below 300m; approved HUD required below 150m.

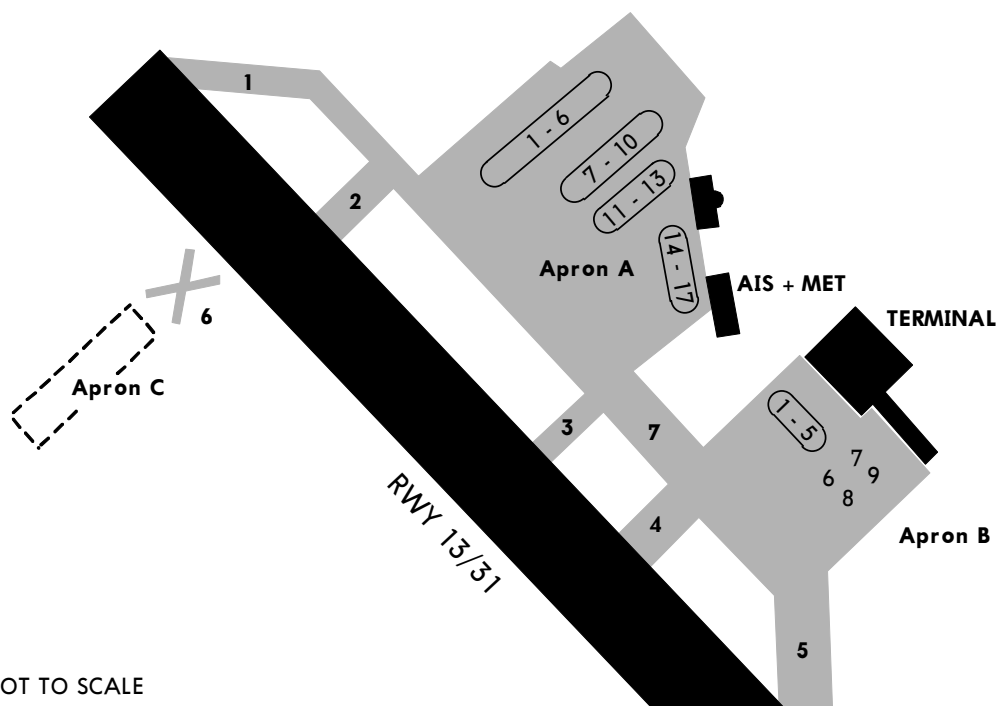

Movement of acfts are prohibited without controller's clearance.
Taxiing of acfts with Follow-me assistance.
Twys 1, 2, 6 and 8 for taxiing acfts code A, B and C.
Twys 3, 4, 5 and 7 for taxiing acft code A, B, C and D.

LOW VISIBILITY PROCEDURE (LVP)

LVP shall be applied when RVR is less than 400m.
Pilots will be informed by ATC about beginning of LVP.
- After landing pilots should report about leaving RWY.
- Taxiing and parking is performed with follow-me car only.
- Taxiing on TWY and apron is permitted only for one aircraft at a time.

STRAIGHT-IN RWY		A	B	C	D
13	ILS	1361' (292')	1371' (302')	1381' (312')	1391' (322')
	<i>FULL</i>	R650m	R700m	R700m	R800m
	<i>Limited</i>	R750m	R750m	R750m	R800m
	<i>ALS out</i>	R1400m	R1400m	R1400m	R1500m
	LOC	NOT AUTH	NOT AUTH	NOT AUTH	NOT AUTH
	VOR ❶	1560' (491')	1560' (491')	1560' (491')	1560' (491')
		R1500m	R1500m	R1500m	R1500m
		R1500m	R1500m	C2300m	C2300m
31	ILS	1317' (243')	1327' (253')	1336' (262')	1346' (272')
	<i>FULL</i>	R550m	R600m	R600m	R600m
	<i>Limited</i>	R750m	R750m	R750m	R750m
	<i>ALS out</i>	R1300m	R1300m	R1300m	R1300m
	LOC	NOT AUTH	NOT AUTH	NOT AUTH	NOT AUTH
	VOR ❶	1560' (486')	1560' (486')	1560' (486')	1560' (486')
		R1500m	R1500m	R1500m	R1500m
	<i>ALS out</i>	R1500m	R1500m	C2300m	C2300m



❶ Continuous Descent Final Approach.

CIRCLE-TO-LAND	100 KT	135 KT	180 KT	205 KT
	1730' (653')	1730' (653')	2300' (1223')	2300' (1223')
	V1500m	V1600m	V2400m	V3600m

TAKE-OFF RWY 13, 31

	Approved Operators HIRL & CL & mult. RVR req	LVP must be in Force			RCLM (DAY only) or RL	RCLM (DAY only) or RL	NIL (DAY only)
		RL & CL & mult. RVR req	RL & CL	RCLM (DAY only) or RL			
A							
B	125m	150m	200m	250m		400m	500m
C							
D	150m	200m	250m	300m			

BRIEFING STRIP	ATIS 128.7 (Russian 124.7)	L'VIV Radar (APP) 126.0	L'VIV Start (TWR) 124.0	L'VIV Tower 128.0	*Ground 119.0
	LOC ILO 109.5	Final Apch Crs 132°	GS D4.6 LIV 2470' (1401')	ILS DA(H) Refer to Minimums	Apt Elev 1077' RWY 1069'
MISSED APCH: Climb on 132° to 3940', then as directed. MISSED APCH RADIO COMM FAILURE: Climb on 132° to 3940'. At 6.5 LIV turn LEFT onto 120° to NDB, hold 5 min at 3940', then continue on 304° to VOR, then according to chart.					3000' MSA LIV VOR
Alt Set: hPa (MM on req) Rwy Elev: 39 hPa Trans level: By ATC Trans alt: 10010' 1.DME required. 2. Procedure restricted to MAX 230 KT.					

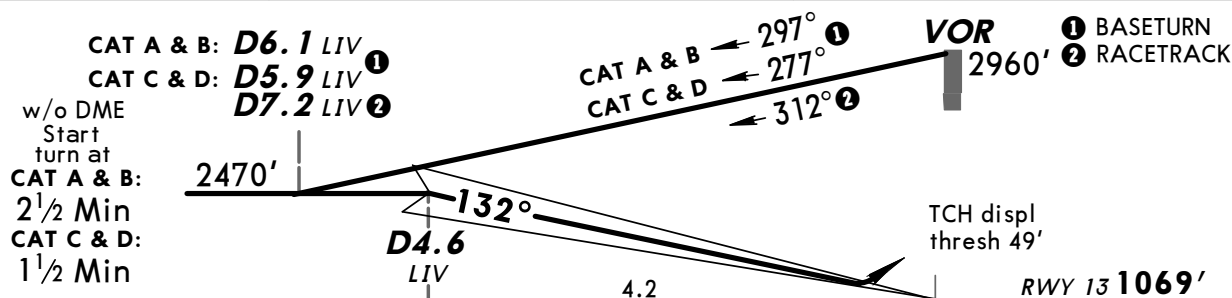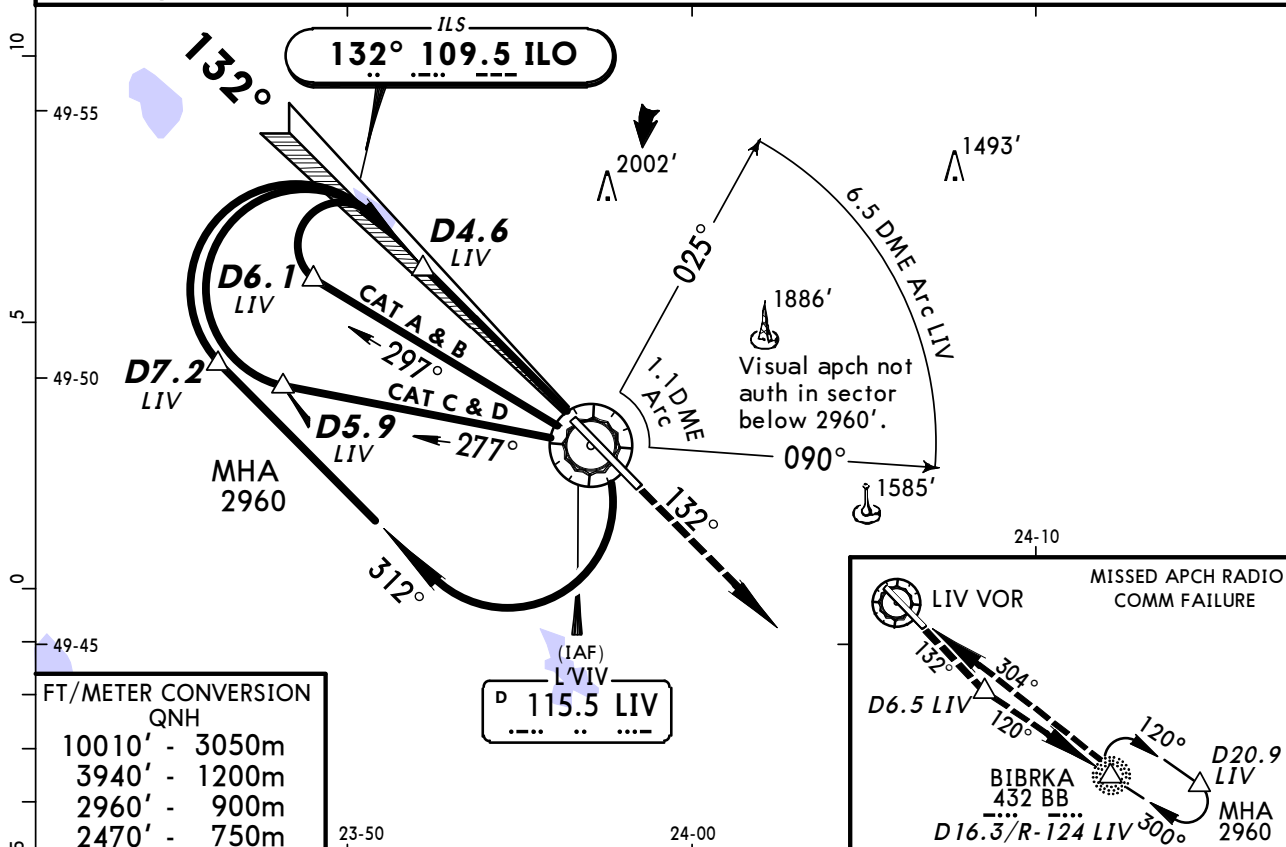

Gnd speed-Kts	70	90	100	120	140	160
GS 3.00°	372	478	531	637	743	849


HIALS-II	3940' on 132°
PAPI	

JAR-OPS		STRAIGHT-IN LANDING RWY 13		LOC (GS out)		CIRCLE-TO-LAND	
A: 1361' (292') C: 1381' (312')		B: 1371' (302') D: 1391' (322')					
FULL		ALS out					
A	RVR 650m					Max Kts	MDA(H) VIS
B						100	1730' (653') 1500m
C						135	1730' (653') 1600m
D	RVR 800m	RVR 1200m				180	2300' (1223') 2400m
						205	2300' (1223') 3600m

UKLL/LWO
L'VIV

JEPPESSEN
30 NOV 12 (11-2) Eff 13 Dec

L'VIV, UKRAINE
ILS Rwy 31

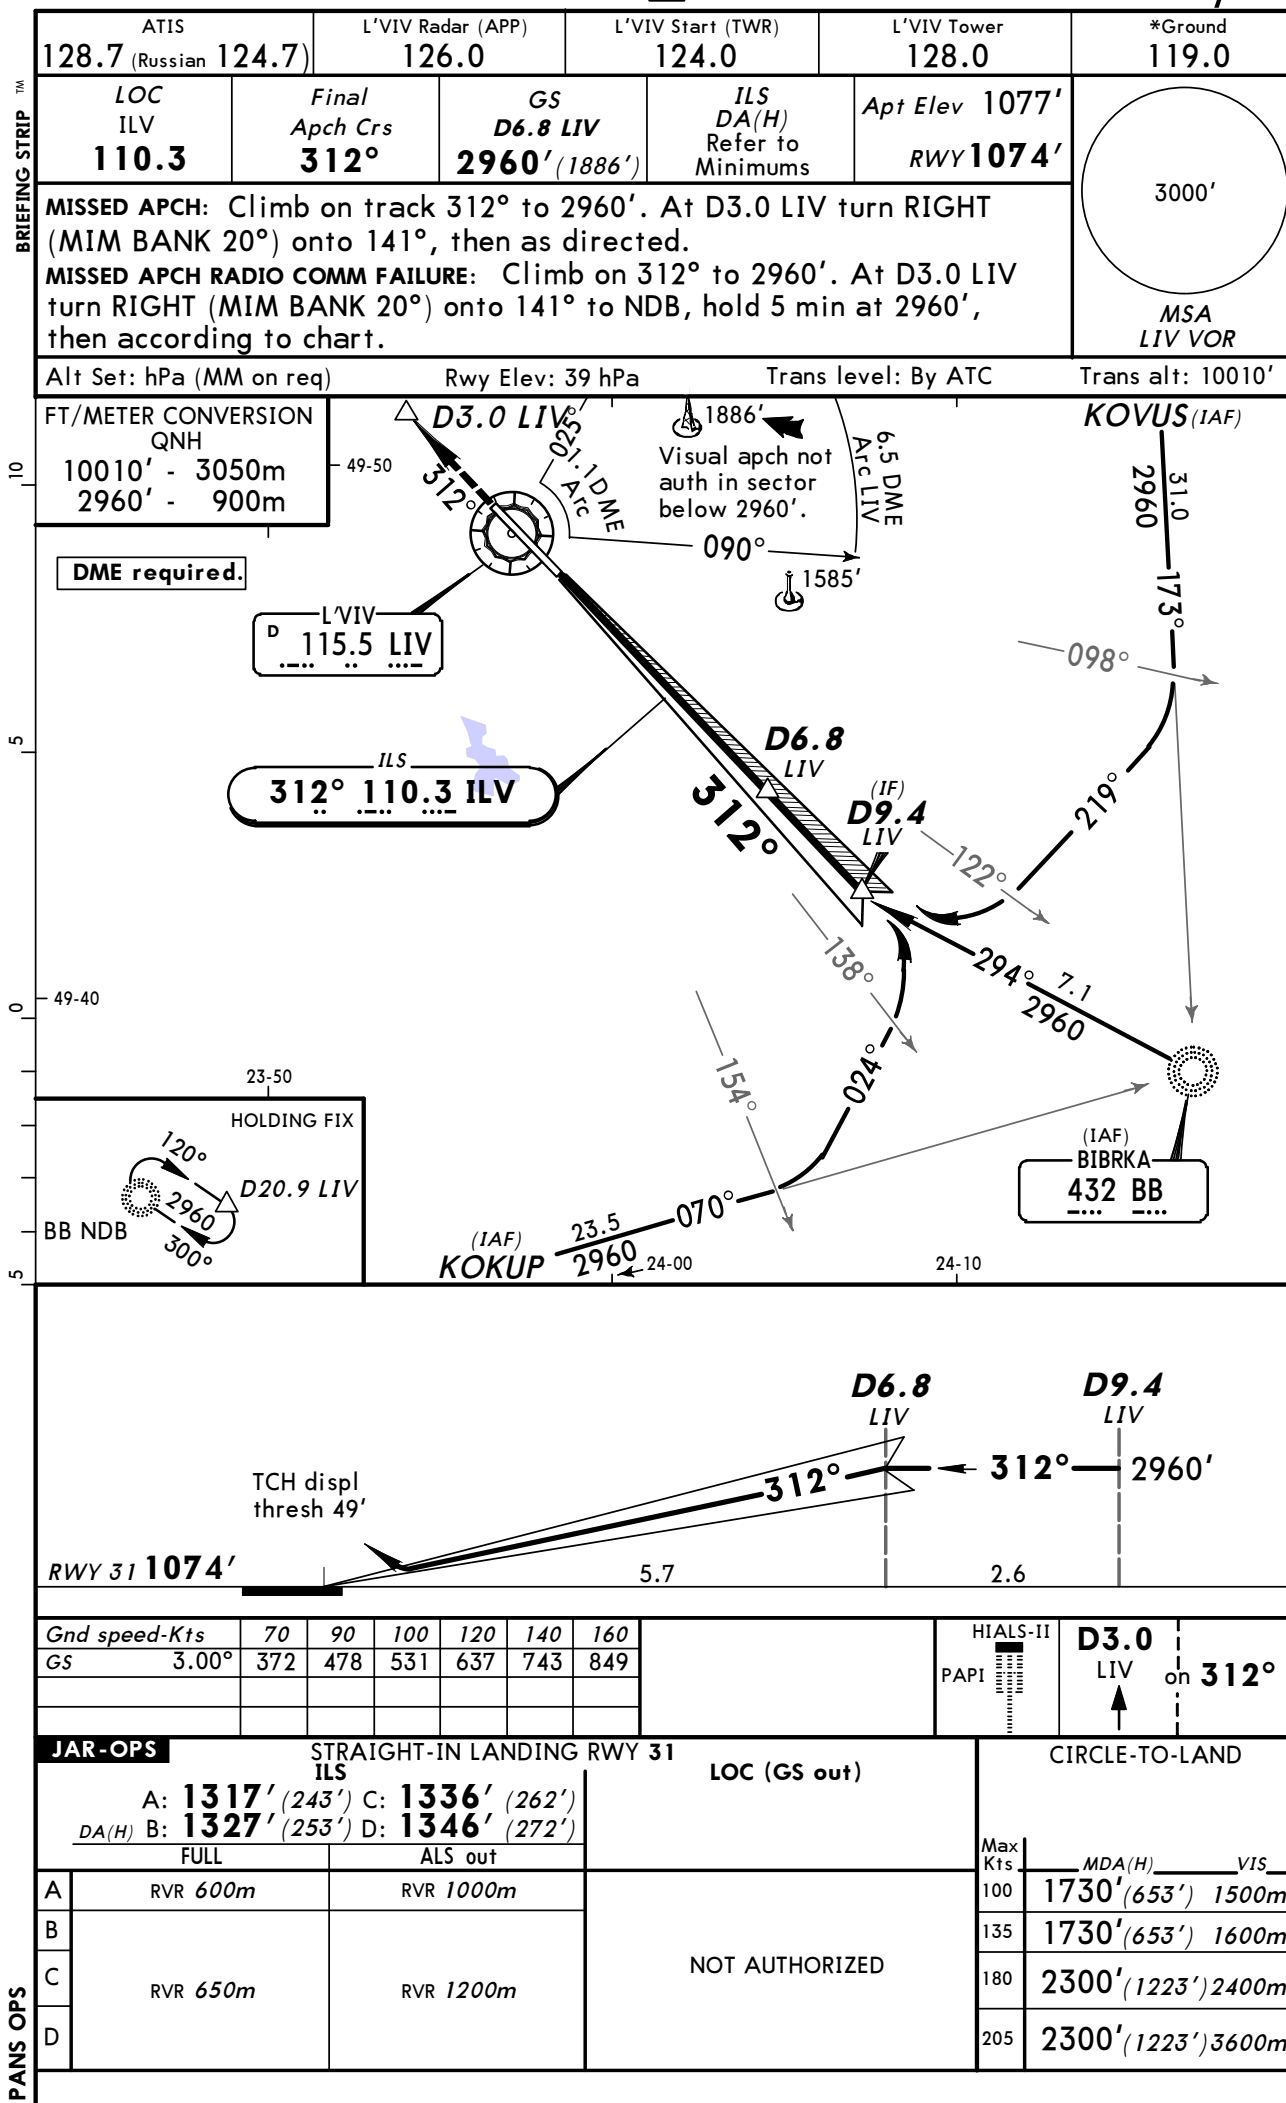


UKLL/LWO
L'VIV

JEPPESSEN
30 NOV 12 (13-1) Eff 13 Dec


L'VIV, UKRAINE
VOR Rwy 13

ATIS 128.7 (Russian 124.7)	L'VIV Radar (APP) 126.0	L'VIV Start (TWR) 124.0	L'VIV Tower 128.0	*Ground 119.0
VOR LIV 115.5	Final Apch Crs 137°	Minimum Alt D4.6 2470' (1401')	MDA(H) 1560' (491')	Apt Elev 1077' RWY 1069'
MISSED APCH: Climb on 137° to 3940', then as directed. MISSED APCH RADIO COMM FAILURE: Climb on 137° to 3940'. At D6.5 turn LEFT onto 112° to NDB, hold 5 min at 3940', then continue on 304° to VOR, then according to chart.				
Alt Set: hPa (MM on req) Rwy Elev: 39 hPa Trans level: By ATC Trans alt: 10010' 1.DME required. 2. Procedure restricted to MAX 230 KT.				

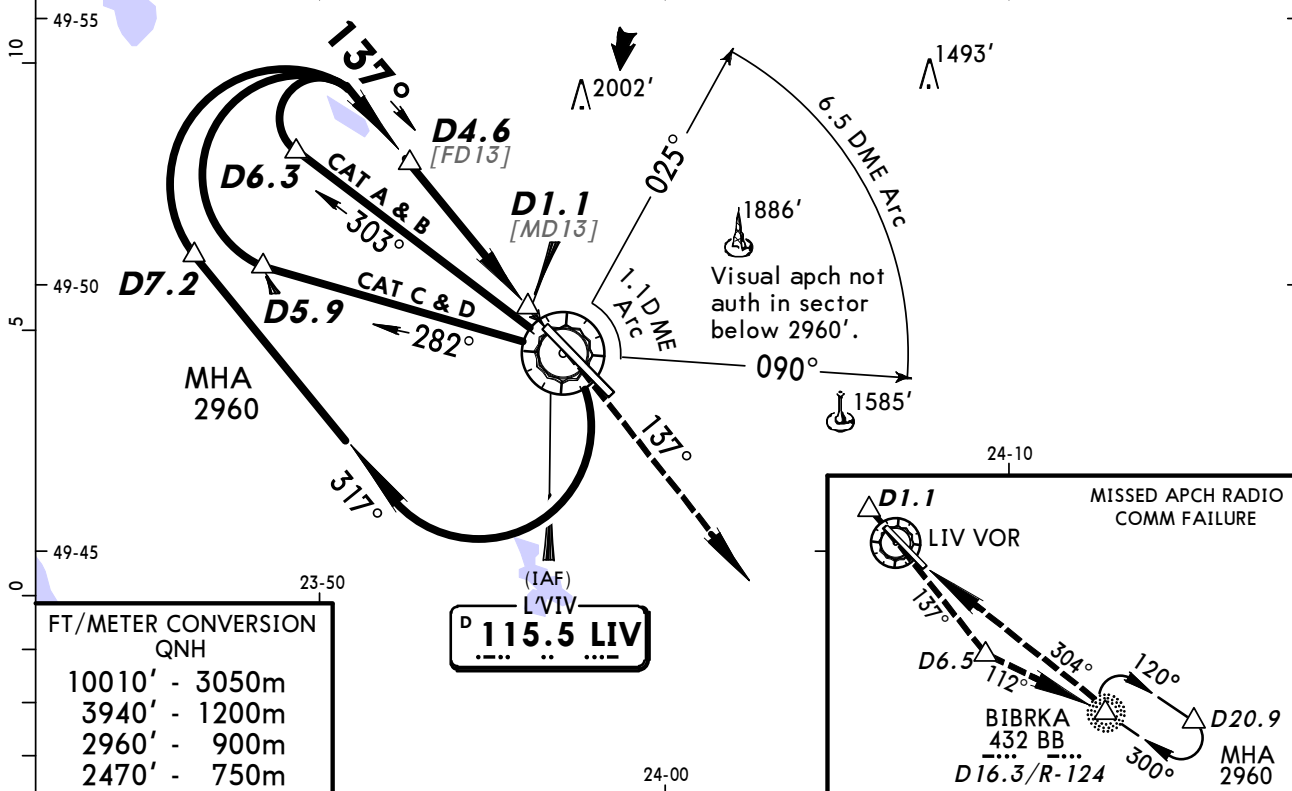

FT/METER CONVERSION QNH	
10010' -	3050m
3940' -	1200m
2960' -	900m
2470' -	750m

LIV DME	3.2	2.2
ALTITUDE	2020'	1690'

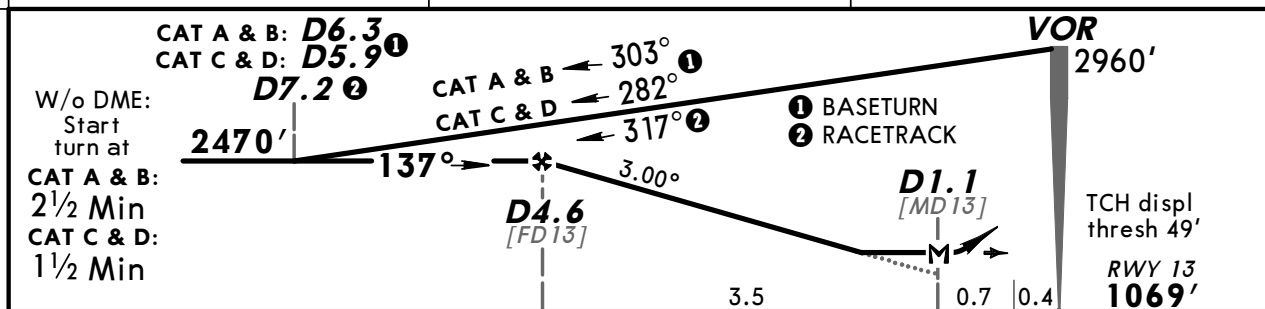

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II	
Descent angle	3.00°	372	478	531	637	743	PAP	3940' on 137°
MAP at D1.1								



JAR-OPS STRAIGHT-IN LANDING RWY13				CIRCLE-TO-LAND			
MDA(H) 1560' (491')							
		ALS out	Max Kts	MDA(H)	VIS		
A	RVR 1000m	RVR 1500m	100	1730' (653')	1500m		
B	RVR 1200m		135	1730' (653')	1600m		
C	RVR 1600m	RVR 2000m	180	2300' (1223')	2400m		
D	RVR 1600m		205	2300' (1223')	3600m		

CHANGES: ATIS frequency.

© JEPPESSEN, 2009, 2012. ALL RIGHTS RESERVED.

BRIEFING STRIP

ATIS 128.7 (Russian 124.7)		L'VIV Radar (APP) 126.0		L'VIV Start (TWR) 124.0		L'VIV Tower 128.0		*Ground 119.0		
VOR LIV 115.5		Final Apch Crs 309°		Minimum Alt D6.9 2960' (1886')		MDA(H) 1560' (486')		Apt Elev 1077' RWY1074'		
MISSED APCH: Climb on 309° to 2960'. At D3.0 turn RIGHT (MIM BANK 20°) onto 141°, then as directed. MISSED APCH RADIO COMM FAILURE: Climb on 309° to 2960'. At D3.0 turn RIGHT (MIM BANK 20°) onto 141° to NDB, hold 5 min at 2960', then according to chart.									3000' MSA LIV VOR	
Alt Set: hPa (MM on req)			Rwy Elev: 39 hPa		Trans level: By ATC			Trans alt: 10010'		
DME required.										

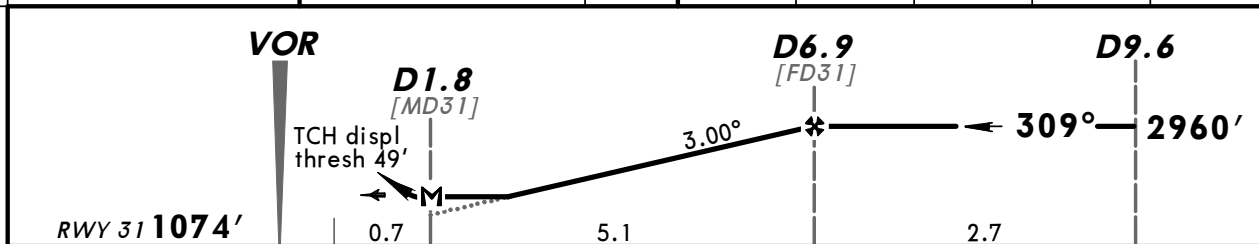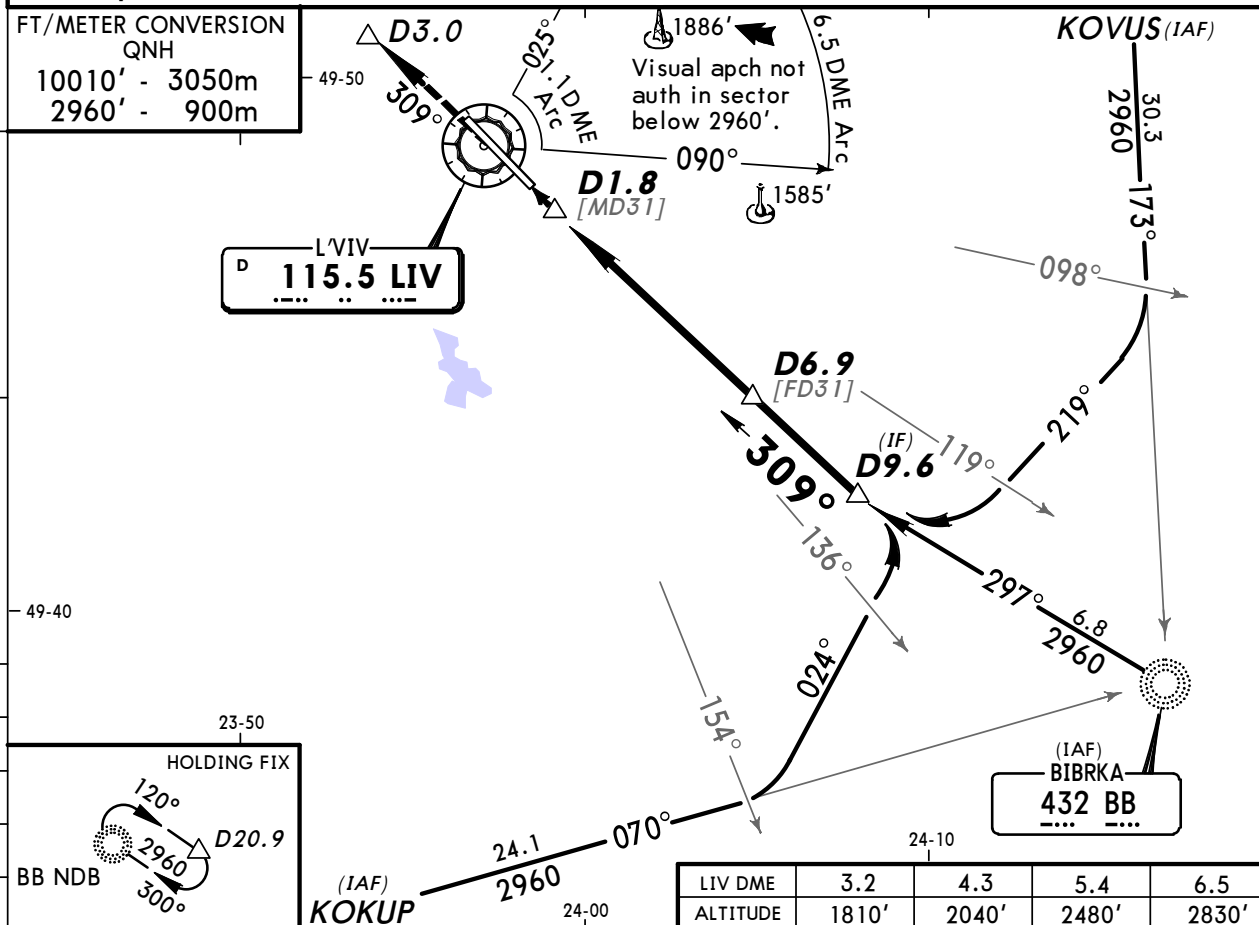

HIALS-II PAPI	D3.0 on 309°
------------------	--------------

JAR-OPS			STRAIGHT-IN LANDING RWY 31		CIRCLE-TO-LAND		
			MDA(H) 1560'(486')				
			ALS out		Max Kts.	MDA(H)	VIS
A	RVR 1000m		RVR 1500m		100	1730'(653')	1500m
B	RVR 1200m				135	1730'(653')	1600m
C			RVR 2000m		180	2300'(1223')	2400m
D	RVR 1600m				205	2300'(1223')	3600m

PANS OPS



Chart changes since cycle 16-2013

ADD = added chart, REV = revised chart, DEL = deleted chart.

ACT PROCEDURE IDENT

INDEX

REV DATE

EFF DATE

L'VIV, (L'VIV - UKLL)

TERMINAL CHART CHANGE NOTICES

Chart Change Notices for Airport UKLL

Type: Terminal

Effectivity: Temporary

Begin Date: Immediately

End Date: Until Further Notice

During construction work on rwy SID/STARs renumbered and revised;
refer to temp charts and latest NOTAMs.

Type: Terminal

Effectivity: Temporary

Begin Date: Immediately

End Date: Until Further Notice

New ATIS freq 124.7MHz available in Russian H24.