

List of pages in this Trip Kit

Trip Kit Index

Airport Information For UMOO

Terminal Charts For UMOO

Revision Letter For Cycle 01-2014

Change Notices

Notebook

General Information

Location: Mahiliou Blr
IATA Code: MVQ
Lat/Long: N53° 57.3' E030° 05.6'
Elevation: 636 ft

Airport Use: Public
Magnetic Variation: 7.9°E

Fuel Types: Jet A
Repair Types: Minor Airframe
Customs: Yes
Airport Type: IFR
Landing Fee: Yes
Control Tower: Yes
Jet Start Unit: No
LLWS Alert: No
Beacon: No

Sunrise: 0617 Z
Sunset: 1354 Z,

Runway Information

Runway: 13
Length x Width: 8419 ft x 138 ft
Surface Type: asphalt
TDZ-Elev: 625 ft
Lighting: Edge, ALS

Runway: 31
Length x Width: 8419 ft x 138 ft
Surface Type: asphalt
TDZ-Elev: 616 ft
Lighting: Edge, ALS


Communication Information

ATIS 126.2 Non-English
ATIS 118.075
Mahiliou Tower 133.0 Secondary
Mahiliou Tower 127.1


*ATIS
118.07
(126.2 Russian)

Apt Elev
636'

Alt Set: hPa
Trans level: By ATC Trans alt: 6000'



DEDOK ONE CHARLIE (DEDOK 1C) [DEDO1C]
DINPU ONE NOVEMBER (DINPU 1N) [DINP1N]
DULEB ONE CHARLIE (DULEB 1C) [DULE1C]
RWY 13 ARRIVALS
VOR DME REQUIRED

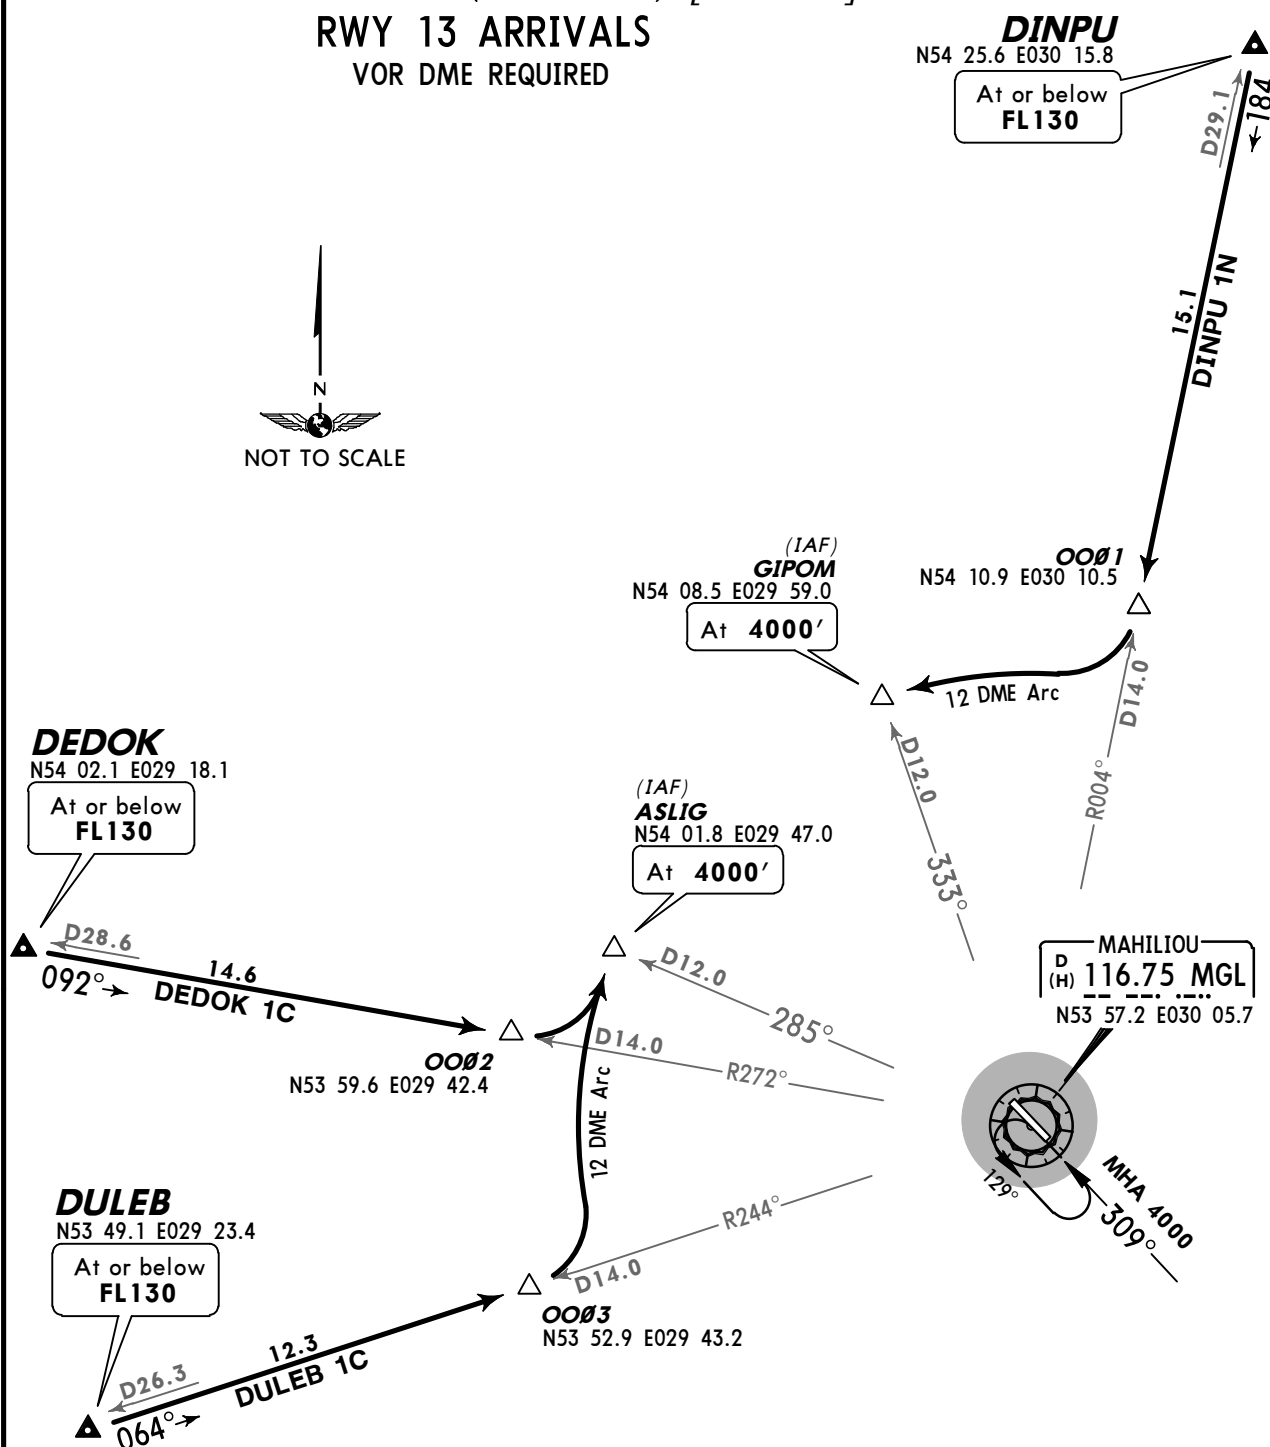


STAR	ROUTING
DEDOK 1C	Intercept MGL R-272 inbound to OO02, turn LEFT, along MGL 12 DME arc to ASLIG.
DINPU 1N	Intercept MGL R-004 inbound to OO01, turn RIGHT, along MGL 12 DME arc to GIPOM.
DULEB 1C	Intercept MGL R-244 inbound to OO03, turn LEFT, along MGL 12 DME arc to ASLIG.


*ATIS
118.07
(126.2 Russian)

Apt Elev
636'


Alt Set: hPa
Trans level: By ATC Trans alt: 6000'



KOPON ONE CHARLIE (KOPON 1C) [KOPO1C]
PIROS ONE CHARLIE (PIROS 1C) [PIRO1C]
ROVSI ONE CHARLIE (ROVSI 1C) [ROVS1C]
RWY 13 ARRIVALS
VOR DME REQUIRED

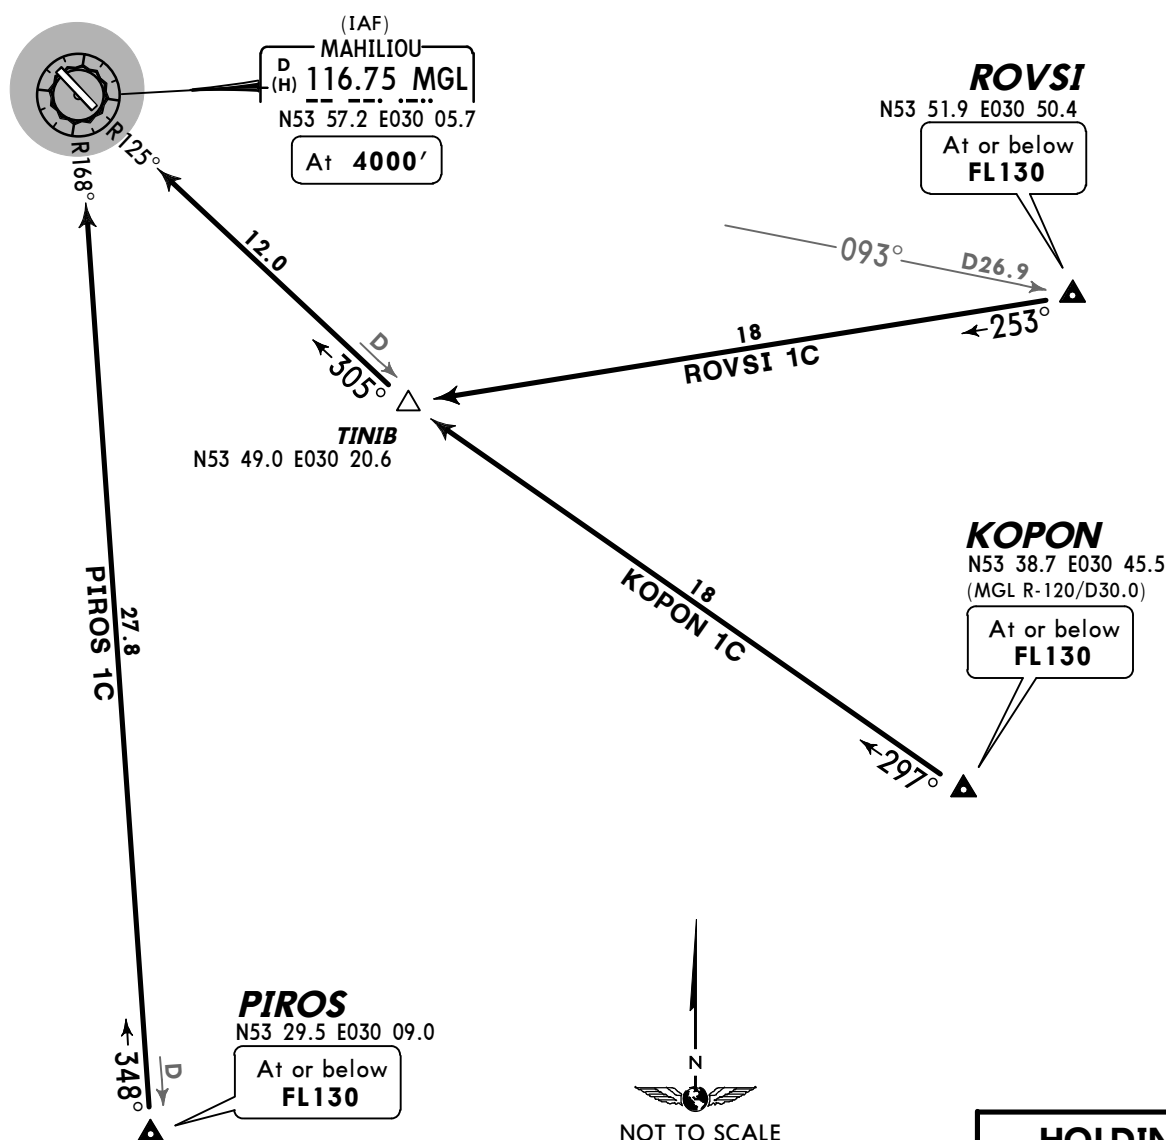

HOLDING
OVER MGL




STAR	ROUTING
KOPON 1C	On 297° track to TINIB, intercept MGL R-125 inbound to MGL.
PIROS 1C	Intercept MGL R-168 inbound to MGL.
ROVSI1C	On track 253° to TINIB, turn Right, intercept MGL R-125 inbound to MGL.

*ATIS
118.07
(126.2 Russian)

Apt Elev
636'

Alt Set: hPa
Trans level: By ATC Trans alt: 6000'



DEDOK ONE DELTA (DEDOK 1D) [DEDO1D]
DINPU ONE MIKE (DINPU 1M) [DINP1M]
DULEB ONE DELTA (DULEB 1D) [DULE1D]
RWY 31 ARRIVALS
VOR DME REQUIRED

DINPU
N54 25.6 E030 15.8
At or below
FL130



DEDOK
N54 02.1 E029 18.1
At or below
FL130

092°
28.6
DEDOK 1D

DULEB
N53 49.1 E029 23.4
At or below
FL130

0003
N53 52.9 E029 43.2
12.3
D26.3
064°
DULEB 1D

(IAF)
MAHILIOU
D(H) 116.75 MGL
N53 57.2 E030 05.7
At 4000'


(IAF)
RERGI
N53 46.2 E030 13.7
At 4000'

STAR	ROUTING
DEDOK 1D	Intercept MGL R-272 inbound to MGL.
DINPU 1M	Intercept MGL R-004 inbound to MGL.
DULEB 1D	Intercept MGL R-244 inbound to 0003, turn RIGHT, along MGL 12 DME arc to RERGI.


*ATIS
118.07
(126.2 Russian)

Apt Elev
636'

Alt Set: hPa
Trans level: By ATC Trans alt: 6000'



KOPON ONE DELTA (KOPON 1D) [KOPO1D]
PIROS ONE DELTA (PIROS 1D) [PIRO1D]
ROVSI ONE DELTA (ROVSI 1D) [ROVS1D]
RWY 31 ARRIVALS
VOR DME REQUIRED

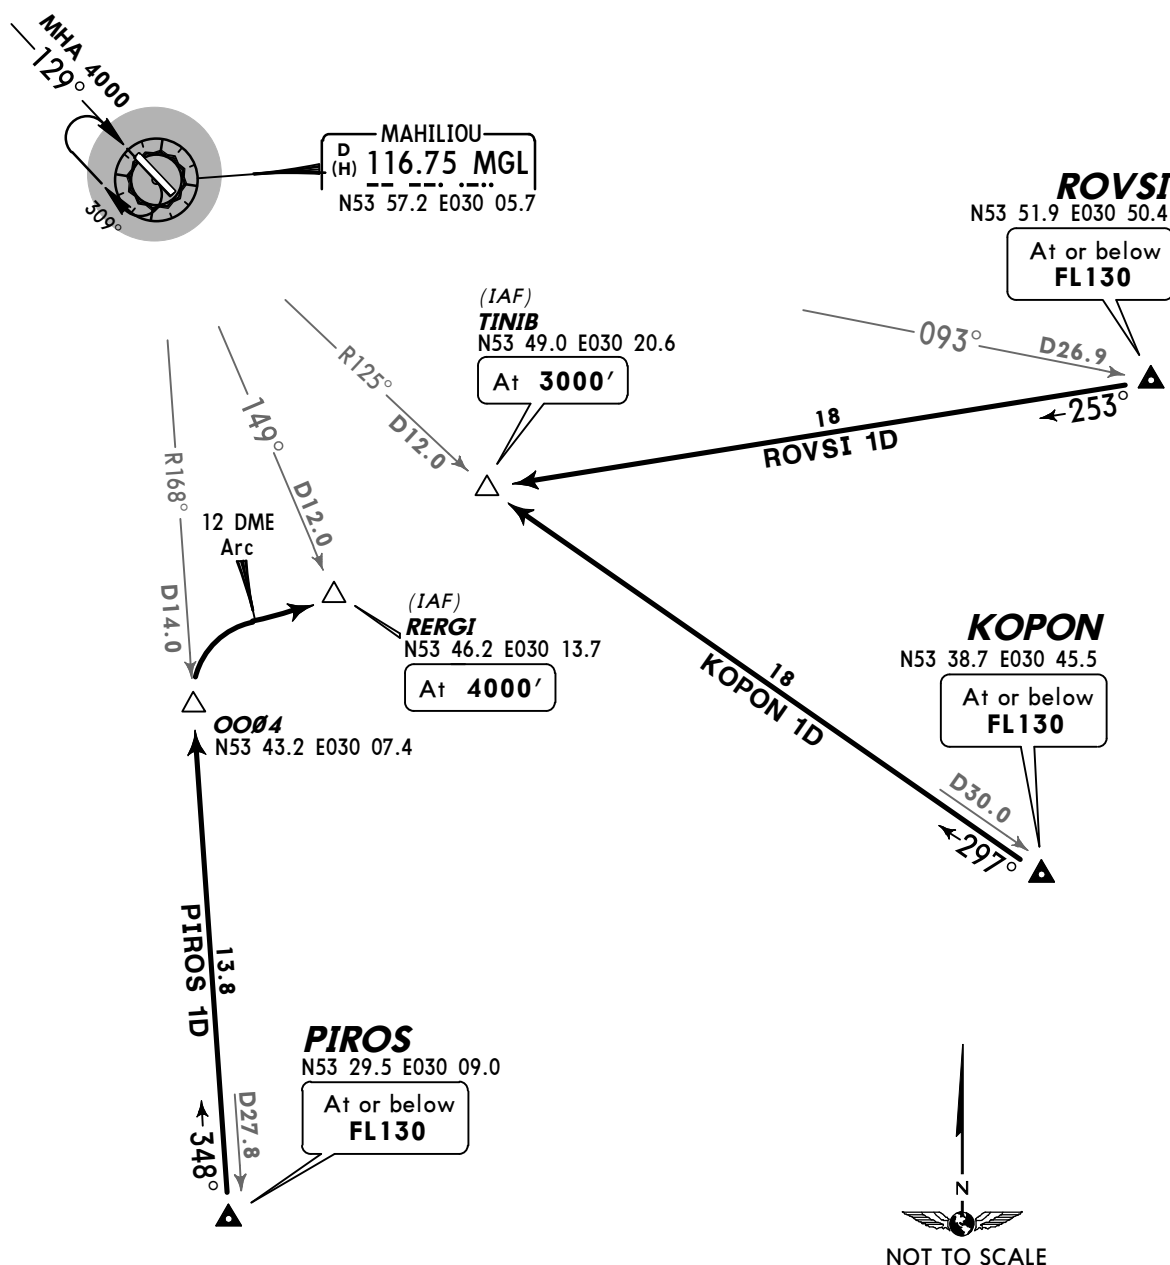

STAR	ROUTING
KOPON 1D	On track 297° to TINIB.
PIROS 1D	Intercept MGL R-168 inbound to 0004, turn RIGHT, along MGL 12 DME arc to RERGI.
ROVSI 1D	On track 253° track to TINIB.

2000'

211°


290°

282°

2300'

330°


MSA
MGL VOR

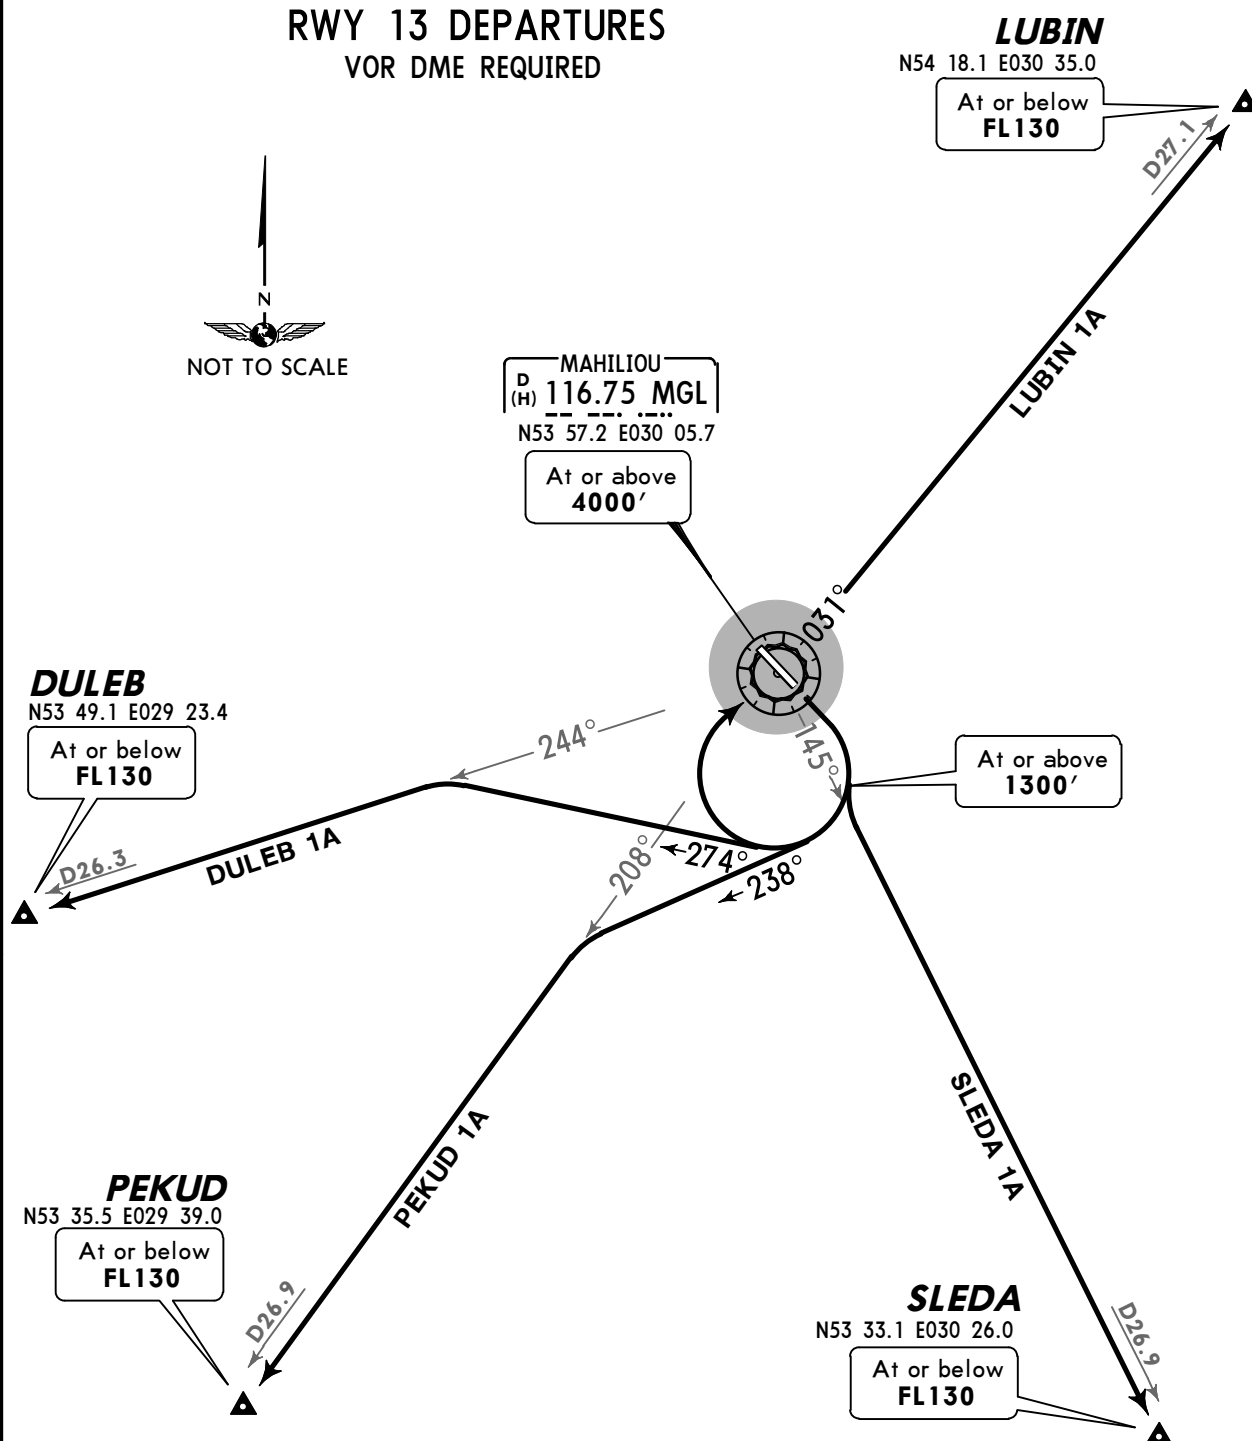


STAR	ROUTING
DULEB 1A	Climb straight ahead to at or above 1300', turn RIGHT, 274° track, intercept MGL R-244 to DULEB.
LUBIN 1A	Climb straight ahead to at or above 1300', turn RIGHT to MGL, intercept MGL R-031 to LUBIN.
PEKUD 1A	Climb straight ahead to at or above 1300', turn RIGHT, 238° track, intercept MGL R-208 to PEKUD.
SLEDA 1A	Climb straight ahead to at or above 1300', turn RIGHT, intercept MGL R-145 to SLEDA.

Apt Elev
636'

Trans level: By ATC Trans alt: 6000'
Procedures based on 240 KT.



DULEB ONE BRAVO (DULEB 1B) [DULE1B]
LUBIN ONE BRAVO (LUBIN 1B) [LUB11B]
PEKUD ONE BRAVO (PEKUD 1B) [PEKU1B]
SLEDA ONE BRAVO (SLEDA 1B) [SLED1B]
RWY 31 DEPARTURES
VOR DME REQUIRED

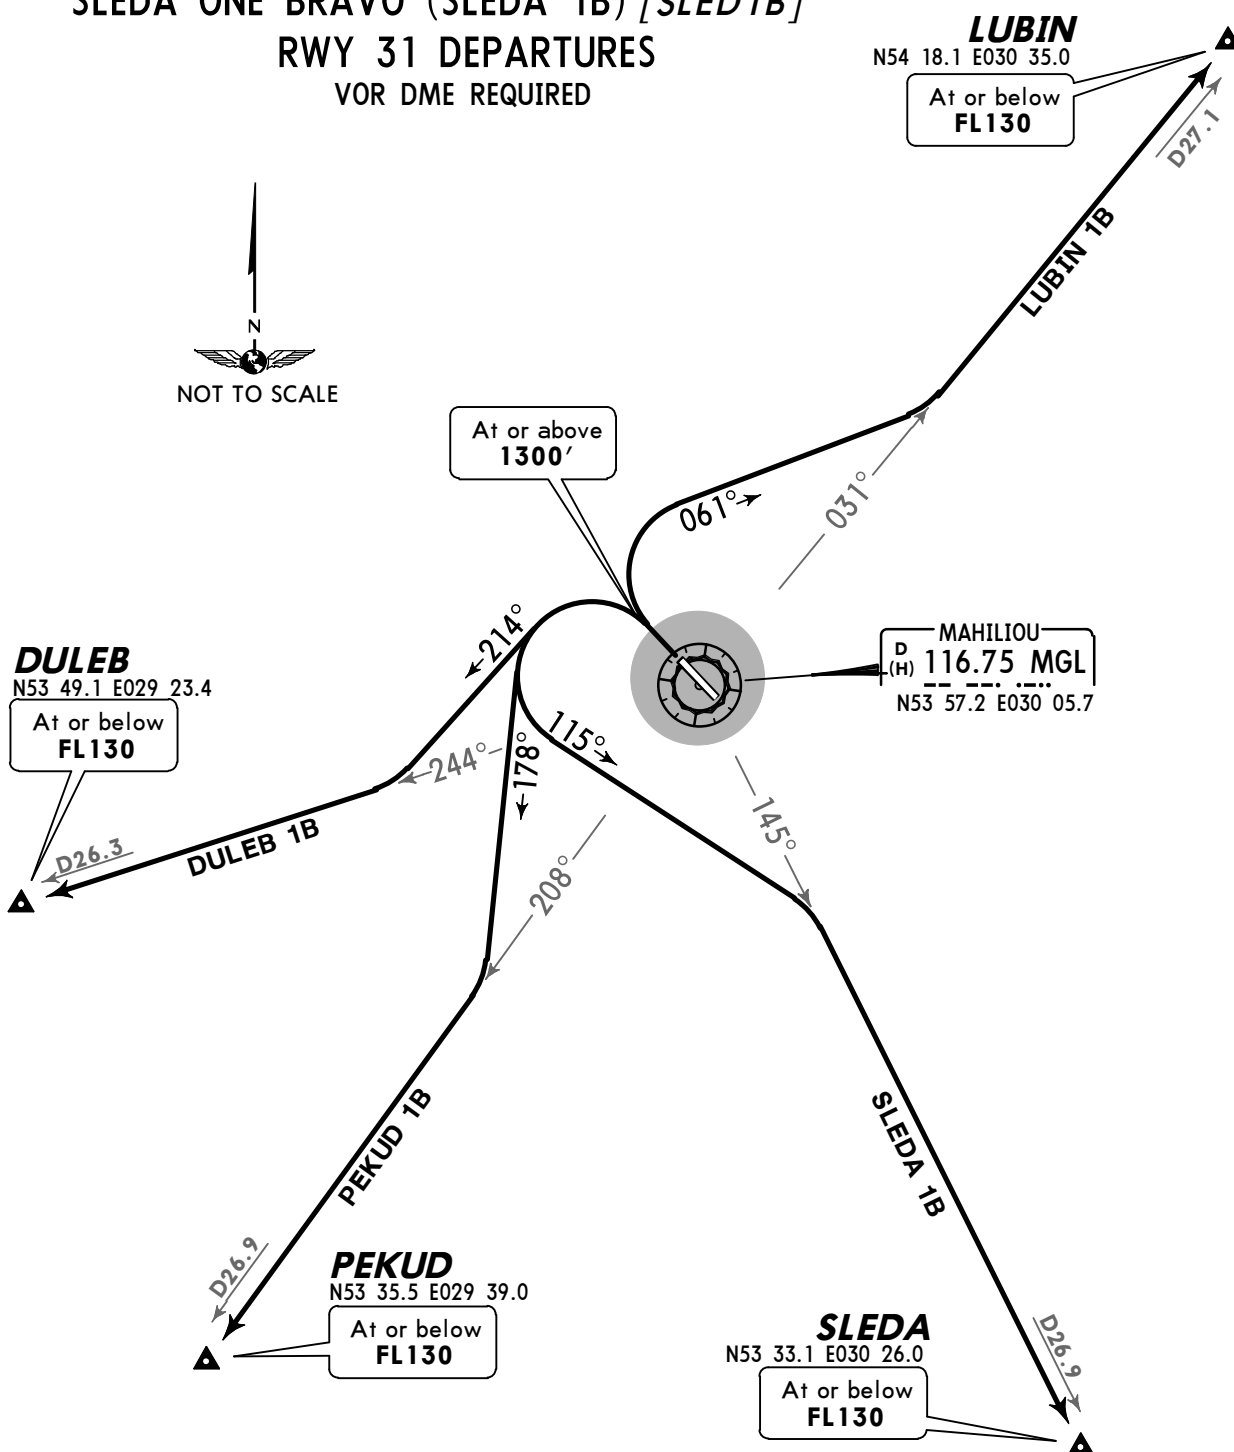

STAR	ROUTING
DULEB 1B	Climb straight ahead to at or above 1300', turn LEFT, 214° track, intercept MGL R-244 to DULEB.
LUBIN 1B	Climb straight ahead to at or above 1300', turn RIGHT, 061° track, intercept MGL R-031 to LUBIN.
PEKUD 1B	Climb straight ahead to at or above 1300', turn LEFT, 178° track, intercept MGL R-208 to PEKUD.
SLEDA 1B	Climb straight ahead to at or above 1300', turn LEFT, 115° track, intercept MGL R-145 to SLEDA.

NOISE ABATEMENT

ARRIVALS

Noise abatement procedures during approach phase shall be carried out by crews of all ACFT according to the Aeroplane Flight Manual unless there are unfavourable meteorological conditions, such as considerable wind speed, cumulo-nimbus clouds etc., in arrival and approach sectors. During instrument as well as visual approach, flying below the ILS glide path angle is not allowed.

No noise abatement procedures shall prescribe the exceeding of indicated air speed of descent.

DEPARTURES


Noise abatement procedures during take-off and climbing phase shall be carried out by crews of all ACFT according to the Aeroplane Flight Manual, but not at the expense of flight safety in case of engines failure during take-off phase or in case of forecasted or expected wind shear or downward gusts.

UM00/MVQ
Apt Elev 636'
N53 57.3 E030 05.7

JEPPesen
21 JUN 13 10-9

Eff 27 Jun

MAHILIOU, BELARUS
MAHILIOU

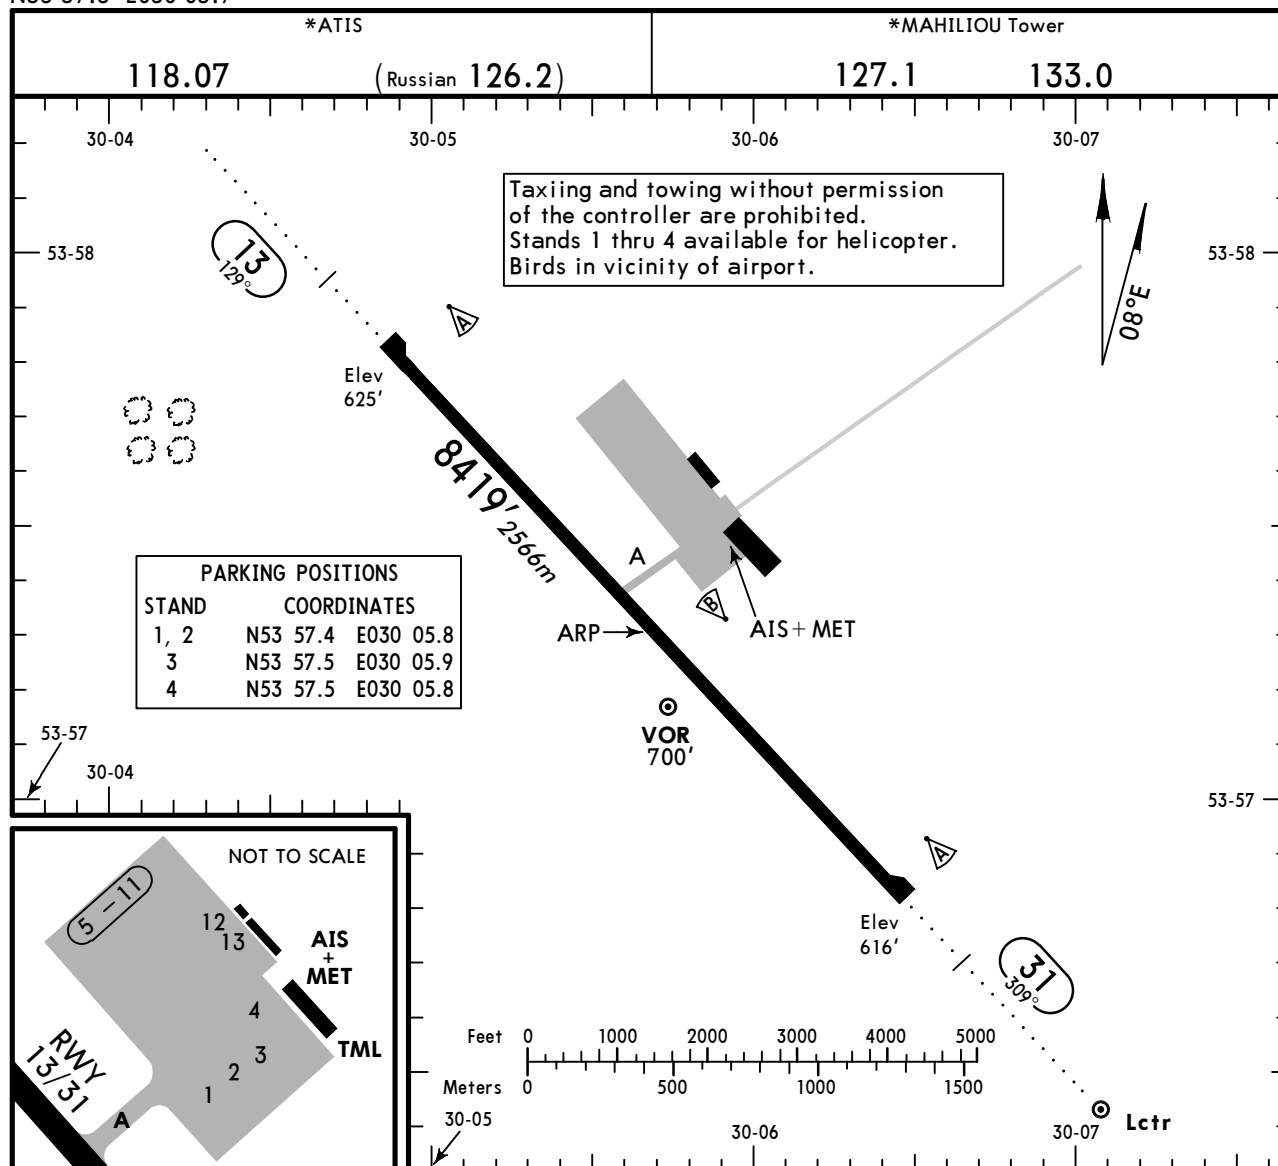

ADDITIONAL RUNWAY INFORMATION

ADDITIONAL RUNWAY INFORMATION					USABLE LENGTHS		WIDTH	
RWY					LANDING BEYOND			TAKE-OFF
					Threshold	Glide Slope		
13	RL (60m)	ALS	PAPI-L (angle 2.83°)	RVR		7447' 2270m		138'
31	RL (60m)	ALS	PAPI-L (angle 2.67°)	RVR				42m

TAKE-OFF

AIR CARRIER (JAA)

All Rwys

LVP must be in force

RCLM (DAY only)
or RL

RCLM (DAY only)
or RL

A		
B	250m	400m
C		
D	300m	

CHANGES: Tower frequency. Note.

© JEPPESEN, 2004, 2013. ALL RIGHTS RESERVED.

STRAIGHT-IN RWY		A	B	C	D
13	ILS	825' (200') R1000m	825' (200') R1000m	833' (208') R1000m	843' (218') R1000m
	ALS out	R1200m	R1200m	R1200m	R1200m
	LOC	NOT AUTH	NOT AUTH	NOT AUTH	NOT AUTH
	VOR ① with DME	960' (335') R1300m	960' (335') R1300m	960' (335') R1300m	960' (335') R1300m
	ALS out	R1500m	R1500m	R1500m	R1500m
	VOR w/o DME	1010' (385') R1800m	1010' (385') R1800m	1050' (425') C2200m	1070' (445') C2300m
	ALS out	R2000m	R2000m	C2400m	C2500m
31	NDB ① with DME	930' (305') R1200m	930' (305') R1200m	930' (305') R1200m	940' (315') R1200m
	ALS out	R1400m	R1400m	R1400m	R1400m
	NDB w/o DME	980' (355') R1600m	980' (355') R1600m	980' (355') R1800m	980' (355') R1800m
	ALS out	R1800m	R1800m	R2000m	R2000m
	VOR ① with DME	900' (284') R1200m	900' (284') R1200m	900' (284') R1200m	930' (314') R1200m
	ALS out	R1400m	R1400m	R1400m	R1400m
	VOR w/o DME	1230' (614') C2800m	1230' (614') C2800m	1230' (614') C3000m	1230' (614') C3000m
	ALS out	C3000m	C3000m	C3200m	C3200m
	NDB ① with DME	920' (304') R1200m	920' (304') R1200m	920' (304') R1200m	930' (314') R1200m
	ALS out	R1400m	R1400m	R1400m	R1400m
	NDB w/o DME	970' (354') R1600m	970' (354') R1600m	970' (354') R1800m	970' (354') R1800m
	ALS out	R1800m	R1800m	R2000m	R2000m

① Continuous Descent Final Approach.

CIRCLE-TO-LAND ②	100 KT	135 KT	180 KT	205 KT
	1100' (464') ③ ceil 190m V1900m	1140' (504') ③ ceil 200m V2800m	1300' (664') ceil 300m V3700m	1340' (704') ceil 310m V4600m


② Not authorized in sector between R-040 MGL and R-110 MGL clockwise.

③ or higher minimums of preceding straight-in approach.


TAKE-OFF RWY 13, 31

LVP must be in force			
RCLM (DAY only) or RL		RCLM (DAY only) or RL	NIL (DAY only)
A	250m	400m	500m
B			
C			
D	300m		

118.07 *ATIS (Russian 126.2)		*MAHILIOU Tower (APP/TWR) 127.1 133.0	
VOR MGL 116.75	Final Apch Crs 131°	With DME Minimum Alt D6.3 2300' (1675')	With DME MDA(H) 960' (335')
		W/o DME Minimum Alt No FAF	W/o DME MDA(H) Refer to Minimums
		Apt Elev 636'	RWY 625'
MISSED APCH: Climb on 131° to 1300', then turn RIGHT to ASLIG climbing to 3000', then as directed.			
Alt Set: hPa	Rwy Elev: 23 hPa	Trans level: By ATC	Trans alt: 6000'

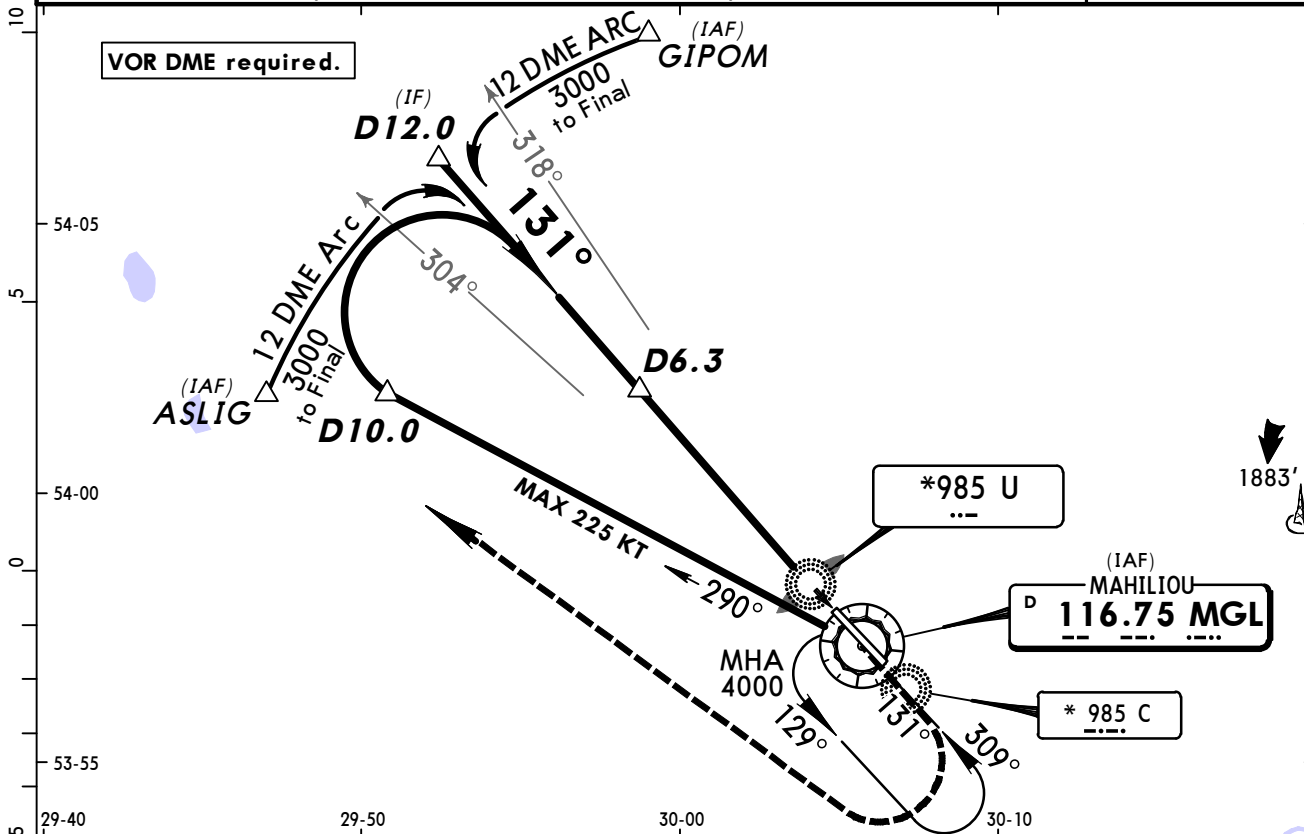

MGL DME	5.8	4.8	3.8	2.8	1.8
ALTITUDE	2160'	1860'	1560'	1260'	960'

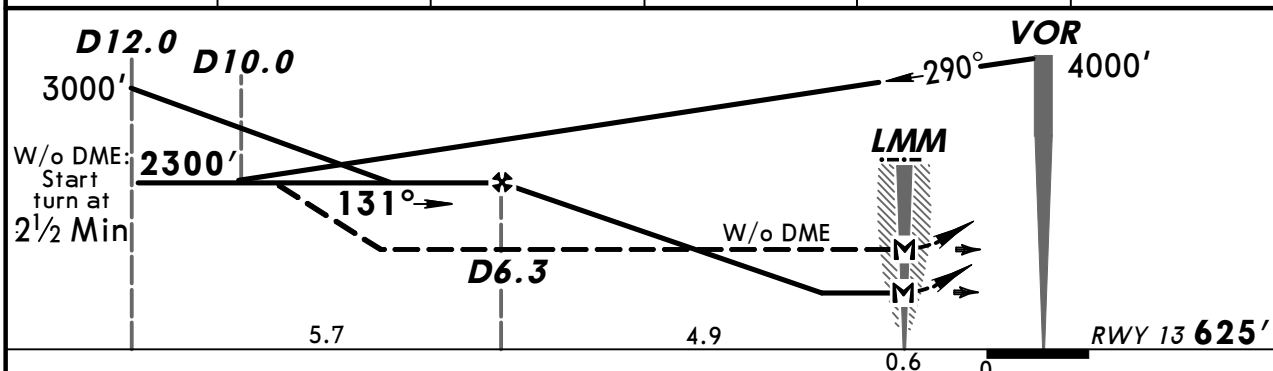

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 2.80°	347	446	495	594	693	792
MAP at LMM						

STRAIGHT-IN LANDING RWY 13				CEILING REQUIRED	
With DME		W/o DME		Not authorized in sector between R-040 and R-110 clockwise	
MDA(H) 960' (335')		C: 1050' (425') AB: 1010' (385') D: 1070' (445')			
ALS out		ALS out		Max Kts	MDA(H) CEIL-VIS
RVR 1500m VIS 1600m		RVR 1500m VIS 1600m		100	1100' (464') 190m - 1900m
		RVR 1800m VIS 2000m		135	1130' (494') 200m - 2800m
				180	1300' (664') 300m - 3700m
		2400m		205	1330' (694') 310m - 4600m

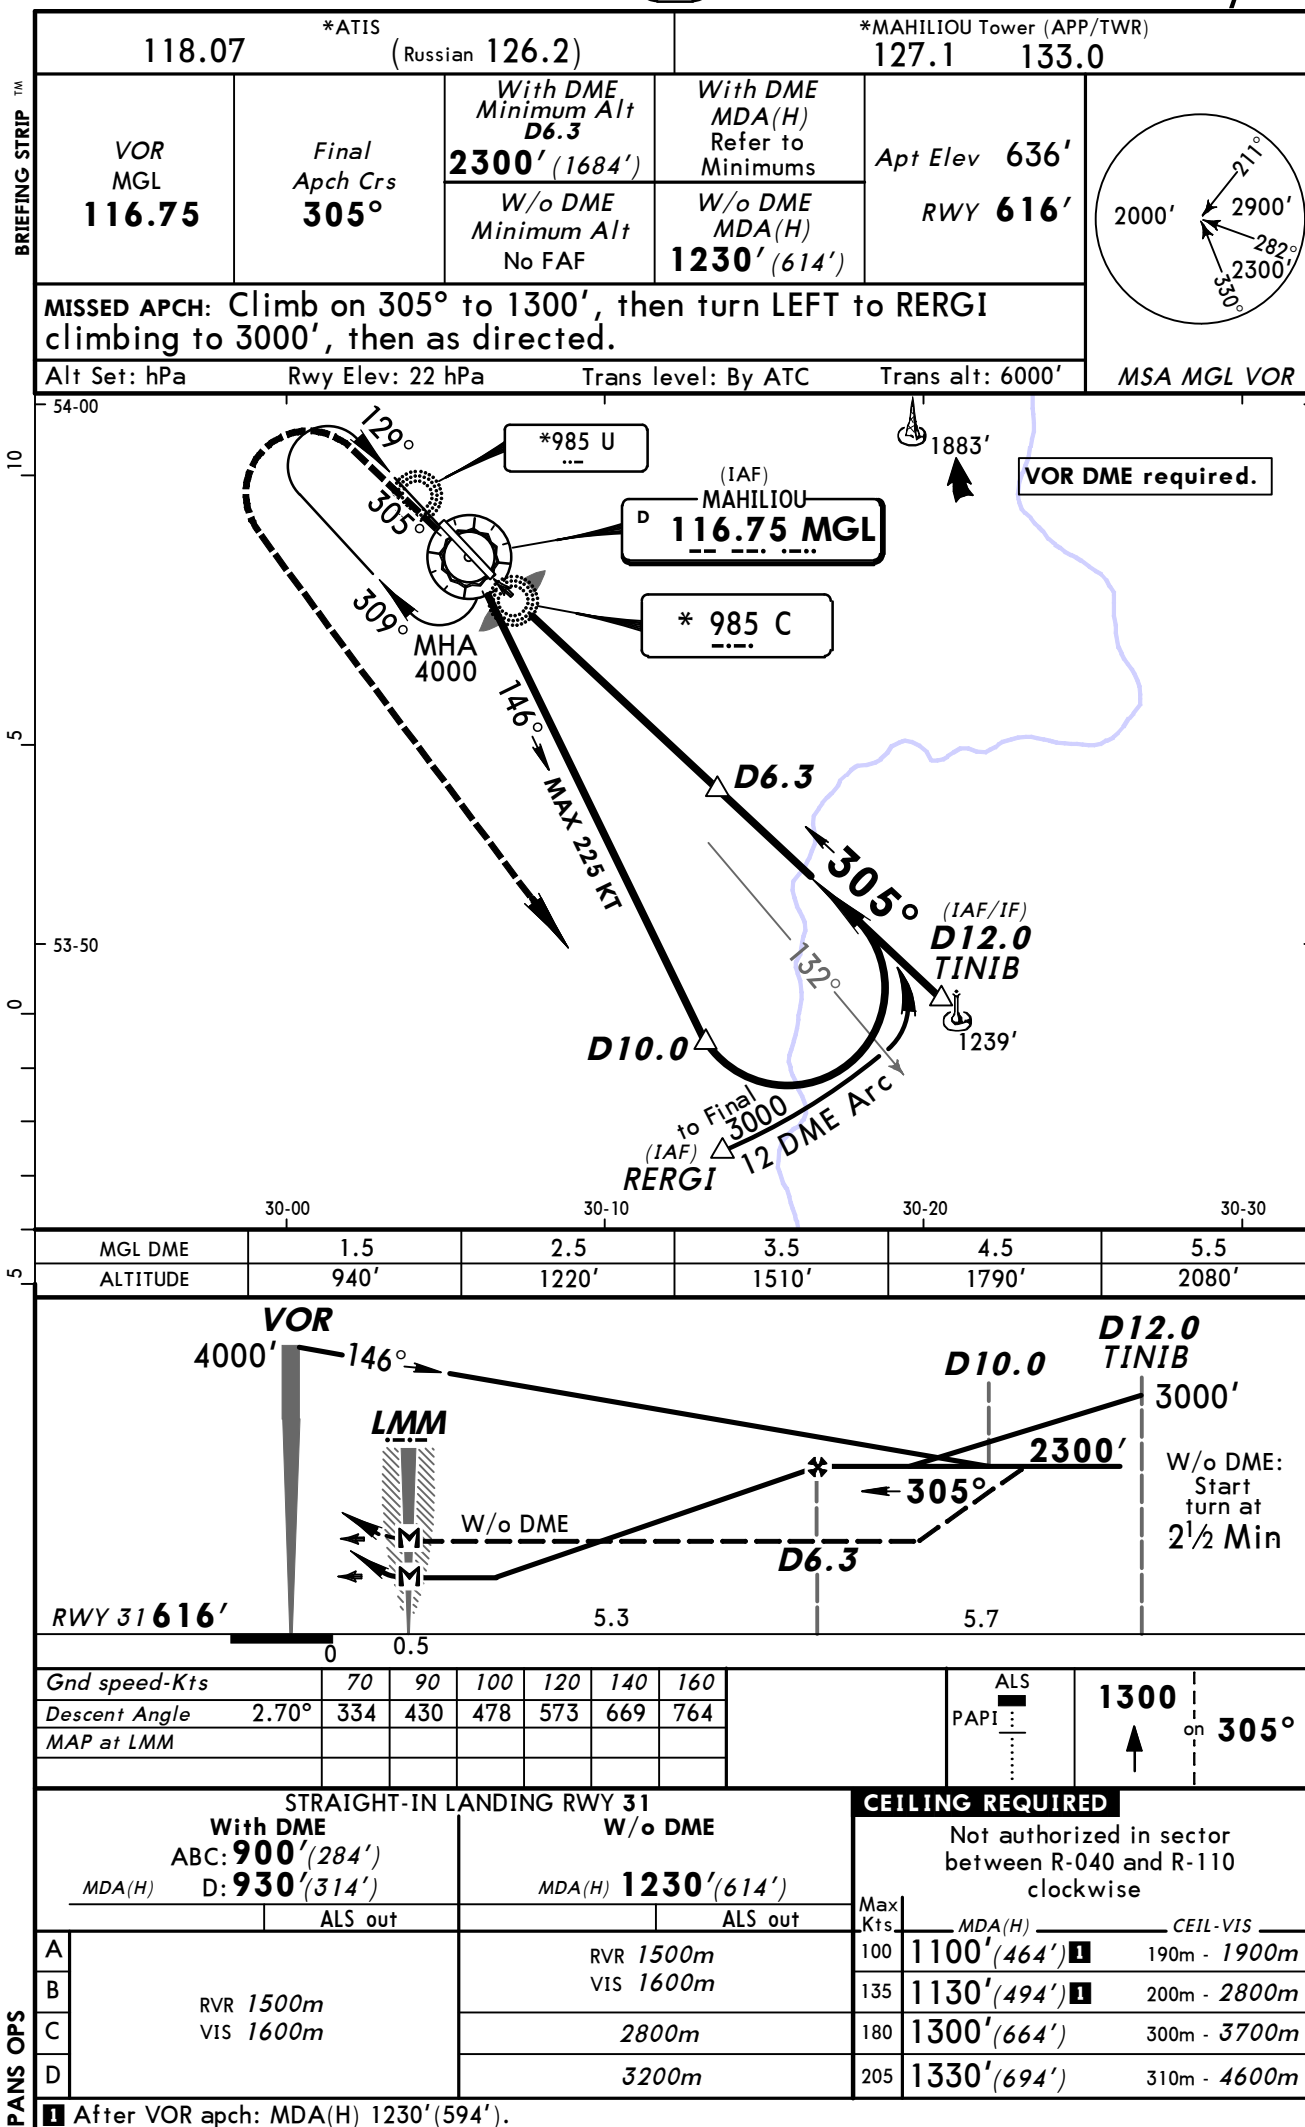


Chart changes since cycle 26-2013

ADD = added chart, REV = revised chart, DEL = deleted chart.

ACT	PROCEDURE IDENT	INDEX	REV DATE	EFF DATE
MAHILIOU, (MAHILIOU - UMOO)				

TERMINAL CHART CHANGE NOTICES

Chart Change Notices for Airport UMOO

Type: Terminal

Effectivity: Permanent

Begin Date: 20131017

End Date: No end date

For all approach proceduers the initial missed apch altitude changed to 1300' or above.