

List of pages in this Trip Kit

Trip Kit Index

Airport Information For LEMD

Terminal Charts For LEMD

Revision Letter For Cycle 01-2016

Change Notices

Notebook

General Information

Location: MADRID ESP
ICAO/IATA: LEMD / MAD
Lat/Long: N40° 28.33', W003° 33.65'
Elevation: 1998 ft

Airport Use: Public
Daylight Savings: Observed
UTC Conversion: -1:00 = UTC
Magnetic Variation: 2.0° W

Fuel Types: Jet A-1
Repair Types: Minor Airframe, Minor Engine
Customs: Yes
Airport Type: IFR
Landing Fee: Yes
Control Tower: Yes
Jet Start Unit: No
LLWS Alert: No
Beacon: No

Sunrise: 0737 Z
Sunset: 1706 Z

Runway Information

Runway: 14L
Length x Width: 11483 ft x 197 ft
Surface Type: asphalt
TDZ-Elev: 1942 ft
Lighting: Edge, Centerline

Runway: 14R
Length x Width: 13084 ft x 197 ft
Surface Type: asphalt
TDZ-Elev: 1995 ft
Lighting: Edge, Centerline

Runway: 18L
Length x Width: 11483 ft x 197 ft
Surface Type: asphalt
TDZ-Elev: 1928 ft
Lighting: Edge, ALS, Centerline, TDZ
Displaced Threshold: 1640 ft

Runway: 18R
Length x Width: 13711 ft x 197 ft
Surface Type: asphalt
TDZ-Elev: 1991 ft

Lighting: Edge, ALS, Centerline, TDZ
Displaced Threshold: 2670 ft

Runway: 32L
Length x Width: 13084 ft x 197 ft
Surface Type: asphalt
TDZ-Elev: 1949 ft
Lighting: Edge, ALS, Centerline, TDZ
Displaced Threshold: 3045 ft

Runway: 32R
Length x Width: 11483 ft x 197 ft
Surface Type: asphalt
TDZ-Elev: 1903 ft
Lighting: Edge, ALS, Centerline, TDZ
Displaced Threshold: 1640 ft

Runway: 36L
Length x Width: 13711 ft x 197 ft
Surface Type: asphalt
TDZ-Elev: 1985 ft
Lighting: Edge, Centerline

Runway: 36R
Length x Width: 11483 ft x 197 ft
Surface Type: asphalt
TDZ-Elev: 1942 ft
Lighting: Edge, Centerline

Communication Information

ATIS: 130.850 Departure Service
ATIS: 118.250 Arrival Service
Barajas Tower: 118.675 Arrival Service
Barajas Tower: 130.250
Barajas Tower: 123.325
Barajas Tower: 120.650 Secondary
Barajas Tower: 120.150 Secondary
Barajas Tower: 118.975 Arrival Service
Barajas Tower: 118.150 Arrival Service
Barajas Tower: 118.075 Arrival Service
Barajas Tower Ground: 123.150
Barajas Tower Ground: 121.975
Barajas Tower Ground: 121.750
Barajas Tower Ground: 121.625
Barajas Apron Ramp/Taxi: 123.250
Barajas Apron Ramp/Taxi: 123.000
Barajas Apron Ramp/Taxi: 121.850
Barajas Apron Ramp/Taxi: 121.700
Barajas Tower Clearance Delivery: 130.350
Barajas Tower Clearance Delivery: 130.075
Madrid Approach: 124.225
Madrid Approach: 124.025

Madrid Approach: 118.750
Madrid Approach: 118.400
Madrid Approach: 127.100
Madrid Approach: 127.500
Madrid Approach: 128.700 Military
Madrid Approach: 130.800
Madrid Approach: 131.175
Madrid Approach: 134.025
Madrid Approach: 134.950 Military
Madrid Approach: 136.100

LEMD/MAD
BARAJAS

JEPPESEN
14 MAR 14 **10-1P**

MADRID, SPAIN
AIRPORT BRIEFING

1. GENERAL

1.1. ATIS

ATIS Arrival 118.25
ATIS Departure 130.85

1.2. NOISE ABATEMENT PROCEDURES

1.2.1. GENERAL

All general aviation and business ACFT wishing to operate at the APT must have hired:

- Ramp handling agent;
- General and business aviation manager, authorized by the APT.

Contact data:

GESTAIR FBO

OCC (Operations & Control Centre)

TEL: 34-916 78 26 48

FAX: 34-913 93 68 99

E-mail: occ@gestair.com

SITA: MADOOG5

FREQ: 131.900 MHz

Multiservicios Aeroportuarios

FBO MADRID

TEL: 34-913 24 30 56

E-mail: handling-fbo@maero.es

SITA: MADOO7X

FREQ: 131.950 MHz

In flight plan item 18 "Other information" and in every slot message or request for general aviation and business flights wishing to operate at the airport shall be included:

- Flight Handling agent;
- General and business aviation manager hired.

Arrival or Departure operations of ACFT licensed according to ICAO Annex 16, VOL I, Chapter II are forbidden.

Changes on the procedures must not be asked until reaching FL 100, except for propeller ACFT.

1.2.2. PREFERENTIAL RWYS

Except when one or more of the following conditions are present or forecasted:

- Bad RWY surface conditions and/or braking action less than good;
- Clouds ceiling lower than 500' AAL;
- Visibility less than 1.9km/1NM;
- Windshear notified or forecasted, or storms on approach or departure;
- Traffic conditions, operative needs, safety situations, or any other meteorological phenomena that may prevent it;

ATC will adhere to the preferential configurations described below, and to the indicated preferential RWY use, up to wind components, gusts included, of 10 KT tailwind and/or 20 KT crosswind:

Between 0700 and 2300LT

Preferential: North Configuration

- Arrivals: 32L/32R
- Departures: 36L/36R.

Non-preferential: South Configuration

- Arrivals: 18L/18R
- Departures: 14L/14R.

LEMD/MAD
BARAJAS

JEPPesen
14 MAR 14 **10-1P1**

MADRID, SPAIN
AIRPORT BRIEFING

1. GENERAL

Between 2300 and 0700LT

Preferential: North Configuration

- Arrivals: 32R
- Departures: 36L.

Non-preferential: South Configuration

- Arrivals: 18L
- Departures: 14L.

In the case of exceptional conditions such as works, maintenance, operator's request for performance reasons, etc., ATC may authorise the use of any non-preferential RWY of the configuration in use, prior Executive on Duty approval and coordination with Madrid TMA, and only as long as wind components, gusts included, are not higher than 10 KT tailwind and/or 20 KT crosswind.

In south configuration, with the object to determine the preferential RWYs, during the nights from Friday to Saturday and from Saturday to Sunday, the night period will be considered from 2300 to 0900LT, whenever the operational circumstances permit to do so. Day time SID must be used in its appropriate schedule.

Madrid ACC will clear ACFT to approach taking into account Madrid TMA geographical entry criteria (arrivals to RWY 32R/18L from the East and to RWY 32L/18R from the West) except when it is necessary to assign a different RWY for arrivals due to safety reasons or to obtain a continuous traffic flow.

ATIS messages shall broadcast configuration in use information.

1.2.3. RUN-UP TESTS

Run-up tests higher than idle regime are allowed H24 at the engine testing area. Procedures of preferential taxiing to the engine testing area:

- Entry in north configuration via MZ;
- Exit in north configuration via AZ;
- Entry in south configuration via AZ;
- Exit in south configuration via MZ.

The request of run-up test clearance in any regime type and any question about the test procedure must be addressed to:

Centro de Gestion Aeroportuaria (GCA)

Tel: 34-913 93 65 52

Fax: 34-913 93 62 01

1.2.4. NIGHT OPERATING RESTRICTION DUE TO NOISE QUOTA

1.2.4.1. OPERATING RESTRICTIONS

Departure and arrival operations classified as CR-4 or above are forbidden.

The APT authority may exceptionally authorize such ACFT to take-off or land if:

- The operation takes place within 30 minutes after or before the time limits expected as long as this is due to a delay caused by the programmed operation.
- The operation is justified on safety reasons as well as transportation of urgent alterations aid or in consequence of operational alterations like meteorological conditions, industrial actions and other exceptional occurrences.

A system of total noise quota is established between 2300-0700LT.

1. GENERAL

1.2.4.2. NOISE QUOTA AIRCRAFT CLASSIFICATION

ACFT are classified according to their Effective Perceived Noise measured in decibels (EPNdB):

EPNdB	NOISE CLASSIFICATION (CR)
more than 101.9	CR-16
99 - 101.9	CR-8
96 - 98.9	CR-4
93 - 95.9	CR-2
90 - 92.9	CR-1
less than 90	CR-0.5

Prop ACFT certified with regard to ICAO Annex 16 Chapters 6 and 10, and prop or jet ACFT certified according to Chapters 3 and 5 with a noise level less than 87 EPNdB, will be considered as CR-0.

1.2.5. AUXILIARY POWER UNITS (APU)

1.2.5.1. GENERAL

Stands T1 thru T35, 300 thru 312, 330 thru 394 and 500 thru 586:

- Use of 400 Hz facilities is obligatory.
- Use of air-conditioning facilities will be obligatory when the ACFT air conditioning is needed.
- Use of ACFT APU is forbidden in stands stated above between 2 minutes after on-block time and 5 minutes before off-block time.
- Use of ACFT APU only when fixed units are not operative and mobile units are not available.

Stands 70 thru 74 between 0700-2300LT:

- Use of 400 Hz facilities is obligatory.
- Use of air-conditioning facilities will be obligatory when the ACFT air conditioning is needed.
- Use of ACFT APU is forbidden in stands stated above between 2 minutes after on-block time and 5 minutes before off-block time.
- Use of ACFT APU only when fixed units are not operative and mobile units are not available.

Stands 70 thru 74 between 2300-0700LT:

- Use of APU is not allowed.

Stands 50 thru 69 and 144 thru 162:

- Between 2300-0700LT use of APU is not allowed.

Stands 1 thru 49, 163 thru 165 and T36 thru T41:

- Between 2300-0700LT the use of APU is forbidden except 10 minutes after on-block time and 10 minutes before off-block time; however, wide fuselage ACFT are permitted to use APU 50 minutes before departure and 15 minutes after arrival.

1.2.5.2. ACFT WITH NIGHT RESTRICTIONS FOR THE USE OF APU

IL (all models), DC8 (all models), F50, MD8 (all models), MD11, B747 (all models), CRJ2, E120, B717 (all models), B727 (all models).

1. GENERAL

1.3. LOW VISIBILITY PROCEDURES

1.3.1. GENERAL

- Low Visibility Procedure will be in force when:
- Manoeuvring area
 - RVR (or VIS if RVR is out) is 700m or below.
 - Ceiling is 290' or below.
 - Apron
 - RVR (or VIS if RVR out) is 400m or below.
- Pilots will be informed when Low Visibility Procedures are in use via ATIS.
When LVP is activated, pilot-in-command of towed ACFT must switch on the Mode S transponder.
- Low Visibility Procedure will be cancelled when:
- Manoeuvring area
 - RVR (or VIS if RVR is out) is equal to or higher than 800m.
 - Ceiling is 300' or above.
 - The improvement tendency of meteorological conditions is strong.
 - Apron
 - VIS is higher than 400m.

1.3.2. ARRIVAL

Except otherwise authorized by ATC, ACFT must vacate the landing RWY via TWYs specified below:

Landing RWY	Exit
18L	Y5, Y4, Y3 (traffic intending to vacate via Y3 shall notify ATC as soon as possible)
18R	Z10, Z8, Z7
32L	L5, L4, L3, L2 (for arrivals to Terminal 4 prefer L2 and L4.)
32R	K5, K4, K3 (traffic intending to vacate via K3 shall notify ATC as soon as possible)

- When leaving RWY sensitive area pilots shall report:
- Sensitive area vacated;
 - TWY used.
- ACFT vacating the sensitive area have priority over all other ACFT taxiing in the vicinity.
- After landing on RWY 18L/R or 32L/R follow appropriate TWY centerline lights until clear of sensitive area and await instructions from BARAJAS Ground or stop if lacking instructions.
- Entry stands 616 thru 618 from RWY 32R: K3, KB2, A28, A27, A26, AM1, M27, M28.

1.3.3. DEPARTURE

- Pilots-in-command will request permission for engine start-up from ATC if reported RVR values are the same or upper than their minimum for take-off.
- When permitted to taxi to a RWY holding point, hold short at the CAT II markings and stop bar lights.
- Unless otherwise instructed:
- In South configuration, access to RWY 14R via TWY LB is forbidden.
 - In North configuration, exits from stands 210 thru 227 shall be carried out via TWYs E2 to E1 to A6 to A5 to C6 to M6 until M10.

LEMD/MAD

JEPPESEN

MADRID, SPAIN

ADOLFO SUAREZ MADRID-BARAJAS 30 OCT 15 **10-1P4**

Eff 12 Nov

AIRPORT BRIEFING

1. GENERAL

1.4. SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM

1.4.1. OPERATION OF MODE S TRANSPONDER WHEN ACFT IS ON GROUND

ACFT operators shall ensure that the Mode S transponders are able to operate when the ACFT is on the ground.

From the request for towed push-back or taxi, whichever is earlier and after landing continuously until ACFT is fully parked on stand, pilots shall select AUTO mode or the equivalent according to specific installation, XPDR or ON if AUTO is not available, and the assigned Mode A code.

Select STBY when ACFT is fully parked.

Whenever ACFT is capable of reporting ACFT ident (i.e. call sign used in flight), ACFT ident should also be entered from the request for towed push-back or taxi, whichever is earlier (through the FMS or the transponder control panel). Flight crew must use the specific format defined by ICAO for entry the ACFT ident (e.g. BAW123, AFR6380).

To ensure that the performance of systems based on SSR frequencies (including airborne TCAS units and SSR radars) are not compromised, TCAS should not be selected before receiving the clearance to line up, and should be deselected after vacating the RWY.

ACFT taxiing without flight plan, Mode A code 2000 should be selected.

1.5. TAXI PROCEDURES

Between 2300-0700LT movements on Ramps 5 and 6 are forbidden.

TWYs CA, CB, C1 (between stand 116 thru 119), C8 and C9 limited to MAX ACFT with code letter B.

Limited to MAX ACFT with code letter C for:

- TWYs C1, C2, J5, JI5, J6, JI6, W5, W6, WI6, WN1, WN2, WA and Gate 7.
- TWY I12 (except segment between stands 36 thru 40, which is limited to MAX wingspan 102'/31m).

TWY C11 and Gate 6 MAX wingspan 125'/38m.

Limited to MAX ACFT with code letter D for:

- TWYs DI3, DI4, I8 thru I11 (except TWY I9 section between service road SV7 and Gate 3), Gate 4 and Gate 5.
- TWY I11 (except segment between stands 1 thru 5, which is limited to MAX wingspan 125'/38m).

Limited to MAX ACFT with code letter E for:

- TWYs A1 thru A17, I8 and I9 section between Gate 2 and service road SV7, E1 thru E4, F1 thru F4, M1 thru M17, M27 thru M34, Gate 1, Gate 2 and Gate 3.
- TWYs of Ramps 4, 5 and 6 except TWY C2.
- TWYs of RWY 14R/32L except L2, L4, LE and L42.
- TWYs of RWY 18R/36L except Z1, Z3, Z7, de-icing area of RWY 36L and access TWYs to Apron T4.
- TWYs AZ2 thru AZ6, MZ3 thru MZ6, EB1, EB2, EB6 thru EB8, EC1, EC2, EC6, EC8, EC9, KA8.

Limited to MAX ACFT with code letter F for:

- TWYs A18 thru A34, L2, L4, L42, LE, ME1, ME2, M18 thru M25, MC, MD, Z1, Z3, Z7.
- TWYs of Apron T4S except EB and EC, de-icing area of RWY 36R, Gate 11 and Gate 12.
- TWYs of RWY 18L/36R and RWY 14L/32R.

LEMD/MAD

JEPPESEN

MADRID, SPAIN

ADOLFO SUAREZ MADRID-BARAJAS

30 OCT 15

10-1P5

Eff 12 Nov

AIRPORT BRIEFING

1. GENERAL

In case of any doubt about the position of the ACFT or in case of difficulties, stop, notify (including last known position) ATC or the Apron Management Service (SDP) in its responsibility area and request Follow-me car. If in doubt about the ACFT position relative to the manoeuvring area but recognizing that the ACFT is on a RWY, notify ATC immediately including the last known position. If an appropriate nearby TWY can be located, vacate the RWY as soon as possible and afterwards stop the ACFT, or as directed.

ACFT vacating RWY via a rapid exit TWY will always have priority over the rest of ACFT, that must give way to them using the intermediate holding position.

When B747-8F taxiing via TWY R1, TWY R8 limited to MAX ACFT CAT D.

B747-8F cannot use RWY holding position Z2/Z4 on RWY 36L or LA/LB on RWY 14R at the same time with other ACFT.

B747-8F can not use RWY holding position LC/LD on RWY 14R.

1.5.1. NO ENTRIES

TWY POSITION	VISIBLE FROM TWY
On M6 btn M7 & G1	M6 & I8
Crossing of A14, A17, AZ2 & S2	A17 & S2
On Y7	Y7

1.6. PARKING INFORMATION

Stands 70 thru 74, 300 thru 312, 330 thru 394, 500 thru 586 and T1 thru T35 equipped with docking guidance system.

On stands 31 thru 33, 35 thru 37, 44, 45, 70 thru 74, 80 thru 97, 100 thru 126, 131, 133, 135 thru 165, 237 thru 239, 300 thru 328, 330 thru 394, 500 thru 586 and T1 thru T40 push-back required.

Do not enter stands T1, T2 and T3 from TWY I7.

Exit of stand 40 will be autonomous, except B747-8F, which will be towed to North on TWY A6.

1.6.1. RAMP 5 & 6

From 2300 to 0700LT, movements in Ramps 5 and 6 are forbidden. It shall only be permitted the use of equipment necessary for the tasks associated with the maintenance of the ACFT and, if required, when an ACFT needs to be dragged outside the restricted area, it shall be accomplished by means of an electric tractor, in which case it will comply with the following:

Entry to stands 75 and 80 to 140: All ACFT shall stop at TWY A4 (in North configuration) or at TWY M4 (in South configuration) and, from there, wait to be towed with the engine switched off to the stand assigned. Only electric engine towing tractors are allowed.

The use of APU is forbidden for all types of ACFT during taxiing operation.

1.7. OTHER INFORMATION

1.7.1. GENERAL

Birds.

1.7.2. WAKE VORTEX CATEGORIES

After clearance to line-up, pilots requiring increased wake turbulence separation will report ATC before entering the departure RWY.

2. ARRIVAL

2.1. SPEED RESTRICTIONS

Pilot must plan the descent profile to comply with the following speed and altitude restrictions at specified points, unless ATC clears otherwise. If it is not possible to comply, then advise ATC of it.

RWY 18L/18R		
POSITION	SPEED	ALTITUDE
TAGOM or equivalent position	220 KT	10,000'
LALPI or equivalent position	220 KT	11,000' or above
When intercepting LOC	200 KT	-
6 DME ILS or equivalent position	160 KT	-
4 DME ILS or equivalent position	160 KT	-

RWY 32L/32R		
POSITION	SPEED	ALTITUDE
TOBEK or equivalent position	220 KT	5000'
ASBIN or equivalent position	220 KT	6000' or above
When intercepting LOC	200 KT	-
6 DME ILS or equivalent position	160 KT	-
4 DME ILS or equivalent position	160 KT	-

ACFT will be exempted from these speed limitations when a continuous descent arrival (CDA) is being performed.

2.1.1. ADJUSTMENT OF VERTICAL SPEED IN MADRID TMA

ACFT shall adjust their vertical speed when approaching to assigned altitude or flight level. In those circumstances, vertical speed shall be reduced to 1500' per minute when approaching to a vertical distance of 1000' above or below assigned altitude or flight level.

2.2. NOISE ABATEMENT PROCEDURES

2.2.1. GENERAL

The following procedures are applicable to all ACFT for landing and take-off - except for safety reasons - to avoid excessive noise in areas surrounding the APT. Non-compliance will cause sanctions to ACFT operators except the execution of approach to RWY 18R with reduced flaps. If unable to comply submit alternative procedures to correspondent authority for approval.

Arrival paths will be radar-monitored and noise level will be measured for each operation.

South Configuration

RWY 18L: Usable for landing between 2300-0700LT.

RWY 18L/R: Usable for landing between 0700-2300LT.

Landing and approach procedures in VMC will be performed with an angle equal to or higher than the ILS GP or PAPI of each RWY.

Approaching RWY 18R the following landing procedure with reduced flaps is recommended, although its use is subject to pilot's decision and safety must prevail at all times:

- Intercept ILS with minimum flap configuration and landing gear retracted;
- Do not extend landing gear and keep the minimum possible flaps configuration up to 5 DME ILS.

LEMD/MAD**JEPPESEN****MADRID, SPAIN**ADOLFO SUAREZ MADRID-BARAJAS 10 JUL 15 **10-1P7****Eff 23 Jul****AIRPORT BRIEFING****2. ARRIVAL****2.2.2. REVERSE THRUST**

The use of reverse thrust above idle is forbidden between 2300-0700LT except for safety reasons. In this case, it must be notified to the Tower and the 'Departamento de Medio Ambiente' of the APT.

2.3. CAT II/III OPERATIONS

RWYs 18L/R and 32L/R approved for CAT II/III operations, special aircrew and ACFT certification required.

2.4. RWY OPERATIONS**2.4.1. MINIMUM REDUCED SEPARATION ON THE SAME RWY**

Any ACFT on final approach will not be allowed to cross the beginning of the RWY until the following minimum separation from the preceding ACFT applies:

- Landing after take-off: The departing ACFT has taken off and is, at least, 2000m from THR.

These minimums will be applied only under the following conditions:

- Between SR and SS;
- While VMC prevails at the aerodrome;
- When the braking action is not negatively affected by precipitation remains on the RWY (slush, water, etc.);
- When the involved ACFT operates without any anomalies.

When issuing the landing clearance according to this procedure, the following instructions shall be used: "... (ACFT call sign) BEHIND LANDING/DEPARTING (ACFT type), CLEARED TO LAND RUNWAY (number)".

2.4.2. MINIMUM RWY OCCUPANCY TIME

In order to minimize the occurrence of "go-around", lessen the RWY occupancy time and, therefore, get the maximum RWY utilization, pilots shall exit the RWY as soon as possible and this will not affect the ACFT safety and standard operation.

Unless ATC advises otherwise and without prejudice to the noise abatement procedures, ACFT will vacate the corresponding RWY by the following rapid exit TWYs and reach the following TWY:

North Configuration

RWY	Rapid Exit	ACFT	Dist from THR	TWY
32L	L7 ¹	all	5446'/1660m	A10
32L	L5	all	6594'/2010m	A11
32L	L4	all	6594'/2010m	L42
32L	L2	all	6988'/2130m	LA4
32L	L3	all	8251'/2515m	A12
32R	K5	all	5906'/1800m	KA4
32R	K4	all	7874'/2400m	KA3 or KC3, KC2

¹ HSTIL-L7 will automatically turn-off when RVR below 800m.

South Configuration

RWY	Rapid Exit	ACFT	Dist from THR	TWY
18L	Y5	all	5906'/1800m	AY
18L	Y4	all	7874'/2400m	BY13
18R	Z10	all	6319'/1926m	ZW3
18R	Z8	all	7717'/2352m	W1
18R	Z7	all	7717'/2352m	B6

LEMD/MAD
JEPPESEN
MADRID, SPAIN
ADOLFO SUAREZ MADRID-BARAJAS
30 OCT 15
10-1P8
Eff 12 Nov
AIRPORT BRIEFING

2. ARRIVAL

2.5. TAXI PROCEDURES

2.5.1. STANDARD TAXI ROUTES

2.5.1.1. NORTH CONFIGURATION

From RWY 32L to:	
Terminal 1, 2 or 3	
Standard route: L7, L5 or L3, TWY A to TWY A10 (transfer point A10-2).	
R-7:	Stands 200 thru 239: Standard route to A6 to C7. Stands 240 thru 249: Standard route to C9.
R-6:	Stand 75: Standard route to A4 to C4 to I6. Stands 80 thru 85: Standard route to A3 to C3. Stands 90 thru 110: Standard route to A2 to C2. Stands 111 thru 126: Standard route to A1 to C1. Stands 130 thru 135: Standard route to A1 to C1 to CA. Stands 136 thru 140: Standard route to A1 to C1 to CB. Stands 144 thru 148: Standard route to A1.
R-5:	Stands 50 thru 74: Standard route to A4 to C4. Stands 150 thru 162: Standard route to A4, A3 or A2 straight to stand.
R-4:	Stands 40 thru 43: Standard route to A6, then straight to stand. Stands 44 and 45: Standard route to A5 to C6 to M6 straight to stand. Stands 30 thru 37: Standard route to A8 to G1 to Gate 1 to I7 to C5 to M5 to stand. Stands 163 and 165: Standard route to A6, then straight to stand.
R-3:	Standard route to A8 to G1 to Gate 1 to I7 or I8.
Stands T1 thru T3: 0700 - 2259LT: Via A5 to A4 to C4 to I6; 2300 - 0659LT: Via A5 to C5.	
R-2:	Stands 14 thru 17: Standard route to A9 to G3 to M9 straight to stand; or A9 to G3 to Gate 3 to I8 or I9.
R-1:	Stands 10 thru 13: Standard route to A9 to G3 to M9 straight to stand; Stands T22 thru T29: Standard route to G4 to Gate 4 to I9 or I10 to stand. Stands 7 thru 9: L7, L5 or L3 to TWY A to A11 to G5 to Gate 5 (transfer point) to I10, then straight to stand. Stands T30 thru T40: L7, L5 or L3 to TWY A to A11, G5, Gate 5 (transfer point) to I12, then straight to stand.
R-0:	Stands 1 thru 5: L7, L5 or L3 to TWY A to A11 to G5 to M11, then straight to stand. Stand 6: L7, L5 or L3 to TWY A to A11 to G5 to Gate 5 (transfer point) to I11, then straight to stand.

LEMD/MAD
JEPPESEN
MADRID, SPAIN
ADOLFO SUAREZ MADRID-BARAJAS 30 OCT 15 10-1P9
Eff 12 Nov
AIRPORT BRIEFING

2. ARRIVAL

From RWY 32L to:	
Terminal 4	
Follow ATC instructions to leave by the LEFT of RWY. Standard route: L7, L5 or L3 to TWY A, incorporate to TWY M by the first possible TWY, follow to TWY M13 to J3 (transfer point J3-2).	
R-10:	Stands 364 thru 374: Standard route to J4 to D1 to D2 to D3. Stands 372 thru 377: Standard route to J4 to D1 to D2. Stand 378: Standard route to J4 to J5. Stands 380 thru 394: Standard route to J4 until J6. Stands 444 and 446: Standard route to J4 to D1 until D3 to R4 to X3. Stand 448: Standard route to J4 to D1 to D2 to S4 to X2.
R-11:	Stands 342 thru 362: Standard route to J4 to D1 until D4. Stands 430 and 432: Standard route to J4 to D1 until D5 to W4 to X5 to X4. Stands 434 thru 442: Standard route to J4 to D1 until D3 to R4 to X3.
R-12:	Stands 300 thru 312: Standard route to J4 to D1 until D5 to W5 to W16. Stands 320 thru 329: Standard route to J4 to D1 until D5 to W5. Stands 330 thru 340: Standard route to J4 to D1 until D4. Stands 420 thru 428: Standard route to J4 to D1 until D5 to W4 to X5 to X4.
R-13:	Stands 400 thru 411: Standard route to J4 to D1 until D5 to W5. Stands 412 thru 419: Standard route to J4 to D1 until D5 to W5 to W1 to WA.
Terminal 4S	
Follow ATC instructions to leave to the RIGHT side of RWY. Standard route: L4 to L42 to L2 to B1 or L2 to B1.	
R-20:	Stands 568 thru 580: Standard route to M21 until M24 to EB2. Stands 582 thru 586: Standard route to M21 to EA2. Stands 620 thru 628: Standard route to M21 until M27.
R-21:	Stands 556 thru 566: Standard route to M21 until M23 to EB2 to EB6. Stands 608 thru 618: Standard route to M21 until M30.
R-22:	Stands 540 thru 554: Standard route to M21 until M23 to EB2 to EB6. Stands 600 thru 606: Standard route to M21 until M31.
R-23:	Stands 500 thru 526: Standard route to B2 until B5 to Gate 13 to EA5. Stands 528 thru 530: Standard route to B2 until B5 to Gate 13. Stands 532 thru 536: Standard route to B1 until B9 to EA7 to EA6. Stand 538: Standard route to B1 until B9 to EA7 to N10.
From RWY 32R to:	
Terminal 1, 2 or 3	
K5 to KA4 to KA3 to KB2 to TWY A to TWY A10 or K5 to KA4 to KC3 to KC2 to TWY A to TWY A10 or K4 to KC3 to KC2 to TWY A to TWY A10 or K3 to KB2 to TWY A to TWY A10, then same route as for RWY 32L.	

LEMD/MAD
BARAJAS

JEPPesen

14 MAR 14

10-1P10

MADRID, SPAIN
AIRPORT BRIEFING**2. ARRIVAL**

Terminal 4	
Follow ATC instructions to leave RWY. <u>Standard route:</u> TWY A to H2 to H3(transfer point H3-2) or K5 to KA4 to KC3 to KC2 to TWY A to H2 to H3(transfer point H3-2) or K4 to KC3 to KC2 to TWY A to H2 to H3(transfer point H3-2) or K3 to KB2 to TWY A to H2 to H3(transfer point H3-2).	
R-10:	Stands 364 thru 370: Standard route to H4 to D2 to D3. Stands 372 thru 377: Standard route to H4 to D2. Stand 378: Standard route to X1 to J4 to J5. Stands 380 thru 394: Standard route to X1 to J4 until J6. Stands 444 and 446: Standard route to H4 to D2 to D3 to R4 to X3. Stand 448: Standard route to H4 to D2 to S4 to X2.
R-11:	Stands 342 thru 362: Standard route to H4 to D2 until D4. Stands 430 thru 432: Standard route to H4 to D2 until D5 to W4 to X5 to X4. Stands 434 thru 442: Standard route to H4 to D2 to D3 to R4 to X3.
R-12:	Stands 300 thru 312: Standard route to H4 to D2 until D5 to W5 to W16. Stands 320 thru 329: Standard route to H4 to D2 until D5 to W5. Stands 330 thru 340: Standard route to H4 to D2 until D4. Stands 420 thru 428: Standard route to H4 to D2 until D5 to W4 to X5 to X4.
R-13:	Stands 400 thru 411: Standard route to H4 to D2 until D5 to W5. Stands 412 thru 419: Standard route to H4 to D2 until D5 to W5 to WN1 to WA.
Terminal 4S	
Follow ATC instructions to leave RWY to TWY A. <u>Standard route:</u> K5 to KA4 to KA3 to KB2 to TWY A or K5 to KA4 to KC3 to KC2 to TWY A or K3 to KB2 to TWY A or K5 to KA4 until KA1 or K4 to KA3 until KA1 or K3 to KA2 to KA1.	
R-20:	Stands 568 thru 580: Standard route to A25 to EC1 to EC2. Stands 582 thru 586: Standard route to A23 to EA1 to EA2. Stands 620 thru 628: Standard route to A26 to AM1 to M27.
R-21:	Stands 556 thru 556: Standard route to Gate 14 to G14. Stands 562 thru 566: Standard route to A25 to EC1 to EC2. Stand 608: Standard route to M30. Stand 612: K5 to KA4 to KA3 to KB2 to KB1 to M29. Stand 614: K5 to KA4 to KA3 to KB2 to KB1 or K5 to KA4 to KC3 until KC1 to M28 or K4 to KC3 until KC1 to M28 or K3 to KB2 to A28 to KC1 to M28. Stand 616: K5 to KA4 to KC3 until KC1 to M28 or K4 to KC3 until KC1 to M28 or K3 to KB2 to A28 to KC1 to M28. Stand 618: K5 to KA4 to KC3 until KC1 or K4 to KC3 until KC1 or K3 to KB2 to A28 to KC1.
R-22:	Stands 540 thru 556: Standard route to Gate 14 to EC6. Stands 600 thru 606: Standard route to M30 to M31.
R-23:	Stands 500 thru 530: Standard route to Gate 14 to EC6 to EC7 to N11 to N10 to EA6 to EA5. Stands 532 thru 536: Standard route to Gate 14 to EC6 to EC7 to N11 to N10 to EA6. Stand 538: Standard route to Gate 14 to EC6 to EC7 to N11 to N10.

LEMD/MAD
BARAJAS

JEPPesen

14 MAR 14

(10-1P11)

MADRID, SPAIN
AIRPORT BRIEFING**2. ARRIVAL****2.5.1.2. SOUTH CONFIGURATION**

From RWY 18L to:	
Terminal 1, 2 or 3	
Y5 to AY to BY13 to M34 until M12 or Y4 to BY 13 to M34 until M12 or Y3 to A33 to N13 to M32 until M12 and follow the same routes as for RWY 18R.	
R-4:	Stands 40 and 165 (B747-8F): Follow ATC instructions. N to M21 until M8 to G1 to A6.
Terminal 4	
Follow ATC instructions. <u>Standard route:</u> Y5 to AY to BY13 to M34 until M14 to H3(transfer point H3-2) or Y4 to BY13 to M34 until M14 to H3(transfer point H3-2) or Y3 to A33 to N13 to M32 until M14 to H3(transfer point H3-2).	
R-10:	Stands 364 thru 370: Standard route to H4 to D2 to D3. Stands 372 thru 377: Standard route to H4 to D2. Stand 378: Standard route to X1 to J4 to J5. Stands 380 thru 394: Standard route to X1 to J4 until J6. Stands 444 and 446: Standard route to H4 to D2 to D3 to R4 to X3. Stand 448: Standard route to H4 to D2 to S4 to X2.
R-11:	Stands 342 thru 362: Standard route to H4 to D2 until D4. Stands 430 and 432: Standard route to H4 to D2 until D5 to W4 to X5 to X4. Stands 434 thru 442: Standard route to H4 to D2 to D3 to R4 to X3.
R-12:	Stands 300 thru 312: Standard route to H4 to D2 until D5 to W5 to W16. Stands 320 thru 329: Standard route to H4 to D2 until D5 to W5. Stands 330 thru 340: Standard route to H4 to D2 until D4. Stands 420 thru 428: Standard route to H4 to D2 until D5 to W4 to X5 to X4.
R-13:	Stands 400 thru 411: Standard route to H4 to D2 until D5 to W5. Stands 412 thru 419: Standard route to H4 to D2 until D5 to W5 to WN1 to WA
Terminal 4S	
Leave RWY. <u>Standard route:</u> Y5 to AY to BY13 to M34 to M33 or Y4 to BY13 to M34 to M33 or Y3 to A33 to N13.	
R-20:	Stands 568 thru 580: Standard route to M32 until M24 to EB2. Stands 582 thru 586: Standard route to M32 until M23 to EA2. Stands 620 thru 628: Standard route to M32 until M27.
R-21:	Stands 556 thru 566: Standard route to M32 until M24 to EB2. Stands 608 thru 610: Standard route to M32 until M30. Stands 612 thru 618: Standard route to M32 until M29.
R-22:	Stands 540 thru 554: Standard route to M32 until M24 to EB2 to EB6. Stands 600 thru 608: Standard route to M32 to M31.
R-23:	Stands 500 thru 530: Standard route to N12 until N10 to EA6 to EA5. Stands 532 to 536: Standard route to N12 until N10 to EA6. Stand 538: Standard route to N12 until N10.

LEMD/MAD
JEPPESEN
MADRID, SPAIN
ADOLFO SUAREZ MADRID-BARAJAS
30 OCT 15
10-1P12
Eff 12 Nov
AIRPORT BRIEFING

2. ARRIVAL

From RWY 18R to:	
Terminal 1, 2 or 3	
Standard route: Z10 to ZW3 to W1 to W2 to MZ6 until MZ3 to M15 until M12 or Z8 to W1 to W2 to MZ6 until MZ3 to M15 until M12 or Z4 to ZW1 to V1 to V2 to MZ4 to MZ3 to M15 until M10 (transfer point M10-2).	
R-7:	Stands 200 thru 239: Standard route to M6 to C6 to A5 to A6 to C7, then straight to stand. Stands 240 thru 249: Standard route to M6 to C6 to A5 to C9, then straight to stand.
R-6:	Stand 75: Standard route to M4 to C4 to I6. Stands 80 thru 85: Standard route to M3 to C3. Stands 90 thru 110: Standard route to M2 to C2. Stands 110 thru 126: Standard route to M1 to C1. Stands 130 thru 135: Standard route to M1 to C1 to CA. Stands 136 thru 140: Standard route to M1 to C1 to CB. Stands 144 thru 148: Standard route to M1 to C1 to A1, straight to stand.
R-5:	Stands 50 thru 74: Standard route to M4 to C4. Stands 150 thru 153: Standard route to M2 to C2 to A2, straight to stand. Stands 154 thru 157: Standard route to M3 to C3 to A3, straight to stand. Stands 159 thru 162: Standard route to M4 to C4 to A4, straight to stand.
R-4:	Stands 40 and 165 (B747-8F): Standard route to M8 to G1 to A6. Stands 30 thru 37: Standard route to M8 to Gate 1 to I7 to C5, straight to stand. Stands 40 thru 43: Standard route to M6 to C6 to A5 to A6. Stands 44 and 45: Standard route to M6 to C6. Stands 163 and 165: Standard route to M6 to C6 to A5.
R-3:	Standard route to M8 to Gate 1 to I7 or I8.
Stands T1 thru T3: 0700 - 2259LT: M8 until M4 to C4 to I6; 2300 - 0659LT: M8 until M5 to C5.	
R-2:	Standard route to M9 straight to stands 14 thru 17 or Gate 3 to I8 or I9.
R-1:	Stands 7 thru 9: Standard route until M11, then to Gate 5 (transfer point) to I10. Stands 10 thru 13: Standard route to M9 straight to stand. Stands T22 thru T29: Standard route to Gate 4 to I9 or I10. Stands T30 thru T40: Standard route until M11, then to Gate 5 (transfer point) to I10 to I12.
R-0:	Stands 1 thru 5: Standard route until M11, then straight to stand. Stand 6: Standard route until M11, then to Gate 5 (transfer point) to I11.

LEMD/MAD
JEPPESEN
MADRID, SPAIN
ADOLFO SUAREZ MADRID-BARAJAS 30 OCT 15 (10-1P13) Eff 12 Nov AIRPORT BRIEFING

2. ARRIVAL

From RWY 18R to: (cont'd)	
Terminal 4	
Leave RWY to the RIGHT side. Standard route: Z10 to ZW3 to W1 to W2 to W3(transfer point W3-2) or Z8 to W1 to W2 to W3(transfer point W3-2) or Z4 to ZW1 to V1 to AZ5 to AZ6 to W2 to W3 (transfer point W3-2).	
R-10:	Stands 364 thru 370: Standard route to X5 to U4 to DI4 to DI3. Stands 372 thru 377: Standard route to X5 until X2 to H4 to D2. Stand 378: Standard route to X5 until X1 to J4 to J5. Stands 380 thru 394: Standard route to X5 until X1 to J4 until J6. Stands 444 and 446: Standard route to X5 to X4 to X3. Stand 448: Standard route to X5 until X2.
R-11:	Stands 342 thru 362: Standard route to X5 to U4 to DI4 to DI3. Stands 430 and 432: Standard route to X5 to X4. Stands 434 thru 442: Standard route to X5 until X3.
R-12:	Stands 300 thru 312: Standard route to X5 to U4 to D5 to W5 to WI6. Stands 320 thru 329: Standard route to X5 to U4 to D5 to W5. Stands 330 thru 340: Standard route to X5 to U4 to DI4. Stands 420 thru 428: Standard route to X5 to X4.
R-13:	Stands 400 thru 411: Standard route to X5 to U4 to D5 to W5. Stands 412 thru 419: Standard route to X5 to U4 to D5 to W5 to WN1 to WA.
Terminal 4S	
Leave RWY to the LEFT side.	
R-20:	Stands 568 thru 580: Z7 to B6 until B12 to M33 until M24 to EB2. Stands 582 thru 586: Z7 to B6 until B12 to M33 until M23 to EA2. Stands 620 thru 628: Z7 to B6 until B12 to M33 until M27.
R-21:	Stands 562 thru 566: Z7 to B6 until B12 to M33 until M24 to EB2. Stands 608 thru 610: Z7 to B6 until B12 to M33 until M30. Stands 612 thru 618: Z7 to B6 until B12 to M33 until M29.
R-22:	Stands 540 thru 554: Z7 to B6 until B12 to M33 until M24 to EB2 to EB6. Stands 600 thru 606: Z7 to B6 until B12 to M33 until M31.
R-23:	Stands 500 thru 526: Z7 to G13 to Gate 13 to EA5. Stands 528 thru 530: Z7 to G13 to Gate 13. Stands 532 thru 536: Z7 to B6 until B9 to EA7 to EA6. Stand 538: Z7 to B6 to B9 to EA7 to N10.

2.5.2. COMMUNICATION FAILURE

In case of communication failure proceed as follows depending on position:

- Before or at the clearance limit:
proceed to clearance limit of the STAR, fly two holding patterns and complete the ILS approach to land on the nearest available RWY.
- Passed the clearance limit:
complete the ILS approach to land on the nearest available RWY.

ACFT will hold in the first segment of the TWY in which the ILS sensitive area is vacated and wait for a Follow-me car which will guide the ACFT to the assigned parking stand.

If the ACFT has already received a taxiing clearance, it shall continue along the assigned route to the clearance limit, taking special caution where it shall hold position and wait for the arrival of a Follow-me car to be guided to the assigned stand.

2.6. OTHER INFORMATION

2.6.1. PROCEDURE AGAINST OVERSHOOTING RWY CENTERLINE

After the pilot has been given a radar vector converging the assigned RWY centerline at an angle of less than 70°, pilots will take the initiative to intercept the ILS localizer or any replacement approach aid unless they have previously been instructed to cross the LOC or RWY centerline by ATC.

LEMD/MAD
BARAJAS

JEPPESEN
14 MAR 14 (10-1P14)

MADRID, SPAIN
AIRPORT BRIEFING

3. DEPARTURE

3.1. APT-COLLABORATIVE DECISION MAKING (A-CDM)

3.1.1. TARGET OFF-BLOCK TIME (TOBT)

TOBT represents the time that an ACFT expects to be ready to start up immediately and push-back within 5 minutes after reception of start-up clearance from TWR.

TOBTs should be updated via regular channels if the time that the ACFT will be ready to leave stand changes. Pilots should ensure that their flight is ready to depart at TOBT (window of -5 to +5 minutes).

TOBTs must be updated to an accuracy of +/-5 minutes.

TOBT earlier than 10 minutes from their APT Slot will not be accepted.

Flight Plan information should be updated with TOBT within a tolerance of +/-10 minutes.

3.1.2. TARGET START-UP APPROVAL TIME (TSAT)

TSAT is issued by ATC and represents the time at which an ACFT can expect start-up, taking into account the ATFM restrictions and local constraints.

ATC sequences the departures based on confirmed TOBT.

Pilots will be notified of their TSAT and any subsequent changes to it by their airline Company or handling agent, Docking Visual Guidance System or from BARAJAS Clearance Delivery when they call ready.

3.1.3. TARGET TAKE-OFF TIME (TTOT)

TTOT represents the time that an ACFT will be ready to take off taking into account TOBT/TSAT and variable Taxi-Out, depending on stand and RWY issue.

The TTOT for departing ACFT will be updated automatically and is available at the CDM-platform.

3.1.4. START-UP

Pilot must report Start-up Request to BARAJAS Clearance Delivery from TOBT -5 minutes to TSAT +5 minutes.

BARAJAS Clearance Delivery will then either approve start or advise the TSAT.

If the Pilot has called ready but the flight is then delayed by ATC, there is no requirement for TOBT to be updated to that TSAT.

If at TSAT + 5 minutes BARAJAS Clearance Delivery has not received a start-up request, the ACFT will lose its TSAT and a new TOBT is required. Once a new TOBT is entered, the flight will be re-sequenced with a new TSAT. ACFT will not be allowed to depart until a valid TOBT is entered and revised TSAT given and complied with.

3.1.5. PUSH-BACK

Push-back must be requested from BARAJAS Apron and start no later than 5 minutes after being transferred from BARAJAS Clearance Delivery.

If unable to meet this constraint, the ACFT may have start-up approval removed and will not be allowed to push-back. A new TOBT is required; once a new TOBT is entered, the flight will be resequenced with a new TSAT. ACFT will not be allowed to depart until a valid TOBT is entered and revised TSAT given and complied with.

3.1.6. REGULATED FLIGHTS

Regulated Flights should keep TOBT updated to an accuracy of +/- 5 minutes according to the time that the ACFT could be ready to leave stand if CTOT is removed.

Regulated flights should keep their Flight Plan up-to-date with TOBT within a tolerance of +/-10 minutes. Regulated Flights will have TSAT since CTOT reception based on CTOT. If CTOT is removed, a new TSAT will be issue based on TOBT available.

LEMD/MAD
BARAJAS

JEPPESEN
14 MAR 14 (10-1P15)

MADRID, SPAIN
AIRPORT BRIEFING

3. DEPARTURE

3.2. DE-ICING PROCEDURE

3.2.1. OPERATION ON DE-ICING AREAS

On request for start-up clearance, pilot shall report the need for de-icing operation.

Pilots will maintain permanent watch on BARAJAS Ground frequency during taxiing and de-icing operation.

To carry out the de-icing operation pilots will park the ACFT at the corresponding position, taking into account the ACFT size.

Once the de-icing operation is finished pilots will notify BARAJAS Tower "Ready for departure" and when cleared, will vacate as soon as possible the spraying area.

ACFT affected by ATFM measures and with assigned approved departure time will have priority over another kind of traffic not affected by the restrictions.

Clearance for the entry to the de-icing area will be granted when an ACFT occupying a position on this area has vacated it after having finished its operation, except for established in item below.

Pilot in command will make sure that ACFT is properly located on the stand position in order to safeguard the movement of the de-icing equipments.

De-icing operation of ACFT will be carried out with IDLE regime and ready for take-off. For de-icing operation of a four-engine ACFT, according to the presence of ice at the back-side of the ACFT, pilot can be required by the agent in charge of the de-icing operation in order to turn off some of the outer engines.

When an ACFT operator with autohandling exceptionally could not give service to an ACFT located in the de-icing area, the ACFT will be serviced by the airport handling operator with priority over holding ACFT.

When an ACFT can not leave the de-icing area by its own, its responsible operator shall compulsory remove it immediately from the mentioned area according with the established procedure with its handling agent.

An operator will communicate with the pilot in command of the ACFT on

De-Icing area RWY 36L: BARAJAS De-icing **123.32** or

De-Icing area RWY 36R: BARAJAS De-Icing **130.25**,

or upon failure, by means of communication JACK, reporting the de-icing service conclusion.

Type and registration of ACFT shall be mentioned.

3.2.2. PROHIBITIONS

It is totally forbidden to carry out a motor test at the de-icing area.

LEMD/MAD

JEPPESEN

MADRID, SPAIN

ADOLFO SUAREZ MADRID-BARAJAS

30 OCT 15

10-1P16

Eff 12 Nov

AIRPORT BRIEFING

3. DEPARTURE

3.3. START-UP, PUSH-BACK & TAXI PROCEDURES

3.3.1. GENERAL

ACFT must be ready to start-up before calling on the appropriate frequency: Clearance Delivery West if they will proceed via SIE, ZMR, BARDI, CCS or VTB and Clearance Delivery East if they proceed via RBO, PINAR, NANDO, TEMIR or NASOS.

With South Configuration, the appropriate frequency for NASOS departures is Clearance Delivery West.

On requesting engine start-up clearance to ATC, pilots will report:

- ACFT call sign
- ACFT type and series
- Parking stand
- ATIS message received

Clearance will be issued as soon as requested. When delays are expected to exceed 15 min, the appropriate engine start-up time will be provided by ATC. Pilots should be aware that the taxi time to RWY 36L from the South apron is approximately between 10 and 20 min. ACFT with assigned Calculated Take-off Time (CTOT) must take into account these taxi time to start-up time accordingly.

It is forbidden to start-up engines higher than IDLE regime at all stands in contact with the terminal, until the ACFT is lined up with the TWY.

It is forbidden to use reverse power to leave the stands, except for express clearance of the APT authority.

Contact BARAJAS Ground for towed push-back and taxi clearance in stands 6 thru 9 in T123 Apron.

Simultaneous push-back will be strictly forbidden between stands 334 and 336.

3.3.2. RAMP 5 & 6

From 2300 to 0700LT, movements in Ramps 5 and 6 are forbidden. It shall only be permitted the use of equipment necessary for the tasks associated with the maintenance of the ACFT and, if required, when an ACFT needs to be dragged outside the restricted area, it shall be accomplished by means of an electric tractor, in which case it will comply with the following:

Exit from stands 75 and 80 to 140: ACFT shall be towed with engine switched off until being aligned with TWY M4 (in North configuration) or TWY A4 (in South configuration). Only electric engine towing tractors are allowed.

The use of APU is forbidden for all types of ACFT during taxiing operation.

LEMD/MAD
JEPPESEN
MADRID, SPAIN
ADOLFO SUAREZ MADRID-BARAJAS
30 OCT 15
10-1P17
Eff 12 Nov
AIRPORT BRIEFING

3. DEPARTURE

3.3.3. PUSH-BACK DIRECTIONS

STANDS	PUSH-BACK WITH NOSE TO
31 thru 34	SW
35	SE
36	NE
37	N
44, 45	N
70, 71	NE
72 thru 74	SW
80 thru 97, 100 thru 126	SE
131, 133	NE
135	SE
136 thru 162	NE
163	North Configuration: SW on TWY A6 South Configuration: SE on TWY A5
165	ACFT with code letter F: SE on TWY A5 All other ACFT: North Configuration: SW on TWY A6 South Configuration: SE on TWY A5
237 thru 239	E
300 thru 312	N
320 thru 328	W
330 thru 334	N
336 thru 370	S
372 thru 378	N
380 thru 394	S
500 thru 536	S
538	W
540 thru 586	N
T1 thru T8	SW
T9 thru T13	S
T14 thru T16	N
T17	S
T18	SE
T19 thru T21	SE
T22 thru T25	NW
T26, T27	N
T28, T29	SE
T30 thru T35	N
T36 thru T40	E

LEMD/MAD
JEPPESEN
MADRID, SPAIN
ADOLFO SUAREZ MADRID-BARAJAS 30 OCT 15 (10-1P18) Eff 12 Nov AIRPORT BRIEFING

3. DEPARTURE

3.3.4. STANDARD TAXI ROUTES

3.3.4.1. NORTH CONFIGURATION

To RWY 36L from:	
Terminal 1, 2 or 3	
<u>Standard route:</u> (From TWY) M10 (transfer point M10-2) until M17 to R5 or R6 or R7 to R8 to Z2.	
R-7:	Stands 200 thru 208: C11 to E3 until E1 to A7 to G1 to M8, then standard route. Stands 210 thru 227: Direct to E2 to E1 to A7 to G1 to M8, then standard route or direct to E2 to E1 to A6 to A5 to C6 to M6, then standard route. Stands 230 thru 249: Direct to C8 to A6 to A5 to C6 to M6 until M8, then standard route.
R-6:	Stands 80 thru 85, 98 and 99: C3 to M3 until M10, then standard route. Stands 75, 90 thru 97 and 100 thru 110: C2 to M2 until M10, then standard route. Stands 111 thru 126: C1 to M1 until M10, then standard route. Stands 130 thru 135: CA to C1 to M1 until M10, then standard route. Stands 136 thru 140: CB to C1 to M1 until M10, then standard route.
R-5:	Stands 50 thru 69: C3 or C5 to M5 until M10, then standard route. Stands 70 and 71: I6 to C5 to M5 until M10, then standard route. Stands 72 thru 74: I6 to C3 to M3 until M10, then standard route.
In R-6 and R-5, ACFT which are in stands 145 thru 162 and need push-back to leave them, will proceed nosing Southwest on TWY A, taxiing on the first possible intersection to TWY M.	
R-4:	I7 to C5 to M5, then standard route or C6 to M6, then standard route. Stands 40 and 165 (B747-8F): A6 to G1 to M8 until MZ3 to R1 and Z4 or A6 to G1 to M8 until M20 to B2 to Z1 or Z3. Stand 163 and 165: A6 to A5 to C6 to M6, then standard route.
R-3:	I8 to M7, then standard route or I7 to C5 to M5, then standard route.
Stands 22 thru 27: straight to M8, then standard route.	
R-2:	I8 or I9 to Gate 2 to M9, then standard route.
R-1:	Stands 7 thru 9: straight to M10 until M17 to R5 or R6 or R7 to R8 to Z2. Stands 10 thru 13 and T22 thru T29: I9 or I10 to Gate 4, then standard route. Stands T30 thru T40: I12 to I11 to Gate 6 (transfer point) to M12 until M17 to R5 or R6 or R7 to R8 to Z2.
R-0:	Stands 1 thru 5: I11 to Gate 6 (transfer point) to M12 until M17 to R5 or R6 or R7 to R8 to Z2. Stand 6: straight to M11 until M17 to R5 or R6 or R7 to R8 to Z2.
Terminal 4	
<u>Standard route:</u> R3 (transfer point R3-2) until R1 to Z4.	
R-10:	Stands 364 thru 370: DI3 to D3 to R4, then standard route. Stands 372 thru 377: D2 to D3 to R4, then standard route. Stand 378: JI5 to D2 to D3 to R4, then standard route. Stands 380 thru 394: JI6 to JI5 to D2 to D3 to R4, then standard route. Stands 444 thru 448: D2 to D3 to R4, then standard route.

LEMD/MAD**JEPPESEN****MADRID, SPAIN**

ADOLFO SUAREZ MADRID-BARAJAS 30 OCT 15

10-1P19**Eff 12 Nov****AIRPORT BRIEFING****3. DEPARTURE**

To RWY 36L from: (cont'd)	
Terminal 4 (cont'd)	
R-11:	Stands 342 thru 346: DI4 to R4, then standard route. Stands 348 thru 362: DI3 to D3 to R4, then standard route. Stands 430 and 432: D4 to D5 to W4 to X5 to X4, then standard route. Stands 434 thru 442: D3 to R4, then standard route.
R-12:	Stands 300 thru 312: W6 to WN1 to WN2 to WN3 to W4 to X5 to X4, then standard route. Stands 320 thru 328: W5 to WN1 to WN2 to WN3 to W4 to X5 to X4, then standard route. Stand 329: D5 to W4 to X5 to X4, then standard route. Stands 330 thru 334: DI4 to D5 to W4 to X5 to X4, then standard route. Stands 336 thru 340: DI4 to R4, then standard route. Stands 420 thru 428: D4 to D5 to W4 to X5 to X4, then standard route.
R-13:	Stands 400 thru 419: WN2 to WN3 to W4 to X5 to X4, then standard route.
Terminal 4S	
R-20:	Stands 582 thru 586: Gate 11 to G11 to Z1. Stands 568 thru 580: EB2 to EB6 to EB7 to N10 to N9 to N6 until N4 to BN1 to Z3 or EB2 to EB6 to EB7 to N10 to N9 to N6 until N3 to G11 to Z1. Stands 620 thru 628: EC2 to EC6 to EC7 to N11 until N9 to N6 until N4 to BN1 to Z3 or EC2 to EC6 to EC7 to N11 until N9 to N6 until N3 to G11 to Z1.
R-21:	Stands 556 thru 566: EB2 to EB6 to EB7 to N10 until N4 to BN1 to Z3 or EB2 to EB6 to EB7 to N10 until N3 to G11 to Z1. Stands 608 thru 618: EC2 to EC6 to EC7 to N11 until N4 to BN1 to Z3 or EC2 to EC6 to EC7 to N11 until N3 to G11 to Z1.
R-22:	Stands 540 thru 554: EB6 to EB7 to N10 until N4 to BN1 to Z3 or EB6 to EB7 to N10 until N3 to G11 to Z1. Stands 600 thru 606: EC6 to EC7 to N11 until N4 to BN1 to Z3 or EC6 to EC7 to N11 until N3 to G11 to Z1.
R-23:	Stands 500 thru 536: EA6 to EA5 to Gate 12 to N4 to BN1 to Z3 or EA6 to EA5 to Gate 12 to N3 to G11 to Z1. Stand 538: N10 until N4 to BN1 to Z3 or N10 until N3 to G11 to Z1.

To RWY 36R from:	
Terminal 1, 2 or 3	
The same route as for RWY 36L until M17, then to M18 until M31 to NY13 to Y1 or M18 until M32 to N13 to Y2 or M18 until M33 to B13 to Y3.	
R-4:	Stands 40 and 165 (B747-8F): A6 to G1 to M8 until M20 to B2 until TWY B to RWY holding position Y3.
Terminal 4	
Standard route: S3 (transfer point S3 2) to M15 until M31 to NY13 to Y1 or S3 (transfer point S3 2) to M15 until M32 to N13 to Y2 or S3 (transfer point S3 2) to M15 until M33 to B13 to Y3.	
R-10:	Stands 364 thru 370: DI3 to S4, then standard route. Stands 372 thru 377: D2 to S4, then standard route. Stand 378: JI5 to D2 to S4, then standard route. Stands 380 thru 394: JI6 to JI5 to D1 to D2 to S4, then standard route. Stands 444 and 446: D3 to R4 to X3, then standard route. Stand 448: D2 to S4, then standard route.

LEMD/MAD

JEPPESEN

MADRID, SPAIN

ADOLFO SUAREZ MADRID-BARAJAS

31 OCT 14

10-1P20

Eff 13 Nov

AIRPORT BRIEFING

3. DEPARTURE

To RWY 36R from: (cont'd)	
Terminal 4 (cont'd)	
R-11:	Stands 342 thru 362: DI4 to DI3 to S4, then standard route. Stands 430 and 432: D4 to D5 to W4 to X5 until X3, then standard route. Stands 434 thru 442: D3 to R4 to X3, then standard route.
R-12:	Stands 300 thru 312: W6 to WN1 to WN2 to WN3 to W4 to X5 until X3, then standard route. Stands 320 thru 328: W5 to WN1 to WN2 to WN3 to W4 to X5 until X3, then standard route. Stand 329: D5 to W4 to X5 until X3, then standard route. Stands 330 thru 334: DI4 to D5 to W4 to X5 until X3, then standard route. Stands 336 thru 340: DI4 to DI3 to S4, then standard route. Stands 420 thru 428: D4 to D5 to W4 to X5 to X3, then standard route.
R-13:	Stands 400 thru 419: WN2 to WN3 to W4 to X5 to X4 to X3, then standard route.
Terminal 4S	
R-20:	Stands 568 thru 580: EB2 to EC2 to EC6 to NY12 to NY13 to Y1. Stands 582 thru 586: Gate 11 to G11 to B3 until B13 to Y3 or Gate 11 to G11 to B3 until EC8 to N12 to N13 to Y2 or Gate 11 to G11 to B3 until EC8 to EC7 to NY12 to NY13 to Y1 or Gate 11 to G11 to B3 until EC9 to BY12 to M34 to B13 to Y3. Stands 620 thru 628: EC2 to EC6 to NY12 to NY13 to Y1 or EC2 to EC7 to N12 to N13 to Y2.
R-21:	Stands 556 thru 566: EB2 to EC2 to EC6 to NY12 to NY13 to Y1. Stands 608 thru 618: EC2 to EC6 to NY12 to NY13 to Y1 or EC2 to EC7 to N12 to N13 to Y2.
R-22:	Stands 540 thru 554: EB6 to EC6 to NY12 to NY13 to Y1. Stands 600 thru 606: EC6 to NY12 to NY13 to Y1 or EC6 to EC7 to N12 to N13 to Y2.
R-23:	Stands 500 thru 536: EA6 to EA5 to Gate 12 to G12 to B5 until B13 to Y3 or EA6 to EA5 to Gate 12 to G12 to B5 until EC8 to N12 to N13 to Y2 or EA6 to EA5 to Gate 12 to G12 to B5 until EC8 to EC7 to NY12 to NY13 to Y1 or EA6 to EA5 to Gate 12 to G12 to B5 until EC9 to BY12 to M34 to B13 to Y3. Stand 538: N10 to EA7 to B10 until B13 to Y3 or N10 to EA7 to B10 until EC8 to N12 to N13 to Y2 or N10 to EA7 to B10 until EC8 to EC7 to NY12 to NY13 to Y1 or N10 to EA7 to B10 until EC9 to BY12 to M34 to B13 to Y3.

LEMD/MAD
JEPPesen
MADRID, SPAIN
ADOLFO SUAREZ MADRID-BARAJAS
31 OCT 14
10-1P21
Eff 13 Nov
AIRPORT BRIEFING

3. DEPARTURE

3.3.4.2. SOUTH CONFIGURATION

To RWY 14L from:	
Terminal 1, 2 or 3	
The same routes as for RWY 14R until A12, then until A27 to A28 to A29 to K1 to holding point or until A28 to KB2 to K2 or K3 to holding point.	
Terminal 4	
Standard route: S3 (transfer point S3-2) to S2 to A17 until A28 to A29 to K1 to holding point or S3 (transfer point S3-2) to S2 to A17 until A28 to KB2 to K2 or K3 to holding point.	
R-10:	Stands 364 thru 370: DI3 to S4 to S3, then standard route. Stands 372 thru 377: D2 to S4 to S3, then standard route. Stand 378: JI5 to D2 to S4 to S3, then standard route. Stands 380 thru 394: JI6 to JI5 to D1 to D2 to S4 to S3, then standard route. Stands 444 and 446: D3 to R4 to X3 to S3, then standard route. Stand 448: D2 to S4 to S3, then standard route.
R-11:	Stands 342 thru 362: DI4 to DI3 to S4 to S3, then standard route. Stands 430 and 432: D4 to D5 to W4 to X5 until X3 to S3, then standard route. Stands 434 thru 442: D3 to R4 to X3 to S3, then standard route.
R-12:	Stands 300 thru 312: W6 to WN1 to WN2 to WN3 to W4 to X5 until X3 to S3, then standard route. Stands 320 thru 328: W5 to WN1 to WN2 to WN3 to W4 to X5 until X3 to S3, then standard route. Stand 329: D5 to W4 to X5 to X4 to S3, then standard route. Stands 330 thru 334: DI4 to D5 to W4 to X5 to X4 to X3 to S3, then standard route. Stands 336 thru 340: DI4 to DI3 to S4 to S3, then standard route. Stands 420 thru 428: D4 to D5 to W4 to X5 to X3 to S3, then standard route.
R-13:	Stands 400 thru 419: WN2 to WN3 to W4 to X5 to X4 to X3, then standard route.
Terminal 4S	
R-20:	Stands 568 thru 580: EB2 to EC2 to Gate 14 to KA1 to K1 to holding point. Stands 582 thru 586: Gate 11 to G11 to B3 until B12 to M33 to M30 to KA1 to K1 to holding point. Stands 620 thru 628: EC2 to Gate 14 to KA1 to K1 to holding point.
R-21:	Stands 556 thru 560: EB6 to EC6 to NY12 to M31 to M30 to KA1 to K1 to holding point. Stands 562 thru 566: EB2 to EC2 to Gate 14 to KA1 to K1 to holding point. Stands 608 thru 610: EC6 to NY12 to M31 to M30 to KA1 to K1 to holding point. Stands 612 thru 618: EC2 to Gate 14 to KA1 to K1 to holding point.
R-22:	Stands 540 thru 554: EB6 to EC6 to NY12 to M31 to M30 to KA1 to K1 to holding point. Stands 600 thru 608: EC6 to NY12 to M31 to M30 to KA1 to K1 to holding point.
R-23:	Stands 500 thru 536: EA6 to EA5 to Gate 12 to B5 until B12 to M33 until M30 to KA1 to K1 to holding point. Stand 538: N10 to EA7 to B10 until B12 to M33 until M30 to KA1 to K1 to holding point.

LEMD/MAD
JEPPESEN
MADRID, SPAIN
ADOLFO SUAREZ MADRID-BARAJAS
30 OCT 15
10-1P22
Eff 12 Nov
AIRPORT BRIEFING

3. DEPARTURE

To RWY 14R from:	
Terminal 1, 2 or 3	
Standard route: (from TWY) A10 (transfer point A10-2) until A12 to RWY holding position LA/LB.	
R-7:	Stands 200 thru 208: C11 to E3 until E1 to A7 until A10, then standard route. Stands 210 thru 227: Straight to E2 to E1 to A7 until A10, then standard route. Stands 230 thru 249: Straight to C8 to A6 until A10, then standard route.
In R-6 and R-5 ACFT which need push-back to leave stands 146 thru 162 will proceed nosing Northeast to use TWY A directly.	
R-6:	Stands 80 thru 85, 98 and 99: C3 to A3 until A10, then standard route. Stands 75, 90 thru 97 and 100 thru 110: C2 to A2 until A10, then standard route. Stands 111 thru 126: C1 to A1 until A10, then standard route. Stands 130 thru 135: CA to C1 to A1 until A10, then standard route. Stands 136 thru 140: CB to C1 to A1 until A10, then standard route. Stands 144 thru 148: A1 until A10, then standard route.
R-5:	Stands 50 thru 69: C3 or C5 to A5 until A10, then standard route. Stands 70 and 71: I6 to C5 to A5 until A10, then standard route. Stands 72 thru 74: I6 to C3 to A3 until A10, then standard route.
R-4:	Stands 30 thru 37: I7 to C5 to A5 until A10, then standard route. Stands 40 thru 45: M6 to C6 to A5 until A10, then standard route. Stands 40 and 165 (B747-8F): Standard route to RWY holding position LA or A19 to ME2 to RWY holding position LE. Stands 163 and 165: A5 until A10, then standard route.
R-3:	I8 to Gate 1 to G1 to A8 until A10, then standard route or I7 to C5 to A5 until A10, then standard route.
Stands 22 thru 27: M8 to G1 to A8 until A10, then standard route.	
R-2:	I8 or I9 to Gate 2 to G2 to A9 to A10, then standard route.
R-1:	Stands 7 thru 9: Straight to M10 to G5 to A11 to A12 to RWY holding position LA/LB. Stands 10 thru 13 and T22 thru T29: I9 or I10 to Gate 4 to G4 to A10, then standard route. Stands T30 thru T40: I12 to I11 to Gate 6 (transfer point) to A12 to RWY holding position LA/LB.
R-0:	Stands 1 thru 5: I11 to Gate 6 (transfer point) to A12 to RWY holding position LA/LB. Stand 6: Straight to G5 to A11 to A12 to RWY holding position LA/LB.

LEMD/MAD
JEPPESEN
MADRID, SPAIN
ADOLFO SUAREZ MADRID-BARAJAS
30 OCT 15
10-1P23
Eff 12 Nov
AIRPORT BRIEFING

3. DEPARTURE

To RWY 14R from: (cont'd)	
Terminal 4	
Standard route: S3 (transfer point S3-2) to S2 to A17 to holding points LC to LD to LE. R3 and transfer point R3-2 will be used as alternative route.	
R-10:	Stands 364 thru 370: DI3 to S4 to S3, then standard route. Stands 372 thru 377: D2 to S4 to S3, then standard route. Stand 378: JI5 to D1 to D2 to S4 to S3, then standard route. Stands 380 thru 394: JI6 to JI5 to D1 to D2 to S4 to S3, then standard route. Stands 444 thru 446: D3 to R4 to X3 to S3, then standard route. Stand 448: D2 to S4 to S3, then standard route.
R-11:	Stands 342 thru 362: DI4 to DI3 to S4 to S3, then standard route. Stands 430 and 432: D4 to D5 to W4 to X5 to X4 to X3 to S3, then standard route. Stands 434 thru 442: D3 to R4 to X3 to S3, then standard route.
R-12:	Stands 300 thru 312: W6 to WN1 to WN2 to WN3 to W4 to X5 to X4 to X3 to S3, then standard route. Stands 320 thru 328: W5 to WN1 to WN2 to WN3 to W4 to X5 to X4 to X3 to S3, then standard route. Stand 329: D5 to W4 to X5 to X4 to S3, then standard route. Stands 330 thru 334: DI4 to D5 to W4 to X5 to X4 to X3 to S3, then standard route. Stands 336 thru 340: DI4 to DI3 to S4 to S3, then standard route. Stands 420 thru 428: D4 to D5 to W4 to X5 to X4 to X3 to S3, then standard route.
R-13:	Stands 400 thru 419: WN2 to WN3 to W4 to X5 to X4 to X3 to S3, then standard route. Stands PE-10 thru PE-30: X6 to X5 to X4 to X3 to S3, then standard route.
Terminal 4S	
R-20:	Stands 568 thru 580: EB2 to EB6 to EB7 to N10 until N2 to M21 to B1 to LE to holding point LE. Stands 582 thru 586: Gate 11 to N2 to M21 to B1 to LE to holding point LE. Stands 620 thru 628: EC2 to EB2 to EB6 to EB7 to N10 until N2 to M21 to B1 to LE to holding point LE.
R-21:	Stands 556 thru 560: EB6 to EB7 to N10 until N2 to M21 to B1 to LE to holding point LE. Stands 562 thru 566: EB2 to EB6 to EB7 to N10 until N2 to M21 to B1 to LE to holding point LE. Stands 608 thru 618: EC6 to EB2 to EB6 to EB7 to N10 until N2 to M21 to B1 to LE to holding point LE.
R-22:	Stands 540 thru 554: EB6 to EB7 to N10 until N2 to M21 to B1 to LE to holding point LE. Stands 600 thru 606: EC6 to EB6 to EB7 to N10 until N2 to M21 to B1 to LE to holding point LE.
R-23:	Stands 500 thru 536: EA6 to EA5 to Gate 12 to N4 until N2 to M21 to B1 to LE to holding point LE. Stand 538: N10 until N2 to M21 to B1 to LE to holding point LE.

3. DEPARTURE

3.3.5. COMMUNICATION FAILURE

ACFT will continue with extreme CAUTION on the assigned route to stop at an intermediate holding position or its clearance limit and wait for a Follow-me car which will guide the ACFT to the designated holding position or parking stand.

3.4. NOISE ABATEMENT PROCEDURES

For additional depiction refer to 10-4 Noise Abatement Charts.

3.4.1. GENERAL

The following procedures are applicable to all ACFT for landing and take-off - except for safety reasons - to avoid excessive noise in areas surrounding the APT. Non-compliance will cause sanctions to ACFT operators. If unable to comply submit alternative procedures to correspondent authority for approval.

Departure paths will be radar-monitored and noise level will be measured for each operation.

Departures shall be performed in accordance to ICAO DOC 8168 NOISE ABATEMENT DEPARTURE PROCEDURE A (NADP A).

ACFT may be exempted when using different procedures, duly reported to APT Management in advance, which are proved to lead to a less acoustic impact or due to safety reasons.

North Configuration

RWY 36L: Usable for take-off between 0700-2300LT.
 SIDs BARDI 1K, 1AX, CCS 1K, 1AX, SIE 1K, VTB 1AX, 1K, ZMR 1AX, 1K are mandatory for ACFT included in the list shown below.*
 ACFT not included in the list are allowed to use SIDs BARDI 1T, 1AY, CCS 1T, 1AY, SIE 1T, 1AL, VTB 1AY, 1T, ZMR 1T, 1AL.

RWY 36L: Usable for take-off between 2300-0700LT.

***ACFT List** AN72, A124, A340-600, A388, B721, B722, B731, B732, B741, B742, B743, B744, B74D, B74R, B74S, B748, DC10, DC85, DC86, DC87, H25A, IL62, IL96, L101, MD11, SBR1, T134, YK42.

South Configuration

RWY 14L/R: Usable for take-off between 0700-2300LT, following the initial segments of all publicated SIDs. Between 2300-0700LT RWY 14L will be used following the initial segments of all publicated SIDs.


3.5. RWY OPERATIONS

3.5.1. MINIMUM RWY OCCUPANCY TIME

ACFT not ready to initiate take-off run immediately when cleared for take-off, will have take-off clearance cancelled and will receive instructions to vacate the RWY at the first available TWY.

Alt Set: hPa Trans level: By ATC Trans alt: 13000'

1. The published minimum altitudes integrate no correction for low temperatures.
2. This chart may only be used for cross-checking of altitudes assigned while the aircraft is identified.



© JEPPESEN, 2002, 2013. ALL RIGHTS RESERVED.


Alt Set: hPa Trans level: By ATC Trans alt: 13000'

B-RNAV APPROVAL REQUIRED

ORBIS ONE ZULU (ORBIS 1Z) [ORBI1Z]

RWYS 18L/R ARRIVALS VIA IAFS LALPI & SIE

Direct distance to
Barajas Apt from:
LALPI 30NM
SIE 41NM




LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS

JEPPesen
19 DEC 14 10-2C

MADRID, SPAIN
STAR

D-ATIS 118.25	Apt Elev 1998'	Alt Set: hPa Trans level: By ATC Trans alt: 13000'
------------------	-------------------	--

NASOS FOUR ALFA (NASOS 4A) [NASO4A]
PRADO FOUR ECHO (PRADO 4E) [PRAD4E]
VILLA FOUR ECHO (VILLA 4E) [VILA4E]
RWYS 18L/R ARRIVALS
VIA IAF TAGOM

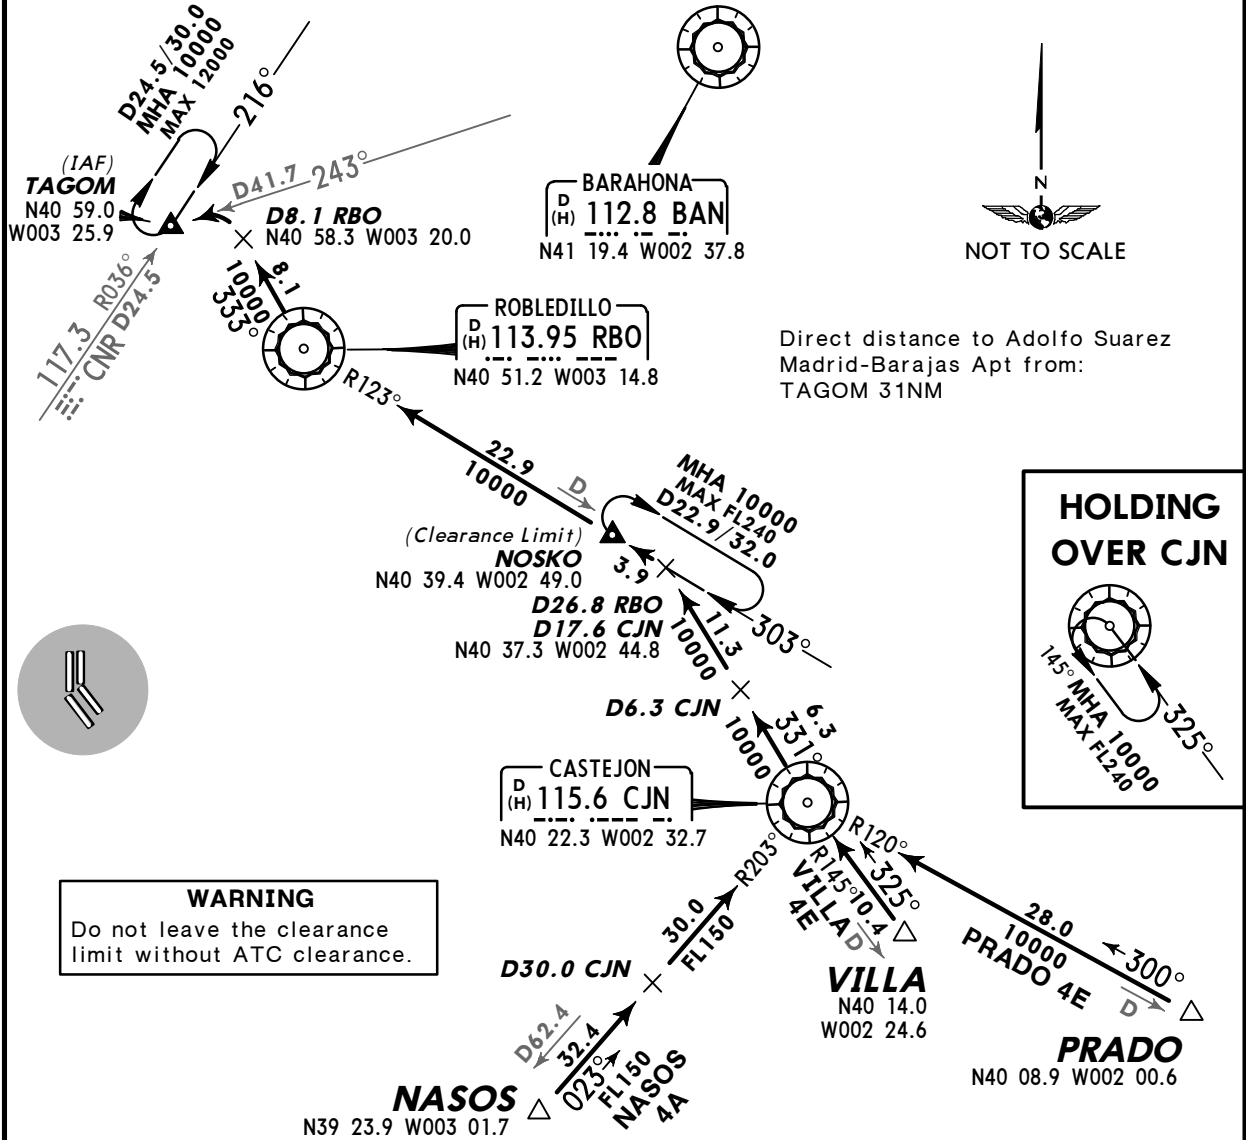

Pilots must plan the descent profile to comply with the following speed and level/altitude restrictions at specific points or equivalent positions. If unable to comply advise ATC. Descent profiles will adjust to these restrictions to reduce, where it is possible, either fuel consumption, or acoustic and environmental impact in the airport vicinity.			
STAR	Position	Speed	FL/Altitude
NASOS 4A	D30.0 CJN	250 KT	MAX FL210
	D6.3 CJN	220 KT	MAX FL160
	NOSKO	220 KT	MAX FL160
	TAGOM	220 KT	10000'
PRADO 4E	PRADO	250 KT	MAX FL210
	D6.3 CJN	220 KT	MAX FL160
	NOSKO	220 KT	MAX FL160
	TAGOM	220 KT	10000'
VILLA 4E	VILLA	250 KT	MAX FL210
	D6.3 CJN	220 KT	MAX FL160
	NOSKO	220 KT	MAX FL160
	TAGOM	220 KT	10000'



LEMD/MAD
BARAJAS

JEPPESSEN
14 SEP 12 10-2D Eff 20 Sep

MADRID, SPAIN
STAR


ATIS 118.25	Apt Elev 1998'	Alt Set: hPa Trans level: By ATC Trans alt: 13000' Within 10 NM radius of PDT between R-250 and R-074 and between 4000' and 5000' Ground Proximity Warning System (GPWS) alarm signal may occur due to orographic characteristics of terrain.
----------------	-------------------	--

ADUXO ONE DELTA (ADUXO 1D) [ADUX1D]
(B-RNAV)

B-RNAV APPROVAL REQUIRED

BARAHONA FOUR DELTA (BAN 4D)
TERSA ONE DELTA (TERSA 1D) [TERS1D]
TERSA TWO ZULU (TERSA 2Z) [TERS2Z]

RWYS 32L/R ARRIVALS
VIA IAF ASBIN

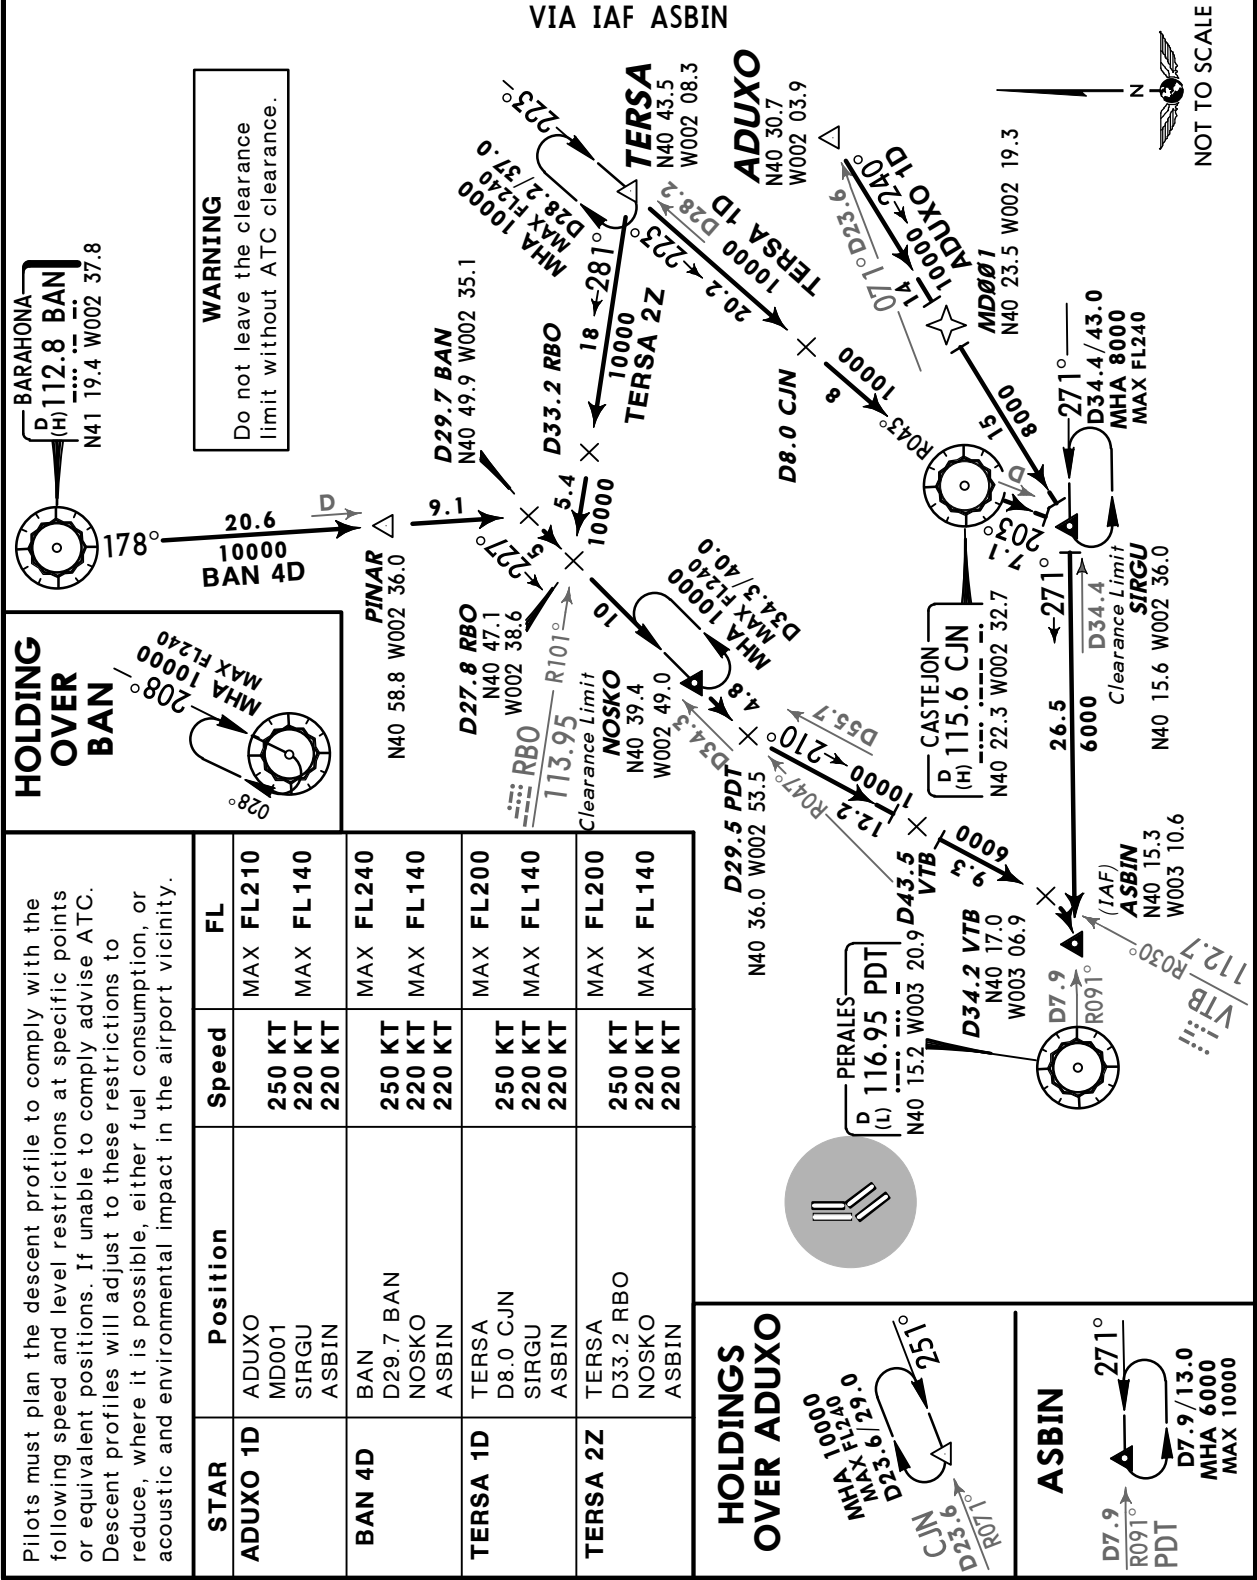


LEMD/MAD
BARAJAS

JEPPESSEN
14 SEP 12 10-2E Eff 20 Sep

MADRID, SPAIN
STAR

ATIS 118.25	Apt Elev 1998'	Alt Set: hPa Trans level: By ATC Trans alt: 13000' Within 10 NM radius of PDT between R-250 and R-074 and between 4000' and 5000' Ground Proximity Warning System (GPWS) alarm signal may occur due to orographic characteristics of terrain.
----------------	-------------------	--

NASOS ONE DELTA (NASOS 1D) [NASO1D]
PRADO ONE DELTA (PRADO 1D) [PRAD1D]
VILLA ONE DELTA (VILLA 1D) [VILA1D]
RWYS 32L/R ARRIVALS
VIA IAF ASBIN

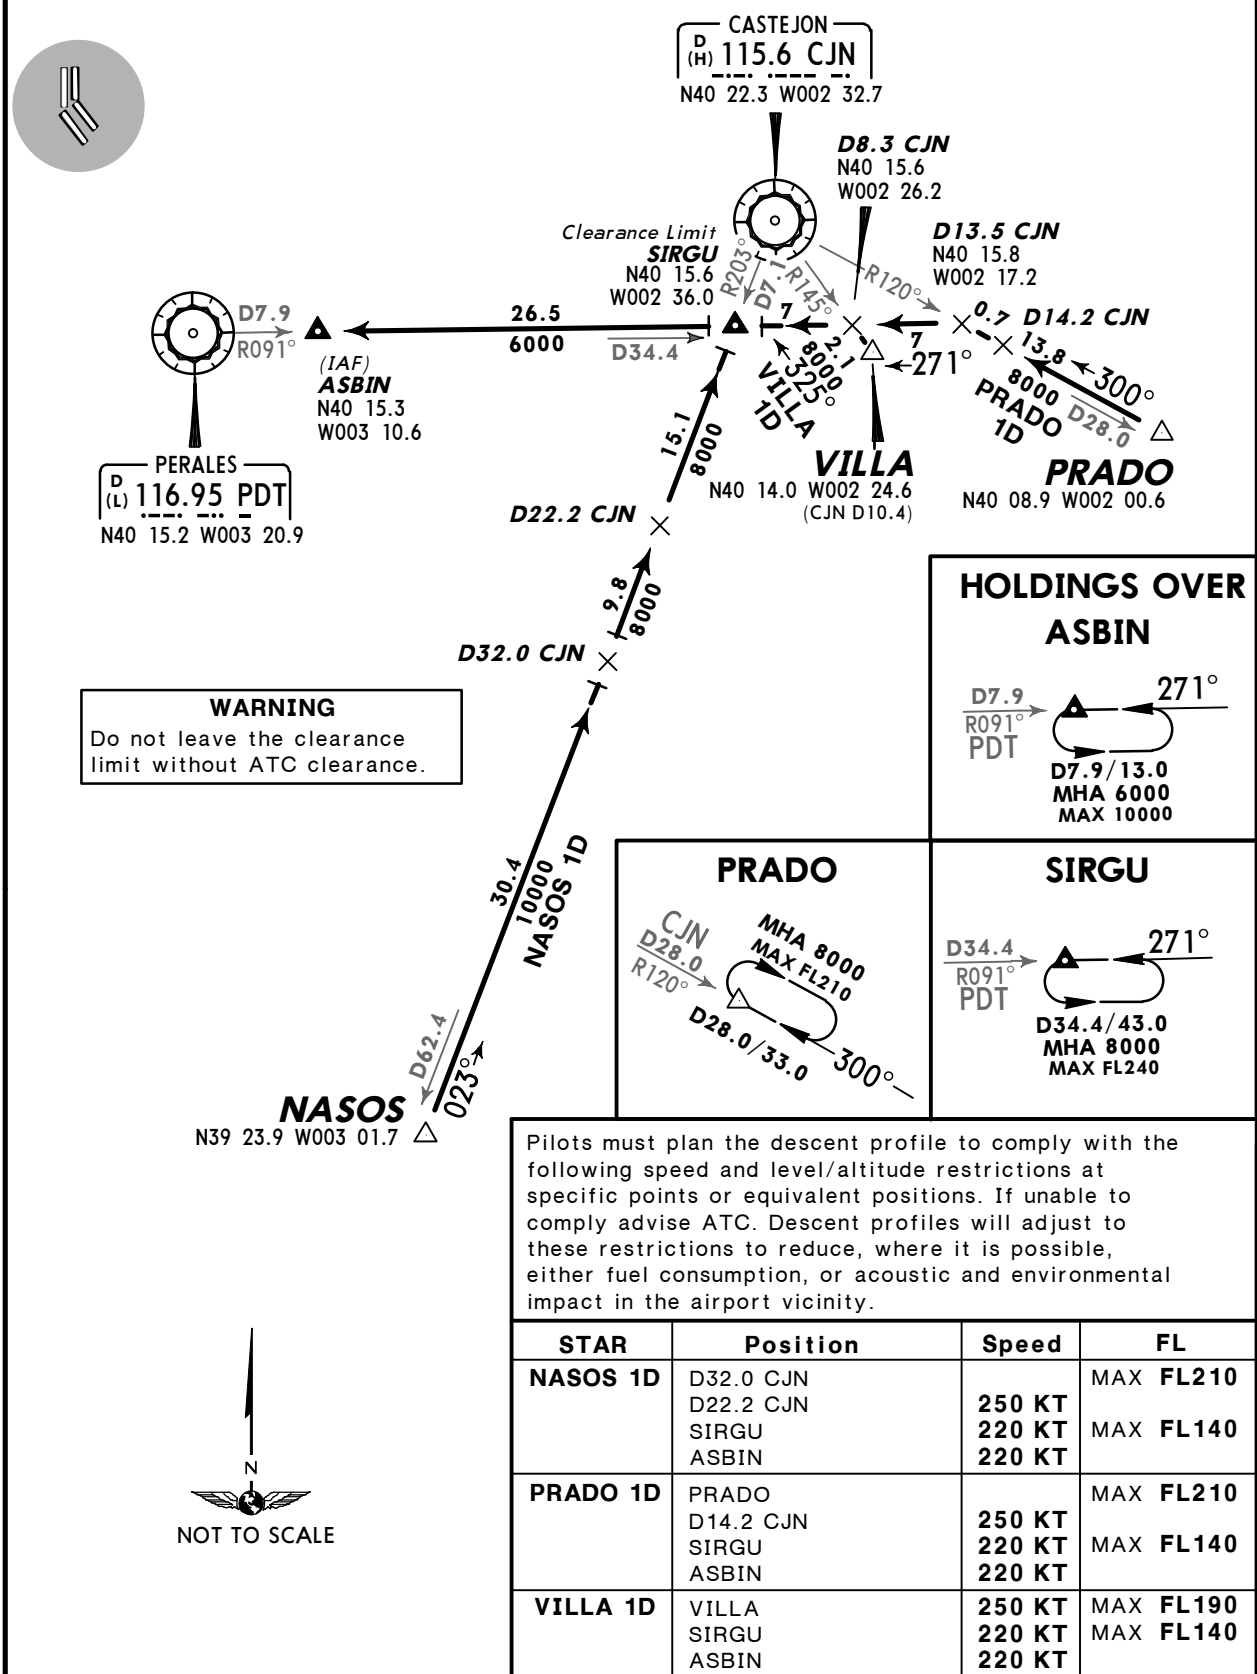


LEMD/MAD
BARAJAS

JEPPESSEN
8 NOV 13 10-2G Eff 14 Nov

MADRID, SPAIN
STAR

ATIS 118.25	Apt Elev 1998'	Alt Set: hPa Trans level: By ATC Trans alt: 13000' Within 10 NM radius of PDT between R-250 and R-074 and between 4000' and 5000' Ground Proximity Warning System (GPWS) alarm signal may occur due to orographic characteristics of terrain.
----------------	-------------------	--

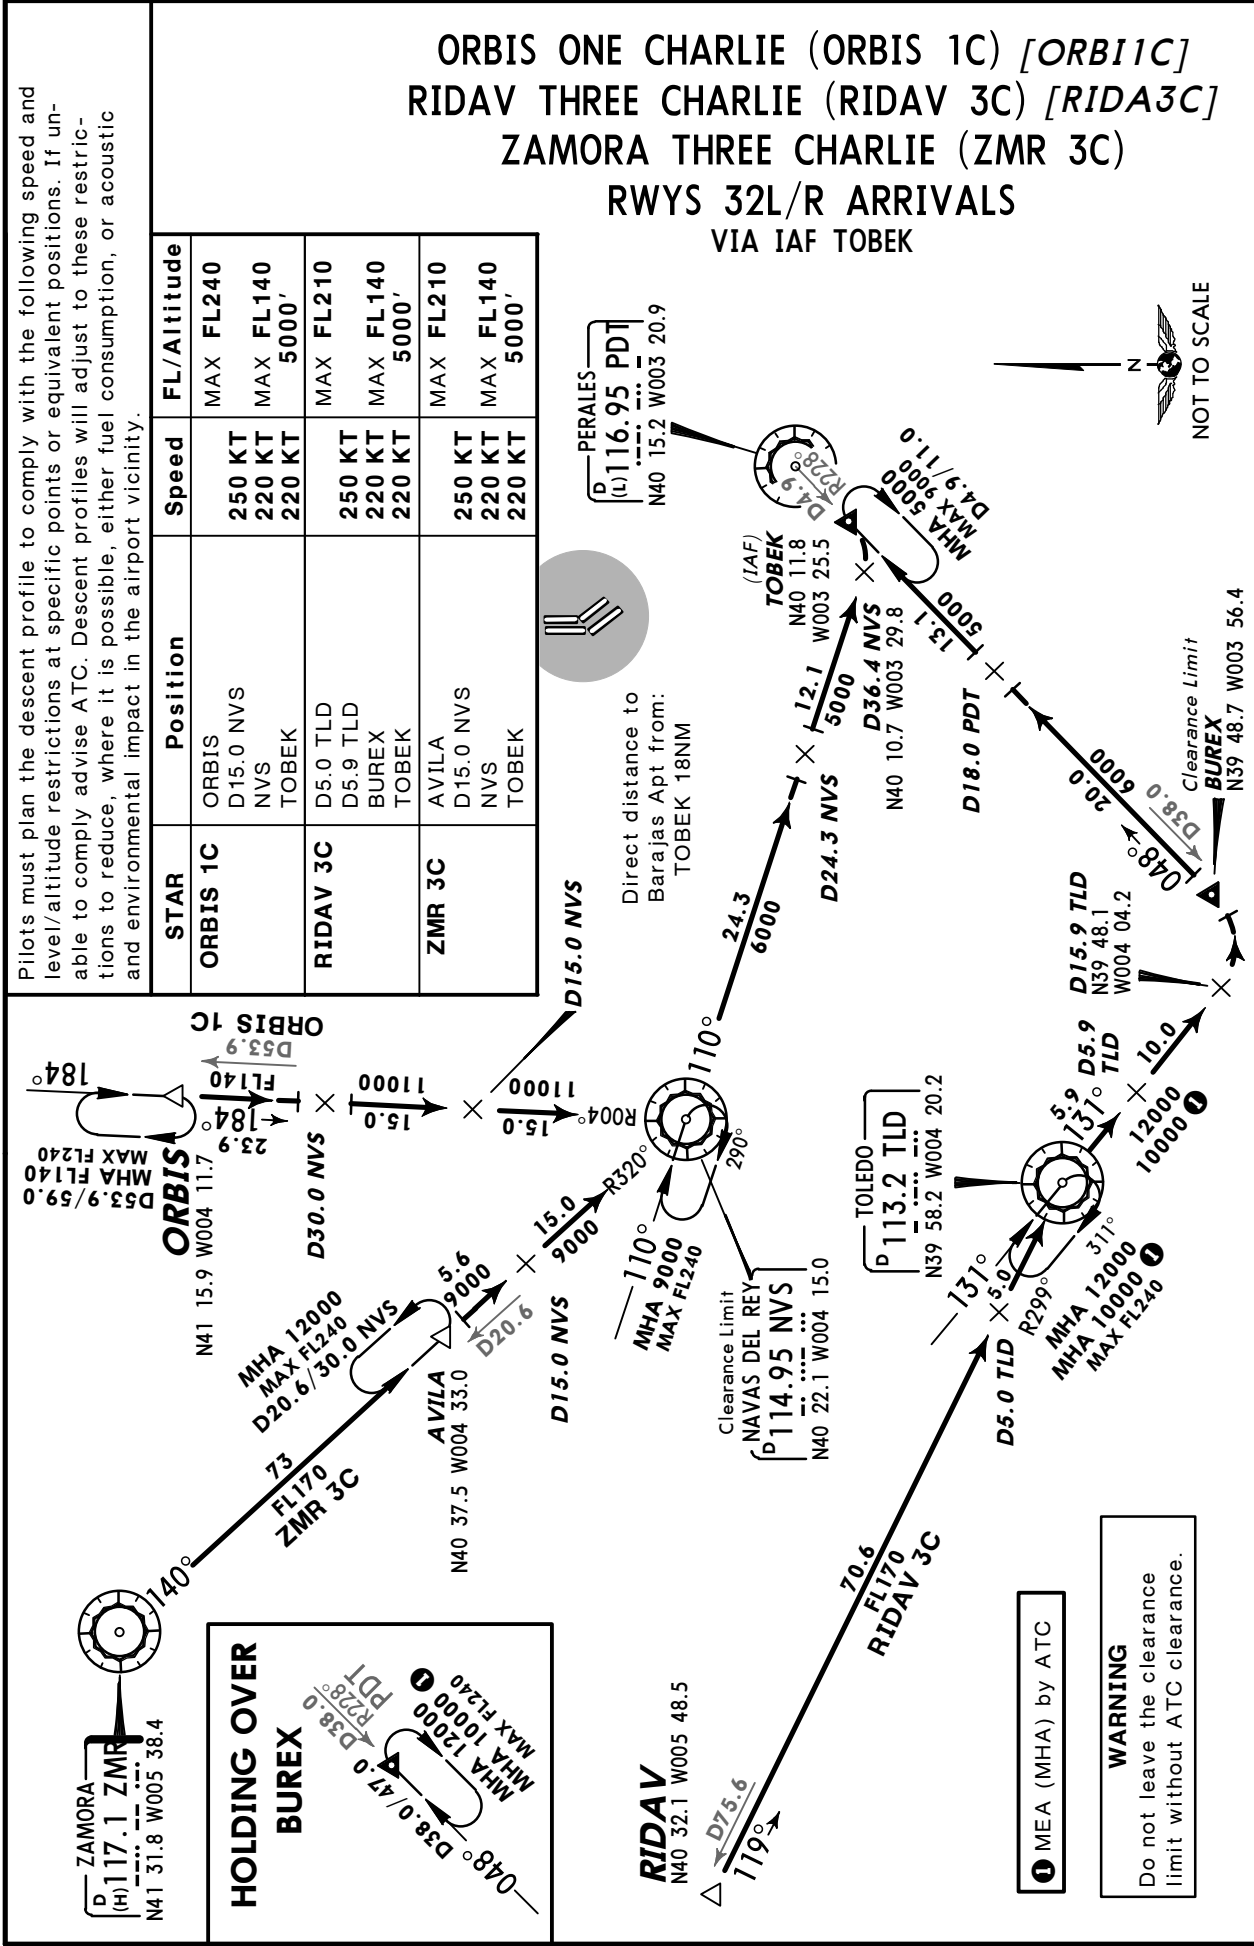


LEMD/MAD
BARAJAS

JEPPESSEN
8 NOV 13 10-2H Eff 14 Nov

MADRID, SPAIN
STAR

ATIS 118.25	Apt Elev 1998'	Alt Set: hPa Trans level: By ATC Trans alt: 13000' Within 10 NM radius of PDT between R-250 and R-074 and between 4000' and 5000' Ground Proximity Warning System (GPWS) alarm signal may occur due to orographic characteristics of terrain.
----------------	-------------------	---

MORAL THREE DELTA CHARLIE CHARLIE (MORAL 3DCC) [MO3DCC]
SOTUK ONE DELTA CHARLIE CHARLIE (SOTUK 1DCC) [SO1DCC]
TOLEDO TWO DELTA CHARLIE CHARLIE (TLD 2DCC) [TL2DCC]
RWYS 32L/R CONTINUOUS DESCENT ARRIVALS (CDA)
BY ATC
VIA IAF TOBEK
USABLE BETWEEN 0000-0700LT

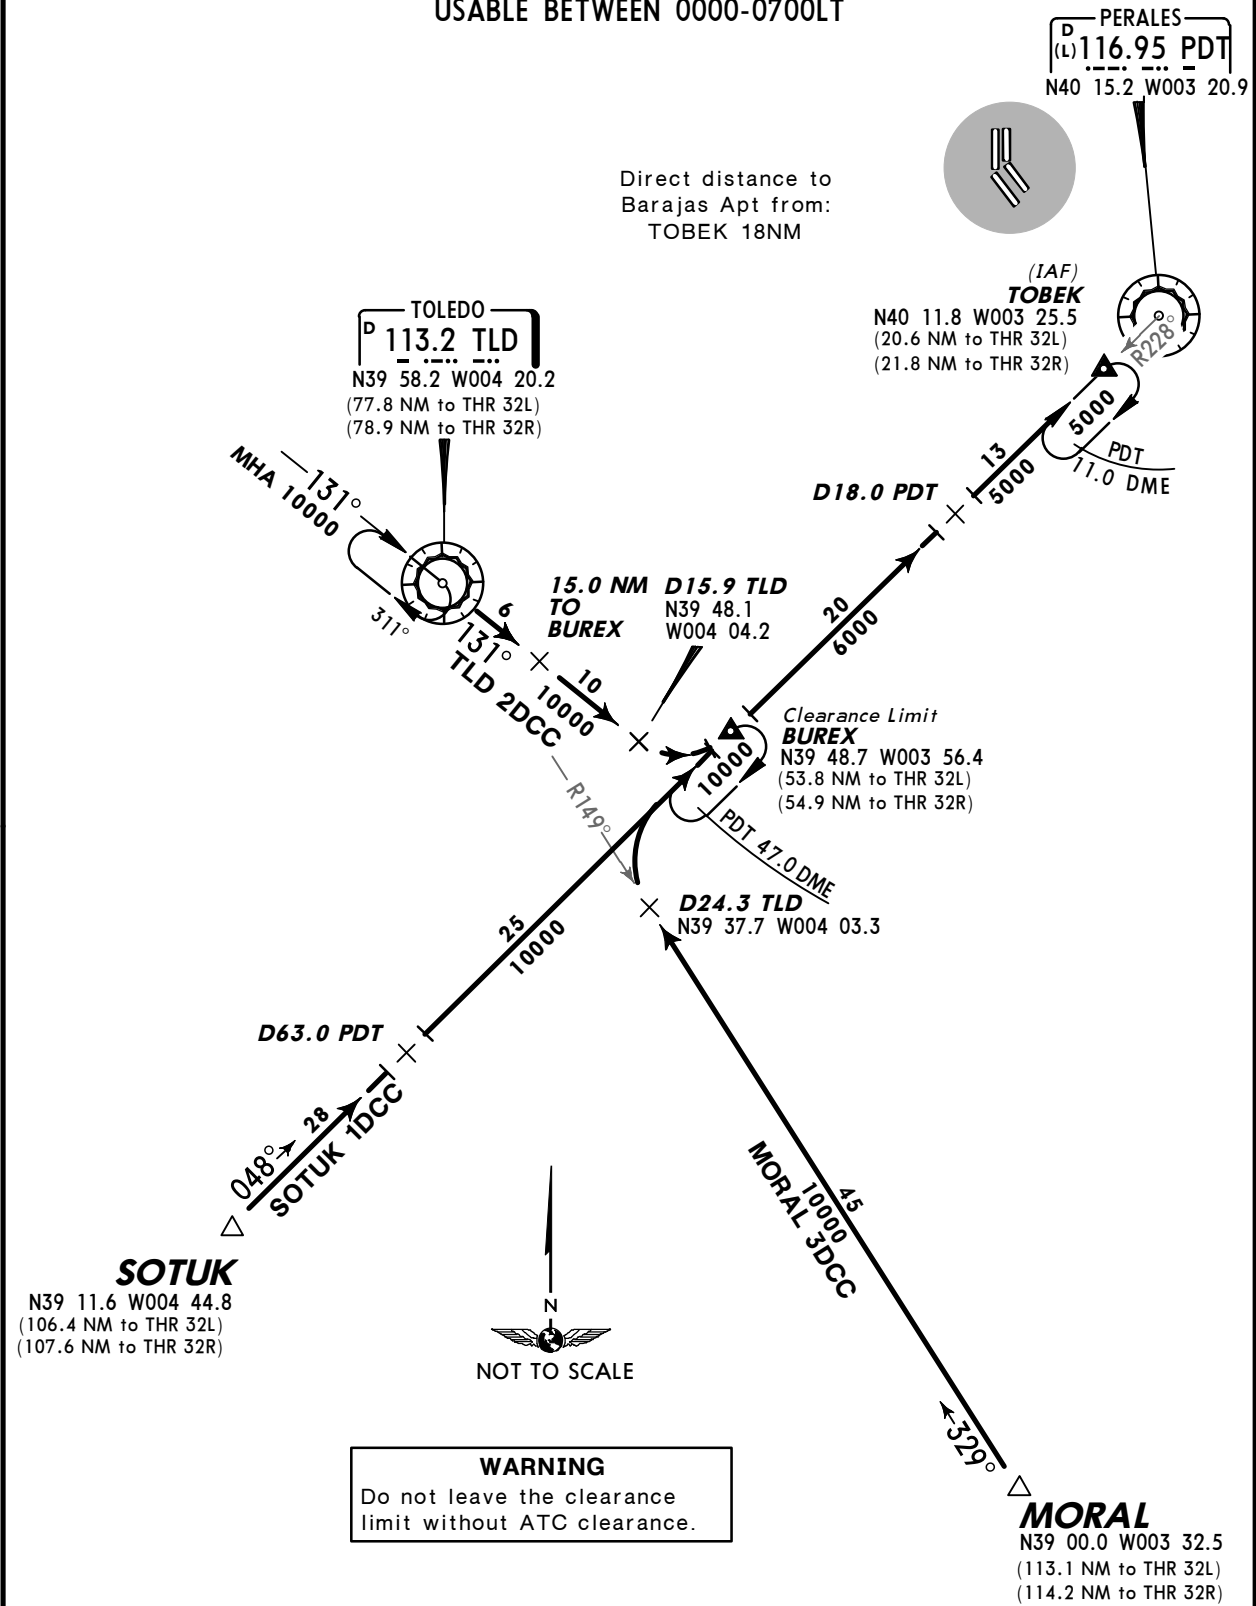


LEMD/MAD
BARAJAS

JEPPESSEN
8 NOV 13 10-2J Eff 14 Nov

MADRID, SPAIN
STAR

ATIS 118.25	Apt Elev 1998'	Alt Set: hPa Trans level: By ATC Trans alt: 13000' Within 10 NM radius of PDT between R-250 and R-074 and between 4000' and 5000' Ground Proximity Warning System (GPWS) alarm signal may occur due to orographic characteristics of terrain.
----------------	-------------------	--

ORBIS ONE DELTA CHARLIE CHARLIE (ORBIS 1DCC) [OR1DCC]
RIDAV THREE DELTA CHARLIE CHARLIE (RIDAV 3DCC) [RI3DCC]
ZAMORA ONE DELTA CHARLIE CHARLIE (ZMR 1DCC) [ZM1DCC]
RWYS 32L/R CONTINUOUS DESCENT ARRIVALS (CDA)
BY ATC
VIA IAF TOBEK
USABLE BETWEEN 0000-0700LT

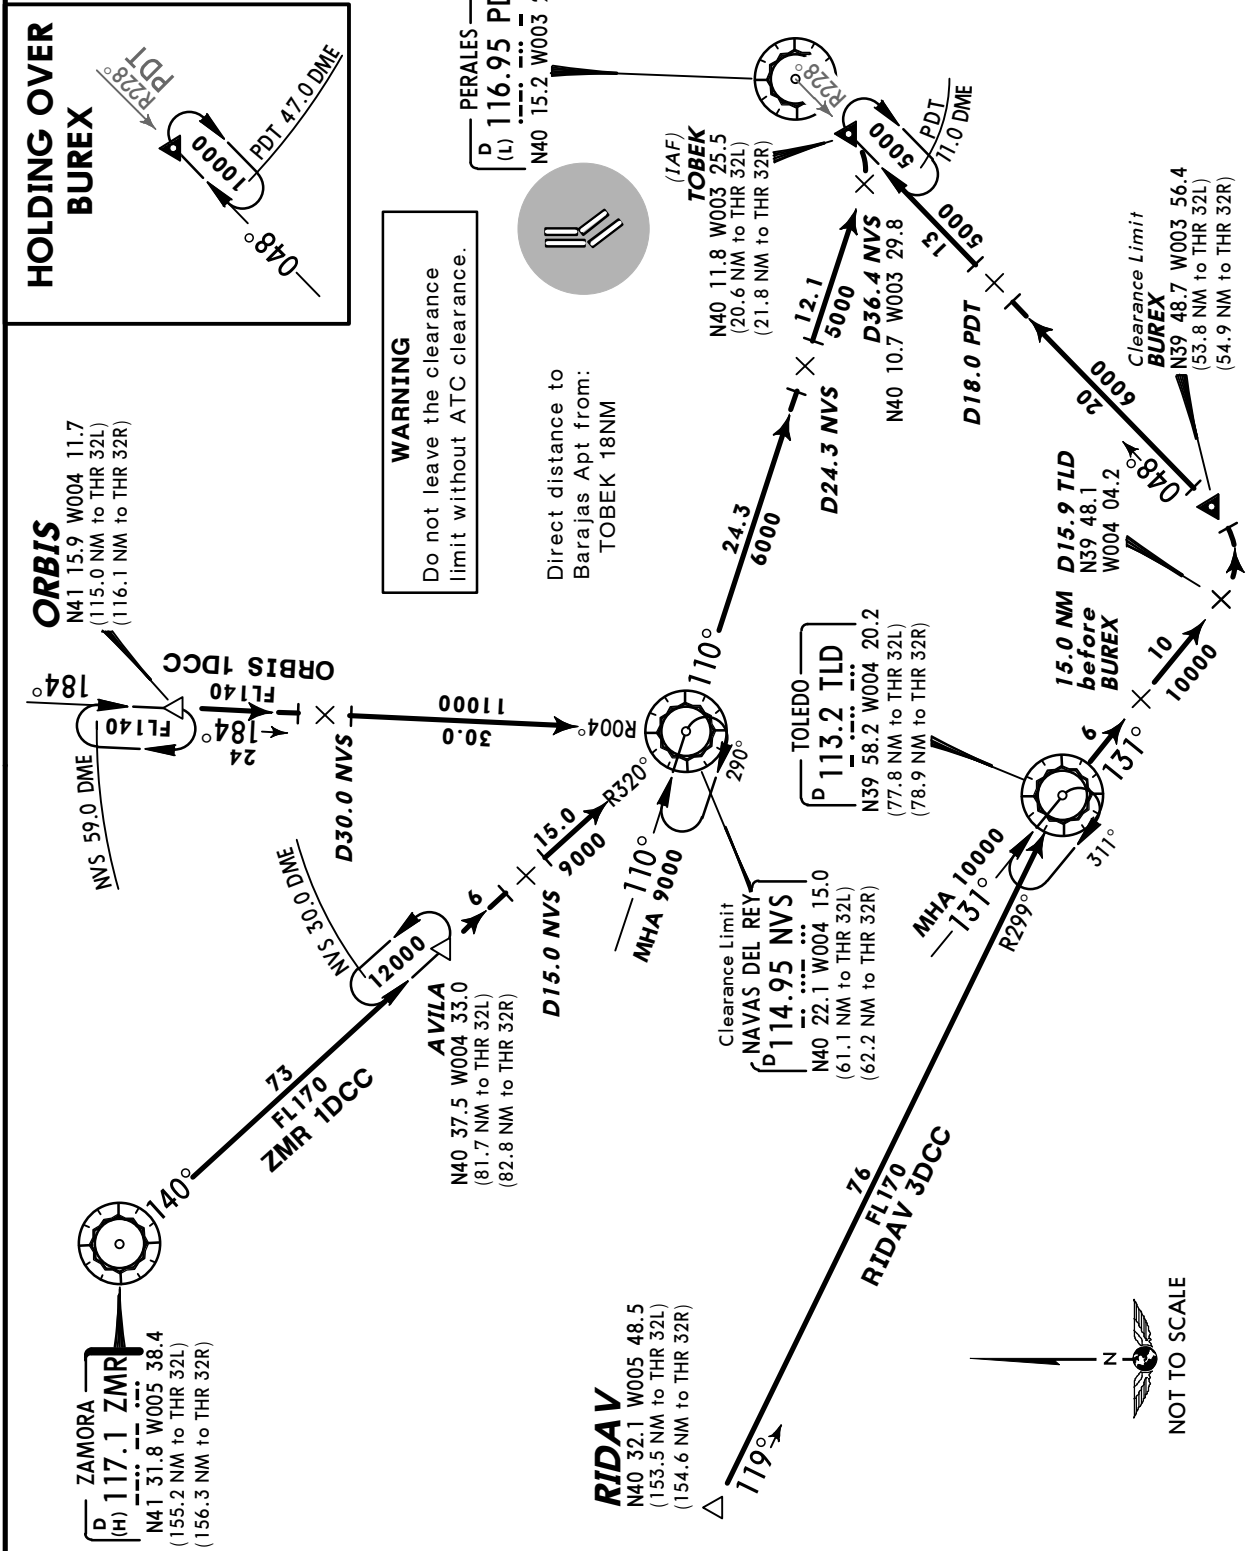

LEMD/MAD
BARAJAS

JEPPESSEN
14 SEP 12 10-2K Eff 20 Sep

MADRID, SPAIN
STAR

ATIS 118.25	Apt Elev 1998'	Alt Set: hPa Trans level: By ATC Trans alt: 13000' Within 10 NM radius of PDT between R-250 and R-074 and between 4000' and 5000' Ground Proximity Warning System (GPWS) alarm signal may occur due to orographic characteristics of terrain.
----------------	-------------------	--

ADUXO ONE DELTA CHARLIE DELTA (ADUXO 1DCD) [AD1DCD]
(B-RNAV)

B-RNAV APPROVAL REQUIRED


BARAHONA TWO DELTA CHARLIE DELTA (BAN 2DCD) [BA2DCD]

TERSA ONE DELTA CHARLIE DELTA (TERSA 1DCD) [TE1DCD]

RWYS 32L/R CONTINUOUS DESCENT ARRIVALS (CDA)
BY ATC

VIA IAF ASBIN

USABLE BETWEEN 0000LT-0700LT

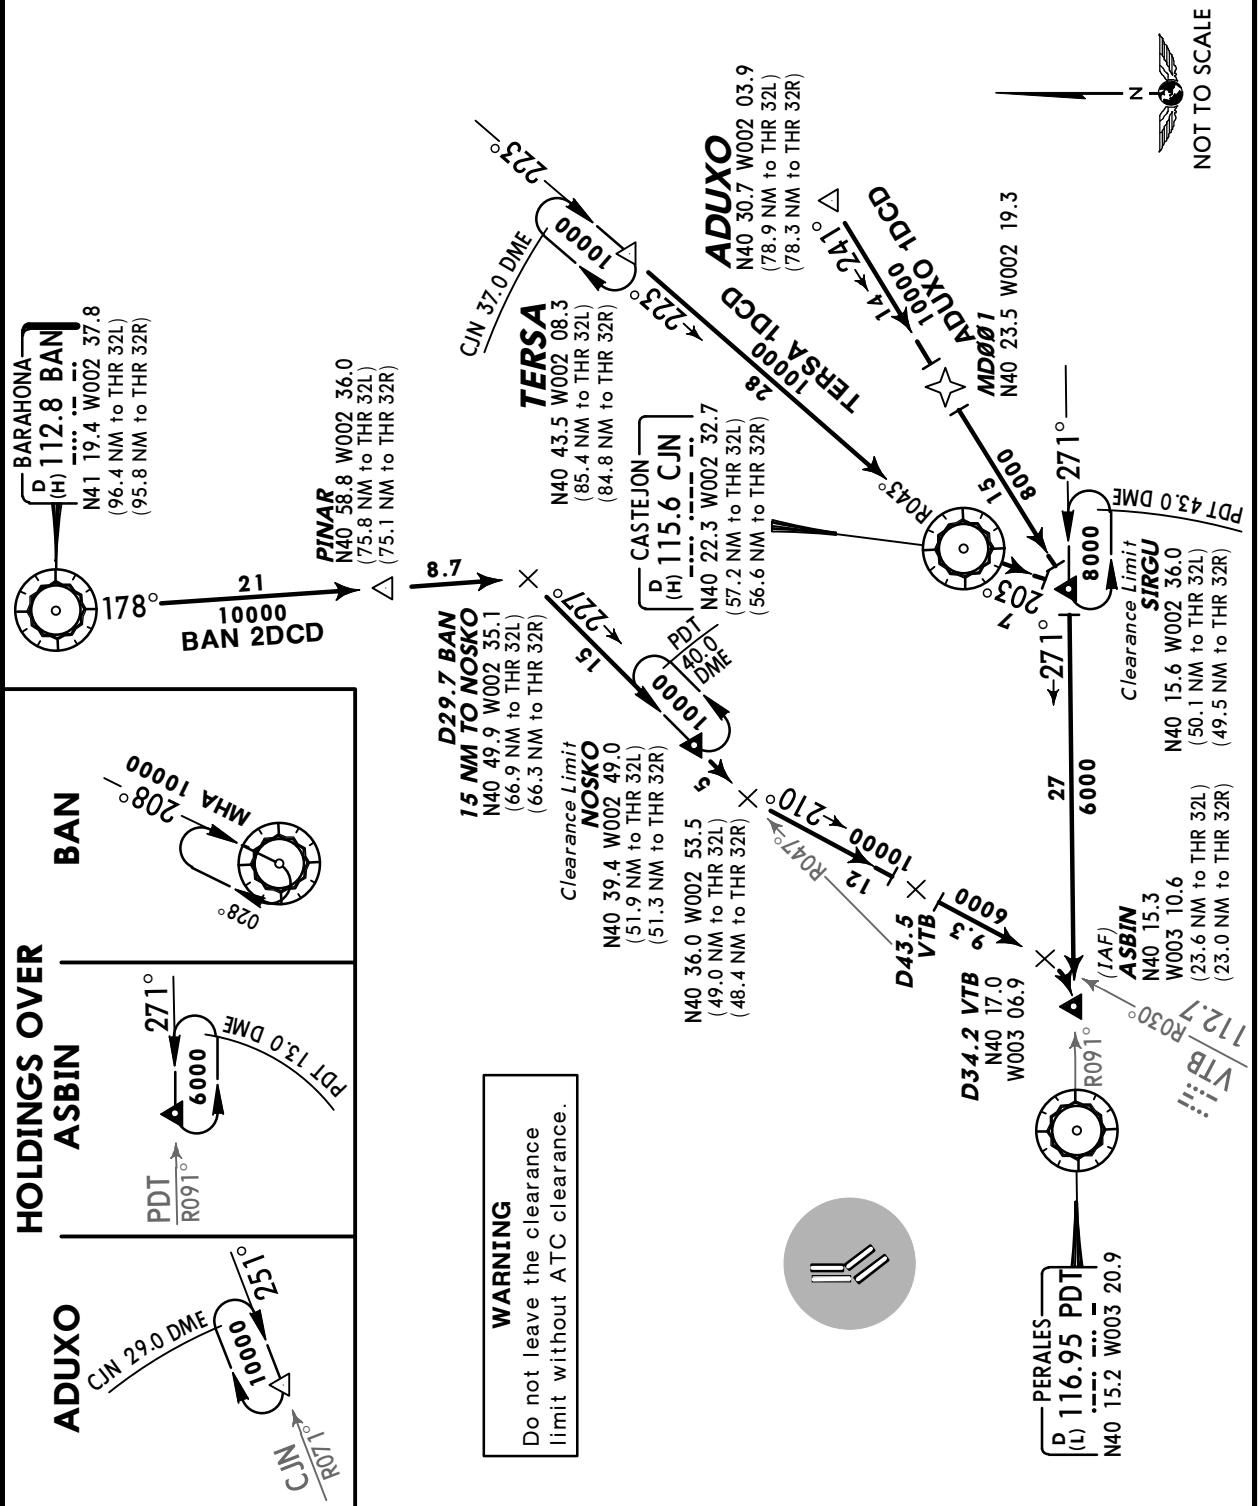


LEMD/MAD
BARAJAS

JEPPESSEN
14 SEP 12 10-2L Eff 20 Sep

MADRID, SPAIN
STAR

ATIS 118.25	Apt Elev 1998'	Alt Set: hPa Trans level: By ATC Trans alt: 13000' Within 10 NM radius of PDT between R-250 and R-074 and between 4000' and 5000' Ground Proximity Warning System (GPWS) alarm signal may occur due to orographic characteristics of terrain.
----------------	-------------------	--

NASOS ONE DELTA CHARLIE DELTA (NASOS 1DCD) [NA1DCD]
PRADO ONE DELTA CHARLIE DELTA (PRADO 1DCD) [PR1DCD]
VILLA ONE DELTA CHARLIE DELTA (VILLA 1DCD) [VI1DCD]
RWYS 32L/R CONTINUOUS DESCENT ARRIVALS (CDA)
BY ATC
VIA IAF ASBIN
USABLE BETWEEN 0000LT-0700LT

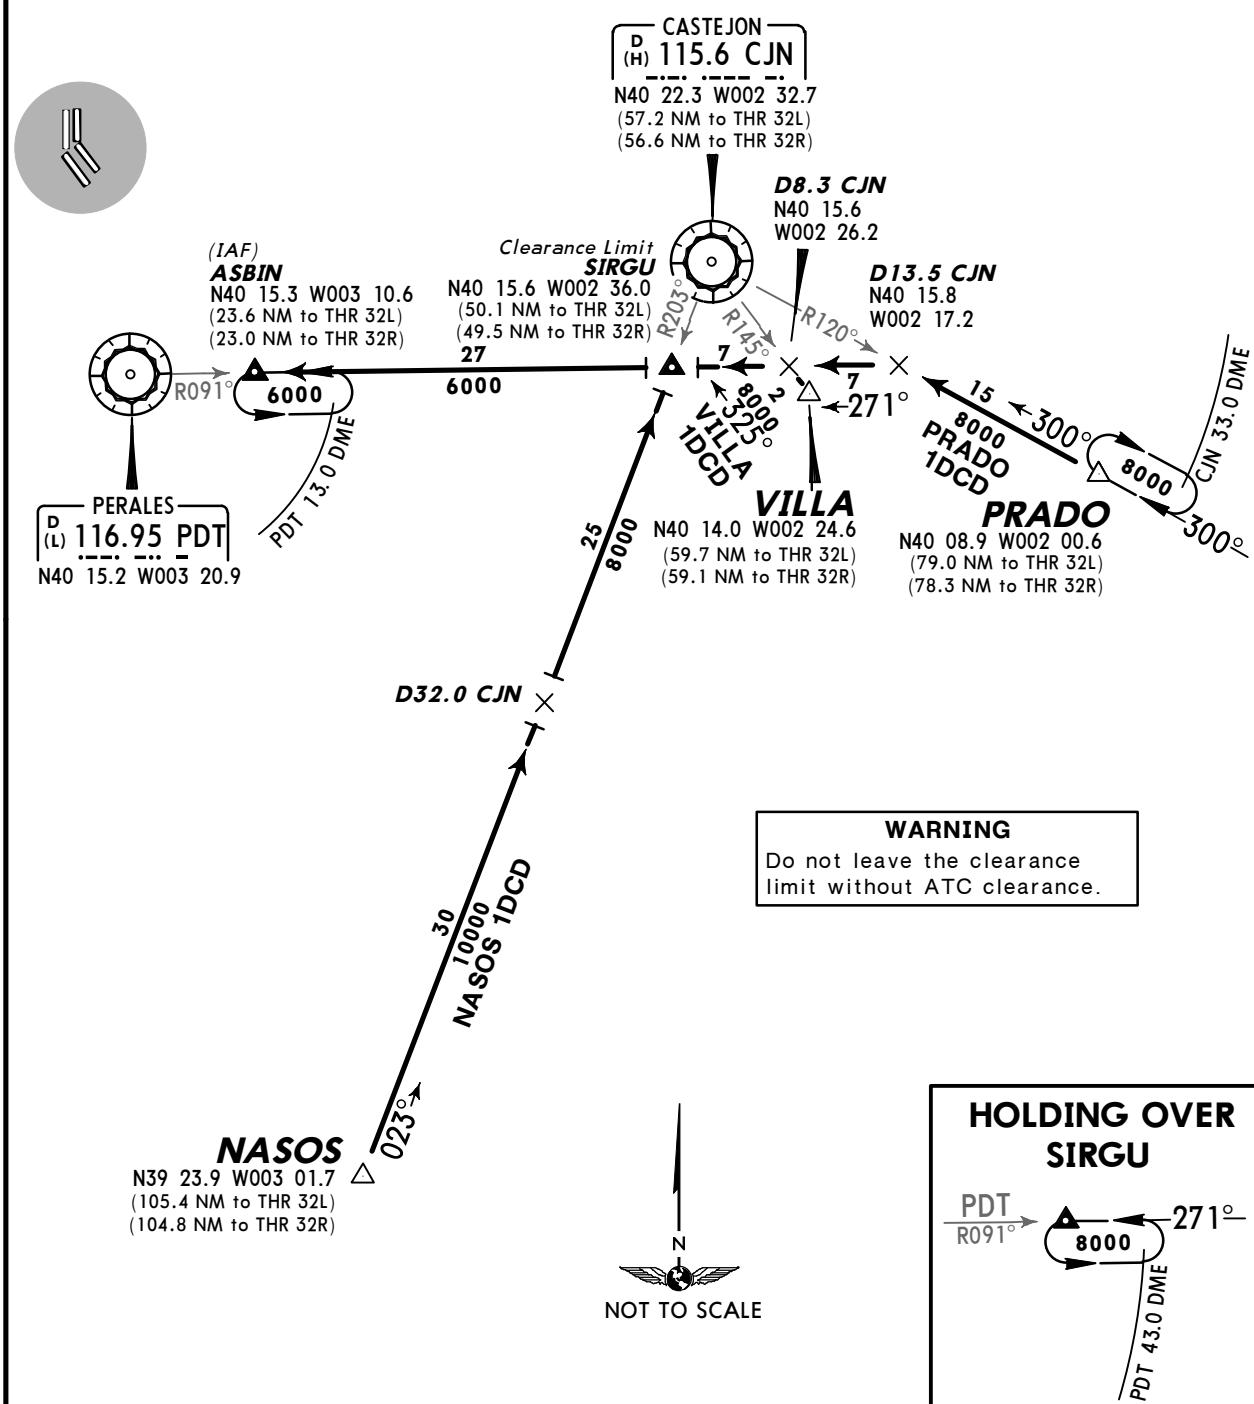

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS

MADRID, SPAIN
RNAV SID

RNAV SID DESIGNATION	REFER TO CHART
BARDI 2AS	10-3B
BARDI 1AX, 1AY	10-3C
CCS 2AS	10-3D
CCS 1AX, 1AY	10-3E
NANDO 3AR, 2AU	10-3F
PINAR 2AR	10-3G
PINAR 2AU	10-3H
RBO 2AR, 2AU	10-3J
SIE 1AL	10-3K
SIE 2AS	10-3L
VTB 2AS	10-3L1
VTB 1AX, 1AY	10-3L2
ZMR 1AL, 1AX	10-3L3
ZMR 2AS	10-3L4

FOR FURTHER SID DESIGNATION
REFER TO PAGE 10-3A

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS

 **JEPPESSEN**
 27 NOV 15 **(10-3A)** **Eff 10 Dec**

MADRID, SPAIN

SID

SID DESIGNATION	REFER TO CHART
BARDI 1B, 1Q, 1V	10-3M
BARDI 1K, 1T	10-3N
BARDI 1N, 4W	10-3N1
CACERES 2B, 1Q, 2V	10-3N2
CACERES 4W	10-3N3
CACERES 3N	10-3N4
CACERES 1K, 1T	10-3N5
NANDO 1B	10-3N6
NANDO 2N	10-3P
NANDO 1D, 5W	10-3Q
NANDO 1E, 1V	10-3S
PINAR 2B	10-3T
PINAR 2N	10-3T1
PINAR 1D, 5W	10-3T2
PINAR 1E, 1V	10-3T3
ROBLEDILLO 1B	10-3T4
ROBLEDILLO 1N	10-3T5
ROBLEDILLO 1D, 4W	10-3U
ROBLEDILLO 1E, 1V	10-3V
SOMOSIERRA 2B	10-3V1
SOMOSIERRA 1N, 1T	10-3V2
SOMOSIERRA 1K, 2W	10-3V3
SOMOSIERRA 1Q	10-3V4
SOMOSIERRA 2V	10-3V5
VILLATOBAS 1B, 1Q, 1V	10-3V6
VILLATOBAS 1K, 1T	10-3V7
VILLATOBAS 1N	10-3W
VILLATOBAS 1D, 6W	10-3X
ZAMORA 1B, 1Q, 1V	10-3X1
ZAMORA 1K, 1N, 1T	10-3X2
ZAMORA 2W	10-3X3
CONTINGENCY DEPS	10-3X4

--	--


LEMD/MAD
BARAJAS

JEPPESEN
9 AUG 13 10-3B Eff 22 Aug


MADRID, SPAIN
RNAV SID

Apt Elev
1998'

Trans level: By ATC Trans alt: 13000'
SIDs are also noise abatement procedures (refer to 10-4).



BARDI 2AS [BAR2AS]
RWY 14R P-RNAV DEPARTURE
USABLE BETWEEN 0700-2300LT
RNAV (DME/DME)
P-RNAV APPROVAL REQUIRED
SUBJECT TO LE(R)-71B & LE(R)-71C ACTIVITY
~~SPEED~~ MAX 250 KT BELOW 10000'

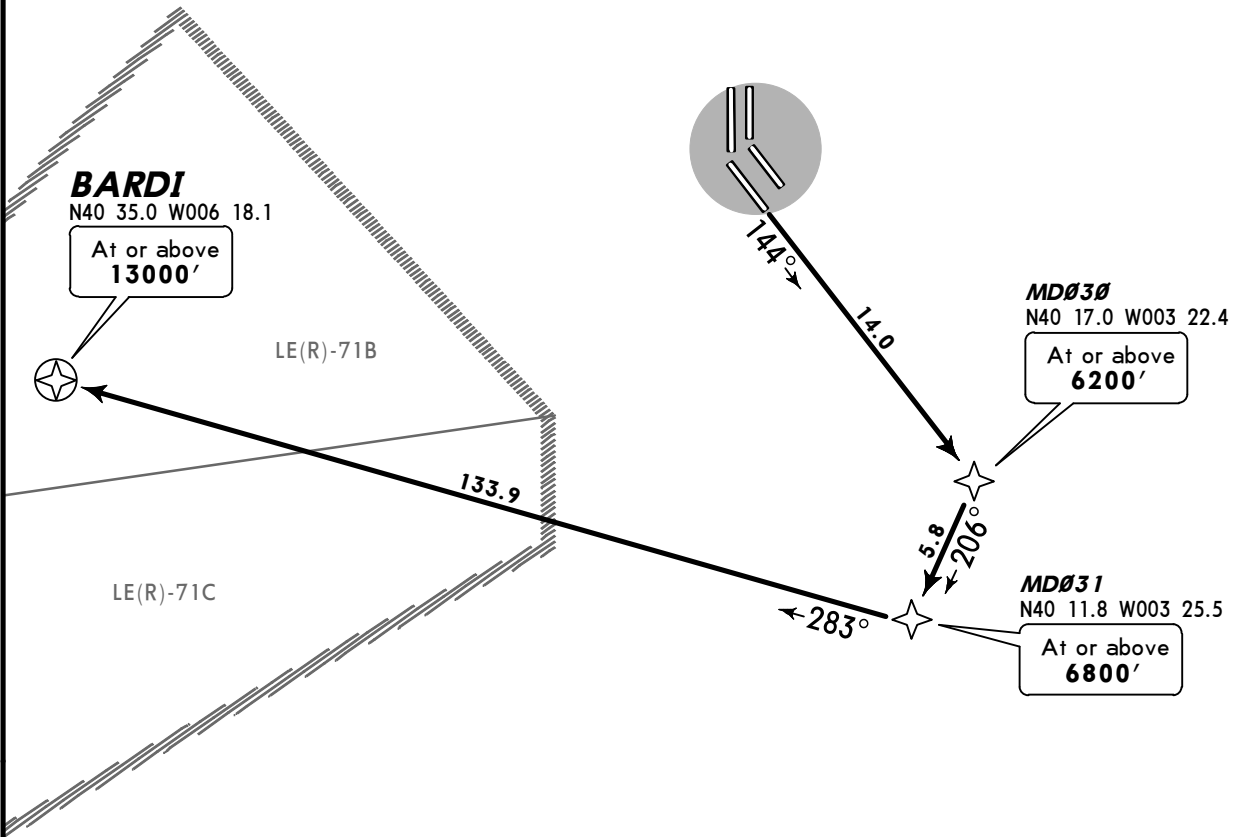

This SID requires a minimum climb gradient
of
5.5% until MD030.

Gnd speed-KT	75	100	150	200	250	300
5.5% V/V(fpm)	418	557	835	1114	1392	1671

Initial ATC clearance: Maintain **13000'** and request flight level change enroute

ROUTING

(2400'+) - MD030 (6200'+) - MD031 (6800'+) - BARDI (13000'+).

CHANGES: None.

© JEPPESEN, 2003, 2012. ALL RIGHTS RESERVED.

LEMD/MAD
BARAJAS

JEPPESSEN
9 AUG 13 10-3C Eff 22 Aug

MADRID, SPAIN
RNAV SID

Apt Elev
1998'

Trans level: By ATC Trans alt: 13000'
1. SIDs are also noise abatement procedures (refer to 10-4).
2. EXPECT close-in obstacles.

BARDI 1AX [BAR1AX], BARDI 1AY [BAR1AY]
RWY 36L P-RNAV DEPARTURES

USABLE BETWEEN 0700-2300LT



RNAV (DME/DME)

P-RNAV APPROVAL REQUIRED

SUBJECT TO LE(R)-71B & LE(R)-71C ACTIVITY

FOR AIRCRAFT USABILITY REFER TO AIRPORT BRIEFING PAGES

***SPEEDS* MAX 250 KT BELOW 10000'**

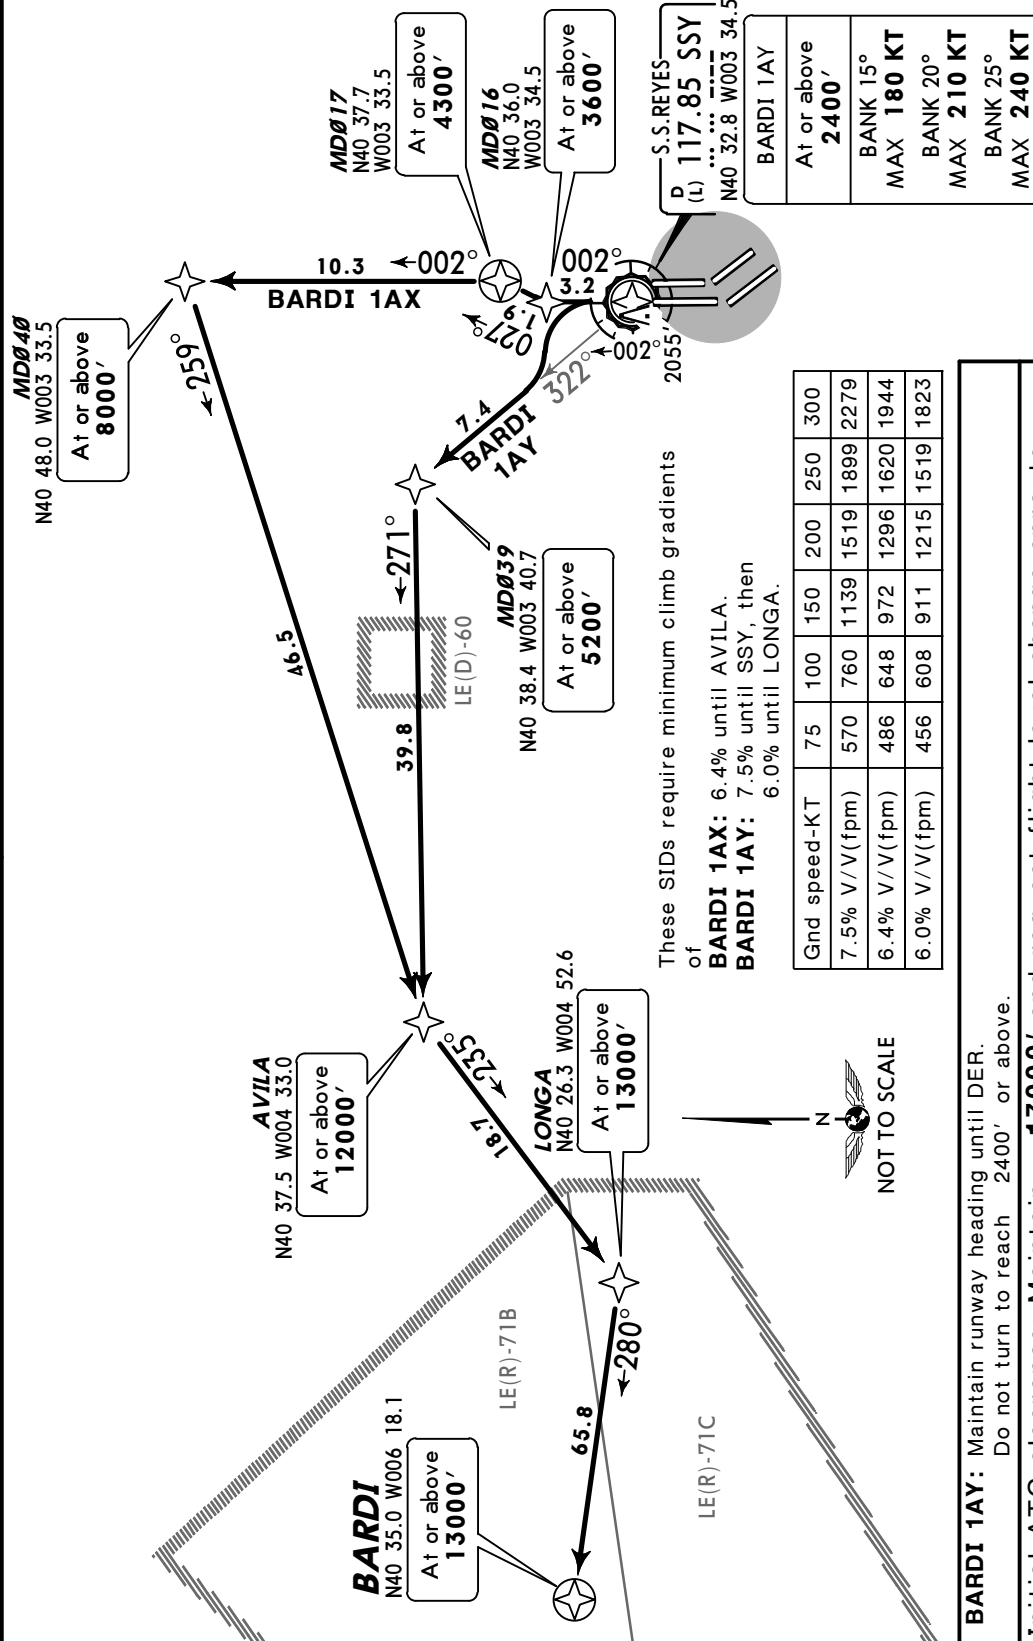

BARDI 1AY: Maintain runway heading until DER.
Do not turn to reach 2400' or above.

Initial ATC clearance: Maintain **13000'** and request flight level change enroute

ROUTING	
BARDI 1AX	MD016 (3600'+) - MD017 (4300'+) - MD040 (8000'+) - AVILA (12000'+) - LONGA
BARDI 1AY	SSY (2400'+; K180-/K210-/K240-) - MD039 (5200'+) - AVILA (12000'+) - LONGA
① Subject to LE(D)-60 activity.	


LEMD/MAD
BARAJAS

JEPPESEN
14 SEP 12 10-3D Eff 20 Sep


MADRID, SPAIN
RNAV SID

Apt Elev
1998'

Trans level: By ATC Trans alt: 13000'
SIDs are also noise abatement procedures (refer to 10-4).



CCS 2AS
RWY 14R P-RNAV DEPARTURE
USABLE BETWEEN 0700-2300LT
RNAV (DME/DME)
P-RNAV APPROVAL REQUIRED
~~SPEED~~ MAX 250 KT BELOW 10000'

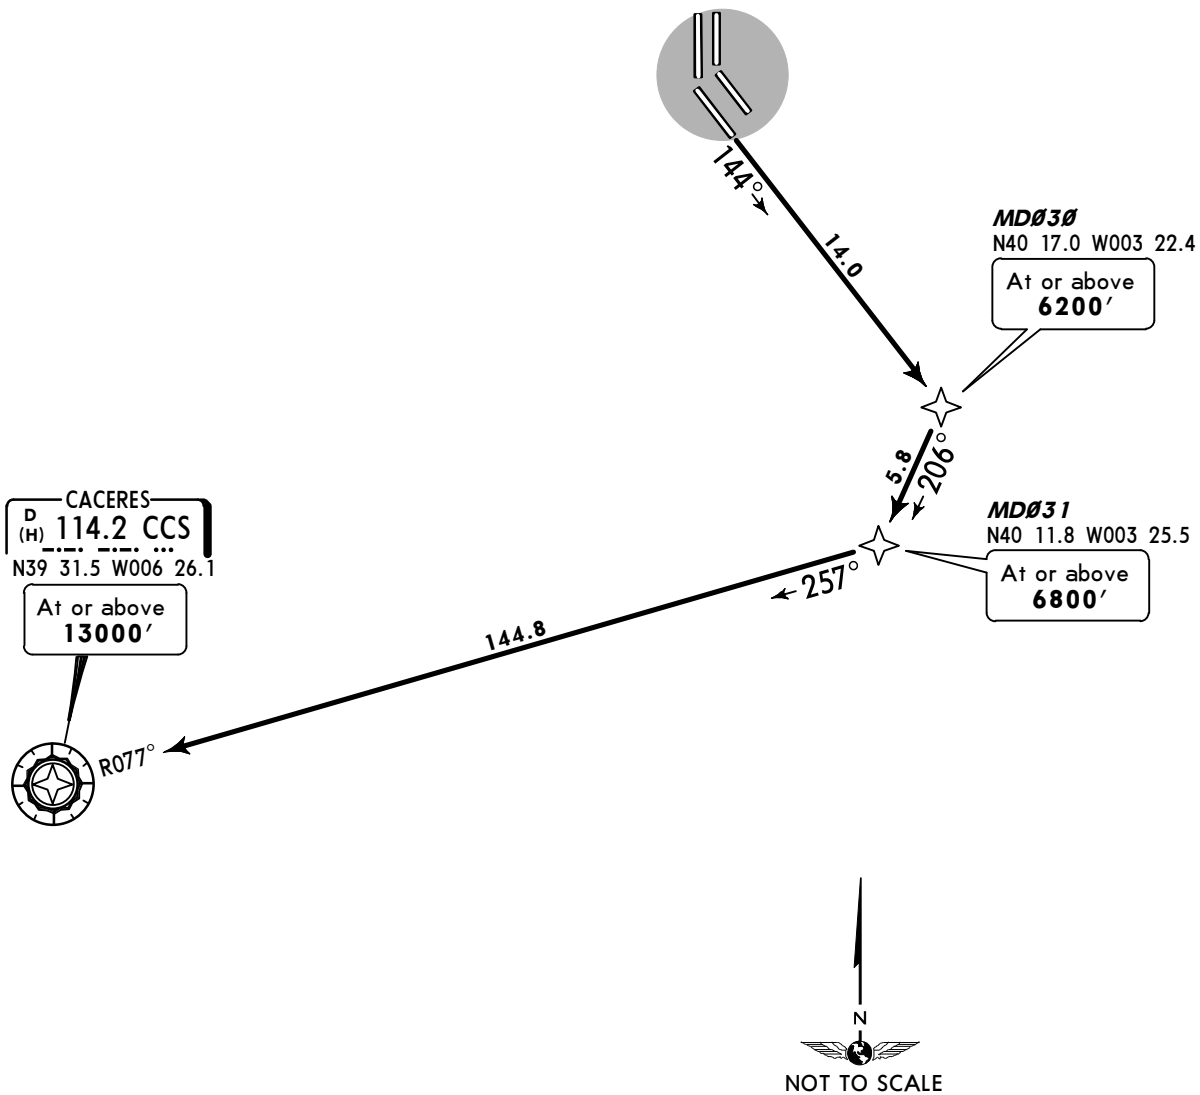

This SID requires a minimum climb gradient
of
5.5% until MD030.

Gnd speed-KT	75	100	150	200	250	300
5.5% V/V(fpm)	418	557	835	1114	1392	1671

Initial ATC clearance: Maintain **13000'** and request flight level change enroute

ROUTING

(2400'+) - MD030 (6200'+) - MD031 (6800'+) - CCS (13000'+).

LEMD/MAD
BARAJAS

JEPPESSEN
14 SEP 12 10-3E Eff 20 Sep

MADRID, SPAIN
RNAV SID

Apt Elev
1998'

Trans level: By ATC Trans alt: 13000'
1. SIDs are also noise abatement procedures (refer to 10-4). 2. EXPECT close-in
obstacles.

CCS 1AX, CCS 1AY
RWY 36L P-RNAV DEPARTURES



USABLE BETWEEN 0700-2300LT

RNAV (DME/DME)

P-RNAV APPROVAL REQUIRED

FOR AIRCRAFT USABILITY REFER TO AIRPORT BRIEFING PAGES

SPEEDS MAX 250 KT BELOW 10000'

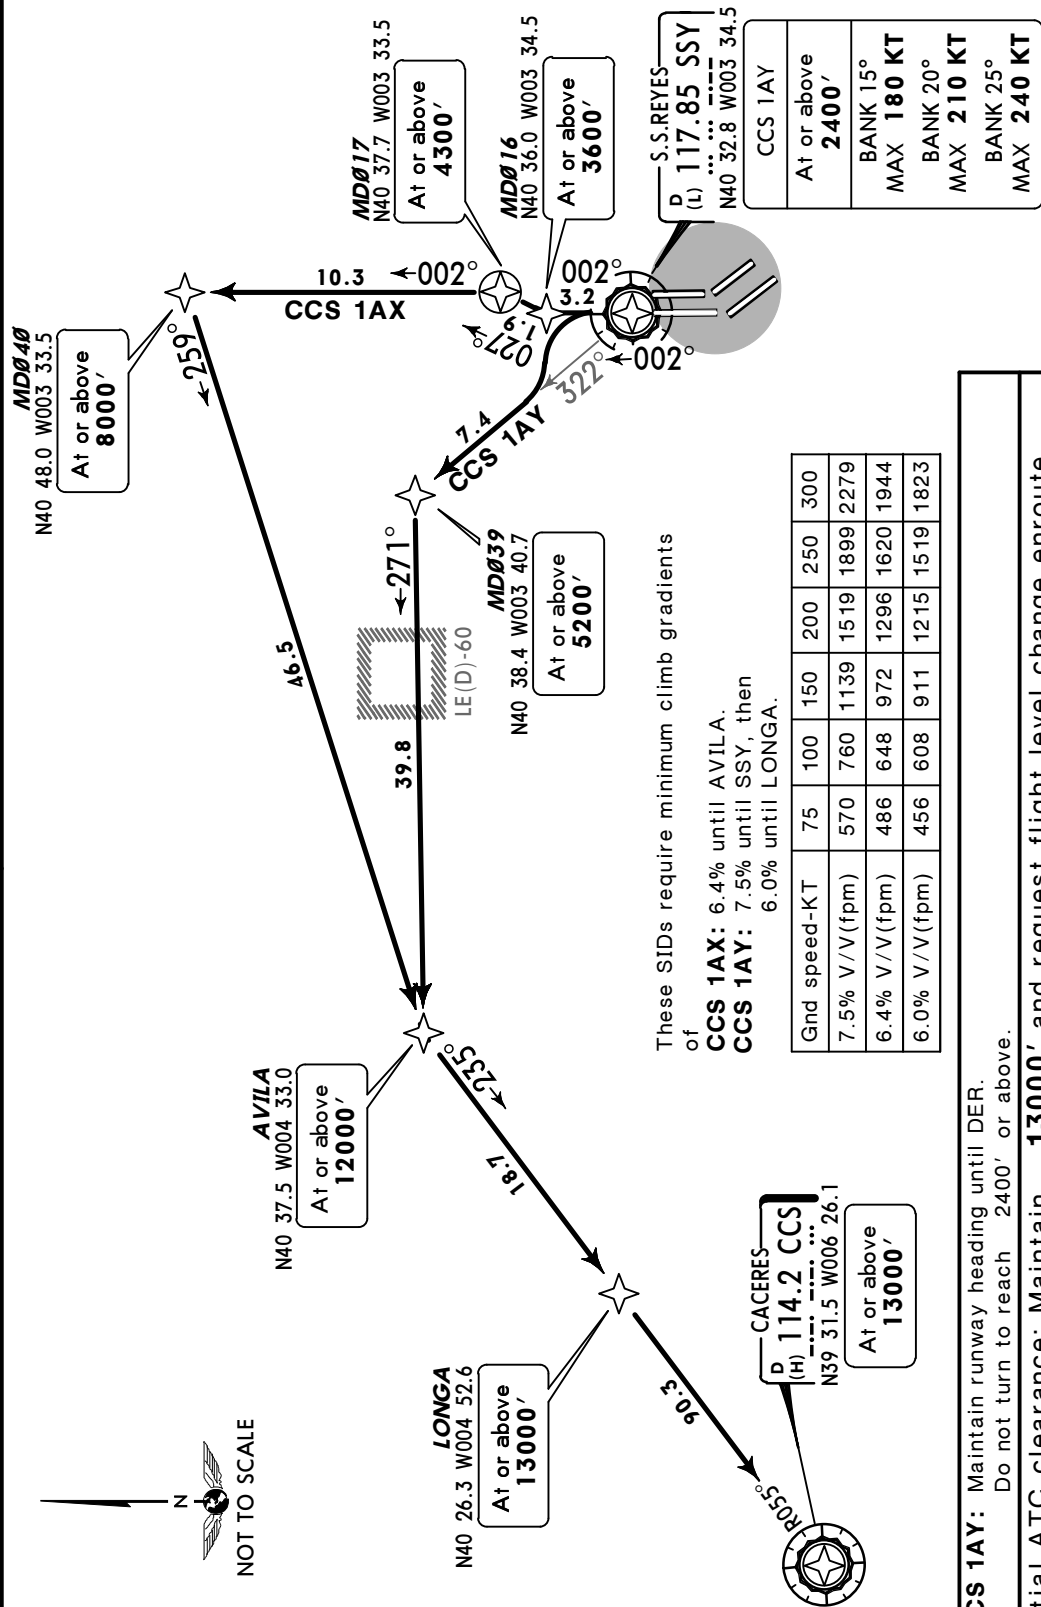


LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS

JEPPesen
12 DEC 14 10-3F


MADRID, SPAIN
RNAV SID

Apt Elev
1998'

Trans level: By ATC Trans alt: 13000'
1. SIDs are also noise abatement procedures (refer to 10-4).
2. EXPECT close-in obstacles



NANDO 3AR [NAN3AR]
NANDO 2AU [NAN2AU]
RWYS 36R, 14L P-RNAV DEPARTURES
USABLE BETWEEN 0700-2300LT
RNAV (DME/DME)
P-RNAV APPROVAL REQUIRED
SPEED: MAX 250 KT BELOW 10000'

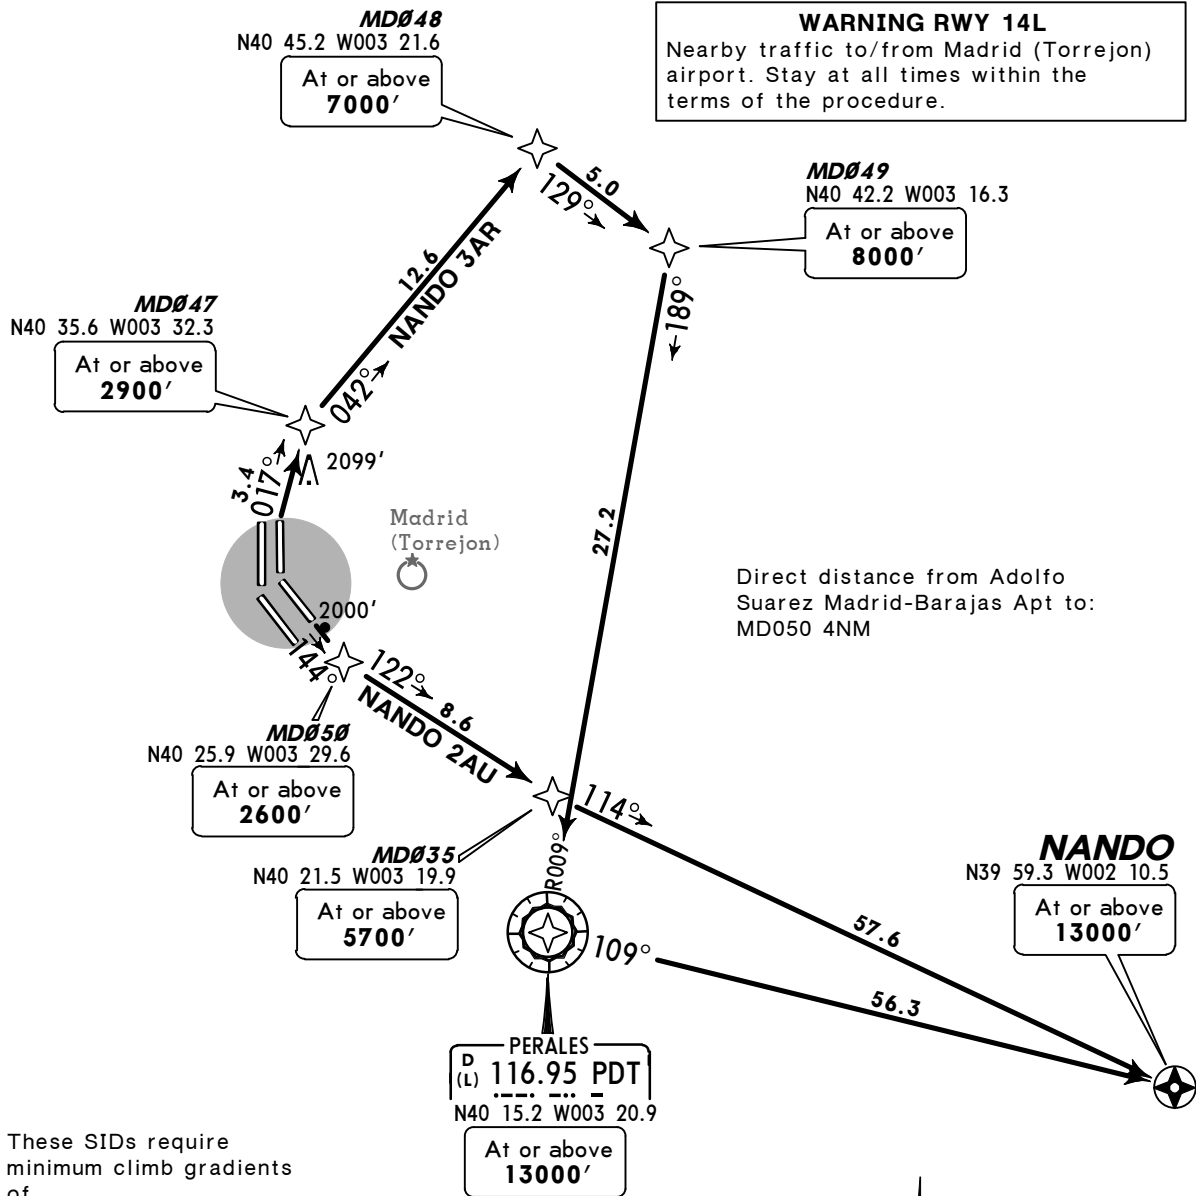

These SIDs require minimum climb gradients of
NANDO 3AR: 6.0% until PDT.
NANDO 2AU: 7.0% until MD050, then 5.5% until MD035.

Gnd speed-KT	75	100	150	200	250	300
7.0% V/V(fpm)	532	709	1063	1418	1772	2127
6.0% V/V(fpm)	456	608	911	1215	1519	1823
5.5% V/V(fpm)	418	557	835	1114	1392	1671



Initial ATC clearance: Maintain **13000'** and request flight level change enroute

SID	RWY	ROUTING
NANDO 3AR	36R	MD047 (2900'+) - MD048 (7000'+) - MD049 (8000'+) - PDT (13000'+) - NANDO (13000'+).
NANDO 2AU	14L	MD050 (2600'+) - MD035 (5700'+) - NANDO (13000'+).


LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS

JEPPESEN
12 DEC 14 10-3G


MADRID, SPAIN
RNAV SID

Apt Elev
1998'

Trans level: By ATC Trans alt: 13000'
1. SIDs are also noise abatement procedures (refer to 10-4).
2. EXPECT close-in obstacles



PINAR 2AR [PIN2AR]
RWY 36R P-RNAV DEPARTURE
USABLE BETWEEN 0700-2300LT
RNAV (DME/DME)
P-RNAV APPROVAL REQUIRED
SPEED: MAX 250 KT BELOW 10000'

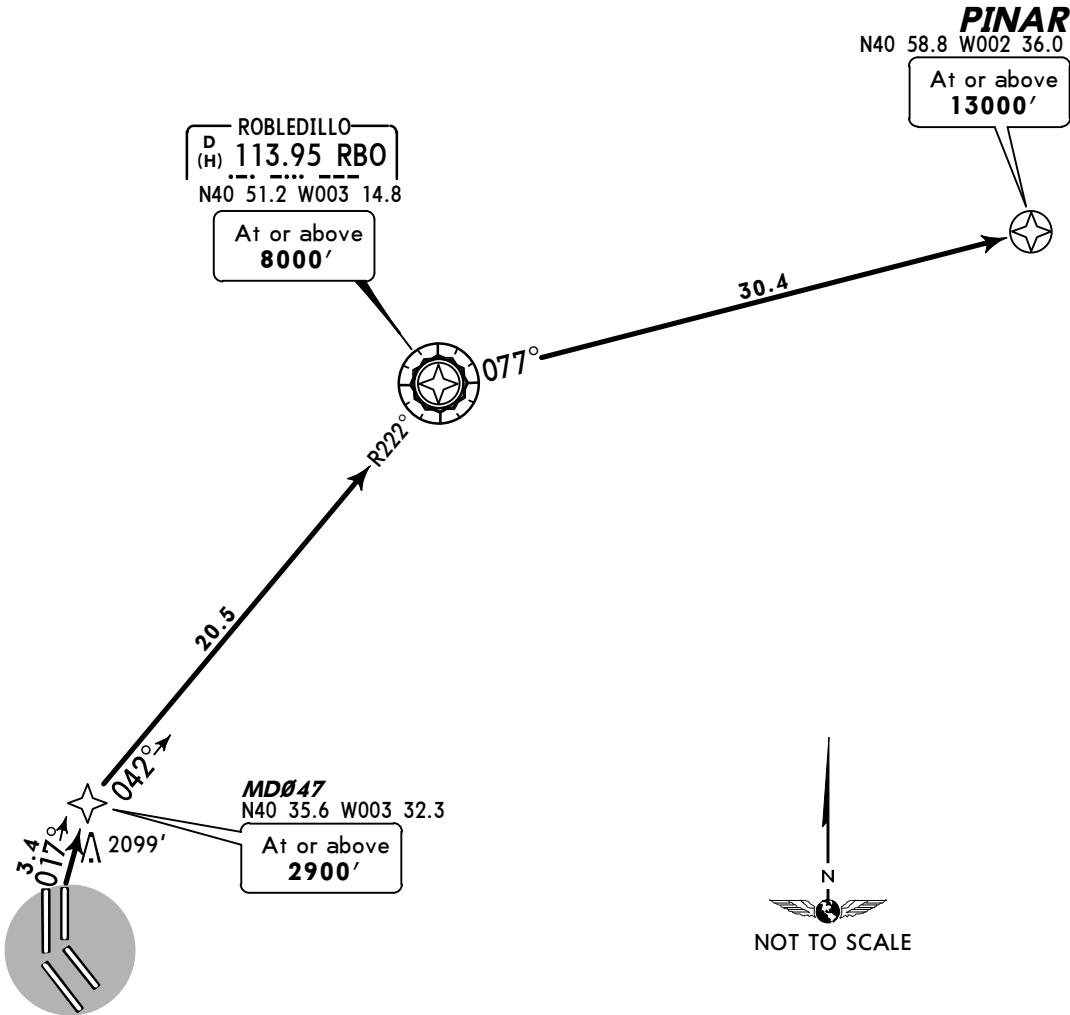

This SID requires a minimum climb gradient
of
5.0% until RBO.

Gnd speed-KT	75	100	150	200	250	300
5.0% V/V(fpm)	380	506	760	1013	1266	1519

Initial ATC clearance: Maintain **13000'** and request flight level change enroute

ROUTING

MD047 (2900'+) - RBO (8000'+) - PINAR (13000'+).

PINAR
N40 58.8 W002 35.9
At or above
13000'

077°

30.4

WARNING
Nearby traffic to/from Madrid (Torrejon) airport. Stay at all times within the terms of the procedure.



NOT TO SCALE

29.2

MD051
N40 22.3 W003 19.7
At or above
5700'

This SID requires minimum climb gradients
of
7.0% until MD050, then
6.0% until RBO.

Gnd speed-KT	75	100	150	200	250	300
7.0% V/V(fpm)	532	709	1063	1418	1772	2127
6.0% V/V(fpm)	456	608	911	1215	1519	1823

Initial ATC clearance: Maintain **13000'** and request flight level change enroute

ROUTING

MD050 (2600'+) - MD051 (5700'+) - RBO (13000'+) - PINAR (13000'+).


LEMD/MAD
BARAJAS

JEPPESEN
9 AUG 13 10-3K Eff 22 Aug

MADRID, SPAIN
RNAV SID

Apt Elev
1998'


Trans level: By ATC Trans alt: 13000'
1. SIDs are also noise abatement procedures (refer to 10-4).
2. EXPECT close-in obstacles.



SIE 1AL
RWY 36L P-RNAV DEPARTURE

USABLE BETWEEN 0700-2300LT
RNAV (DME/DME)

P-RNAV APPROVAL REQUIRED
FOR AIRCRAFT USABILITY REFER TO AIRPORT BRIEFING PAGES
~~SPEED~~ MAX 250 KT BELOW 10000'

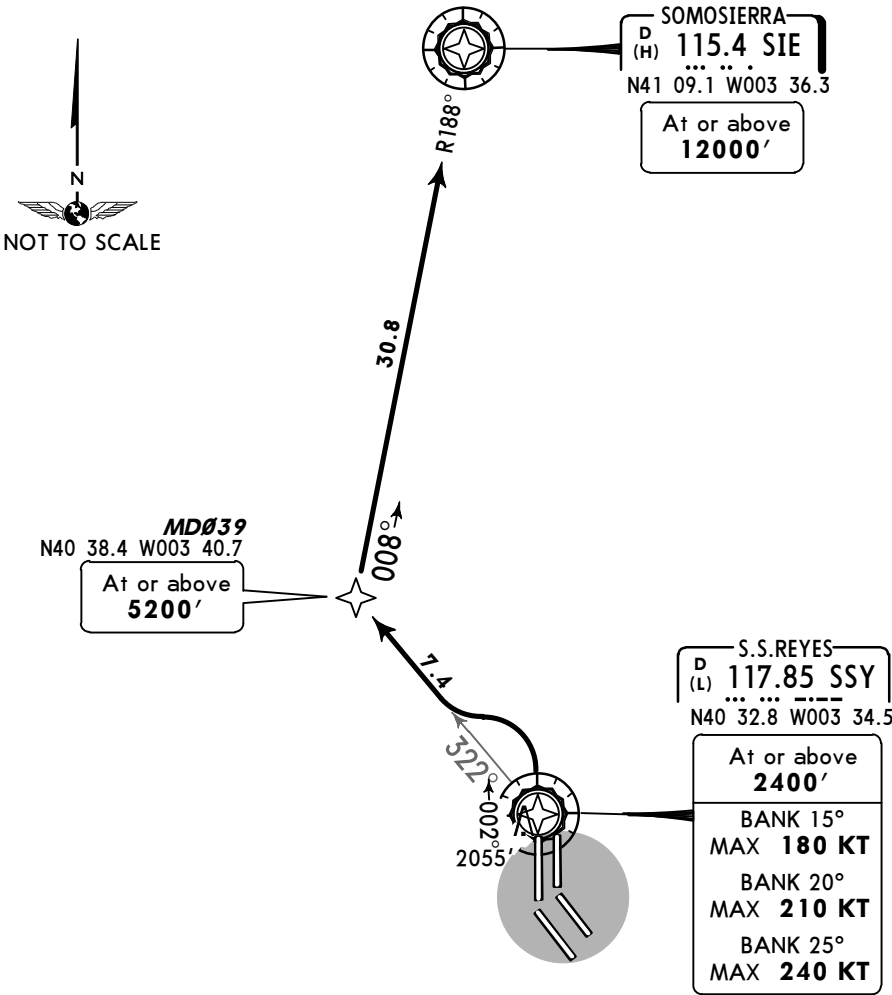

This SID requires minimum climb gradients
of
7.5% until MD039, then
6.0%.

Gnd speed-KT	75	100	150	200	250	300
7.5% V/V(fpm)	570	760	1139	1519	1899	2279
6.0% V/V (fpm)	456	608	911	1215	1519	1823

Maintain runway heading until DER. Do not turn to reach 2400' or above.

Initial ATC clearance: Maintain **13000'** and request flight level change enroute

ROUTING

SSY (2400'+; K180-/K210-/K240-) - MD039 (5200'+) - SIE (12000'+).


LEMD/MAD
BARAJAS

JEPPESEN
9 AUG 13 10-3L1 Eff 22 Aug


MADRID, SPAIN
RNAV SID

Apt Elev
1998'

Trans level: By ATC Trans alt: 13000'
SIDs are also noise abatement procedures (refer to 10-4).



VTB 2AS
RWY 14R P-RNAV DEPARTURE
USABLE BETWEEN 0700-2300LT
RNAV (DME/DME)
P-RNAV APPROVAL REQUIRED
~~SPEED~~ MAX 250 KT BELOW 10000'

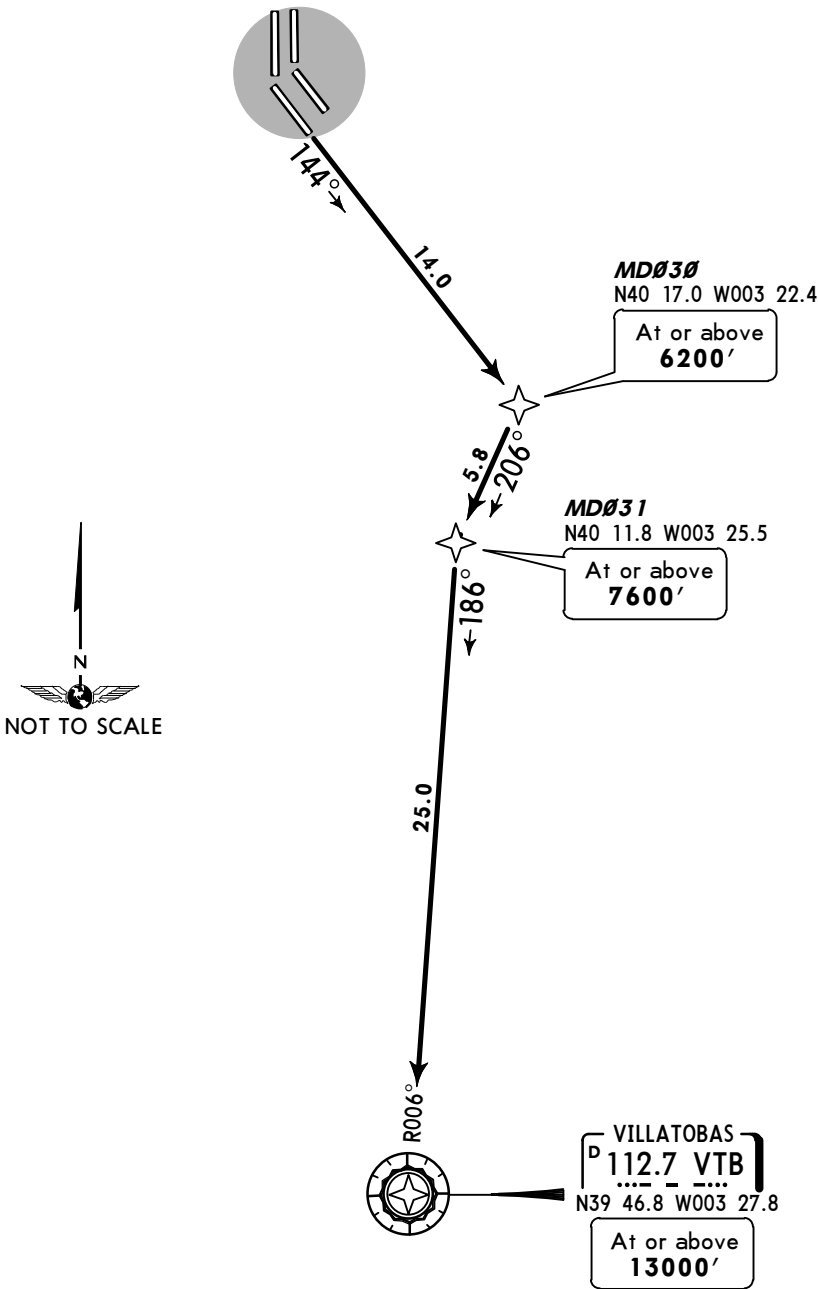

This SID requires a minimum climb gradient
of
5.5% until MD031.

Gnd speed-KT	75	100	150	200	250	300
5.5% V/V(fpm)	418	557	835	1114	1392	1671

Initial ATC clearance: Maintain **13000'** and request flight level change enroute

ROUTING

(2400'+) - MD030 (6200'+) - MD031 (7600'+) - VTB (13000'+).


LEMD/MAD
BARAJAS

JEPPESSEN
9 AUG 13 10-3L2 Eff 22 Aug

MADRID, SPAIN
RNAV SID

Apt Elev
1998'

Trans level: By ATC Trans alt: 13000'
1. SIDs are also noise abatement procedures (refer to 10-4).
2. EXPECT close-in obstacles.




VTB 1AX, VTB 1AY
RWY 36L P-RNAV DEPARTURES

USABLE BETWEEN 0700-2300LT
RNAV (DME/DME)

P-RNAV APPROVAL REQUIRED

FOR AIRCRAFT USABILITY REFER TO AIRPORT BRIEFING PAGES

SPEED MAX 250 KT BELOW 10000'

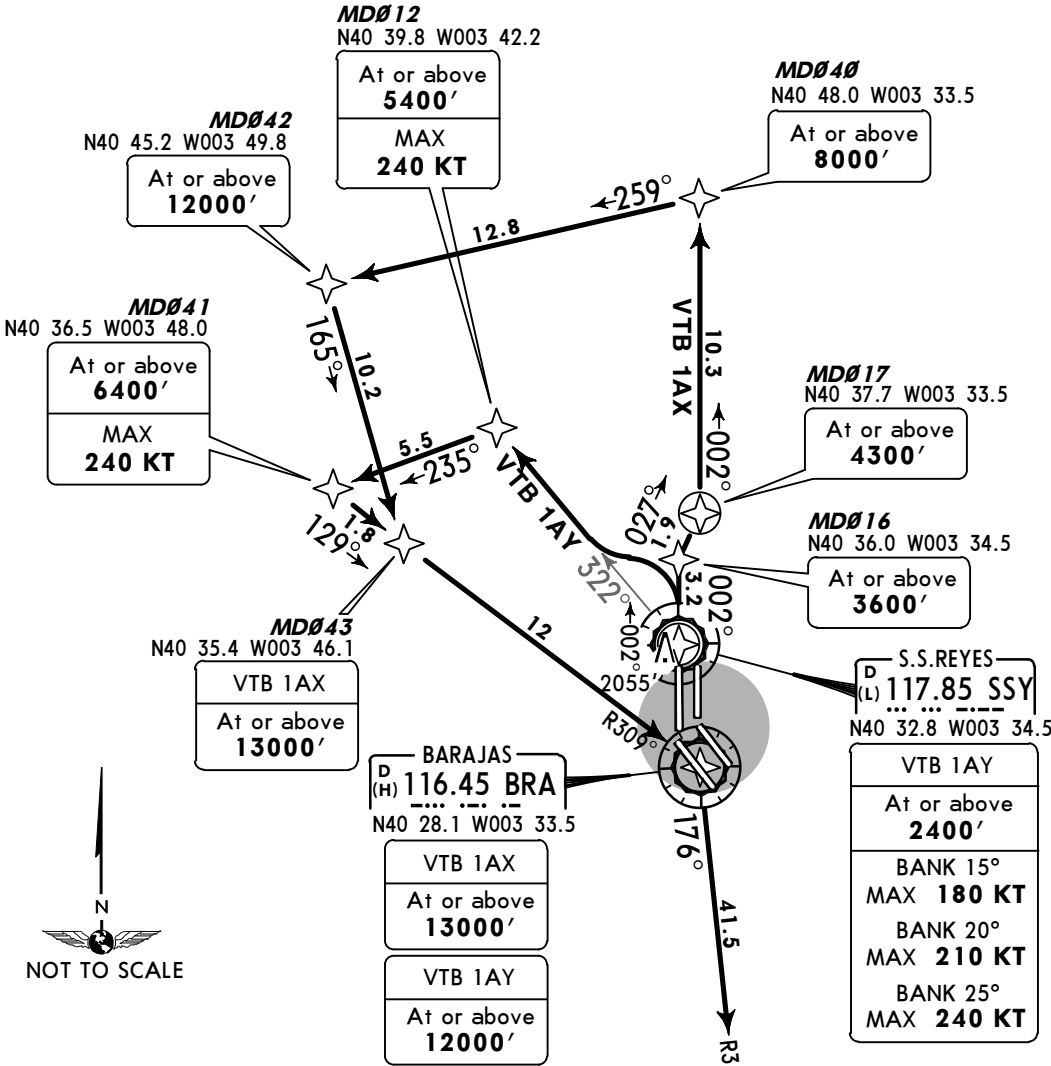

These SIDs require minimum climb gradients
of

VTB 1AX: 6.4% until MD042.
VTB 1AY: 7.5% until MD012, then
6.0% until BRA.

Gnd speed-KT	75	100	150	200	250	300
7.5% V/V(fpm)	570	760	1139	1519	1899	2279
6.4% V/V(fpm)	486	648	972	1296	1620	1944
6.0% V/V(fpm)	456	608	911	1215	1519	1823

VTB 1AY: Maintain runway heading until DER.
Do not turn to reach 2400' or above.

Initial ATC clearance: Maintain **13000'** and request flight level change enroute

SID	ROUTING
VTB 1AX	MD016 (3600'+) - MD017 (4300'+) - MD040 (8000'+) - MD042 (12000'+) - MD043 (13000'+) - BRA (13000'+) - VTB (13000'+).
VTB 1AY	SSY (2400'+; K180-/K210-/K240-) - MD012 (5400'+; K240-) - MD041 (6400'+; K240-) - BRA (12000'+) - VTB (13000'+).


LEMD/MAD
BARAJAS

JEPPESEN
9 AUG 13 10-3L3 Eff 22 Aug

MADRID, SPAIN
RNAV SID

Apt Elev
1998'

Trans level: By ATC Trans alt: 13000'
1. SIDs are also noise abatement procedures (refer to 10-4).
2. EXPECT close-in obstacles.



ZMR 1AL, ZMR 1AX
RWY 36L P-RNAV DEPARTURES


USABLE BETWEEN 0700-2300LT

RNAV (DME/DME)

P-RNAV APPROVAL REQUIRED

FOR AIRCRAFT USABILITY REFER TO AIRPORT BRIEFING PAGES

SPEED: MAX 250 KT BELOW 10000'

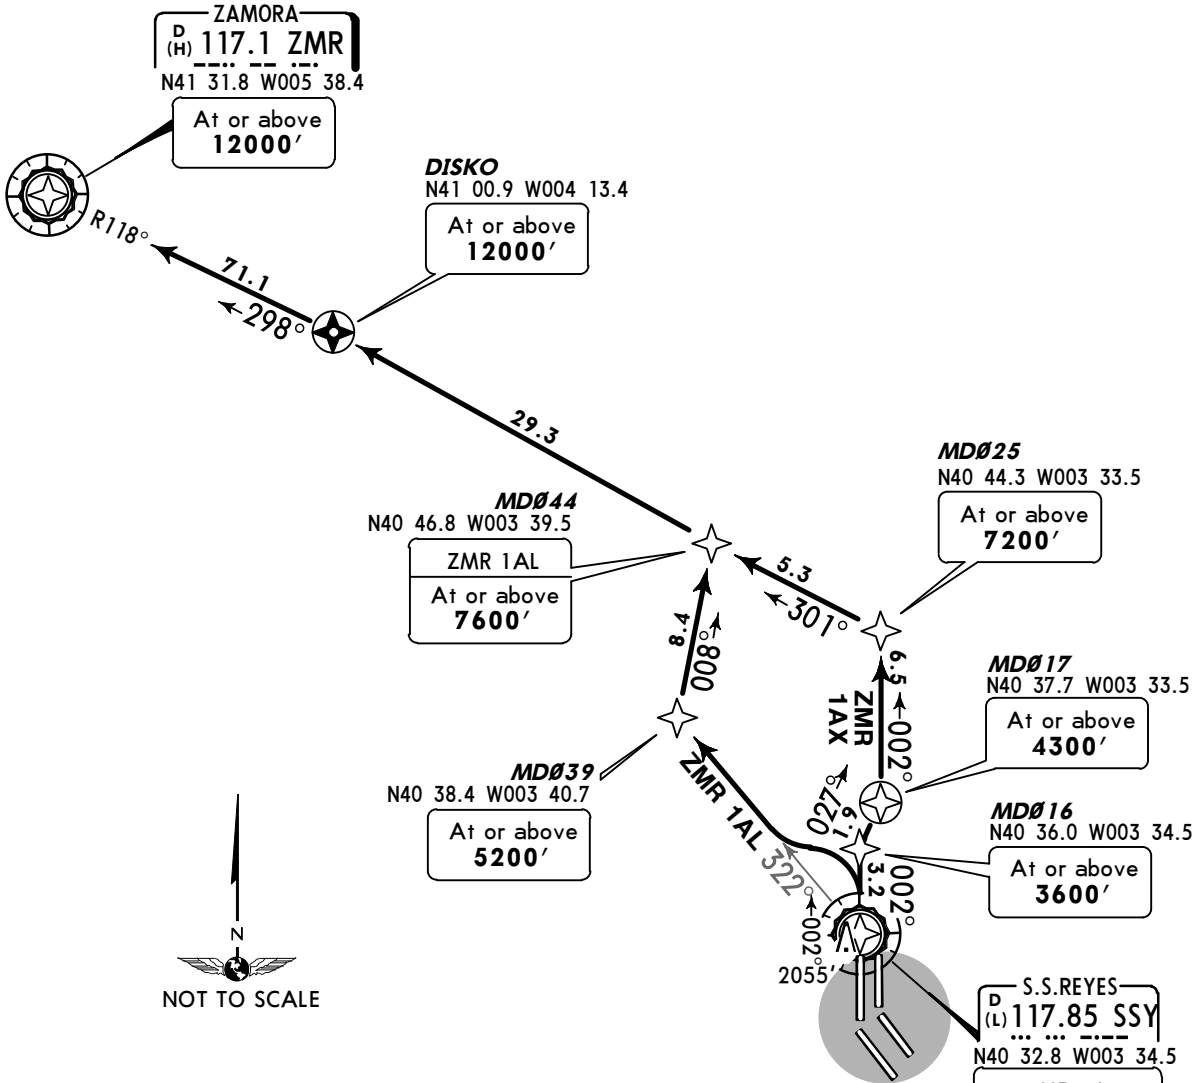

These SIDs require minimum climb gradients
of

ZMR 1AL: 7.5% until MD039, then
6.0% until DISKO.

ZMR 1AX: 7.0% until MD025.

Gnd speed-KT	75	100	150	200	250	300
7.5% V/V(fpm)	570	760	1139	1519	1899	2279
7.0% V/V(fpm)	532	709	1063	1418	1772	2127
6.0% V/V(fpm)	456	608	911	1215	1519	1823

S.S.REYES D (L) 117.85 SSY N40 32.8 W003 34.5
ZMR 1AL
At or above 2400'
BANK 15°
MAX 180 KT
BANK 20°
MAX 210 KT
BANK 25°
MAX 240 KT

ZMR 1AL: Maintain runway heading until DER.
Do not turn to reach 2400' or above.

Initial ATC clearance: Maintain **13000'** and request flight level change enroute

SID	ROUTING
ZMR 1AL	SSY (2400'+); K180-/K210-/K240-) - MD039 (5200'+) - MD044 (7600'+) - DISKO (12000'+) - ZMR (12000'+).
ZMR 1AX	MD016 (3600'+) - MD017 (4300'+) - MD025 (7200'+) - DISKO (12000'+) - ZMR (12000'+).


LEMD/MAD
BARAJAS

JEPPESEN
9 AUG 13 10-3L4 Eff 22 Aug


MADRID, SPAIN
RNAV SID

Apt Elev
1998'

Trans level: By ATC Trans alt: 13000'
SIDs are also noise abatement procedures (refer to 10-4).



ZMR 2AS
RWY 14R P-RNAV DEPARTURE
USABLE BETWEEN 0700-2300LT
RNAV (DME/DME)
P-RNAV APPROVAL REQUIRED
~~SPEED~~ MAX 250 KT BELOW 10000'

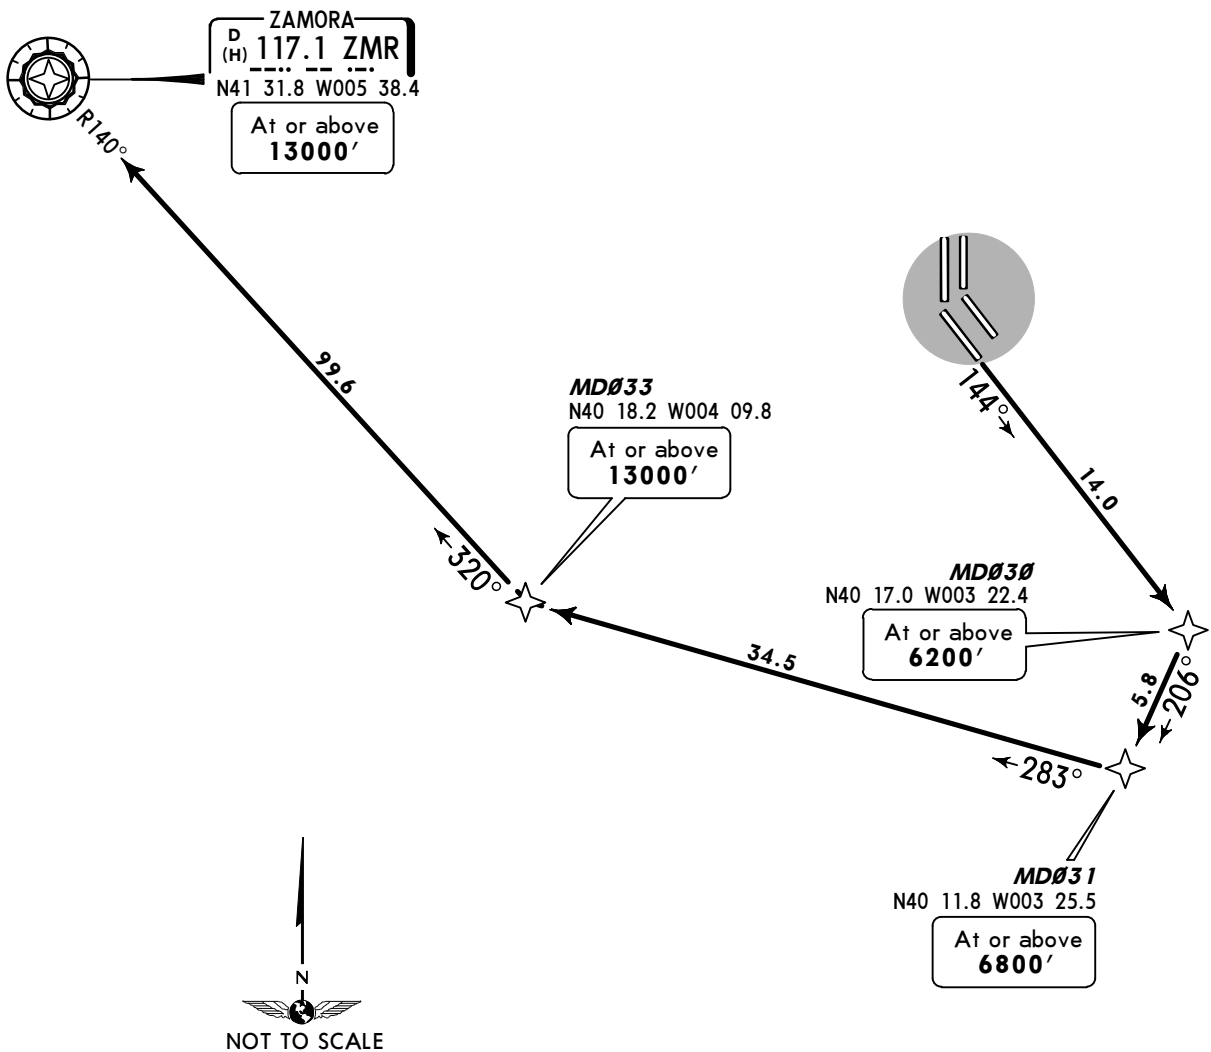

This SID requires a minimum climb gradient
of
5.5% until MD030.

Gnd speed-KT	75	100	150	200	250	300
5.5% V/V(fpm)	418	557	835	1114	1392	1671

Initial ATC clearance: Maintain **13000'** and request flight level change enroute

ROUTING

(2400'+) - MD030 (6200'+) - MD031 (6800'+) - MD033 (13000'+) - ZMR (13000'+).

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS



11 SEP 15

10-3N3

Eff 17 Sep

MADRID, SPAIN

SID

Apt Elev
1998'


Trans level: By ATC Trans alt: 13000'
1. SIDs are also noise abatement procedures (refer to 10-4A).
2. EXPECT close-in obstacles.

CACERES FOUR WHISKEY (CCS 4W)

RWY 36R DEPARTURE

SUBJECT TO LE(D)-60 & LE(R)-71C ACTIVITY

SPEED: MAX 250 KT BELOW 10000'

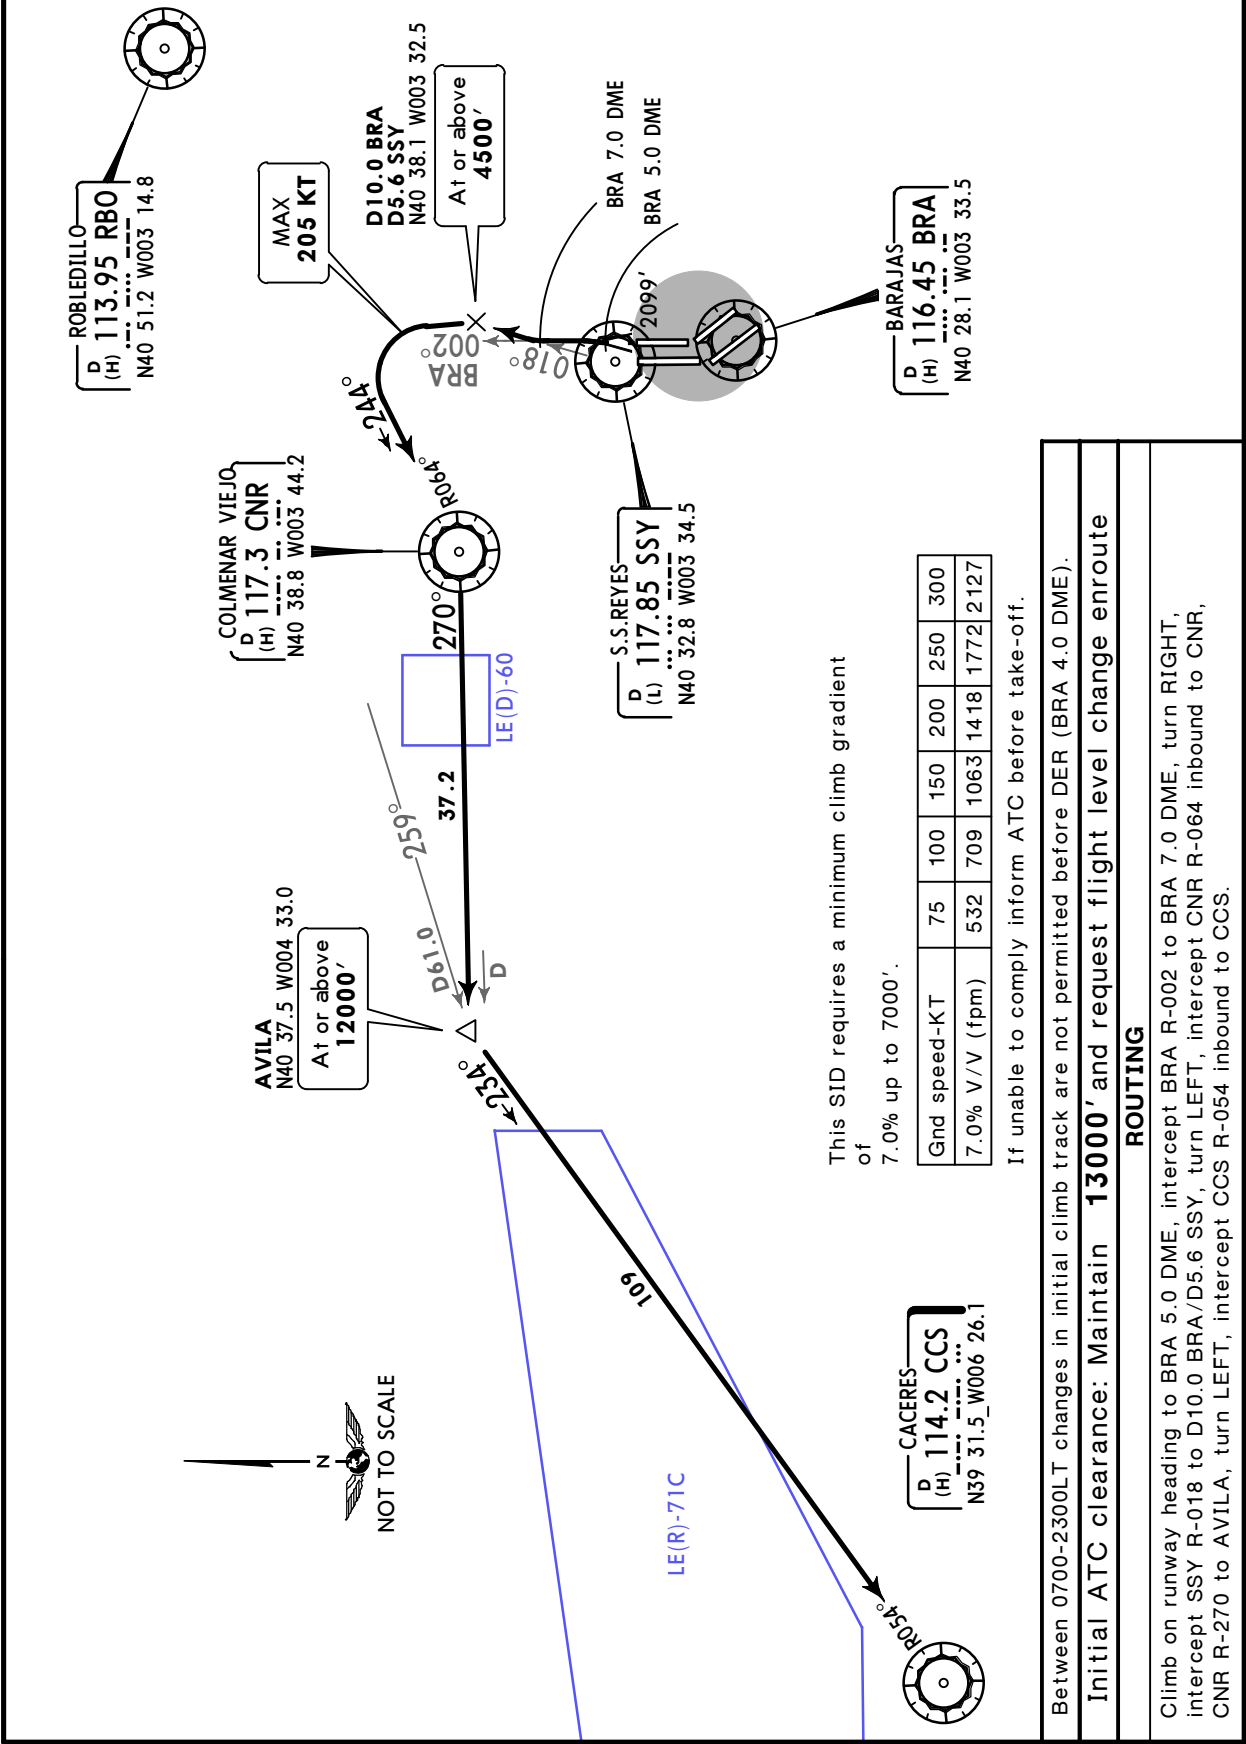

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS



11 SEP 15

10-3N4

Eff 17 Sep

MADRID, SPAIN

SID

Apt Elev
1998'


Trans level: By ATC Trans alt: 13000'
1. SIDs are also noise abatement procedures (refer to 10-4A).
2. EXPECT close-in obstacles.

CACERES THREE NOVEMBER (CCS 3N)

RWY 36L DEPARTURE

USABLE 2300-0700LT

SPEED: MAX 250 KT BELOW 10000'

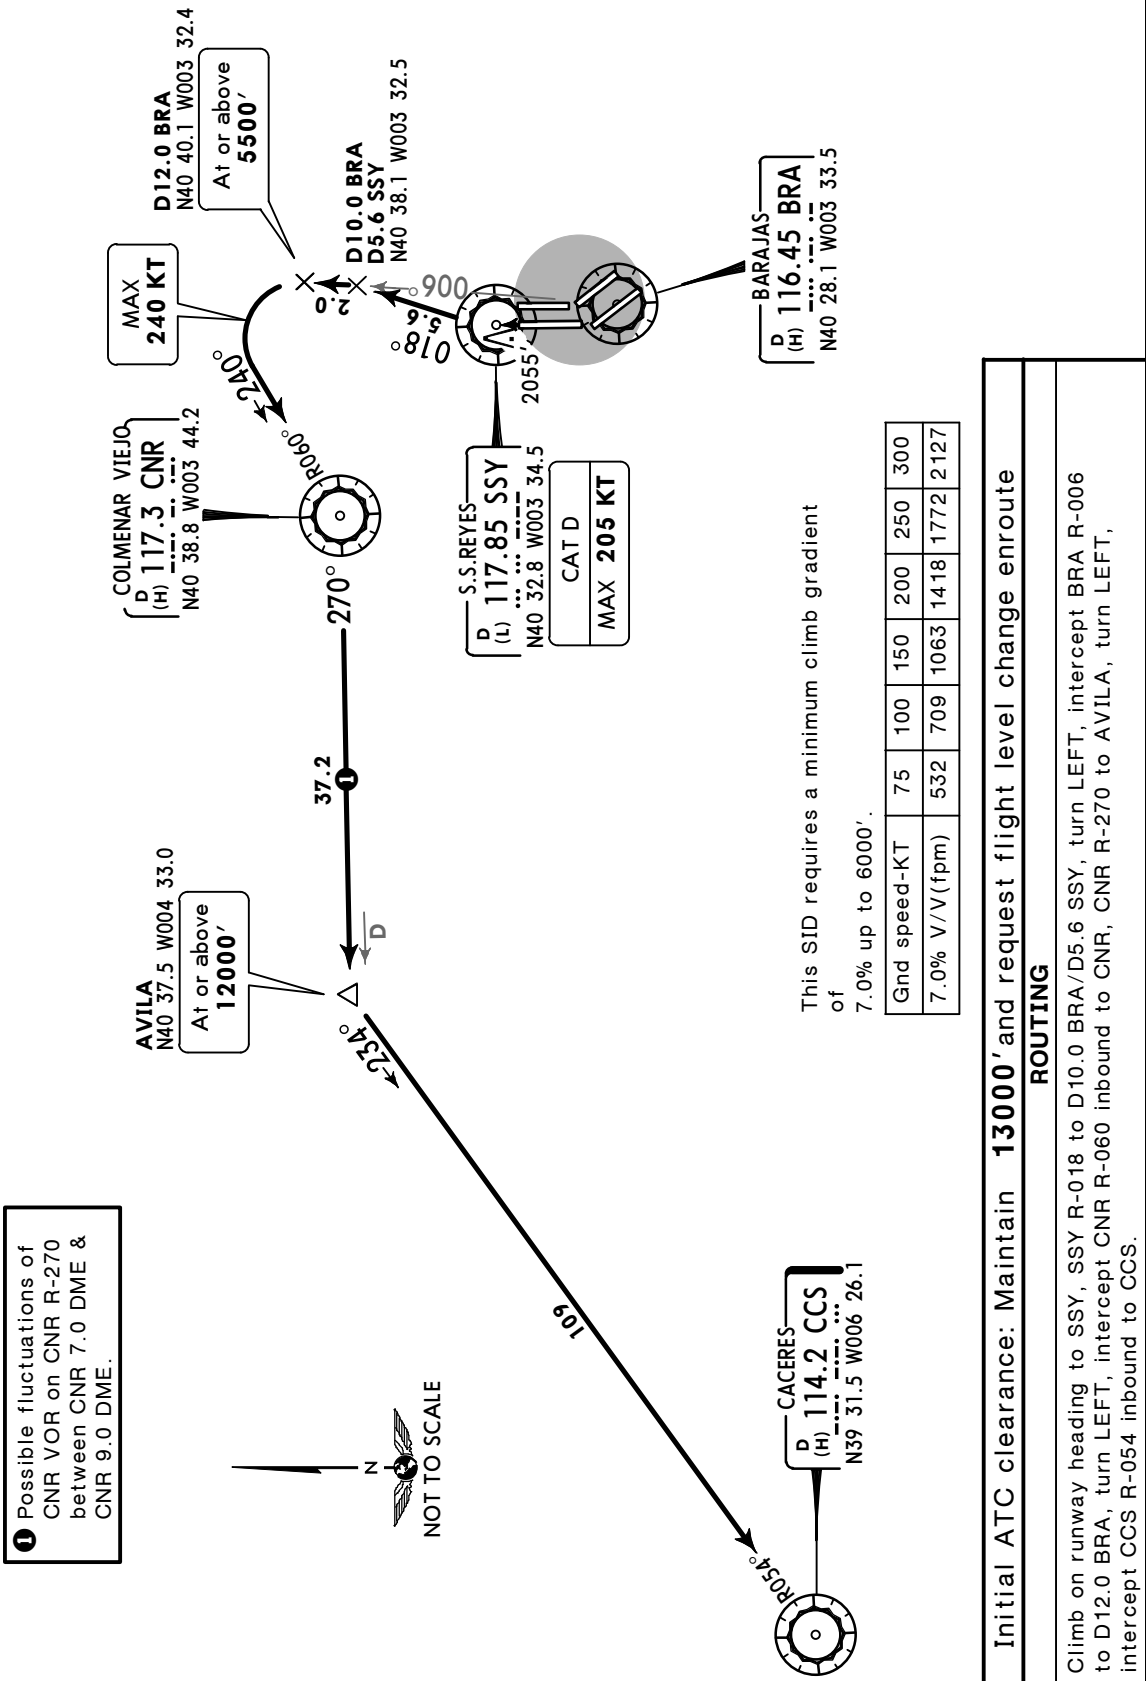

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS


JEPPESEN
27 NOV 15 (10-3N5) Eff 10 Dec

MADRID, SPAIN
SID

Apt Elev
1998'

Trans level: By ATC Trans alt: 13000'
1. SIDs are also noise abatement procedures (refer to 10-4A).
2. EXPECT close-in obstacles.

CACERES ONE KILO (CCS 1K)
CACERES ONE TANGO (CCS 1T)
RWY 36L DEPARTURES
USABLE 0700-2300LT
FOR AIRCRAFT USABILITY REFER TO AIRPORT BRIEFING PAGES
SPEED: MAX 250 KT BELOW 10000'

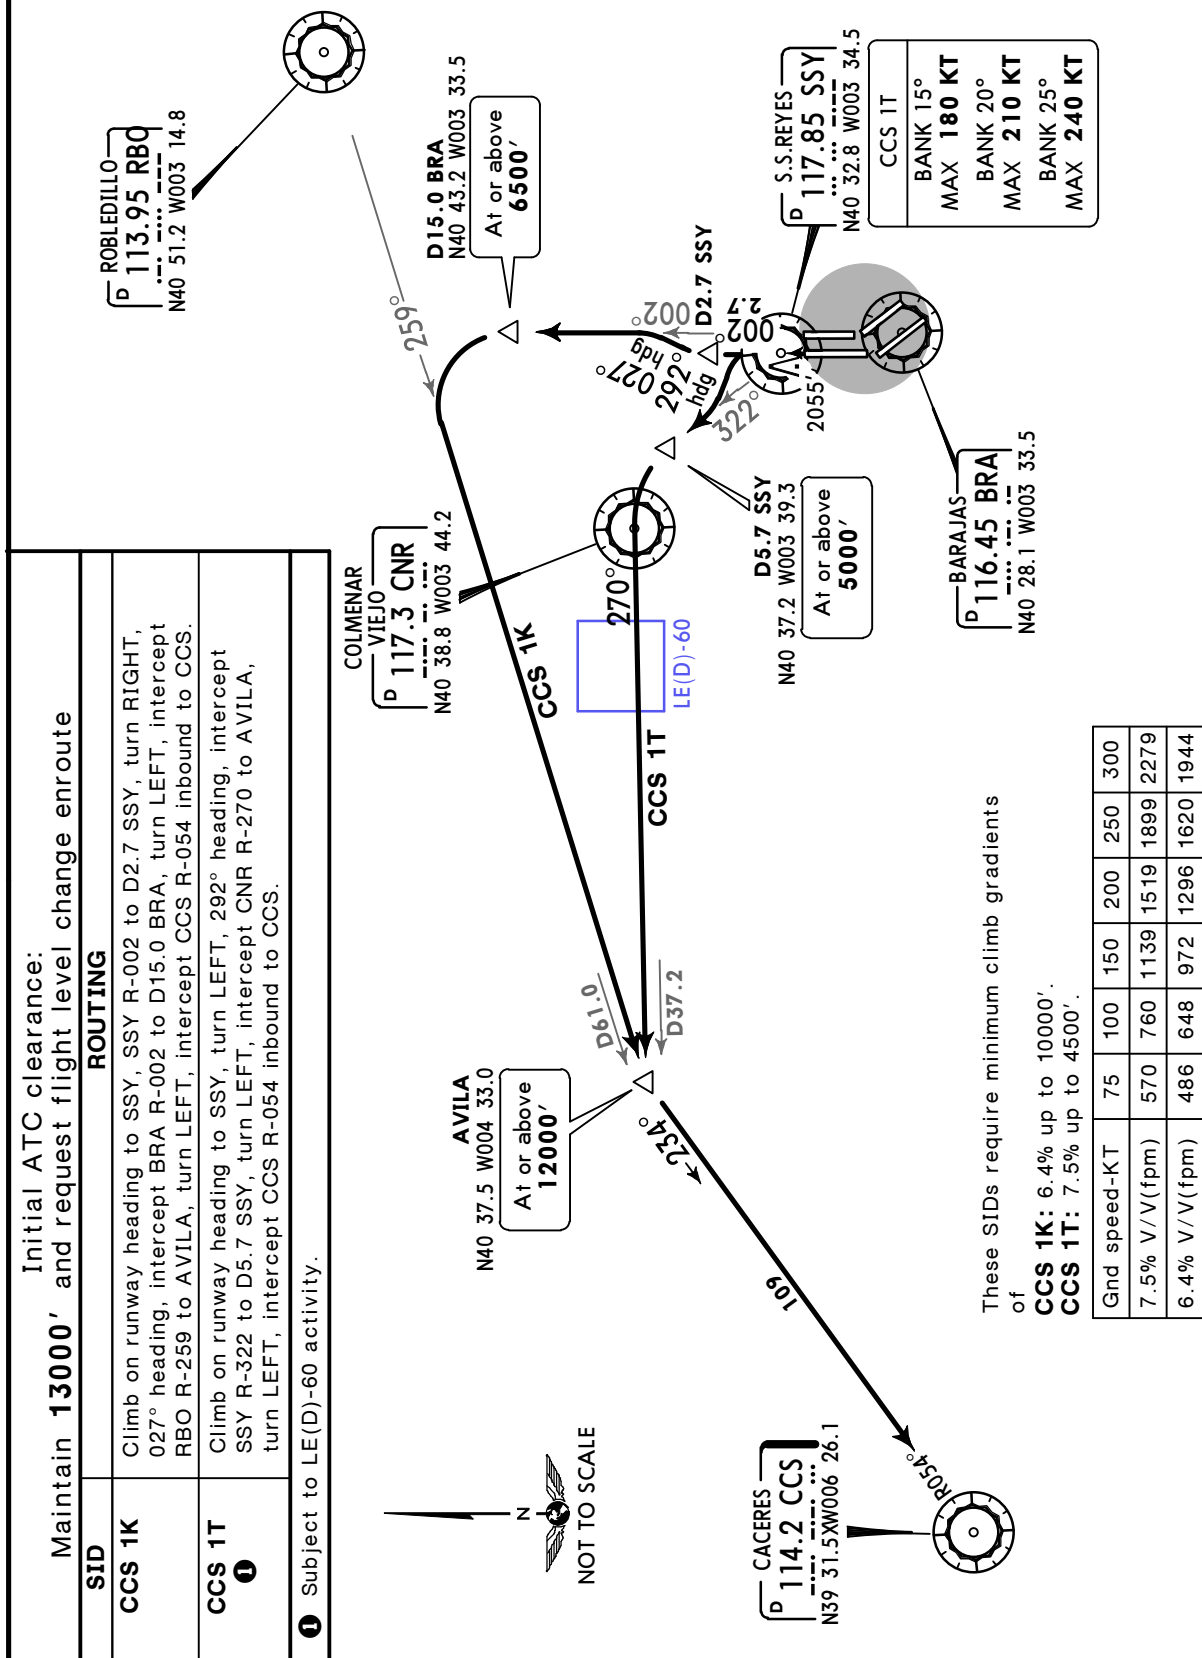

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS

JEPPESEN
27 NOV 15 (10-3N6) Eff 10 Dec

MADRID, SPAIN
SID


Apt Elev
1998'

Trans level: By ATC Trans alt: 13000'
1. SIDs are also noise abatement procedures (refer to 10-4A).
2. EXPECT close-in obstacles

NANDO ONE BRAVO (NANDO 1B) [NAND1B]


RWY 14R DEPARTURE

SPEED: MAX 250 KT BELOW 10000'

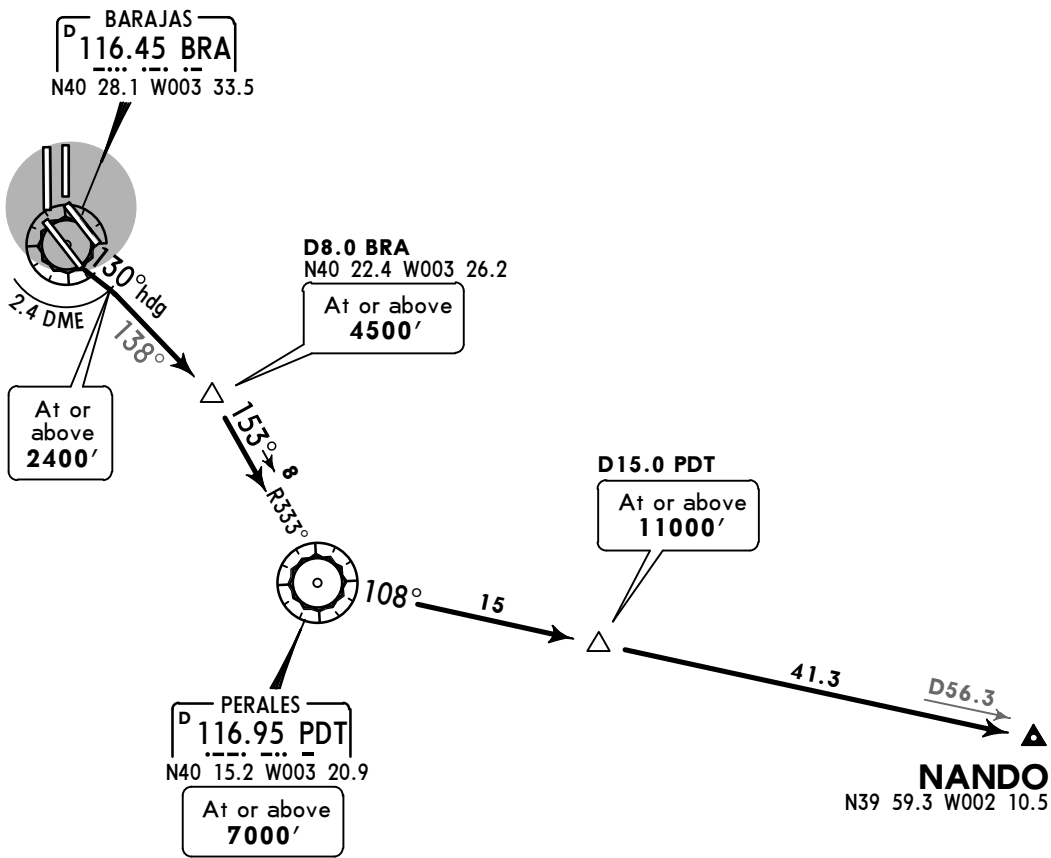

This SID requires a minimum climb gradient
of
6.1% up to 7000'.

Gnd speed-KT	75	100	150	200	250	300
6.1% V/V(fpm)	463	618	927	1235	1544	1853



Between 2300-0700LT changes in initial climb track are not permitted before DER (BRA 1 DME).

Initial ATC clearance: Maintain **13000'** and request flight level change enroute

ROUTING

Climb on 130° heading to BRA 2.4 DME, turn RIGHT, intercept BRA R-138 to D8.0 BRA, turn RIGHT, intercept PDT R-333 inbound to PDT, PDT R-108 to NANDO.

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS


JEPPESEN
27 NOV 15 **10-3P** Eff 10 Dec

MADRID, SPAIN
SID

Apt Elev
1998'

Trans level: By ATC Trans alt: 13000'
1. SIDs are also noise abatement procedures (refer to 10-4A).
2. EXPECT close-in obstacles.

NANDO TWO NOVEMBER (NANDO 2N) [NAND2N]
RWY 36L DEPARTURE
SPEED: MAX 250 KT BELOW 10000'

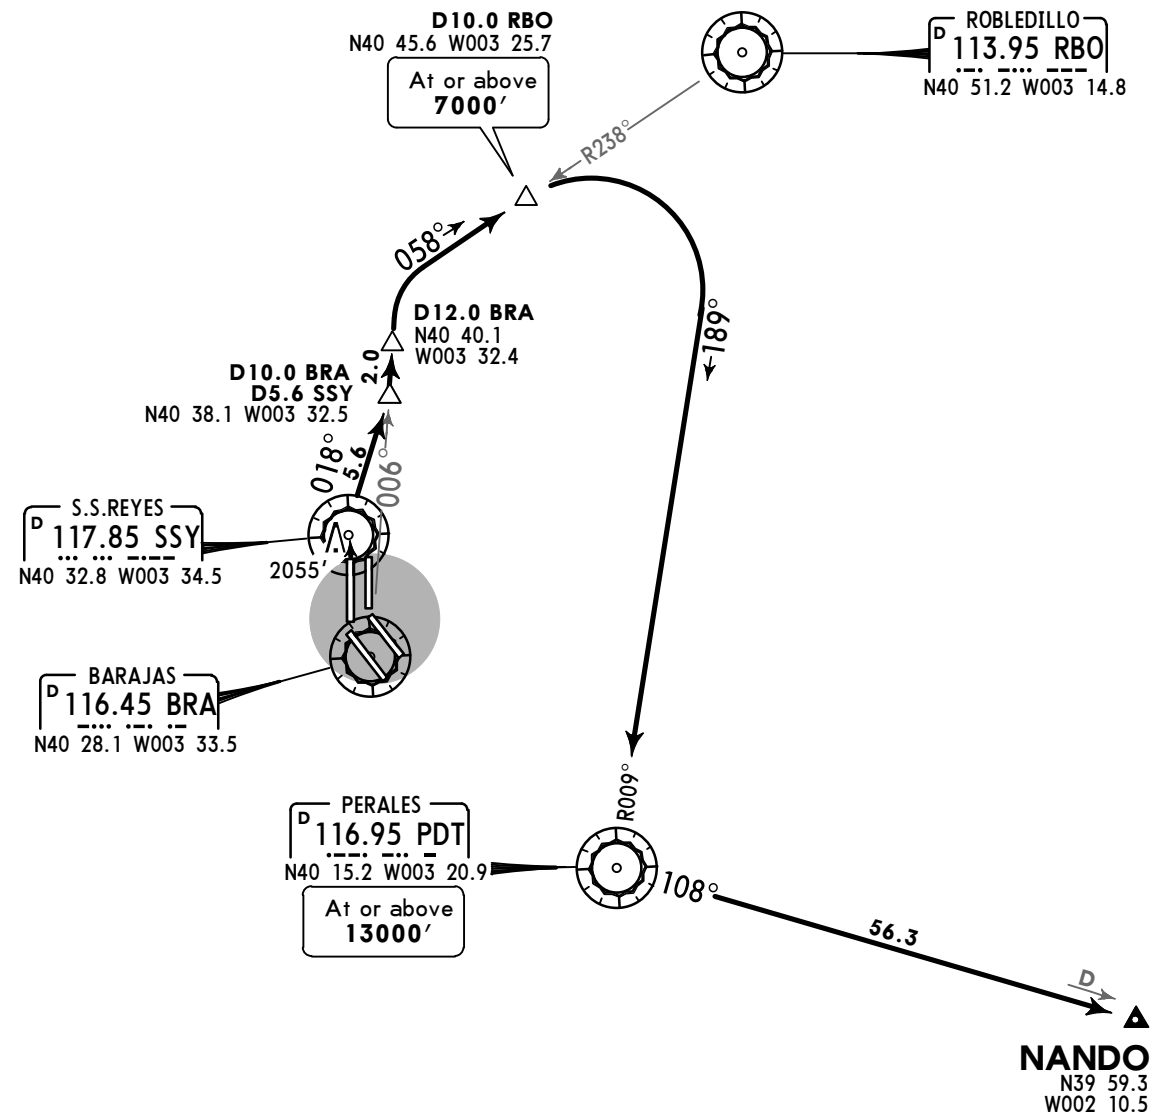

This SID requires minimum climb gradients of
Between 0700-2300LT: 6.6% up to 8000'.
Between 2300-0700LT: 5.5% up to 8000'.

Gnd speed-KT	75	100	150	200	250	300
5.5% V/V (fpm)	418	557	835	1114	1392	1671
6.6% V/V (fpm)	501	668	1003	1337	1671	2005



Initial ATC clearance: Maintain **13000'** and request flight level change enroute
ROUTING

Climb on runway heading to SSY, SSY R-018 to D10.0 BRA/D5.6 SSY, turn LEFT, intercept BRA R-006 to D12.0 BRA, turn RIGHT, intercept RBO R-238 inbound to D10.0 RBO, turn RIGHT, intercept PDT R-009 inbound to PDT, PDT R-108 to NANDO.

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS


JEPPESSEN
27 NOV 15 10-3Q Eff 10 Dec

MADRID, SPAIN
SID

Apt Elev
1998'

Trans level: By ATC Trans alt: 13000'
1. SIDs are also noise abatement procedures (refer to 10-4A).
2. EXPECT close-in obstacles.

NANDO ONE DELTA (NANDO 1D) [NAND1D]
NANDO FIVE WHISKEY (NANDO 5W) [NAND5W]
RWY 36R DEPARTURES
SPEED: MAX 250 KT BELOW 10000'

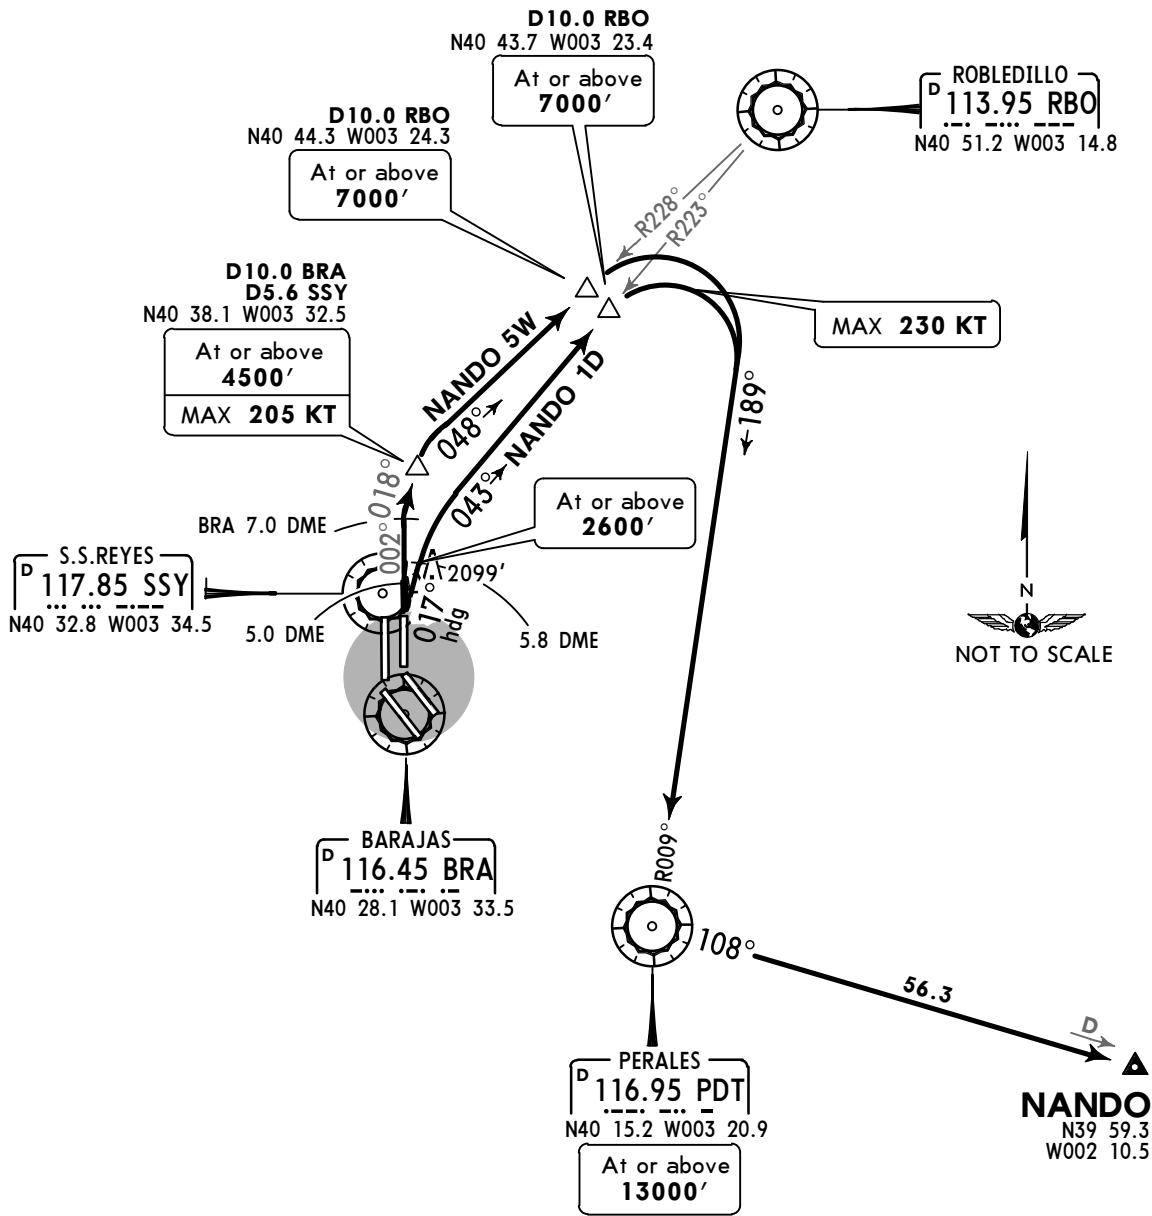

These SIDs require minimum climb gradients of

NANDO 1D: 6.0% up to 9000'.
NANDO 5W: 7.0% up to 9000'. If unable to comply inform ATC before take-off.

NANDO 1D: Changes in initial climb track are not permitted before DER (BRA 4.0 DME).

Initial ATC clearance: Maintain **13000'** and request flight level change enroute

SID	ROUTING
NANDO 1D Usable 0700-2300LT	Climb on 017° heading to BRA 5.8 DME, intercept RBO R-223 inbound to D10.0 RBO, turn RIGHT, intercept PDT R-009 inbound to PDT, PDT R-108 to NANDO.
NANDO 5W Usable 2300-0700LT	Climb on runway heading to BRA 5.0 DME, intercept BRA R-002 to BRA 7.0 DME, turn RIGHT, intercept SSY R-018 to D10.0 BRA/D5.6 SSY, turn RIGHT, intercept RBO R-228 inbound to D10.0 RBO, turn RIGHT, intercept PDT R-009 inbound to PDT, PDT R-108 to NANDO.

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS


JEPPESSEN
27 NOV 15 10-3S Eff 10 Dec

MADRID, SPAIN
SID

Apt Elev
1998'

Trans level: By ATC Trans alt: 13000'
1. SIDs are also noise abatement procedures (refer to 10-4A).
2. EXPECT close-in obstacles

NANDO ONE ECHO (NANDO 1E) [NAND1E]
NANDO ONE VICTOR (NANDO 1V) [NAND1V]
RWY 14L DEPARTURES
SPEED: MAX 250 KT BELOW 10000'

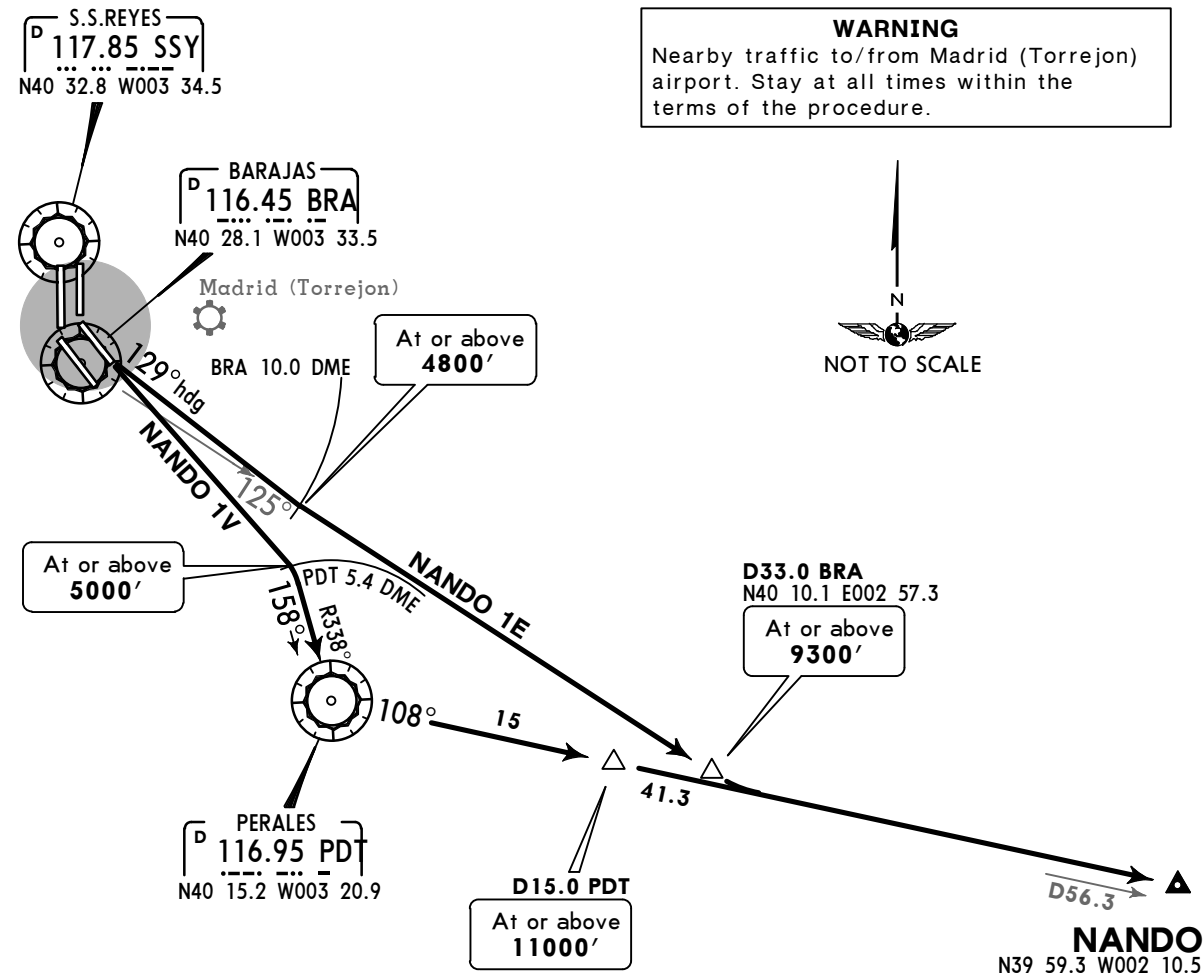

These SIDs require minimum climb gradients of

7.0% up to 2200', then

NANDO 1E: 5.8% up to 4800'.

NANDO 1V: 5.5% up to 11000'.

Gnd speed-KT	75	100	150	200	250	300
7.0% V/V(fpm)	532	709	1063	1418	1772	2127
5.8% V/V(fpm)	441	587	881	1175	1468	1762
5.5% V/V(fpm)	418	557	835	1114	1392	1671

NANDO 1E: Changes in initial climb track are not permitted before DER (SSY 5 DME).
Initial ATC clearance: Maintain **13000'** and request flight level change enroute

SID	ROUTING
NANDO 1E Usable 0700-2300LT	Climb on 129° heading to BRA 10.0 DME, turn LEFT, intercept BRA R-125 to D33.0 BRA, turn LEFT, intercept PDT R-108 to NANDO.
NANDO 1V Usable 2300-0700LT	Climb on runway heading to PDT 5.4 DME, turn RIGHT, intercept PDT R-338 inbound to PDT, PDT R-108 to NANDO.

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS


JEPPESSEN
27 NOV 15 10-3T Eff 10 Dec

MADRID, SPAIN
SID

Apt Elev
1998'

Trans level: By ATC Trans alt: 13000'
1. EXPECT close-in obstacles.
2. SIDs are also noise abatement procedures (refer to 10-4A).

PINAR TWO BRAVO (PINAR 2B) [PINA2B]
RWY 14R DEPARTURE
SPEED: MAX 250 KT BELOW 10000'

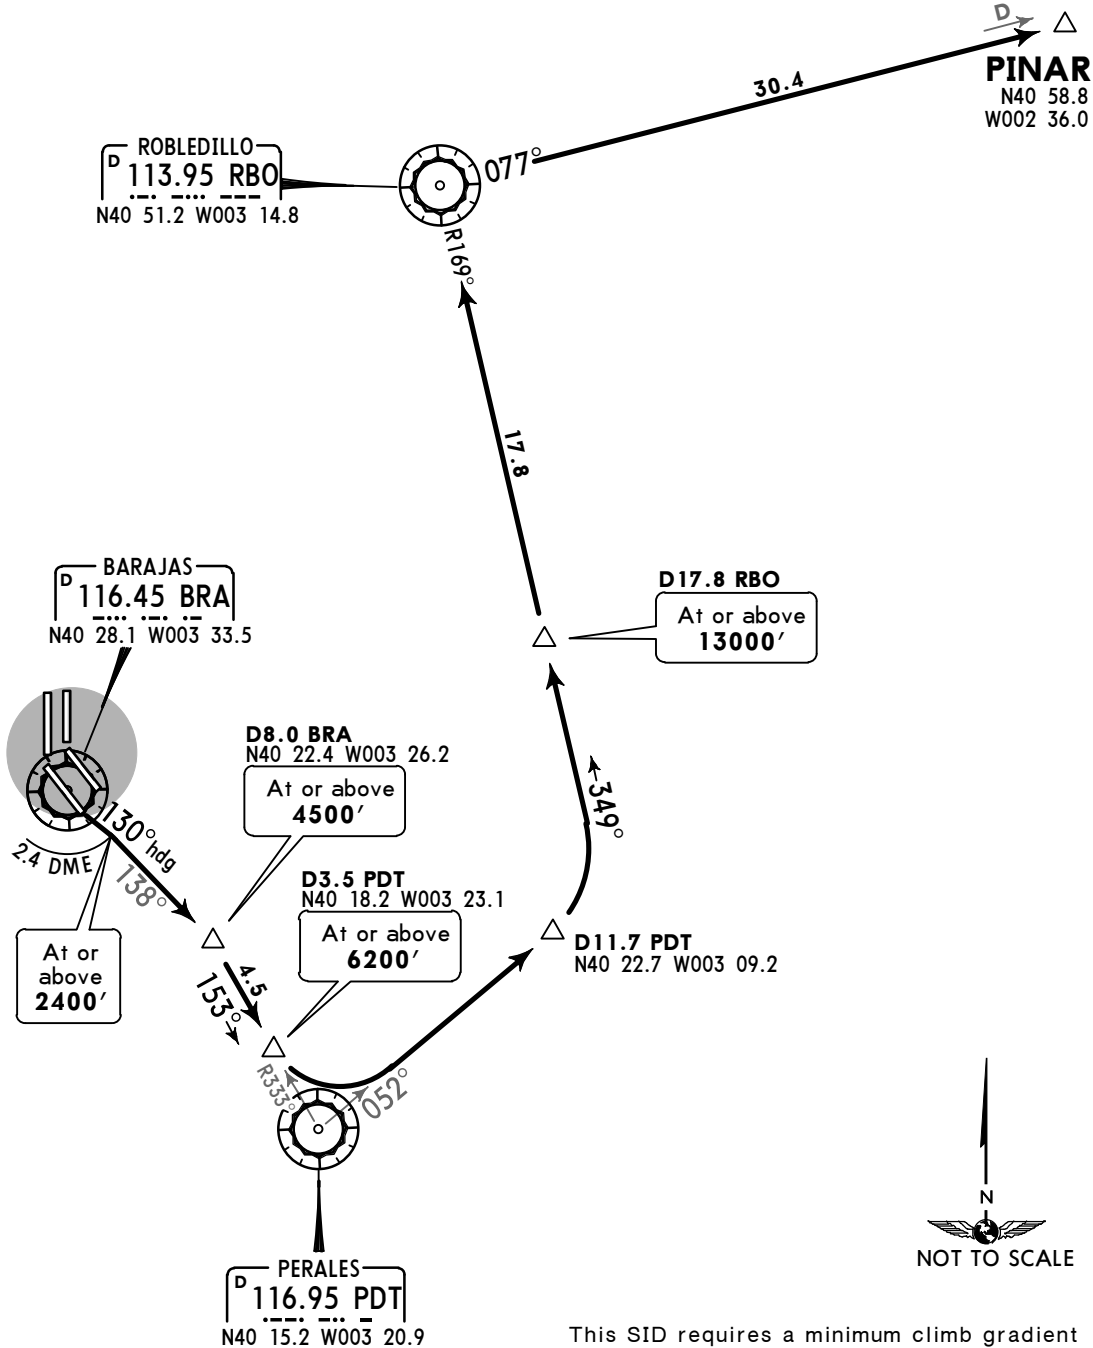

This SID requires a minimum climb gradient of 6.1% up to 13000'.

Gnd speed-KT	75	100	150	200	250	300
6.1% V/V(fpm)	463	618	927	1235	1544	1853

Between 2300-0700LT changes in initial climb track are not permitted before DER (BRA 1 DME).

Initial ATC clearance: Maintain 13000' and request flight level change enroute

ROUTING

Climb on 130° heading to BRA 2.4 DME, turn RIGHT, intercept BRA R-138 to D8.0 BRA, turn RIGHT, intercept PDT R-333 inbound to D3.5 PDT, turn LEFT, intercept PDT R-052 to D11.7 PDT, turn LEFT, intercept RBO R-169 inbound to RBO, RBO R-077 to PINAR.

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS


27 NOV 15
10-3T1 Eff 10 Dec

MADRID, SPAIN
SID

Apt Elev
1998'

Trans level: By ATC Trans alt: 13000'
1. SIDs are also noise abatement procedures (refer to 10-4A).
2. EXPECT close-in obstacles.

PINAR TWO NOVEMBER (PINAR 2N) [PINA2N]
RWY 36L DEPARTURE
SPEED: MAX 250 KT BELOW 10000'

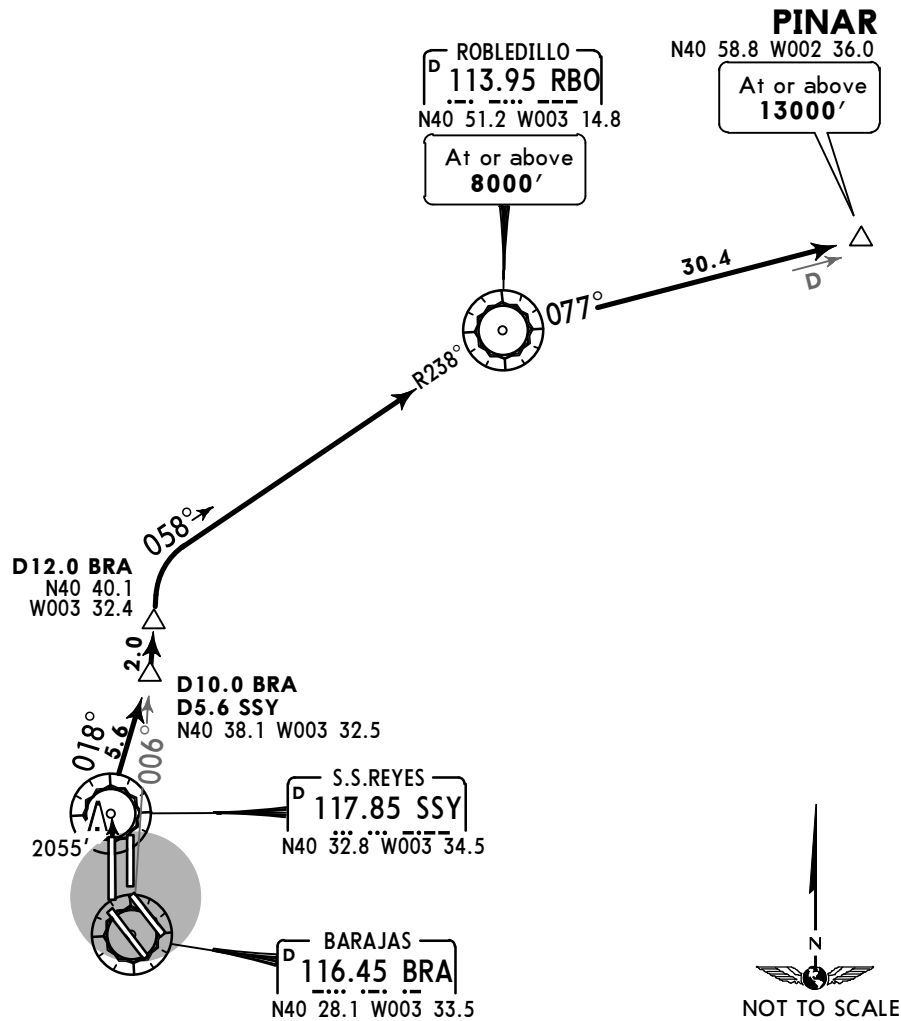

This SID requires minimum climb gradients
of
Between 0700-2300LT: 6.6% up to 8000'.
Between 2300-0700LT: 5.5% up to 8000'.

Gnd speed-KT	75	100	150	200	250	300
6.6% V/V(fpm)	501	668	1003	1337	1671	2005
5.5% V/V(fpm)	418	557	835	1114	1392	1671

Initial ATC clearance: Maintain **13000'** and request flight level change enroute

ROUTING

Climb on runway heading to SSY, SSY R-018 to D10.0 BRA/D5.6 SSY, turn LEFT, intercept
BRA R-006 to D12.0 BRA, turn RIGHT, intercept RBO R-238 inbound to RBO, RBO R-077 to
PINAR.

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS


JEPPESEN
27 NOV 15 10-3T2 Eff 10 Dec

MADRID, SPAIN
SID

Apt Elev
1998'

Trans level: By ATC Trans alt: 13000'
1. SIDs are also noise abatement procedures (refer to 10-4A).
2. EXPECT close-in obstacles.

PINAR ONE DELTA (PINAR 1D) [PINA1D]
PINAR FIVE WHISKEY (PINAR 5W) [PINA5W]
RWY 36R DEPARTURES
SPEED: MAX 250 KT BELOW 10000'

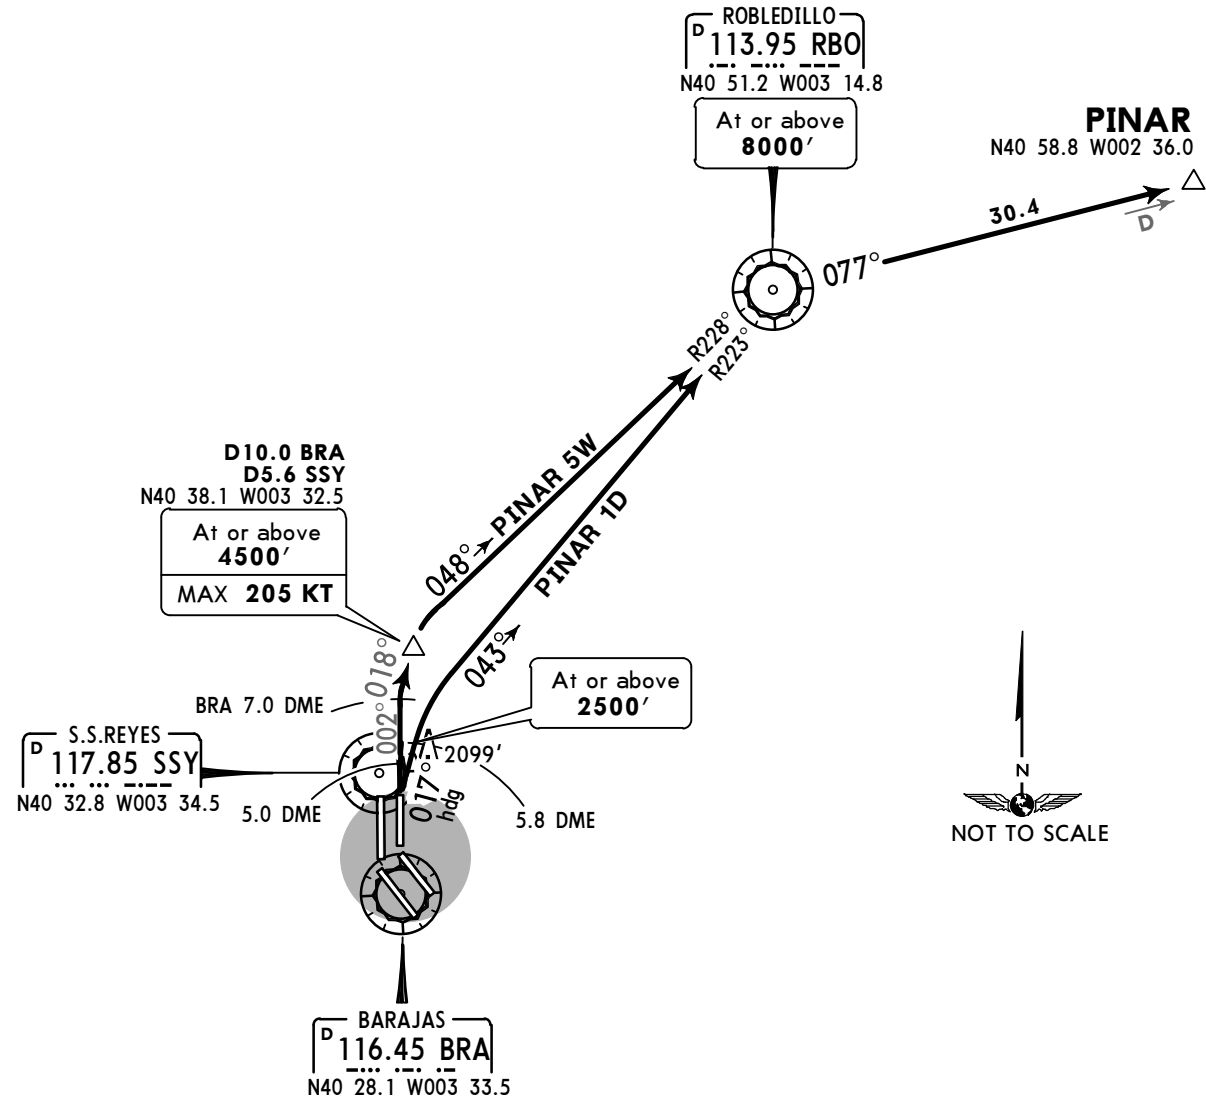

These SIDs require minimum climb gradients of

PINAR 1D: 5.0% up to 8000'.

PINAR 5W: 7.0% up to 8000'.

Gnd speed-KT	75	100	150	200	250	300
5.0% V/V (fpm)	380	506	760	1013	1266	1519
7.0% V/V (fpm)	532	709	1063	1418	1772	2127

If unable to comply inform ATC before take-off.

PINAR 1D: Changes in initial climb track are not permitted before DER (BRA 4.0 DME).

Initial ATC clearance: Maintain **13000'** and request flight level change enroute

SID	ROUTING
PINAR 1D Usable 0700-2300LT	Climb on 017° heading to BRA 5.8 DME, intercept RBO R-223 inbound to RBO, RBO R-077 to PINAR.
PINAR 5W Usable 2300-0700LT	Climb on runway heading to BRA 5.0 DME, intercept BRA R-002 to BRA 7.0 DME, turn RIGHT, intercept SSY R-018 to D10.0 BRA/D5.6 SSY, turn RIGHT, intercept RBO R-228 inbound to RBO, RBO R-077 to PINAR.

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS


JEPPesen
27 NOV 15 10-3T4 Eff 10 Dec

MADRID, SPAIN
SID

Apt Elev
1998'

Trans level: By ATC Trans alt: 13000'
1. EXPECT close-in obstacles.
2. SIDs are also noise abatement procedures (refer to 10-4A).

ROBLEDILLO ONE BRAVO (RBO 1B)
RWY 14R DEPARTURE
SPEED: MAX 250 KT BELOW 10000'

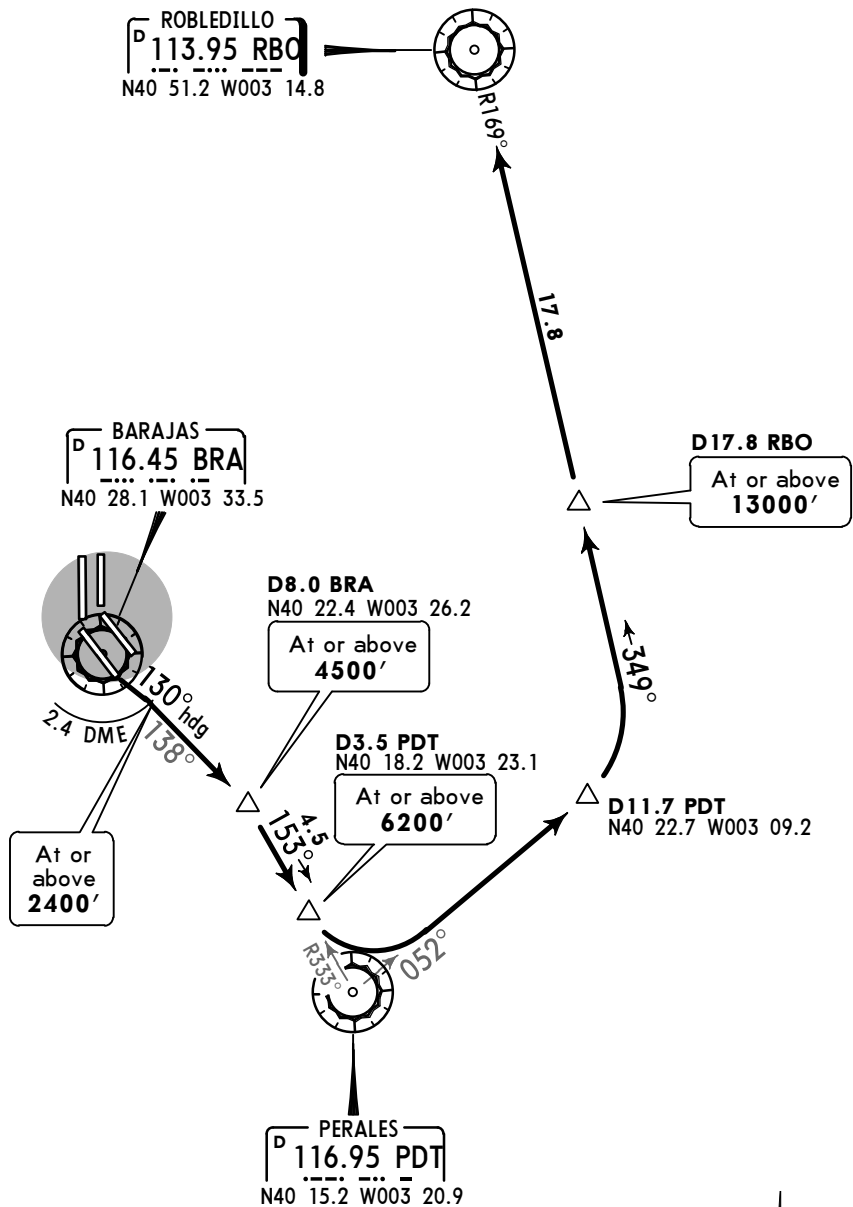

This SID requires a minimum climb gradient
of
6.1% up to 13000'.

Gnd speed-KT	75	100	150	200	250	300
6.1% V/V(fpm)	463	618	927	1235	1544	1853

Between 2300-0700LT changes in initial climb track are not permitted before DER (BRA 1 DME).

Initial ATC clearance: Maintain **13000'** and request flight level change enroute

ROUTING

Climb on 130° heading to BRA 2.4 DME, turn RIGHT, intercept BRA R-138 to D8.0 BRA, turn RIGHT, intercept PDT R-333 inbound to D3.5 PDT, turn LEFT, intercept PDT R-052 to D11.7 PDT, turn LEFT, intercept RBO R-169 inbound to RBO.

LEMD/MAD
BARAJAS


JEPPESSEN
9 AUG 13 (10-3T5) Eff 22 Aug

MADRID, SPAIN
SID

Apt Elev
1998'


Trans level: By ATC Trans alt: 13000'
1. EXPECT close-in obstacles.
2. SIDs are also noise abatement procedures (refer to 10-4A).

ROBLEDILLO ONE NOVEMBER (RBO 1N)
RWY 36L DEPARTURES
~~SPEED~~ MAX 250 KT BELOW 10000'

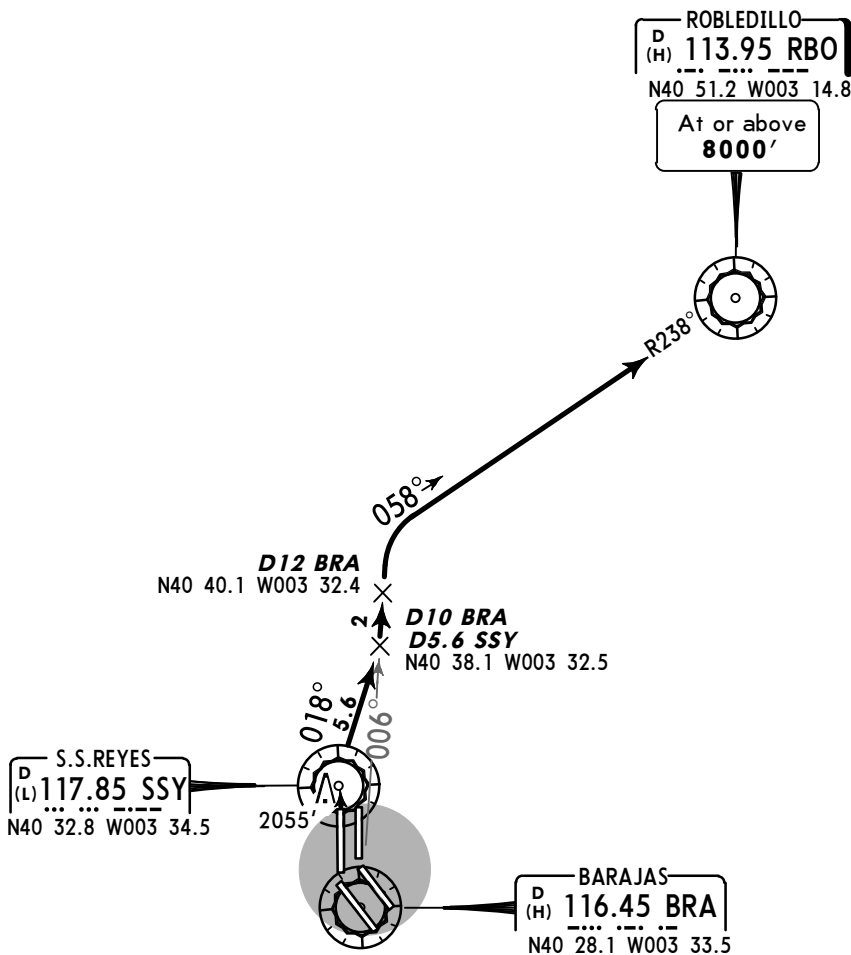

This SID requires minimum climb gradients
of
Between 0700-2300LT: 6.6% until leaving 8000'.
Between 2300-0700LT: 5.5% until leaving 8000'.

Gnd speed-KT	75	100	150	200	250	300
6.6% V/V(fpm)	501	668	1003	1337	1671	2005
5.5% V/V(fpm)	418	557	835	1114	1392	1671



Initial ATC clearance: Maintain **13000'** and request flight level change enroute

ROUTING

Climb on runway heading to SSY, SSY R-018 to D10 BRA/D5.6 SSY, turn LEFT, intercept
BRA R-006 to D12 BRA, turn RIGHT, intercept RBO R-238 inbound to RBO.

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS


JEPPESEN
27 NOV 15 10-3U Eff 10 Dec

MADRID, SPAIN
SID

Apt Elev
1998'

Trans level: By ATC Trans alt: 13000'
1. SIDs are also noise abatement procedures (refer to 10-4A).
2. EXPECT close-in obstacles.

ROBLEDILLO ONE DELTA (RBO 1D)
ROBLEDILLO FOUR WHISKEY (RBO 4W)
RWY 36R DEPARTURES
SPEED: MAX 250 KT BELOW 10000'

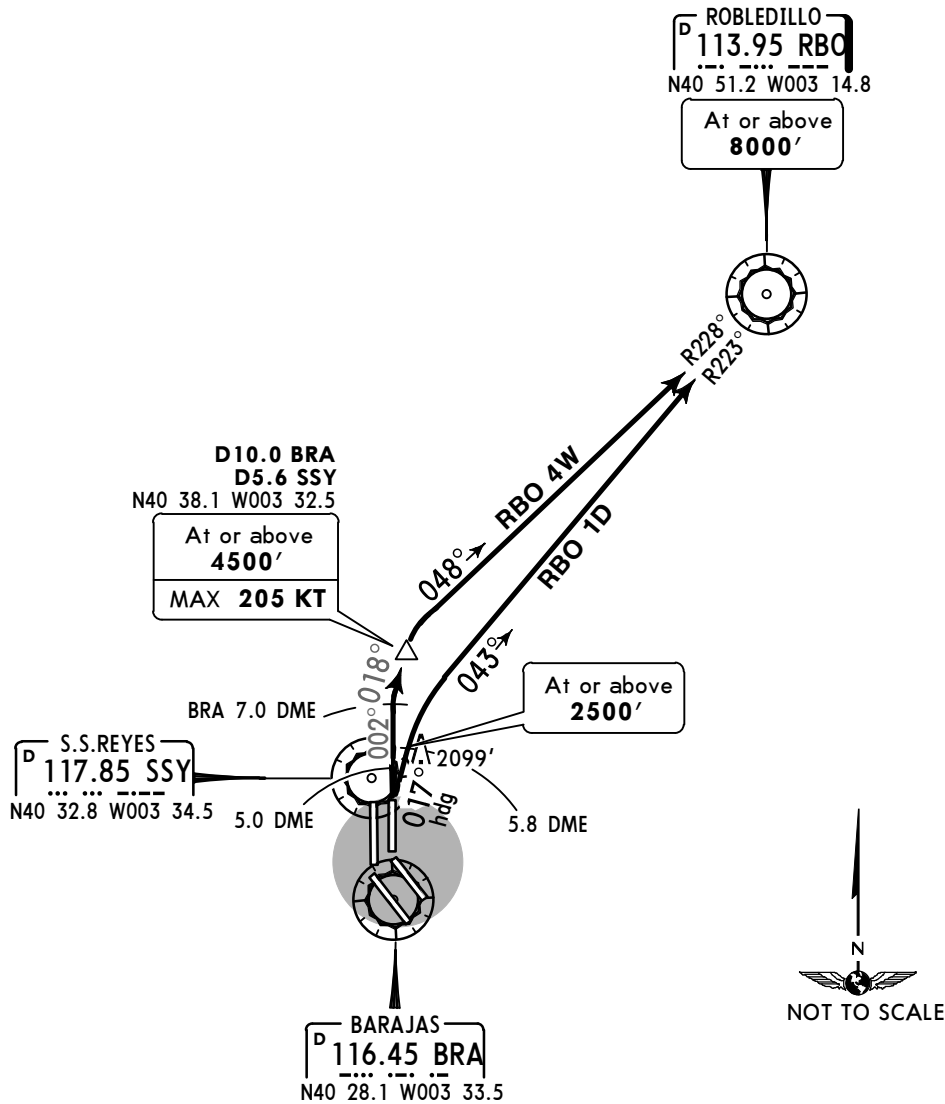

These SIDs require minimum climb gradients
of

RBO 1D: 5.0% up to 8000'.

RBO 4W: 7.0% up to 8000'.

Gnd speed-KT	75	100	150	200	250	300
5.0% V/V (fpm)	380	506	760	1013	1266	1519
7.0% V/V (fpm)	532	709	1063	1418	1772	2127

If unable to comply inform ATC before take-off.

RBO 1D: Changes in initial climb track are not permitted before DER (BRA 4.0 DME).

Initial ATC clearance: Maintain **13000'** and request flight level change enroute

SID	ROUTING
RBO 1D Usable 0700-2300LT	Climb on 017° heading to BRA 5.8 DME, intercept RBO R-223 inbound to RBO.
RBO 4W Usable 2300-0700LT	Climb on runway heading to BRA 5.0 DME, intercept BRA R-002 to BRA 7.0 DME, turn RIGHT, intercept SSY R-018 to D10.0 BRA/D5.6 SSY, turn RIGHT, intercept RBO R-228 inbound to RBO.

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS


JEPPesen
27 NOV 15 10-3V Eff 10 Dec

MADRID, SPAIN
SID

Apt Elev
1998'

Trans level: By ATC Trans alt: 13000'
1. SIDs are also noise abatement procedures (refer to 10-4A).
2. EXPECT close-in obstacles.

ROBLEDILLO ONE ECHO (RBO 1E)
ROBLEDILLO ONE VICTOR (RBO 1V)
RWY 14L DEPARTURES
SPEED: MAX 250 KT BELOW 10000'

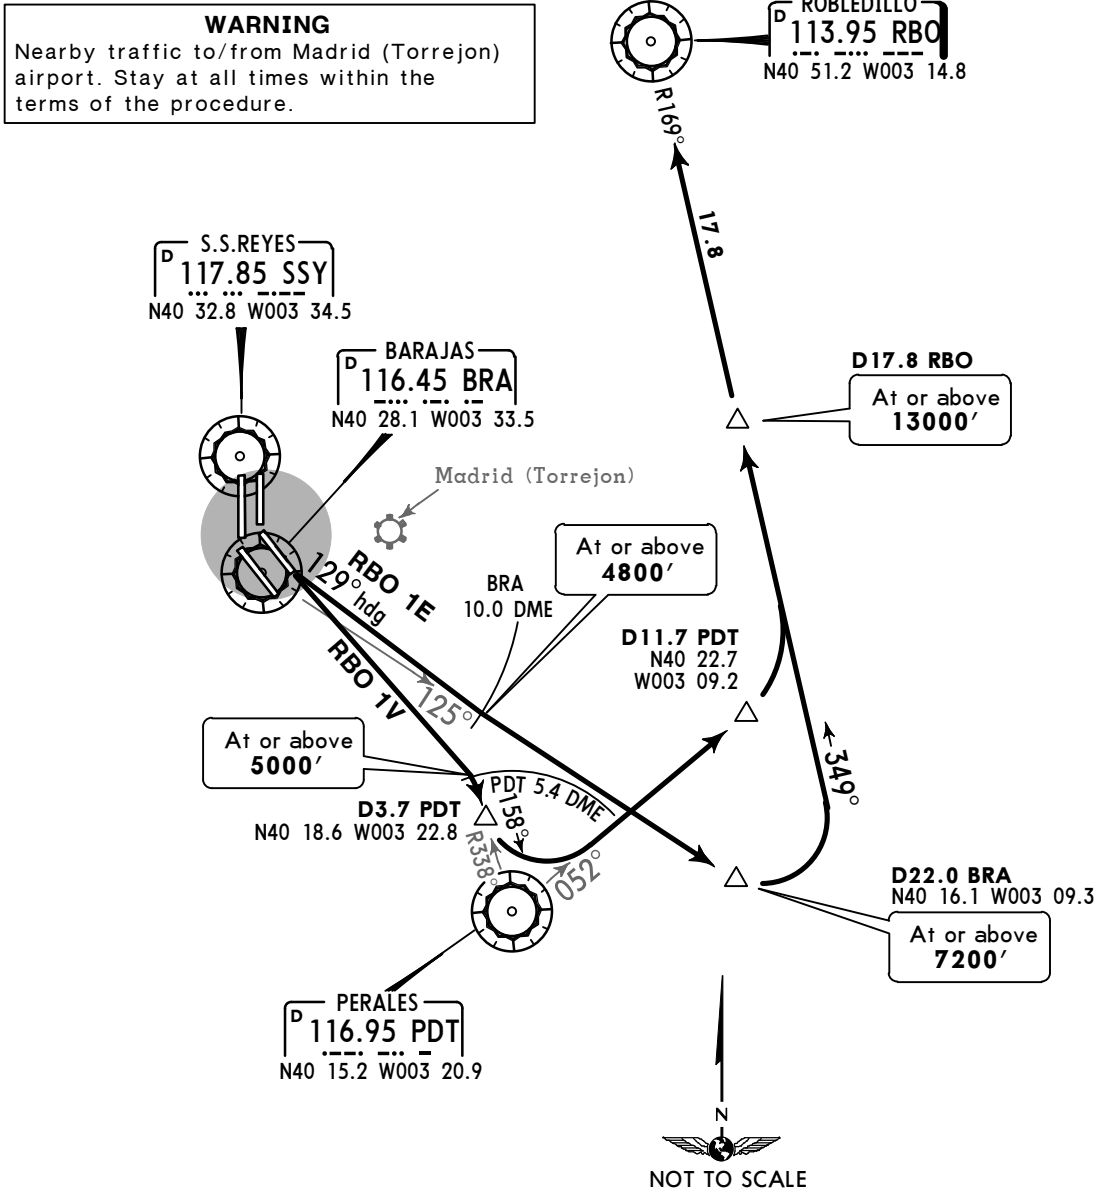

These SIDs require minimum climb gradients of
7.0% up to 2200', then
RBO 1E: 6.0% up to 13000'.
RBO 1V: 5.0% up to 13000'.

Gnd speed-KT	75	100	150	200	250	300
5.0% V/V (fpm)	380	506	760	1013	1266	1519
6.0% V/V (fpm)	456	608	911	1215	1519	1823
7.0% V/V (fpm)	532	709	1063	1418	1772	2127

RBO 1E: Changes in initial climb track are not permitted before DER (SSY 5.0 DME).
Initial ATC clearance: Maintain **13000'** and request flight level change enroute

SID	ROUTING
RBO 1E Usable 0700-2300LT	Climb on 129° heading to BRA 10.0 DME, turn LEFT, intercept BRA R-125 to D22.0 BRA, turn LEFT, intercept RBO R-169 inbound to RBO.
RBO 1V Usable 2300-0700LT	Climb on runway heading to PDT 5.4 DME, turn RIGHT, intercept PDT R-338 inbound to D3.7 PDT, turn LEFT, intercept PDT R-052 to D11.7 PDT, turn LEFT, intercept RBO R-169 inbound to RBO.

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS


JEPPesen
27 NOV 15 (10-3V1) Eff 10 Dec

MADRID, SPAIN
SID

Apt Elev
1998'

Trans level: By ATC Trans alt: 13000'
1. SIDs are also noise abatement procedures (refer to 10-4A).
2. EXPECT close-in obstacles

SOMOSIERRA TWO BRAVO (SIE 2B)
RWY 14R DEPARTURE
USABLE 2300-0700LT
SPEED: MAX 250 KT BELOW 10000'

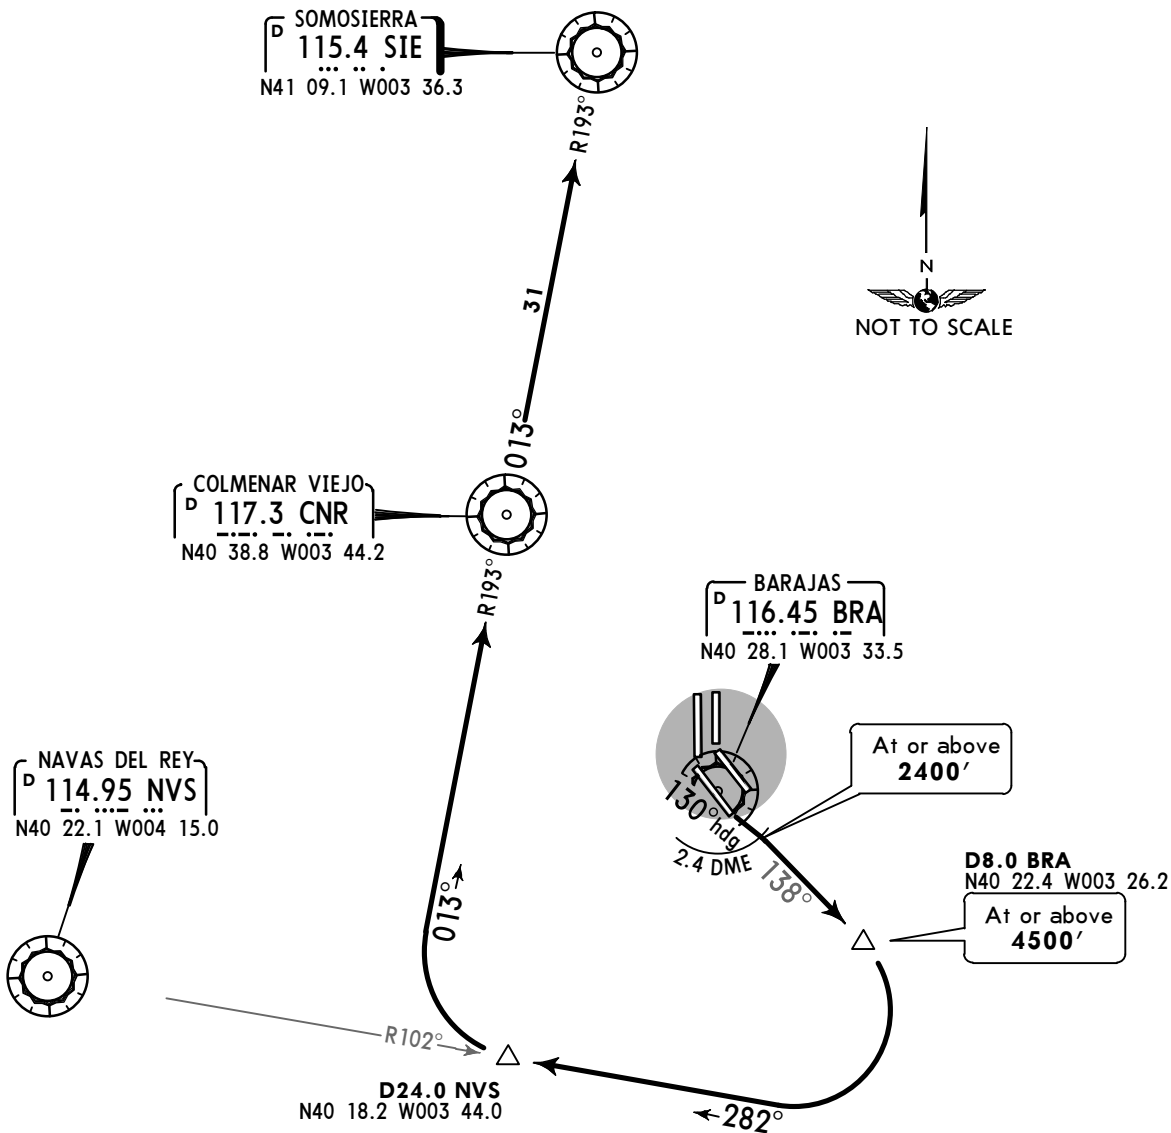

This SID requires minimum climb gradients
of
5.5% up to 5000', then
4.5% up to FL145.

Gnd speed-KT	75	100	150	200	250	300
5.5% V/V(fpm)	418	557	835	1114	1392	1671
4.5% V/V(fpm)	342	456	684	911	1139	1367

Changes in initial climb track are not permitted before DER (BRA 1 DME).

Initial ATC clearance: Maintain **13000'** and request flight level change enroute

ROUTING

Climb on 130° heading to BRA 2.4 DME, turn RIGHT, intercept BRA R-138 to D8.0 BRA, turn RIGHT, intercept NVS R-102 inbound to D24.0 NVS, turn RIGHT, intercept CNR R-193 inbound to CNR, intercept SIE R-193 inbound to SIE.


LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS

JEPPesen
27 NOV 15 10-3V2 Eff 10 Dec

MADRID, SPAIN
SID

Apt Elev 1998'
Trans level: By ATC Trans alt: 13000'
1. SIDs are also noise abatement procedures (refer to 10-4A).
2. EXPECT close-in obstacles.

SOMOSIERRA ONE NOVEMBER (SIE 1N)
SOMOSIERRA ONE TANGO (SIE 1T)
RWY 36L DEPARTURES
SPEED: MAX 250 KT BELOW 10000'

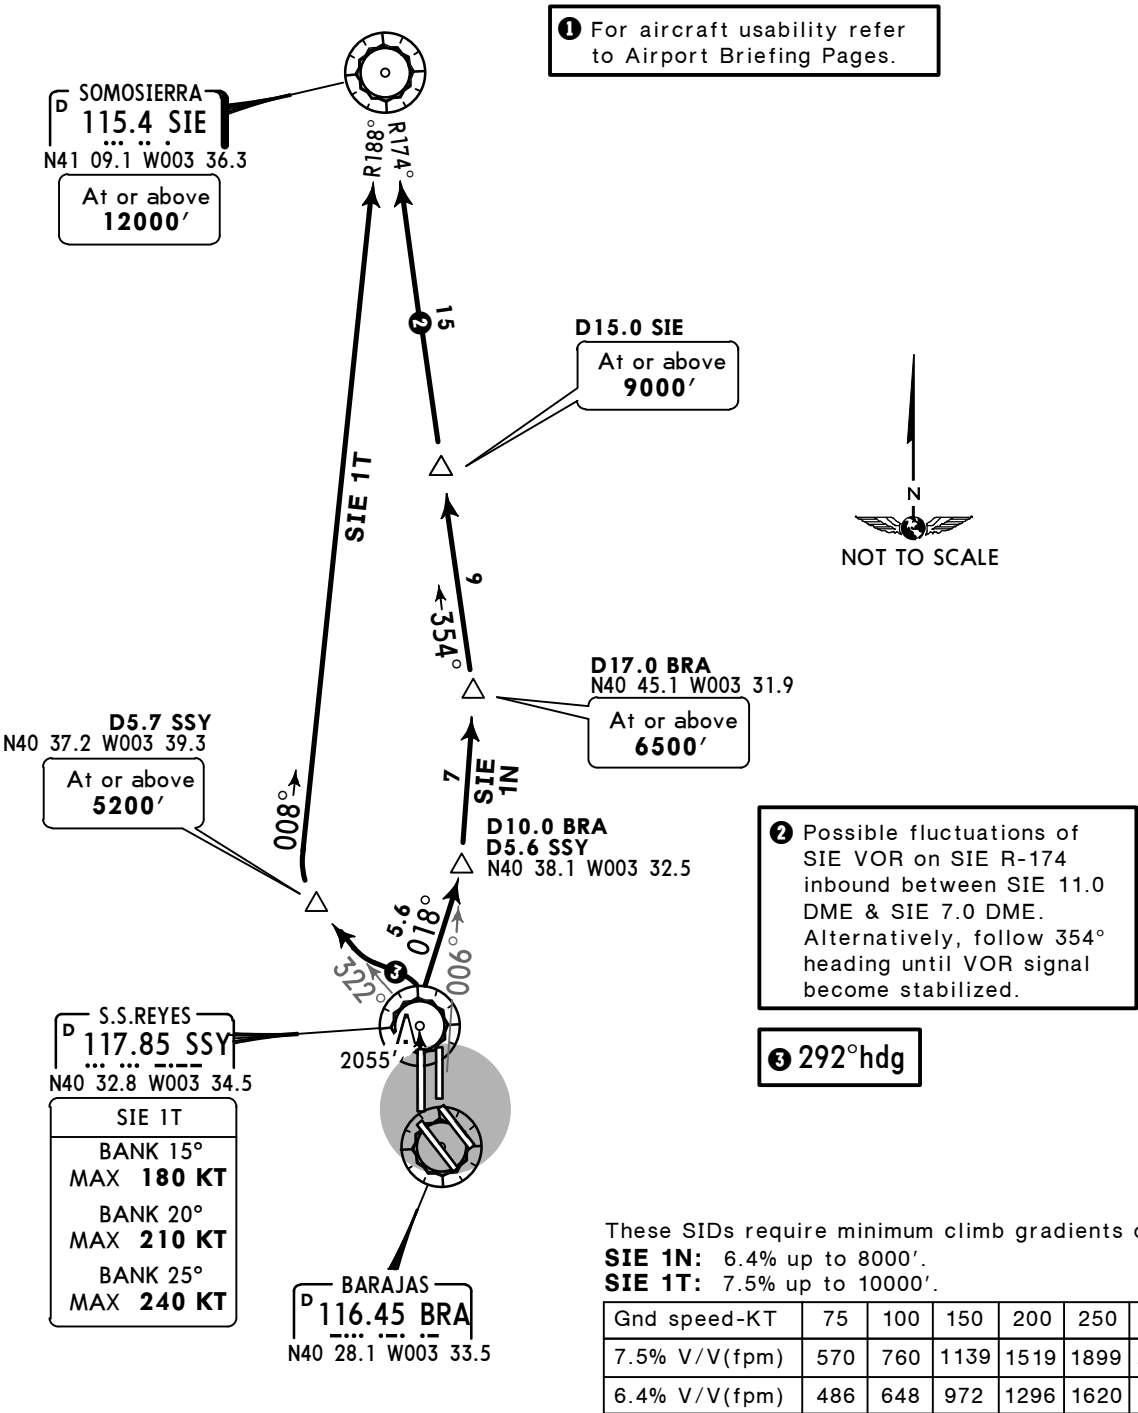

Initial ATC clearance: Maintain 13000' and request flight level change enroute

SID	ROUTING
SIE 1N Usable 2300-0700LT	Climb on runway heading to SSY, SSY R-018 to D10.0 BRA/D5.6 SSY, turn LEFT, intercept BRA R-006 to D17.0 BRA, turn LEFT, intercept SIE R-174 inbound to SIE.
SIE 1T Usable 0700-2300LT	Climb on runway heading to SSY, turn LEFT, 292° heading, intercept SSY R-322 to D5.7 SSY, turn RIGHT, intercept SIE R-188 inbound to SIE.

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS

JEPPESSEN
27 NOV 15 10-3V4 Eff 10 Dec

MADRID, SPAIN
SID


Apt Elev
1998'

Trans level: By ATC Trans alt: 13000'
1. SIDs are also noise abatement procedures (refer to 10-4A).
2. EXPECT close-in obstacles.

SOMOSIERRA ONE QUEBEC (SIE 1Q)
RWY 14R DEPARTURE

USABLE 0700-2300LT

SPEED: MAX 250 KT BELOW 10000'

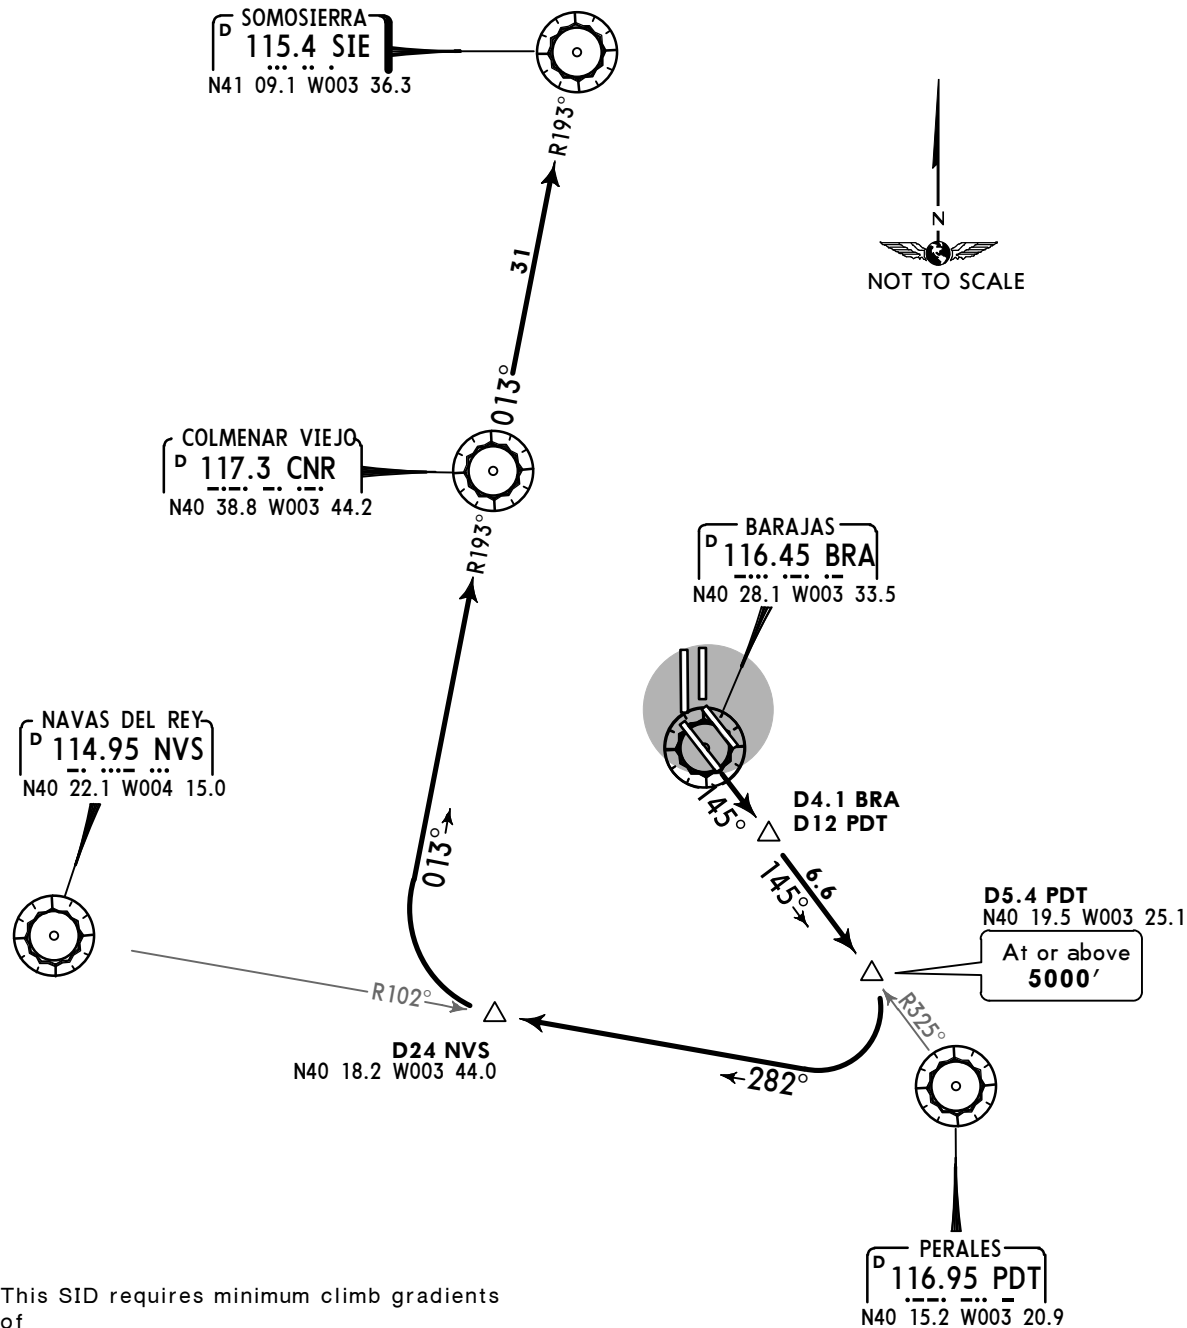

This SID requires minimum climb gradients
of
5.5% up to 5000', then
4.5% up to FL145.

Gnd speed-KT	75	100	150	200	250	300
5.5% V/V(fpm)	418	557	835	1114	1392	1671
4.5% V/V(fpm)	342	456	684	911	1139	1367

Initial ATC clearance: Maintain **13000'** and request flight level change enroute

ROUTING

Climb on BRA R-145 to D4.1 BRA/D12 PDT, turn RIGHT, intercept PDT R-325 inbound to D5.4 PDT, turn RIGHT, intercept NVS R-102 inbound to D24 NVS, turn RIGHT, intercept CNR R-193 inbound to CNR, intercept SIE R-193 inbound to SIE.

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS

JEPPESEN
27 NOV 15 10-3V5 Eff 10 Dec


MADRID, SPAIN
SID

Apt Elev 1998'	Trans level: By ATC Trans alt: 13000' 1. SIDs are also noise abatement procedures (refer to 10-4A). 2. EXPECT close-in obstacles.
-------------------	--

SOMOSIERRA TWO VICTOR (SIE 2V)
RWY 14L DEPARTURE

SPEED: MAX 250 KT BELOW 10000'

WARNING
Nearby traffic to/from Madrid (Torrejon) airport. Stay at all times within the terms of the procedure.

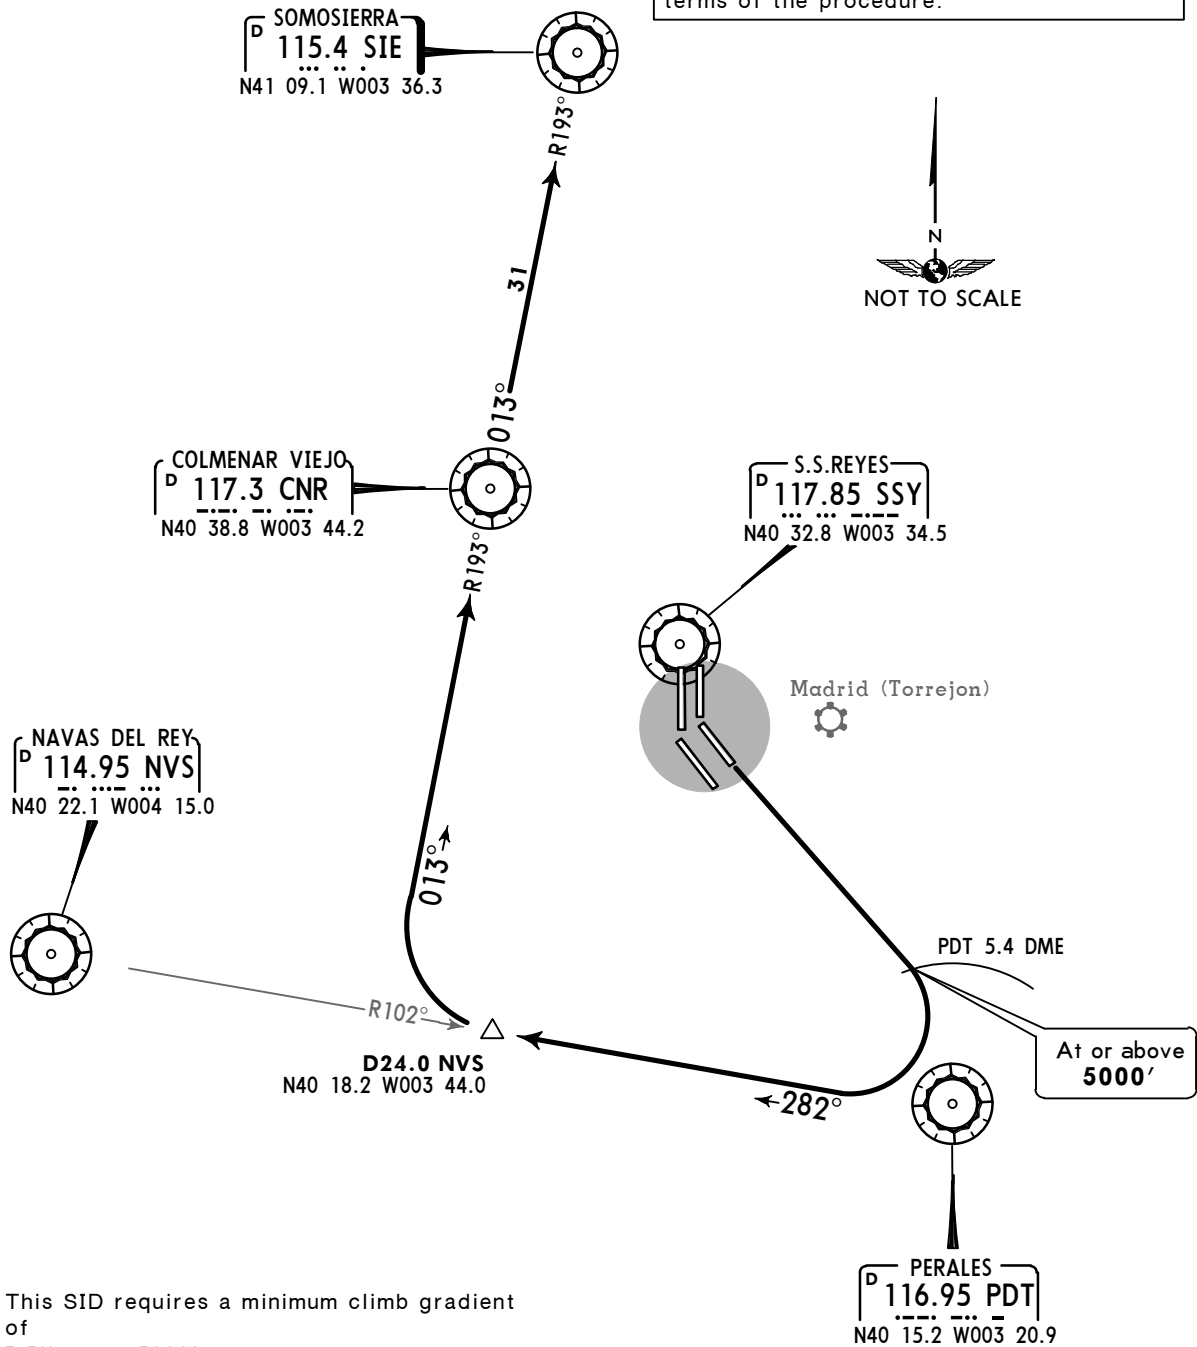

This SID requires a minimum climb gradient of 5.5% up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
5.5% V/V(fpm)	418	557	835	1114	1392	1671

Between 0700-2300LT changes in initial climb track are not permitted before DER (SSY 5.0 DME).

Initial ATC clearance: Maintain **13000'** and request flight level change enroute

ROUTING

Climb on runway heading to PDT 5.4 DME, turn RIGHT, intercept NVS R-102 inbound to D24.0 NVS, turn RIGHT, intercept CNR R-193 inbound to CNR, intercept SIE R-193 inbound to SIE.


LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS

JEPPESEN
27 NOV 15 10-3V6 Eff 10 Dec

MADRID, SPAIN
SID

Apt Elev 1998'	Trans level: By ATC Trans alt: 13000' 1. SIDs are also noise abatement procedures (refer to 10-4A). 2. EXPECT close-in obstacles.
-------------------	--

VILLATOBAS ONE BRAVO (VTB 1B)
VILLATOBAS ONE QUEBEC (VTB 1Q)
VILLATOBAS ONE VICTOR (VTB 1V)
RWYS 14R/L DEPARTURES
SPEED: MAX 250 KT BELOW 10000'

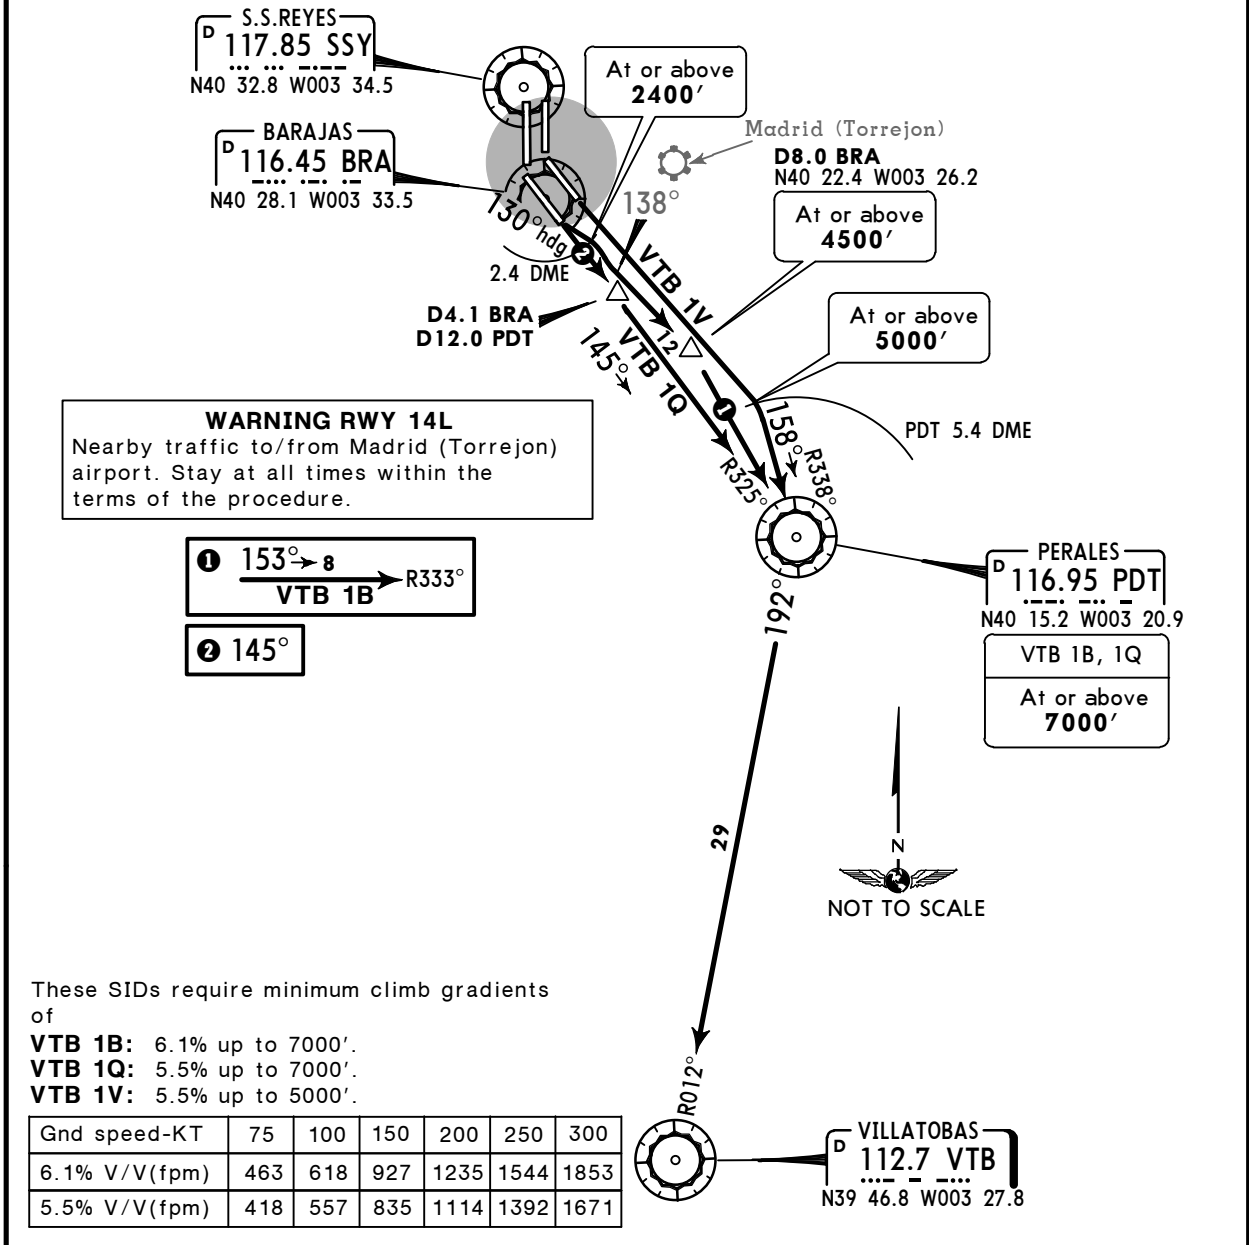

VTB 1B: Changes in initial climb track are not permitted before DER (BRA 1.0 DME).
VTB 1V: Between 0700-2300LT changes in initial climb track are not permitted before DER (SSY 5.0 DME).

Initial ATC clearance: Maintain 13000' and request flight level change enroute		
SID	RWY	ROUTING
VTB 1B Usable 2300-0700LT	14R	Climb on 130° heading to BRA 2.4 DME, turn RIGHT, intercept BRA R-138 to D8.0 BRA, turn RIGHT, intercept PDT R-333 inbound to PDT, turn RIGHT, intercept VTB R-012 inbound to VTB.
VTB 1Q Usable 0700-2300LT		Climb on BRA R-145 to D4.1 BRA/D12.0 PDT, turn RIGHT, intercept PDT R-325 inbound to PDT, turn RIGHT, intercept VTB R-012 inbound to VTB.
VTB 1V	14L	Climb on runway heading to PDT 5.4 DME, turn RIGHT, intercept PDT R-338 inbound to PDT, turn RIGHT, intercept VTB R-012 inbound to VTB.

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS

JEPPesen
27 NOV 15 10-3W Eff 10 Dec

MADRID, SPAIN
SID

Apt Elev
1998'


Trans level: By ATC Trans alt: 13000'
1. SIDs are also noise abatement procedures (refer to 10-4A).
2. EXPECT close-in obstacles.

VILLATOBAS ONE NOVEMBER (VTB 1N)

RWY 36L DEPARTURES

USABLE BETWEEN 2300-0700LT

SPEED: MAX 250 KT BELOW 10000'

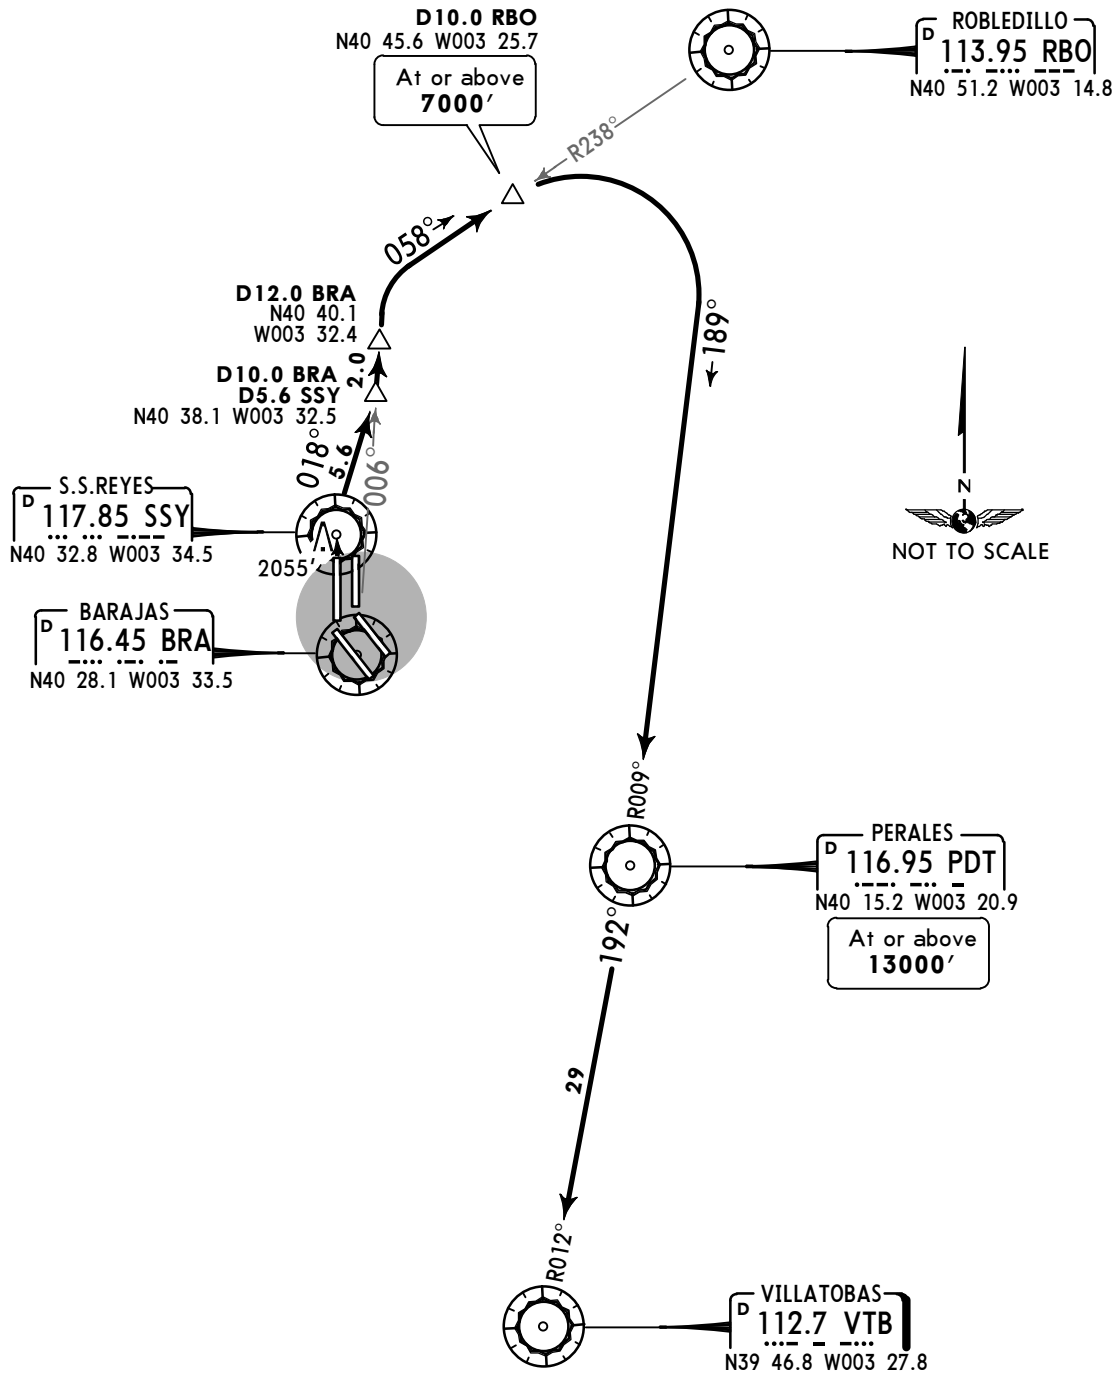

This SID require a minimum climb gradient
of
5.5% up to 8000'.

Gnd speed-KT	75	100	150	200	250	300
5.5% V/V(fpm)	418	557	835	1114	1392	1671

Initial ATC clearance: Maintain **13000'** and request flight level change enroute

ROUTING

Climb on runway heading to SSY, SSY R-018 to D10.0 BRA/D5.6 SSY, turn LEFT, intercept BRA R-006 to D12.0 BRA, turn RIGHT, intercept RBO R-238 inbound to D10.0 RBO, turn RIGHT, intercept PDT R-009 inbound to PDT, VTB R-012 inbound to VTB.

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS


JEPPesen
27 NOV 15 10-3X Eff 10 Dec

MADRID, SPAIN
SID

Apt Elev
1998'

Trans level: By ATC Trans alt: 13000'
1. SIDs are also noise abatement procedures (refer to 10-4A).
2. EXPECT close-in obstacles.

VILLATOBAS ONE DELTA (VTB 1D)
VILLATOBAS SIX WHISKEY (VTB 6W)
RWY 36R DEPARTURES
SPEED: MAX 250 KT BELOW 10000'

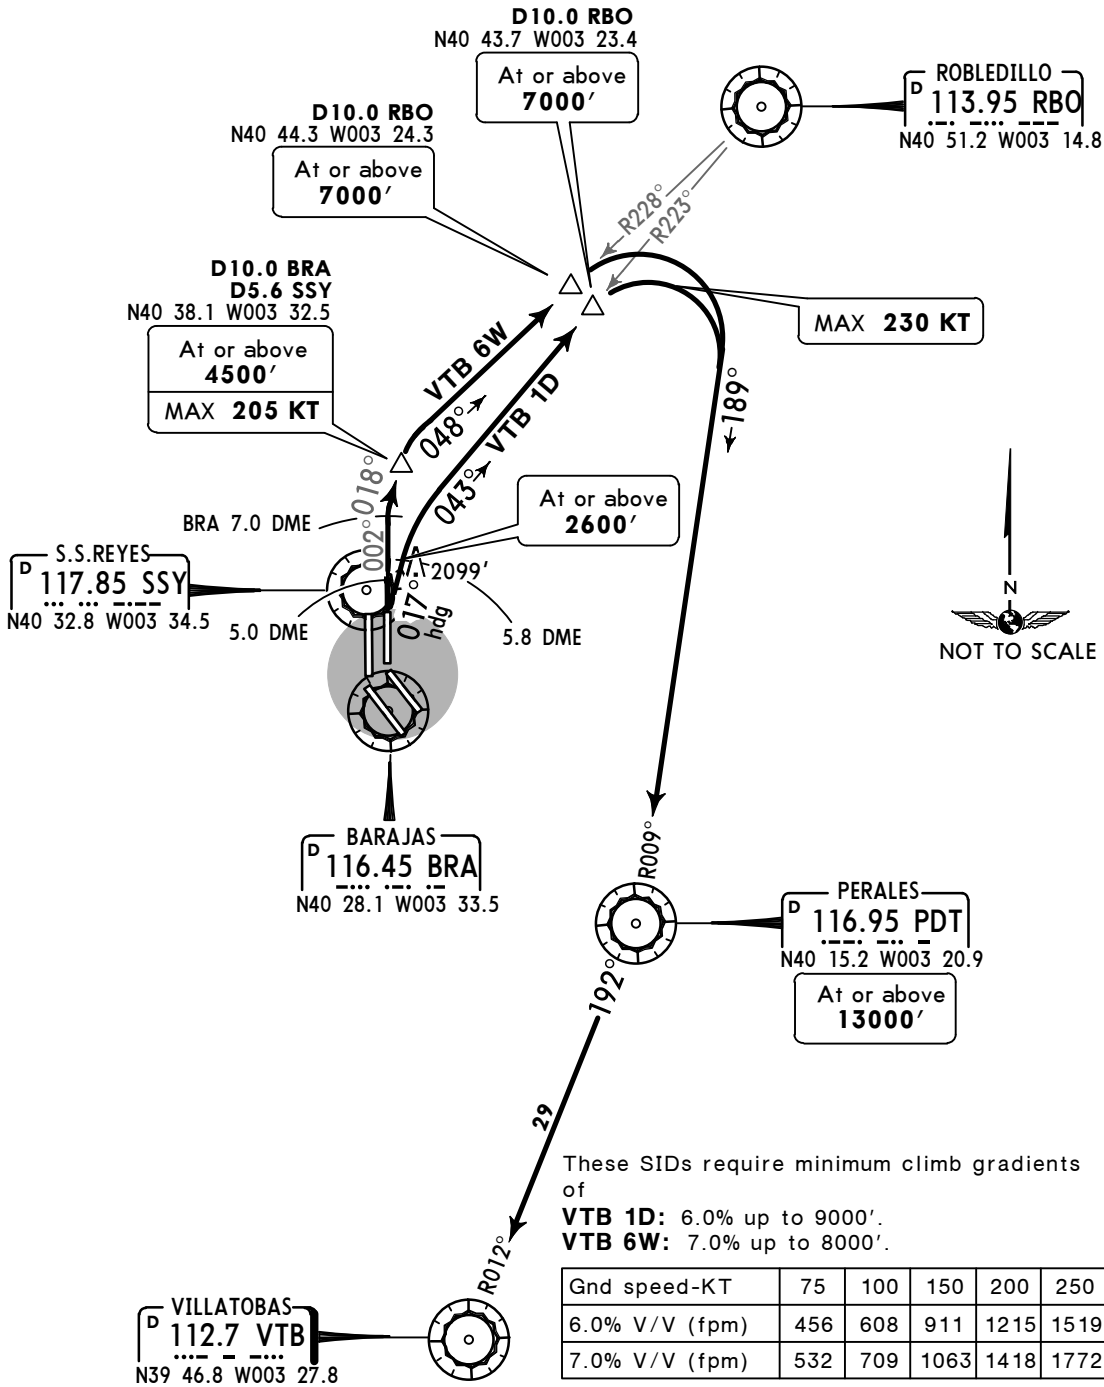

If unable to comply inform ATC before take-off.

VTB 1D: Changes in initial climb track are not permitted before DER (BRA 4.0 DME).

Initial ATC clearance: Maintain **13000'** and request flight level change enroute

SID	ROUTING
VTB 1D Usable 0700-2300LT	Climb on 017° heading to BRA 5.8 DME, intercept RBO R-223 inbound to D10.0 RBO, turn RIGHT, intercept PDT R-009 inbound to PDT, VTB R-012 inbound to VTB.
VTB 6W Usable 2300-0700LT	Climb on runway heading to BRA 5.0 DME, intercept BRA R-002 to BRA 7.0 DME, turn RIGHT, intercept SSY R-018 to D10.0 BRA/D5.6 SSY, turn RIGHT, intercept RBO R-228 inbound to D10.0 RBO, turn RIGHT, intercept PDT R-009 inbound to PDT, VTB R-012 inbound to VTB.

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS


JEPPESEN
11 SEP 15 10-3X3 Eff 17 Sep

MADRID, SPAIN
SID

Apt Elev
1998'

Trans level: By ATC Trans alt: 13000'
1. SIDs are also noise abatement procedures (refer to 10-4A).
2. EXPECT close-in obstacles.

ZAMORA TWO WHISKEY (ZMR 2W)
RWY 36R DEPARTURE
SPEED: MAX 250 KT BELOW 10000'

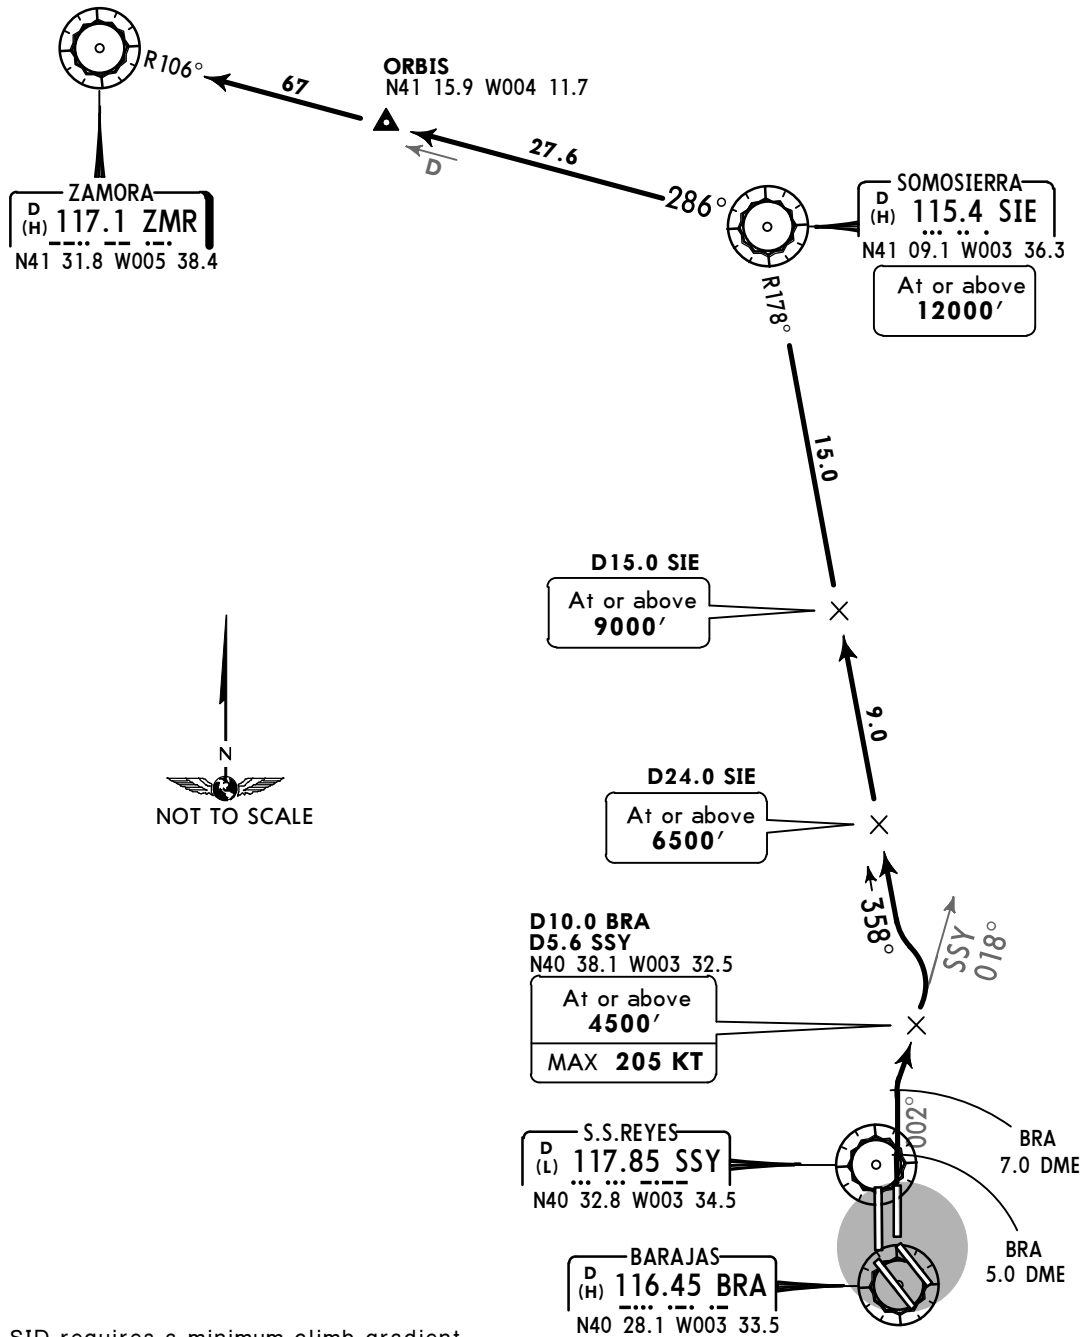

This SID requires a minimum climb gradient of 7.0% up to 8000'.

Gnd speed-KT	75	100	150	200	250	300
7.0% V/V (fpm)	532	709	1063	1418	1772	2127

If unable to comply inform ATC before take-off.

Between 0700-2300LT changes in initial climb track are not permitted before DER (BRA 4.0 DME).

Initial ATC clearance: Maintain 13000' and request flight level change enroute

ROUTING

Climb on runway heading to BRA 5.0 DME, intercept BRA R-002 to BRA 7.0 DME, turn RIGHT, intercept SSY R-018 to D10.0 BRA/D5.6 SSY, turn LEFT, intercept SIE R-178 inbound to SIE, turn LEFT, SIE R-286 via ORBIS to ZMR.

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS

 **JEPPESSEN**
11 SEP 15 **10-3X4** **Eff 17 Sep**

MADRID, SPAIN
SID

RWYS 14L, 36L CONTINGENCY DEPARTURES

Verify take-off frequency before starting take-off.
In the event of failure of BRA or PDT VORDME used for the departures
from runways 14L, 36L the following procedures shall be carried out:

- RWY 14L:** Climb on runway heading to 5000’ and hold for ATC instructions.
RWY 36L: On runway heading to SSY, SSY R-018 to D5.6 SSY, turn LEFT, inter-
cept SIE R-176 inbound to reach 8500’ and hold for ATC instructions.
2300-0700LT

These departures require minimum climb gradients
of

- RWY 14L:** 5.5%.
RWY 36L: 6.4%.

Gnd speed-KT	75	100	150	200	250	300
6.4% V/V(fpm)	486	648	972	1296	1620	1944
5.5% V/V(fpm)	418	557	835	1114	1392	1671

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS

27 NOV 15


JEPPESSEN

10-4

Eff 10 Dec

MADRID, SPAIN


NOISE

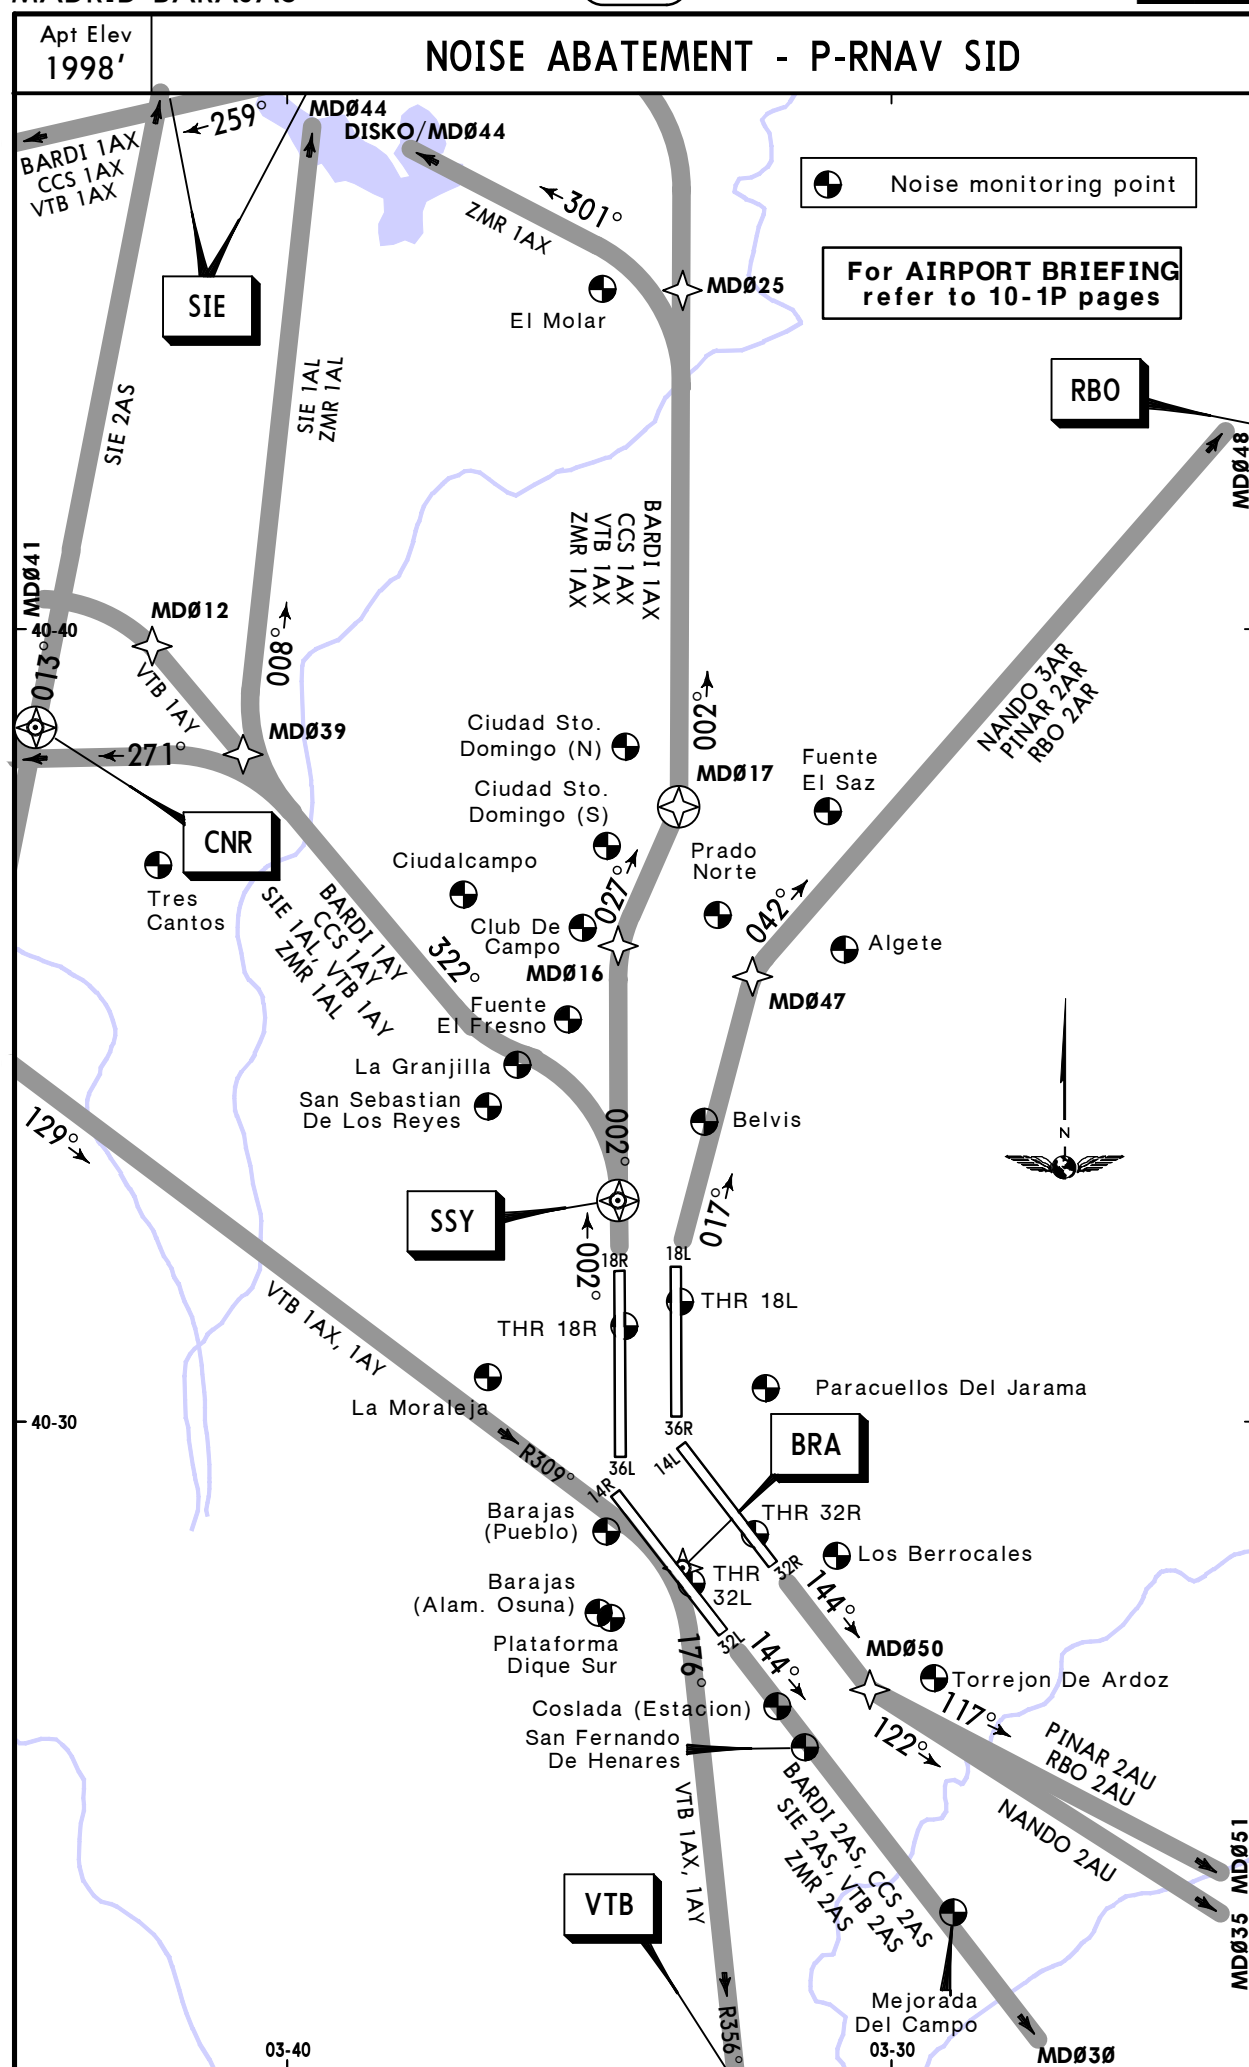

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS

JEPPesen
 27 NOV 15 **(10-4A)** **Eff 10 Dec**

MADRID, SPAIN
NOISE

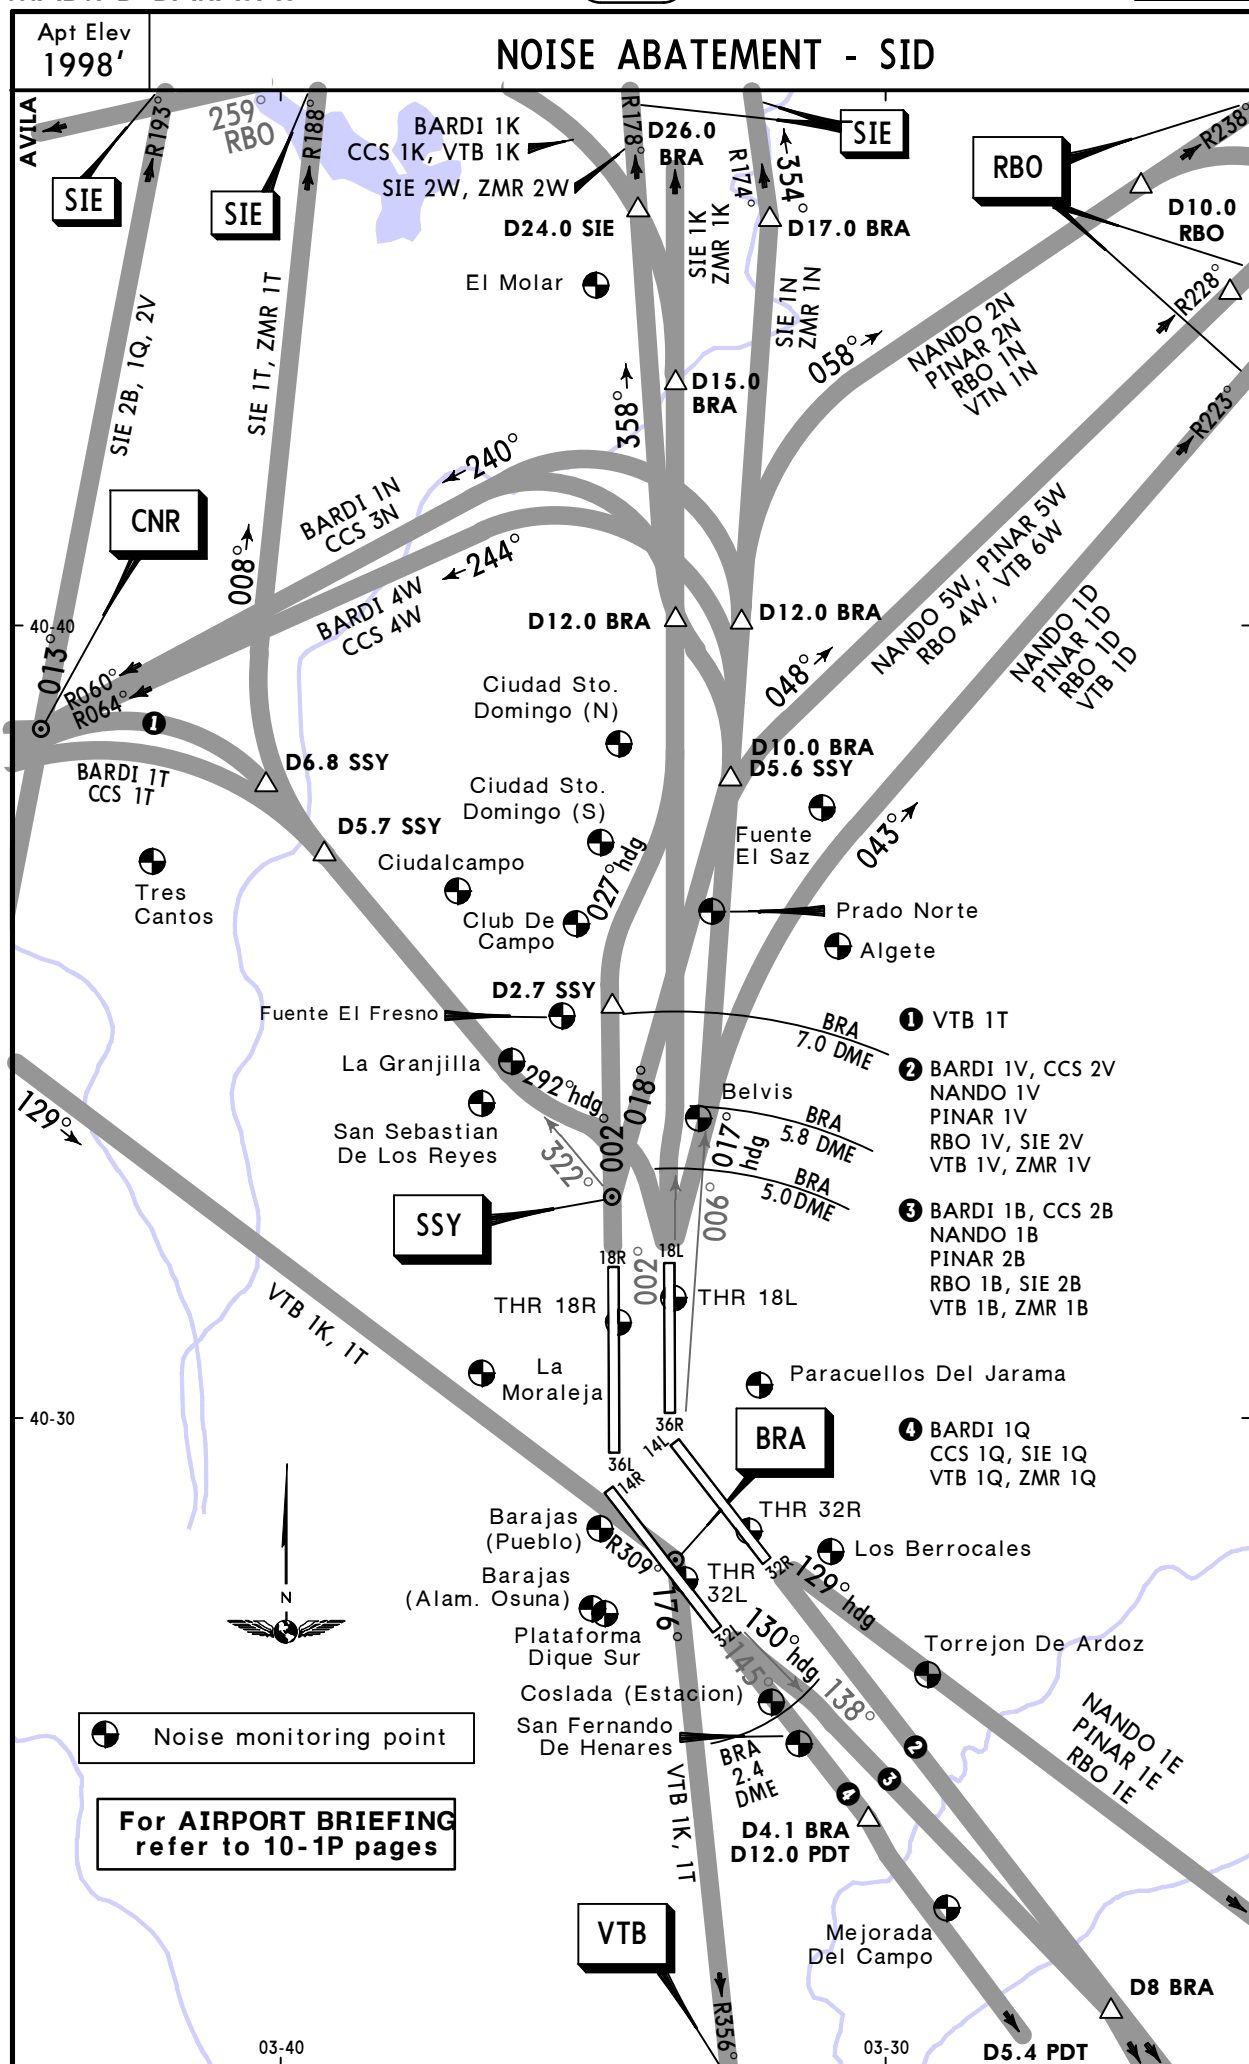

LEMD/MAD


 **JEPPESSEN**
30 JAN 15
Eff 5 Feb

10-8

MADRID, SPAIN
ADOLFO SUAREZ MADRID-BARAJAS

WORKS ON TWY K2

REFER ALSO TO LATEST NOTAMS

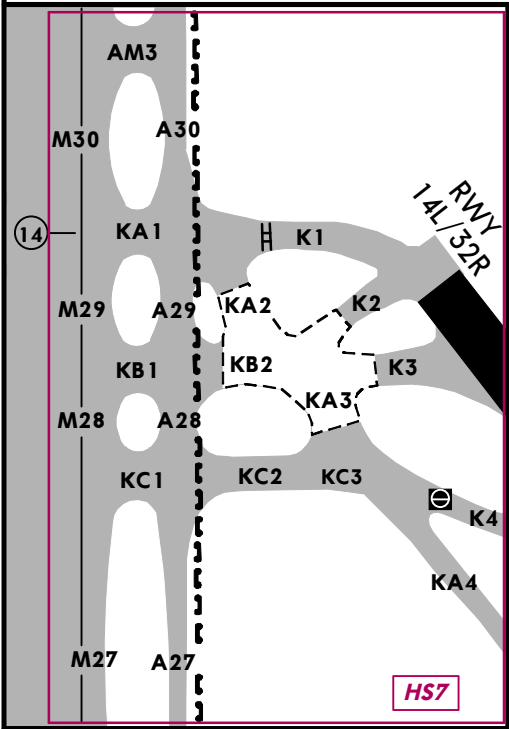

PHASE 1 K2:

Area with impact to TWY K3, KA and KB

During this phase TWY K2, K3, KA2, KA3 and KB2 are closed to traffic in continued schedule, due to the presence of a drop in the affected section of TWY K2 of about 70 cm deep within the RWY strip at a distance from the RWY centre line of 120 m approximately.

Works will be realized at NIGHT with the RWY closed.

Standard taxiing routes shown on 10-1P pages will be modified as follows:

**NORTH CONFIGURATION:
ARRIVAL**

**From RWY 32R to:
Terminal 1, 2 or 3**

K5, KA4, or K4, KC3, KC2 from TWY A to A10 (transfer point A10-2) and the same routes for RWY 32L.

Terminal 4

Follow ATC instructions to leave RWY 32R.
Standard route: K5, KA4, or K4, KC3, KC2, TWY A, H2, H3 (transfer point H3-2).

Terminal 4S

Follow ATC instructions to leave RWY 32R.
Standard route: K5, KA4 or K4, KC3, KC2.

Ramp 20

Stands 582-586: Standard route, TWY A, A23, EA1, EA2.
Stands 568-580: Standard route, TWY A, A25, EC1, EC2.
Stands 620-628: Standard route, TWY A, A26, M1, M27.

Ramp 21:

Stands 556-558: Standard route, KC1, M28, M29, Gate 14, G14.
Stands 562-566: Standard route, TWY A, A25, EC1, EC2.
Stands 612: Standard route, KC1, M28, M29.
Stands 614-616: Standard route, KC1, M28.
Stands 618: Standard route, KC1.
Stands 608: Standard route, KC1, M28 until M30.

Ramp 22:

Stands 540-556: Standard route, KC1, M28, M29, Gate 14, EC6.
Stands 600-606: Standard route, KC1, M28 until M31.

Ramp 23:

Stands 500-530: Standard route, KC1, M28, M29, Gate 14, EC6, EC7, N11, N10, EA6, EA5.
Stands 532-536: Standard route, KC1, M28, M29, Gate 14, EC6, EC7, N11, N10, EA6.
Stands 538: Standard route, KC1, M28, M29, Gate 14, EC6, EC7, N11, N10.

DEPARTURE

Routes are not modified.

**SOUTH CONFIGURATION
ARRIVAL**

Routes are not modified.

DEPARTURE

To RWY 14L from Terminal 1, 2 or 3:

The same routes toward RWY 14R to A12.
From A12 to A27, A28, A29, K1, runway-holding position.

To RWY 14L from Terminal 4:

Standard route: S3 (transfer point S3-2), S2, A17 until A28, A29, K1, runway-holding position.

To RWY 14L from Terminal 4S:


Departure routes are not modified.

LEMD/MAD

 **JEPPESSEN**
30 JAN 15
Eff 5 Feb

MADRID, SPAIN
ADOLFO SUAREZ MADRID-BARAJAS

WORKS ON TWY K2 (Continued)
REFER ALSO TO LATEST NOTAMS

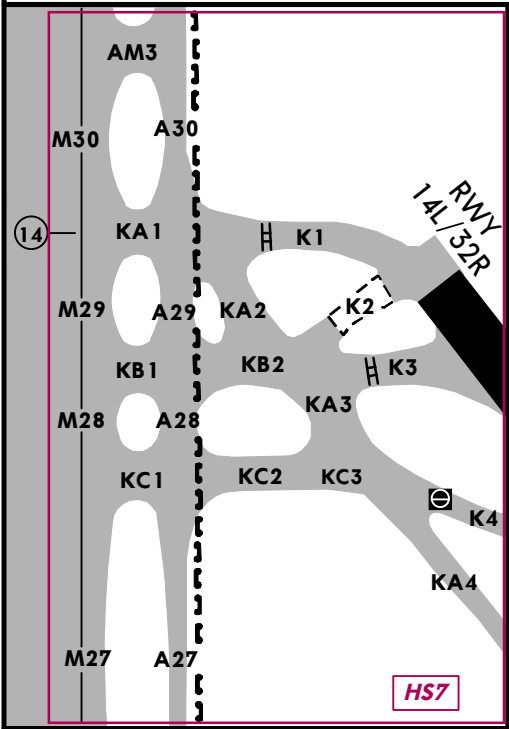

PHASE 2 K2:
Area without impact to KA and KB

During this phase, due to the presence of a drop in the affected section of TWY K2 of approximately 70 cm deep, within the RWY strip approximately to 75 m of the RWY centre line and within the strip of TWY K3 to about 44 m from the TWY K3 centre line, the following restrictions are established:

- Closure to the traffic in continued hours of TWY K2.
- TWY K3 limited on continued hours to ICAO aircraft code letter E (Chapter 1, Annex 14) maximum.

Works will be done at NIGHT hours with the RWY closed.

Standard taxiing routes shown on 10-1P pages will be modified as follows:

NORTH CONFIGURATION:
Routes are not modified.

SOUTH CONFIGURATION
ARRIVAL
Routes are not modified.


DEPARTURE

To RWY 14L from Terminal 1, 2 or 3:
The same routes toward RWY 14R to A12.
To A12 to A27, A28, KB2, K3, runway-holding position or A29, K1, runway-holding position.

To RWY 14L from Terminal 4:
Standard routes: S3 (transfer point S3-2), S2, A17 until A28, A29, K1, runway-holding position or A28, KB2, K3, runway-holding position.

To RWY 14L from Terminal 4S:
Departure routes are not modified.

LEMD/MAD
JEPPESSEN
MADRID, SPAIN

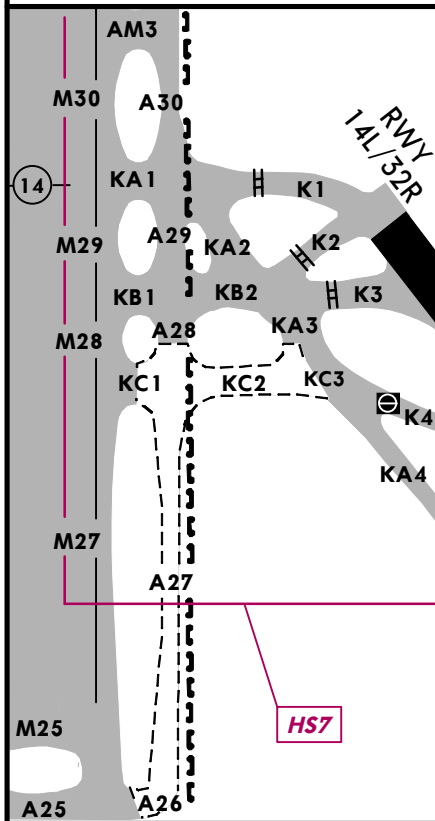30 JAN 15
Eff 5 Feb
10-8B
ADOLFO SUAREZ MADRID-BARAJAS
WORKS ON TWY A28
REFER ALSO TO LATEST NOTAMS

PHASE 1 A28:
Area with impact to TWY KC and without impact to TWY KB

During this phase, due to the presence of a drop in the affected section of TWY A28 of about 70 cm deep, the following restrictions are established:

- Closure to the traffic in continued hours of TWY A28, A27, A26, KC1, KC2 and KC3.
- Section from M28 to AM1 bidirectional.
- Bend between KB1 and M28, bend between KA1 and M29, and bend between KB1 and A29 without lighting in the TWY centre line.

Works will be done at continued hours in DAY and NIGHT.

Standard taxiing routes shown on 10-1P pages will be modified as follows:

**NORTH CONFIGURATION
ARRIVAL**
From RWY 32R or 32L to Terminal 1, 2 or 3:

K5, KA4, KA3, KB2, or K4, KA3, KB2, or K3, KB2, KB1, M28, M27, AM1, A25 from TWY A to A10 (transfer point A10-2) and the same routes for RWY 32L; or K5, KA4, KA3, KA2, KA1, or K4, KA3, KA2, KA1, or K3, KA2, KA1, M30 until M32, N11 until N1, A21 from TWY A to A10 (transfer point A10-2) and the same routes for RWY 32L.

From RWY 32R to Terminal 4:

Follow ATC instructions to leave RWY 32R.

K5, KA4, KA3, KB2, or K4, KA3, KB2, or K3, KB2, KB1, M28, M27, AM1, A25 to TWY A, H2, H3 (transfer point H3-2); or K5, KA4, KA3, KA2, KA1, or K4, KA3, KA2, KA1, or K3, KA2, KA1, M30 until M32, N11 until N1, A21 to TWY A, H2, H3 (transfer point H3-2).

From RWY 32R to Terminal 4S:

Follow ATC instructions to leave RWY 32R.

Standard routes: K5, KA4, KA3, KB2, KB1 or K4, KA3, KB2, KB1 or K3, KB2, KB1 or K5, KA4 until KA1, or K4, KA3 until KA1 or K3, KA2, KA1.

Ramp 20:

Stands 582-586: Standard route, KB1, M28, M27, AM1, A25 until A23, EA1, EA2 or M30 until M32, N11 until N2, M22, EA2.

Stands 568-580: Standard route, KB1, M28, M27, AM1, A25, EC1, EC2 or M30 until M32, N11 until N2, M22 until M24, EC2.

Stands 620-628: Standard route, KB1, M28, M27.

Ramp 21:

Stands 556-558: Standard route, Gate 14, G14.

Stands 562-566: Standard route, KB1, M28, M27, AM1, A25, EC1, EC2 or M30 until M32, N11 until N2, M22 until M24, EC2.

Stands 612: Standard route, KB1, M29.

Stands 614: Standard route, KB1.

Stands 616-618: Standard route, KB1, M28.

Stands 608: Standard route, M30.

Ramp 22:

Stands 540-556: Standard route, Gate 14, EC6.

Stands 600-606: Standard route, M30, M31.

**NORTH CONFIGURATION
ARRIVAL (Continued)**
Ramp 23:

Stands 500-530: Standard route, Gate 14, EC6, EC7, N11, N10, EA6, EA5.

Stands 532-536: Standard route, Gate 14, EC6, EC7, N11, N10, EA6.

Stands 538: Standard route, Gate 14, EC6, EC7, N11, N10.

DEPARTURE

Routes are not modified.

**SOUTH CONFIGURATION
ARRIVAL**

Routes are not modified.

DEPARTURE
To RWY 14L from Terminal 1, 2 or 3:

The same routes toward RWY 14R to A12.

From A12 to A25, AM1, M27 until M28, KB1, KB2, K3, runway-holding position or K2, runway-holding position or KB1, A29, K1, runway-holding position; or from A12 to A20, B1 until B12, M33 until M30, KA1, K1, runway-holding position, or M29, KB1, KB2, K2, runway-holding position or K3, runway-holding position.

To RWY 14L from Terminal 4:

Standard route: S3 (transfer point S3-2), S2, A17 until A25, AM1, M27 until M28, KB1, KB2, K3, runway-holding position or K2, runway-holding position or KB1, A29, K1, runway-holding position; or from A17 to A20, B1 until B12, M33 until M30, KA1, K1, runway-holding position, or M29, KB1, KB2, K2, runway-holding position or K3, runway-holding position.

To RWY 14L from Terminal 4S:

Departure routes are not modified.

LEMD/MAD


JEPPESSEN
30 JAN 15
Eff 5 Feb

10-8C

MADRID, SPAIN
ADOLFO SUAREZ MADRID-BARAJAS

WORKS ON TWY A28 (Continued)

REFER ALSO TO LATEST NOTAMS

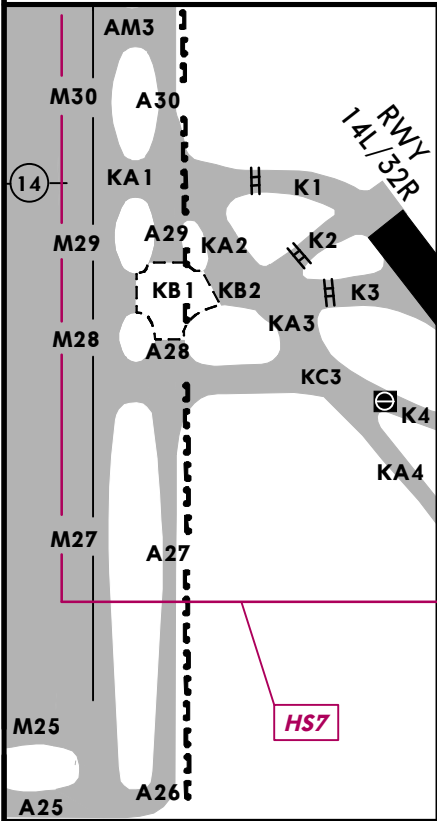

PHASE 2 A28: Area with impact to TWY KB and without impact to KC

During this phase, due to the presence of a drop in the affected section of TWY A28 of about 70 cm deep, the following restrictions are established:

- Closure to the traffic in continued hours of TWY A28, A29, KB1 and KB2.
- Section from M28 to M29 bidirectional.
- Bend between A29 and KC1 and bend between KA1 and M29 without lighting in the TWY centre line.

Works will be done at continued hours in DAY and NIGHT.

Standard taxiing routes shown on 10-1P pages will be modified as follows:

**NORTH CONFIGURATION
ARRIVAL**

From RWY 32R to Terminal 1, 2 or 3::

K5, KA4, KC3, KC2, or K4, KC3, KC2 to TWY A to A10 (transfer point A10-2) and the same routes for RWY 32L or K3, KA2, KA1, M29, M28, KC1, A27 until M27, AM1, to TWY A to A10 (transfer point A10-2) and the same routes for RWY 32L, or K3, KA2, KA1, M30 until M32, N11 until N1, A21 to TWY A to A10 (transfer point A10-2) and the same routes for RWY 32L.

From RWY 32R to Terminal 4:

Follow ATC instructions to leave RWY 32R.
Standard route: K5, KA4, KC3, KC2, or K4, KC3, KC2 to TWY A, H2, H3 (transfer point H3-2), or K3, KA2, KA1, M29, M28, KC1, A27 until M27, AM1, to TWY A, H2, H3 (transfer point H3-2), or K3, KA2, KA1, M30 until M32, N11 until N1, A21 to TWY A, H2, H3 (transfer point H3-2).

From RWY 32R to Terminal 4S:

Follow ATC instructions to leave RWY 32R.
Standard route: K5, KA4, KC3, KC2, TWY A or K4, KC3, KC2, TWY A or K5, KA4 until KA1, or K4, KA3 until KA1 or K3, KA2, KA1.

Ramp 20:

Stands 582-586: Standard route, A23, EA1, EA2 or M30 until M32, N11 until N2, M22, EA2.
Stands 568-580: Standard route, A25, EC1, EC2 or M30 until M32, N11 until N2, M22 until M24, EC2.
Stands 620-628: Standard route, A26, AM1, M27 or M29 until M27.

Ramp 21:

Stands 556-558: Standard route, Gate 14, G14.
Stands 562-566: Standard route, A25, EC1, EC2 or M30 until M32, N11 until N2, M22 until M24, EC2.
Stands 612: KC1, M28, M29 or KA1, M29, M28.
Stands 614-616: KC1, M28, or KA1, M29, M28.
Stands 618: KC1 or KA1, M29, M28.
Stands 608: Standard route, M30.

Ramp 22:

Stands 540-556: Standard route, Gate 14, EC6.
Stands 600-606: Standard route, M30, M31.

**NORTH CONFIGURATION
ARRIVAL (Continued)**

Ramp 23:

Stands 500-530: Standard route, Gate 14, EC6, EC7, N11, N10, EA6, EA5.
Stands 532-536: Standard route, Gate 14, EC6, EC7, N11, N10, EA6.
Stands 538: Standard route, Gate 14, EC6, EC7, N11, N10.

DEPARTURE

Routes are not modified.

**SOUTH CONFIGURATION
ARRIVAL**

Routes are not modified.

DEPARTURE

To RWY 14L from Terminal 1, 2 or 3:

The same routes toward RWY 14R to A12.
From A12 to A27, KC1, M28, M29, KA1, K1 or KA2, K3, runway-holding position or from A12 to A20, B1 until B12, M33 until M30, KA1, K1, runway-holding position, or KA2, K3, runway-holding position.


To RWY 14L from Terminal 4:

Standard route: S3 (transfer point S3-2), S2, A17 until A27, KC1, M28, M29, KA1, K1, runway-holding position or KA2, K3, runway-holding position or from A12 to A20, B1 until B12, M33 until M30, KA1, K1, runway-holding position, or KA2, K3, runway-holding position.

To RWY 14L from Terminal 4S:

Departure routes are not modified.

LEMD/MAD
JEPPESSEN
 20 FEB 15
 Eff 5 Mar

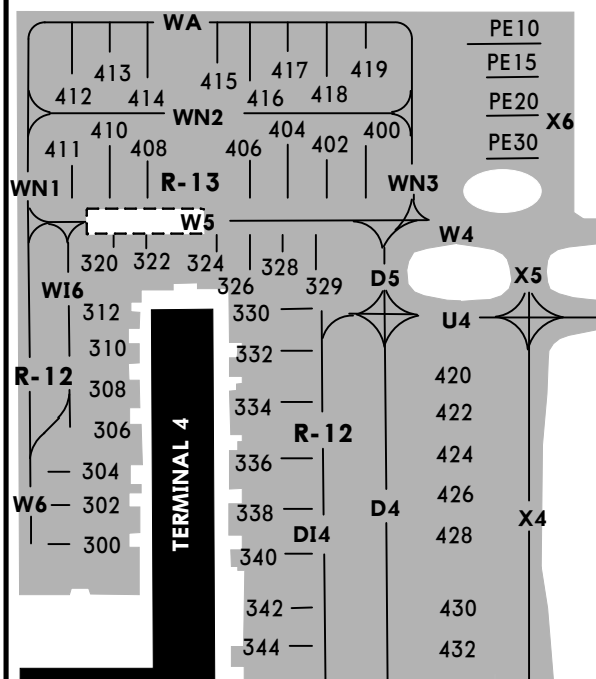10-8D
MADRID, SPAIN
ADOLFO SUAREZ MADRID-BARAJAS
WORKS ON TWY W5
REFER ALSO TO LATEST NOTAMS

PHASE 1: TWY W5 West

During this phase the following changes will apply:

- TWY W5 between the access to stand 324 and 85'/26 m from TWY WN1 centre line approx, will be continuously closed to traffic.
- Two-way traffic will be permitted in TWYs WN2, WA and all other sections of TWY W5.
- Stands 320 to 324 will not be usable.
- ACFT shall access stands 408 to 411 from WN2, nosing to South. Exit from stands 408 to 411 shall be carried out towing the ACFT, nosing to East.
- Push-back from stand 326 shall be carried out towing the ACFT to stand 328 entry marking and releasing. Subsequent ACFT start shall be performed at minimum power.
- Access to TWY W16 from W5 and to/from WN1 will be closed, so access to and push-back from stands 300 to 312 shall be carried out from/to TWY W6.

Standard taxiing routes shown on 10-1P pages will be modified as follows:

**NORTH CONFIGURATION:
ARRIVAL**
From RWY 32L to Terminal 4:

Ramp 12:

Stands 300 to 312: Standard route, J3 (transfer point J3-2), J4, D1 until D5, WN3, WN2, WN1, W6.

Ramp 13:

Stands 408 to 411: Standard route, J3 (transfer point J3-2), J4, D1 until D5, WN3, WN2.

Stands 412 to 419: Standard route, J3 (transfer point J3-2), J4, D1 until D5, WN3, WA.

From RWY 32R to Terminal 4:

Ramp 12:

Stands 300 to 312: Standard route, H3 (transfer point H3-2), H4, D2 until D5, WN3, WN2, WN1, W6.

Ramp 13:

Stands 408 to 411: Standard route, J3 (transfer point J3-2), J4, D1 until D5, WN3, WN2.

Stands 412 to 419: Standard route, J3 (transfer point J3-2), J4, D1 until D5, WN3, WA.

From RWY 18R to Terminal 4:

Ramp 12:

Stands 300 to 312: Standard route W3 (transfer point W3-2), X5, U4, D5, WN3, WN2, WN1, W6.

Ramp 13:

Stands 408 to 411: Standard route W3 (transfer point W3-2), X5, U4, D5, WN3, WN2.

Stands 412 to 419: Standard route W3 (transfer point W3-2), X5, U4, D5, WN3, WA.

From RWY 18L to Terminal 4:

Ramp 12:

Stands 300 to 312: Standard route, H3 (transfer point H3-2), H4, D2 until D5, WN3, WN2, WN1, W6.

Ramp 13:

Stands 408 to 411: Standard route W3 (transfer point W3-2), X5, U4, D5, WN3, WN2.

Stands 412 to 419: Standard route W3 (transfer point W3-2), X5, U4, D5, WN3, WA.

**NORTH CONFIGURATION:
DEPARTURE**
To RWY 36L from Terminal 4:

Ramp 12:

Stands 326 to 328: W5, W4, X5, X4, R3 (transfer point R3-2), standard route.

To RWY 36L from Terminal 4S:

Ramp 12:

Stands 326 to 328: W5, W4, X5 until X3, S3 (transfer point S3-2), standard route.

To RWY 14R or 14L from Terminal 4:


Ramp 12:

Stands 326 to 328: W5, W4, X5 until X3, S3, (transfer point S3-2), standard route.

To RWY 14L from Terminal 4:

Ramp 12:

Stands 326 to 328: W5, W4, X5 until X3, S3, (transfer point S3-2), standard route.

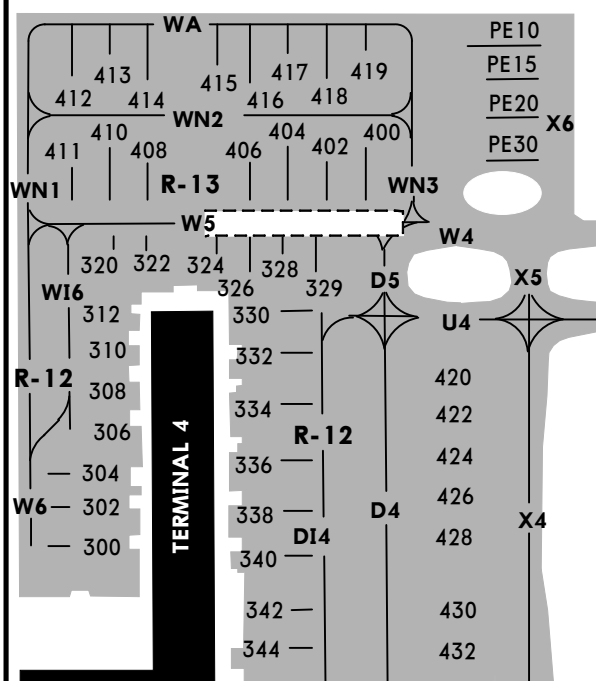LEMD/MAD
JEPPESSEN
 20 FEB 15
Eff 5 Mar
10-8E
MADRID, SPAIN
ADOLFO SUAREZ MADRID-BARAJAS
WORKS ON TWY W5 (Continued)
REFER ALSO TO LATEST NOTAMS

PHASE 2: TWY W5 East

During this phase the following changes will apply:

- TWY W5 between the access to stand 324 and 88'/26.75 m from TWY WN3 centre line approx, and taxiway D5 will be continuously closed to traffic.
- Two-way traffic will be permitted in TWYs U4, W4, WN2 and all other sections of TWY W5.
- TWY WN3 section between W4 and WN2 is restricted to ACFT with code letter C or below.
- Stands 324 to 329 will not be usable.
- ACFT shall access stands 400 to 406 from WN2, nosing to South. Exit from stands 400 to 406 shall be carried out towing the ACFT nosing to East.
- Push-back from stand 322 shall be carried out towing the ACFT to stand 320 entry marking and releasing. Subsequent ACFT start shall be performed at minimum power.
- Code letter D or above ACFT access to stand PE30 shall be carried out through X6, and they shall exit the stand following the RWY and apron service guidance via WN3 to the North and then cross stand PE15 to reach X6.

Standard taxiing routes shown on 10-1P pages will be modified as follows:

**NORTH CONFIGURATION:
ARRIVAL**
From RWY 32L to Terminal 4:

Ramp 11:

Stands 430 to 432: Standard route, J3 (transfer point J3-2), J4, D1 until D4, U4, X4.

Ramp 12:

Stands 300 to 312: Standard route, J3 (transfer point J3-2), J4, D1 until D4, U4, X5, W4, WN3, WN2, WN1, W16.

Stands 320 to 322: Standard route, J3 (transfer point J3-2), J4, D1 until D4, U4, X5, W4, WN3, WN2, WN1, W5.

Stands 420 to 428: Standard route, J3 (transfer point J3-2), J4, D1 until D4, U4, X4.

Ramp 13:

Stands 400 to 406: Standard route, J3 (transfer point J3-2); J4, D1 until D4, U4, X5, W4, WN3, WN2.

Stands 408 to 411: Standard route, J3 (transfer point J3-2), J4, D1 until D4, U4, X5, W4, WN3, WN2, WN1, W5.

Stands 412 to 419: Standard route, J3 (transfer point J3-2), J4, D1 until D4, U4, X5, W4, WN3, WA.

From RWY 32R to Terminal 4:

Ramp 11:

Stands 430 to 432: Standard route, H3 (transfer point H3-2), H4, D2 until D4, U4, X4.

Ramp 12:

Stands 300 to 312: Standard route, H3 (transfer point H3-2), H4, D2 until D4, U4, X5, W4, WN3, WN2, WN1, W16.

Stands 320 to 322: Standard route, H3 (transfer point H3-2), H4, D2 until D4, U4, X5, W4, WN3, WN2, WN1, W5.

Stands 420 to 428: Standard route, H3 (transfer point H3-2), H4, D2 until D4, U4, X4.

Ramp 13:

Stands 400 to 406: Standard route, H3 (transfer point H3-2); H4, D2 until D4, U4, X5, W4, WN3, WN2.

Stands 408 to 411: Standard route, H3 (transfer point H3-2), H4, D2 until D4, U4, X5, W4, WN3, WN2, WN1, W5.

**NORTH CONFIGURATION:
ARRIVAL (Continued)**

Ramp 13 (Continued):

Stands 412 to 419: Standard route, H3 (transfer point H3-2), H4, D2 until D4, U4, X5, W4, WN3, WA.

**NORTH CONFIGURATION:
DEPARTURE**
To RWY 36L from Terminal 4:

Ramp 11:

Stands 430 to 432: D4, U4, X4, R3 (transfer point R3-2), standard route.

Ramp 12:

Stands 330 to 334: D14, U4, X4, R3 (transfer point R3-2), standard route.

Stands 420 to 428: D4, U4, X4, R3 (transfer point R3-2), standard route.

To RWY 36R from Terminal 4:

Ramp 11:

Stands 430 to 432: D4, U4, X4, X3, S3 (transfer point S3-2), standard route.

Ramp 12:

Stands 330 to 334: D14, U4, X4, X3, S3 (transfer point S3-2), standard route.

Stands 420 to 428: D4, U4, X4, X3, S3 (transfer point S3-2), standard route.

**SOUTH CONFIGURATION:
ARRIVAL**
From RWY 18R from Terminal 4:

Ramp 12:

Stands 300 to 312: Standard route W3 (transfer point W3-2), W4, WN3, WN2, WN1, W16.

Stands 320 to 322: Standard route W3 (transfer point W3-2), W4, WN3, WN2, WN1, W5.

To be continued on the following page.

LEMD/MAD



MADRID, SPAIN

10-8F

ADOLFO SUAREZ MADRID-BARAJAS

WORKS ON TWY W5 (Continued)
REFER ALSO TO LATEST NOTAMS

**SOUTH CONFIGURATION:
ARRIVAL (Continued)**

Ramp 13:
Stands 400 to 406: Standard route W3 (transfer point W3-2), W4, WN3, WN2.
Stands 408 to 411: Standard route W3 (transfer point W3-2), W4, WN3, WN2, WN1, W5.
Stands 412 to 419: Standard route, W3 (transfer point W3-2), W4, WN3, WA.

From RWY 18L to Terminal 4:

Ramp 11:
Stands 430 to 432: Standard route, H3 (transfer point H3-2), H4, D2 until D4, U4, X4.

Ramp 12:
Stands 300 to 312: Standard route, H3 (transfer point H3-2), H4, D2 until D4, U4, X5, W4, WN3, WN2, WN1, WI6.
Stands 320 to 322: Standard route, H3 (transfer point H3-2), H4, D2 until D4, U4, X5, W4, WN3, WN2, WN1, W5.
Stands 420 to 428: Standard route, H3 (transfer point H3-2), H4, D2 until D4, U4, X4.

Ramp 13:
Stands 400 to 406: Standard route, H3 (transfer point H3-2); H4, D2 until D4, U4, X5, W4, WN3, WN2.
Stands 408 to 411: Standard route, H3 (transfer point H3-2), H4, D2 until D4, U4, X5, W4, WN3, WN2, WN1, W5.
Stands 412 to 419: Standard route, H3 (transfer point H3-2), H4, D2 until D4, U4, X5, W4, WN3, WA.

**SOUTH CONFIGURATION:
DEPARTURE**

To RWY 14R from Terminal 4:
Ramp 11:
Stands 430 to 432: D4, U4, X4, X3, S3 (transfer point S3-2), standard route.

Ramp 12:
Stands 330 to 334: D14, U4, X4, X3, S3 (transfer point S3-2), standard route.
Stands 420 to 428: D4, U4, X4, X3, S3 (transfer point S3-2), standard route.

To RWY 14L from Terminal 4:
Ramp 11:
Stands 430 to 432: D4, U4, X4, X3, S3 (transfer point S3-2), standard route.


Ramp 12:
Stands 330 to 334: D14, U4, X4, X3, S3 (transfer point S3-2), standard route.
Stands 420 to 428: D4, U4, X4, X3, S3 (transfer point S3-2), standard route.

LEMD/MAD

JEPPESSEN
20 FEB 15
Eff 5 Mar

10-8G

MADRID, SPAIN
ADOLFO SUAREZ MADRID-BARAJAS

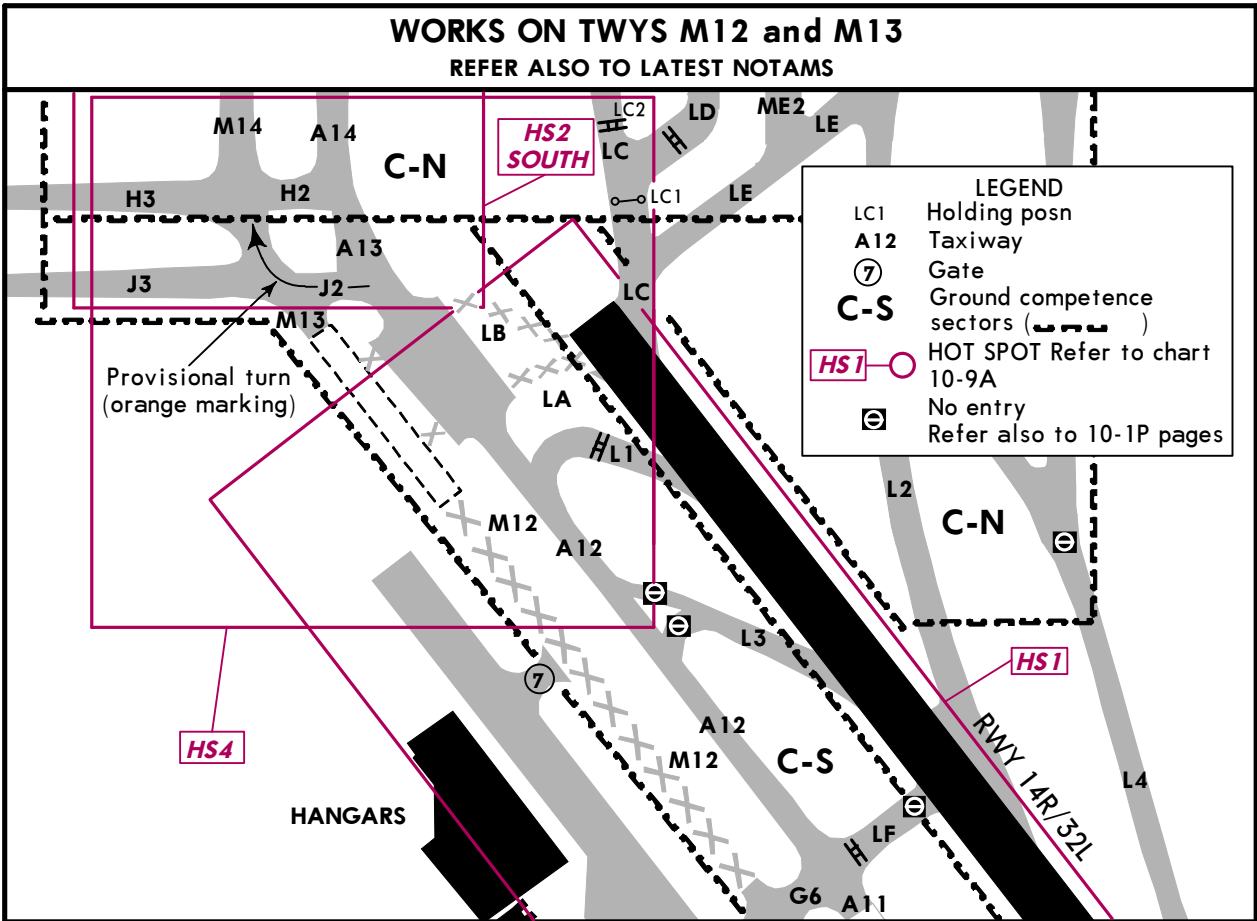

PHASE 1:

Works will be carried out during NIGHT.

During this phase the centerline of the turn from J2 to M14 will be provisionally marked with orange paint.

The area will be affected as follows:

During non-working periods:

- There is a 2 inch/5 cm deep floor unevenness in the affected area in TWYs M12 and M13.
- Possible affects on the centerline lighting of Twys M12 and M13 will be announed by NOTAM. In this case ACFT will be guided by RWY and Apron Service during NIGHT, and during DAY when LVP in force.

During working periods:

- TWYs M12, M13, LA and LB will be closed.
- Two-way traffic permitted in TWY A between J2 and G6.
- TWY centerline lighting in turns M14 - J2 - A13 and G6 - M11 u/s in both directions.

Standard taxiing routes shown on 10-1P pages will be modified as follows:


NORTH CONFIGURATION:	SOUTH CONFIGURATION
ARRIVAL	ARRIVAL
Routes are not modified.	
DEPARTURE	
To RWY 36L from Terminal 1, 2 or 3:	From RWY 18L to Terminal 1, 2 or 3:
Standard route: (From TWY) M10 (transfer point M10-2), M11, G6, A12, A13, J2, M14 until M17, R5 or R6 or R7, R8, Z2.	Standard route: Y5 to AY to BY13 to M34 until M14 or Y4 to BY13 to M34 until M14 or Y3 to A33, to N13 to M32 until M14 to J2 to A13 to A12 to G6 to M11 to M10 (transfer point M10-2).
To RWY 36R from Terminal 1, 2 or 3:	To RWY 18R from Terminal 1, 2 or 3:
Standard route: (From TWY) M10 (transfer point M10-2), M11, G6, A12, A13, J2, M14 until M31, NY13, Y1 or M14 until M32, N13, Y2 or M14 until M33, B13, Y3.	Standard route: Z10 to ZW3 to W1 to W2 to MZ6 until MZ3 or Z8 to W1 to W2 to MZ6 until MZ3 or Z4 to ZW1 to V1 to V2 to MZ4 to MZ3 to M15 to M14 to J2 to A13 to A12 to G6 to M11 to M10 (transfer point M10-2).
	DEPARTURE
	Routes are not modified.

LEMD/MAD

JEPPESEN
20 FEB 15
Eff 5 Mar

(10-8H)

MADRID, SPAIN
ADOLFO SUAREZ MADRID-BARAJAS

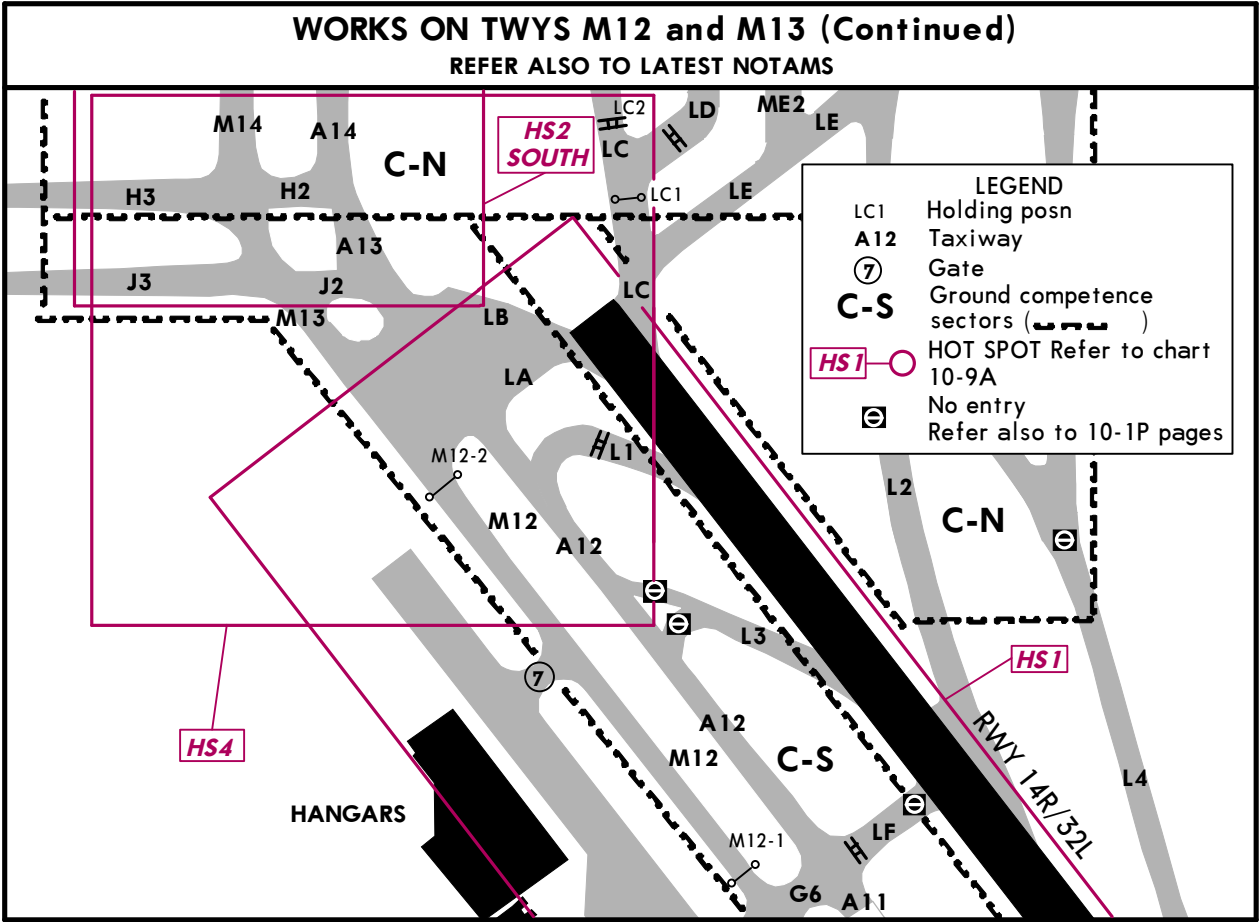

PHASE 2:

- Intermediate holding position in M12 short of G6 is renamed M12-1.
- Intermediate holding position in M12 short of LA is renamed M12-2.

LEMD/MAD


JEPPESSEN
10 JUL 15
Eff 23 Jul

10-8V

MADRID, SPAIN
ADOLFO SUAREZ MADRID-BARAJAS

WORKS ON TWYS A18, A19, A20, M18, M19 and M20

REFER ALSO TO LATEST NOTAMS - EXERCISE CAUTION DUE TO PRESENCE OF PERSONNEL & MACHINERY

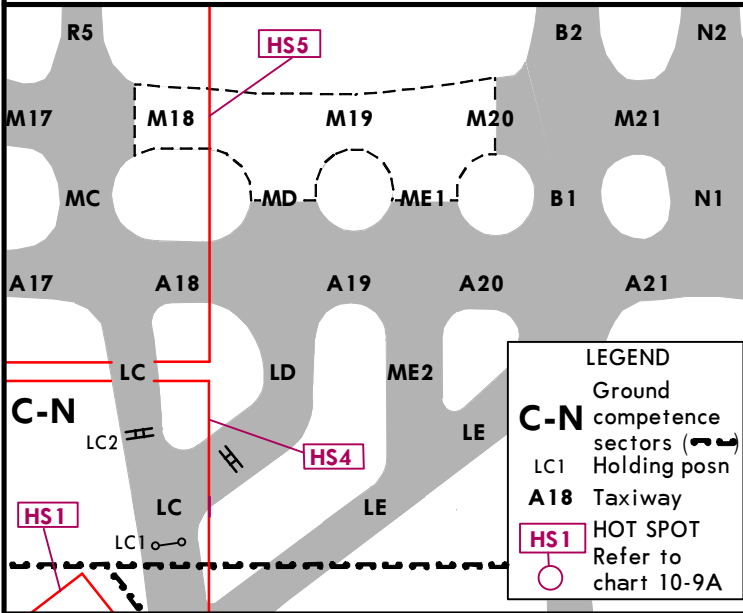

**PHASE 1:
Works on TWYs M18,
M19 and M20.**

Paving the TWYs M18, M19 and M20 and modification of current holding position in TWY M18, becoming bidirectional, adapting the associated lighting and signs.

Restrictions:

- Closure to the traffic of TWYs M18, M19, M20, MD and ME1.
- TWYs A18, A19 and A20 will be used in a bidirectional way.
- TWY M18 degraded to maximum AFCT code letter E.
- Curved segments between TWYs A18 and MC, MC and M17, A20 and B1 without lighting in TWY centre line.

Standard taxiing routes shown on 10-1P pages will be modified as follows:

**NORTH CONFIGURATION
ARRIVAL**


Routes are not modified.

DEPARTURE

To RWY 36R from Terminal 1, 2, 3 and 4:
Standard route to TWY M17 until MC, A18, A19, A20, B1, M21, M22 and following standard route RWY 36R.

**SOUTH CONFIGURATION
ARRIVAL**

From RWY 18L to Terminal 1, 2, 3 and 4:
Standard route to TWY M17 until M21, B1, A20, A19, A18, MC, M17 and following standard route.

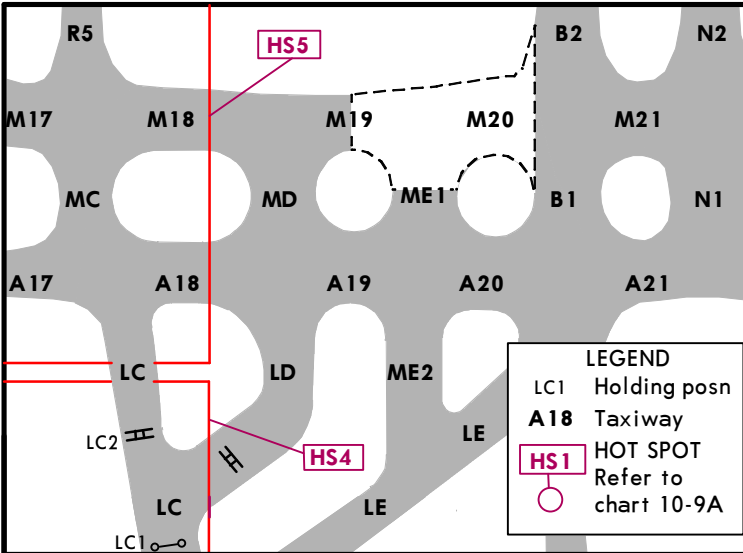

**PHASE 2:
Works on TWY M20.**

Paving on TWY M20 and installation of new lighting signs.

Restrictions:

- Closure to the traffic of TWYs M19, M20 and ME1.
- TWYs B1, B2 and M21 degraded to maximum ACFT code letter C.
- TWYs A19, A20 and A21 will be used in a bidirectional way.
- Curved segments between TWYs M18 and MD, MD and A19, N1 and M22, A21 and LE, G11 and B3 without lighting in TWY centre line.

Standard taxiing routes shown on 10-1P pages will be modified as follows:

**NORTH CONFIGURATION
ARRIVAL**

From RWY 32L to Terminal 4S:
Entry routes for aircraft with code letter lower or equal type C are not modified.
For other aircraft:
Route: L4, A22, N1, or L42, L2, or L2, A21, N1.
Ramps 20 to 22: via L4, M23 and L2, A21, N1, M22 and following standard route.
Ramp 23: via N1, N2, G11, B3 and following standard route.

DEPARTURE

To RWY 36R from Terminal 1, 2, 3 and 4:
Standard route to M18, following via MD, A19, A20, A21, N1, M22 and following standard route.

**SOUTH CONFIGURATION
ARRIVAL**

From RWY 18L to Terminal 1, 2, 3 and 4:
Standard route to M22, following via N1, A21, A20, A19, MD, M18 and following standard route.

DEPARTURE

To RWY 14R from Terminal 4S:
Departure routes for ACFT with code letter lower or equal C are not modified.

The rest of ACFT will taxi via standard route to N2, following via N1, A21, LE, runway-holding position LE.

REFER ALSO TO LATEST NOTAMS - EXERCISE CAUTION DUE TO PRESENCE OF PERSONNEL & MACHINERY

CHANGES: Holding positions.

ATIS Departure 130.85	ACARS: D-ATIS	BARAJAS Clearance Delivery West 130.35	BARAJAS Clearance Delivery East 130.075	Tower (GND)/Apron For sectors see table below	Rwy 14L 118.975	Rwy 14R 118.15	Tower (DEP) Rwy 36L 118.075	Rwy 36R 118.675
-----------------------------	------------------	--	---	---	--------------------	-------------------	-----------------------------------	--------------------



03-32

LEMD/MAD
Apt Elev 1998'
N40 28.3 W003 35.7

BARAJAS Tower (GND)	
E-North (E-N)	121.75
C-North (C-N)	123.15
E-South (E-S)	121.625
C-South (C-S)	121.975
BARAJAS Apron	
W-North (W-N)	123.25
S-North (S-N)	121.85
W-South (W-S)	123.0
S-South (S-S)	121.7

LEGEND	
E4-1	Holding position
E4	Taxiway
R-1	Ramp
E-N	Ground competence sectors ()
	Area not visible from Tower
HS1	HOT SPOT Refer to chart 10-9A
	No entry Refer also to 10-1P pages

For AIRPORT BRIEFING refer to 10-1P pages

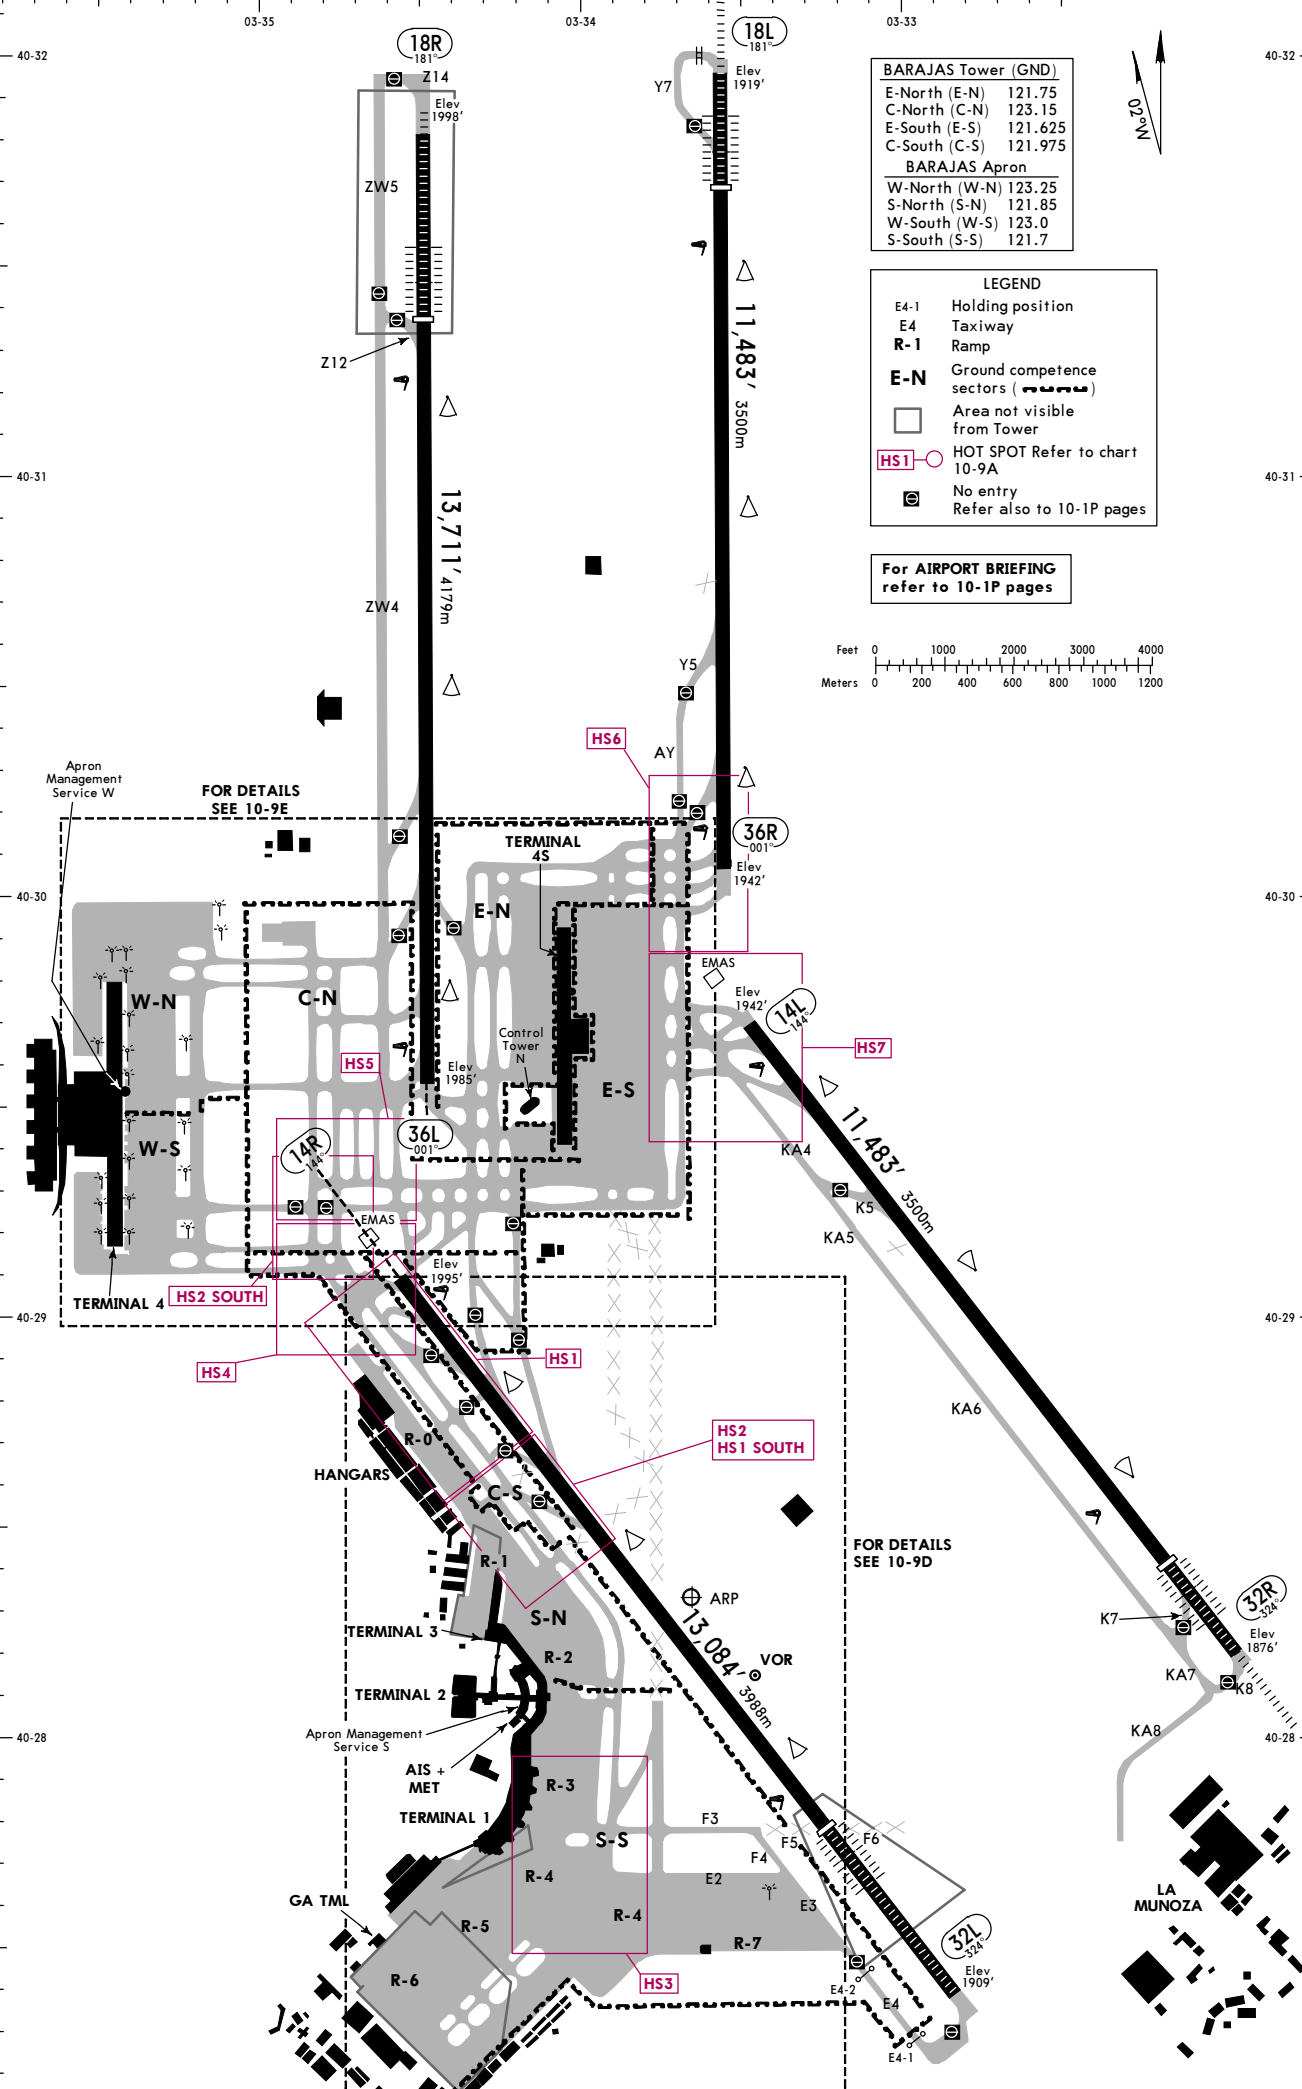

FOR DETAILS SEE 10-9E

FOR DETAILS SEE 10-9D



JEPPesen
27 NOV 15
E4 10 Dec (10-9)
ADOLFO SUAREZ MADRID-BARAJAS

MADRID, SPAIN

LEMD/MAD

JEPPESEN
27 NOV 15
Eff 10 Dec

MADRID, SPAIN
ADOLFO SUAREZ MADRID-BARAJAS

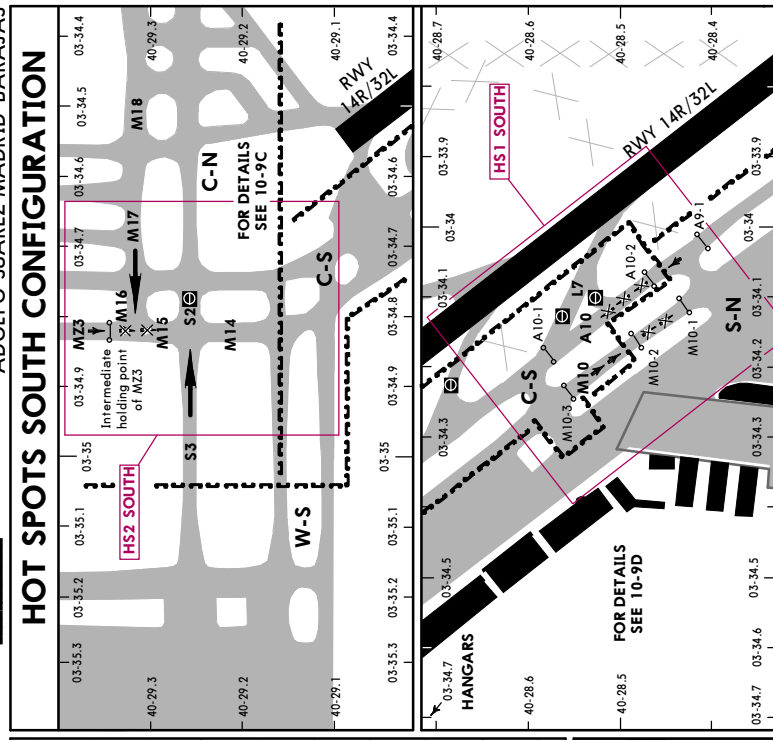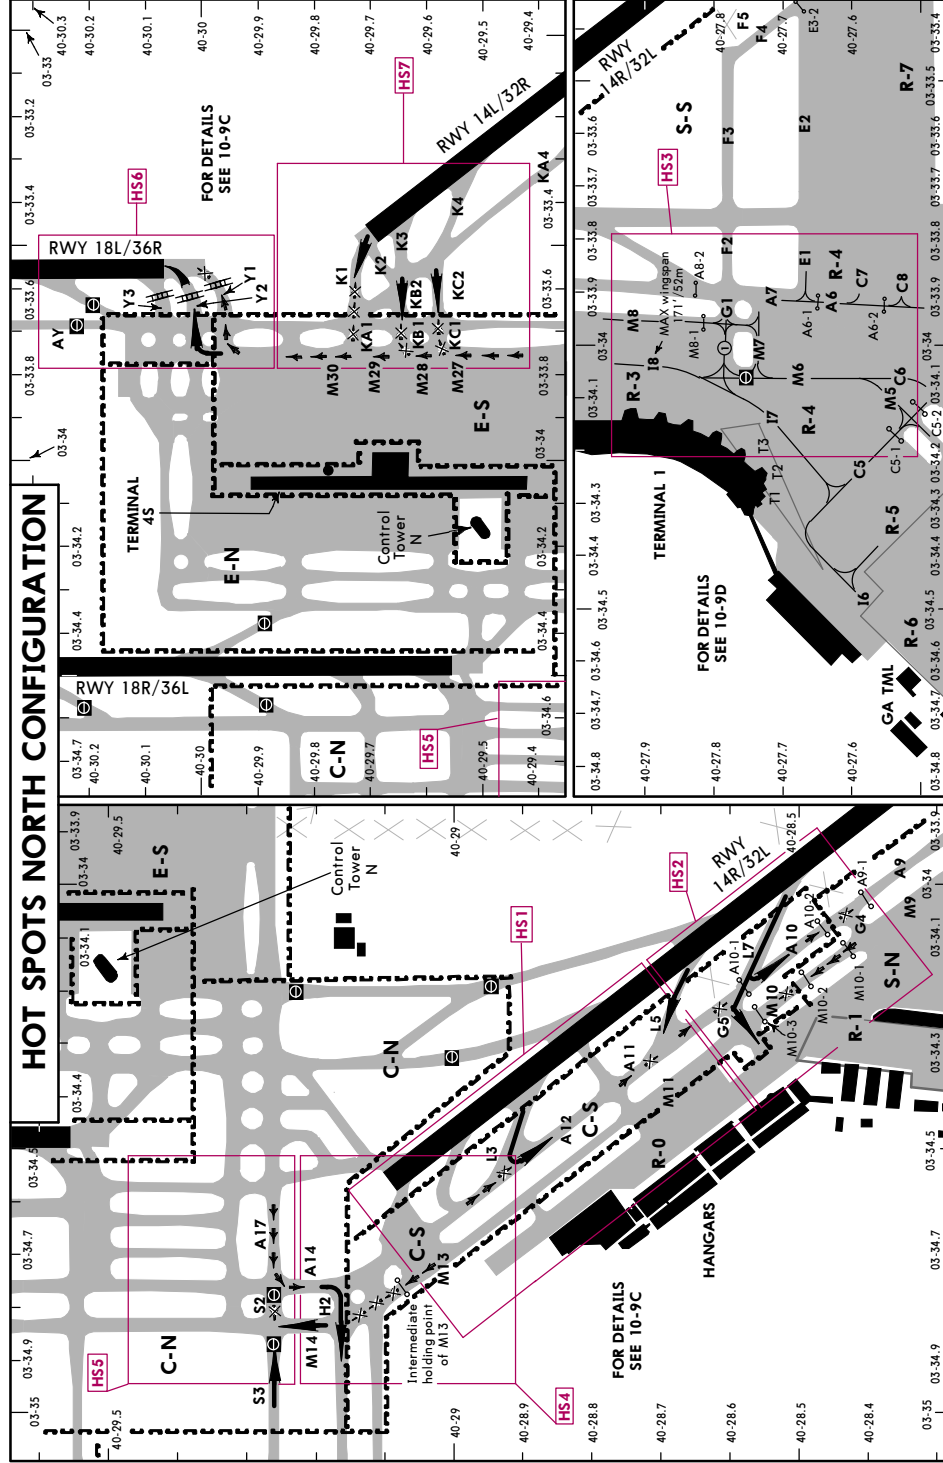

HS1 SOUTH: West area RWY 14R/32L.
TWYs M10 and A10 (Apron - Tower transfer points M10-2 and A10-2)
Aircraft taxiing via TWYs M10 and A10 w/o contact with the next unit
MUST STOP at transfer points M10-2 and A10-2.

HS2 SOUTH: West area near threshold RWY 14R. TWYs MZ3 and M.
Aircraft coming from RWY 18R via TWY MZ instructed to hold short of
TWY M. **MUST STOP AT THE INTERMEDIATE HOLDING POINT OF MZ3**
to avoid conflict with aircraft coming from TWYs M and S.

LEGEND

- M8-1 Holding posn
- T1 Parking stand
- Gate
- Area not visible from Tower
- C-S Ground competence sectors (C-S)
- Correct manoeuvre
- Incorrect manoeuvre
- Other traffic in conflict
- A8 Taxiway
- R-0 Ramp
- No entry
- Refer also to 10-1P pages

BARAJAS Tower (GND)	
E-North (E-N)	121.75
C-North (C-N)	123.15
E-South (E-S)	121.625
C-South (C-S)	121.975
BARAJAS Apron	
S-North (S-N)	121.85
W-South (W-S)	123.0
S-South (S-S)	121.7

HS5: Northwest area near threshold RWY 14R/32L.
Close to TWYs A17 and S2.
Aircraft taxiing via TWY A17. **MUST TURN LEFT ON TWY A14**
and NOT go STRAIGHT AHEAD to avoid conflict with aircraft
taxiing from TWYs S3 and M.

HS6: Area near threshold RWY 36R. TWYs Y1, Y2 and Y3.
Aircraft aligned on TWY Y1, Y2 or Y3. **MUST NOT ACCESS
RUNWAY WITHOUT CLEARANCE** due to confusion in the
take-off sequence.

HS7: Area near threshold RWY 14L. TWY M.
Aircraft taxiing via TWY M heading towards RWY 36R. **MUST
CONTINUE STRAIGHT AND NOT TURN RIGHT**, in order to avoid
conflict with aircraft vacating RWY 32R and possible runway
incursion.

HS1: West area RWY 14R/32L. TWYs M10, M11, A10, A11 and A12.
Aircraft along TWY A. **MUST GIVE WAY** to aircraft vacating runway via rapid exits
L3, L5 and L7.

HS2: West area RWY 14R/32L. Apron-Tower transfer points (A10-2 and M10-2).
Aircraft taxiing along TWYs M10 and A10 w/o contact with the next unit
at transfer points M10-2 and A10-2. **MUST STOP**

HS3: West area RWY 14R/32L. TWYs M6, M7, INNER and GATE 1.
CAUTION: Area of possible disorientation. Special heed must be paid to BARAJAS
Apron instructions and signaling (especially to NO ENTRY and MAX Span).
Access to parking stands T1, T2 and T3 from TWY I7 is forbidden.

HS4: West area near threshold RWY 14R/32L. TWY M13.
Aircraft taxiing via TWY M13 instructed to stop must do so
HOLDING POINT OF M13, to avoid conflict with traffic taxiing via TWY H towards
Terminal T4.

CHANGES: Holding positions.


© JEPPESEN, 2014, 2015. ALL RIGHTS RESERVED.

CHANGES: Holding positions.

LEMD/MAD

JEPPESSEN
27 NOV 15
EFT 10 Dec
(10-9C)

MADRID, SPAIN
ADOLFO SUAREZ MADRID-BARAJAS

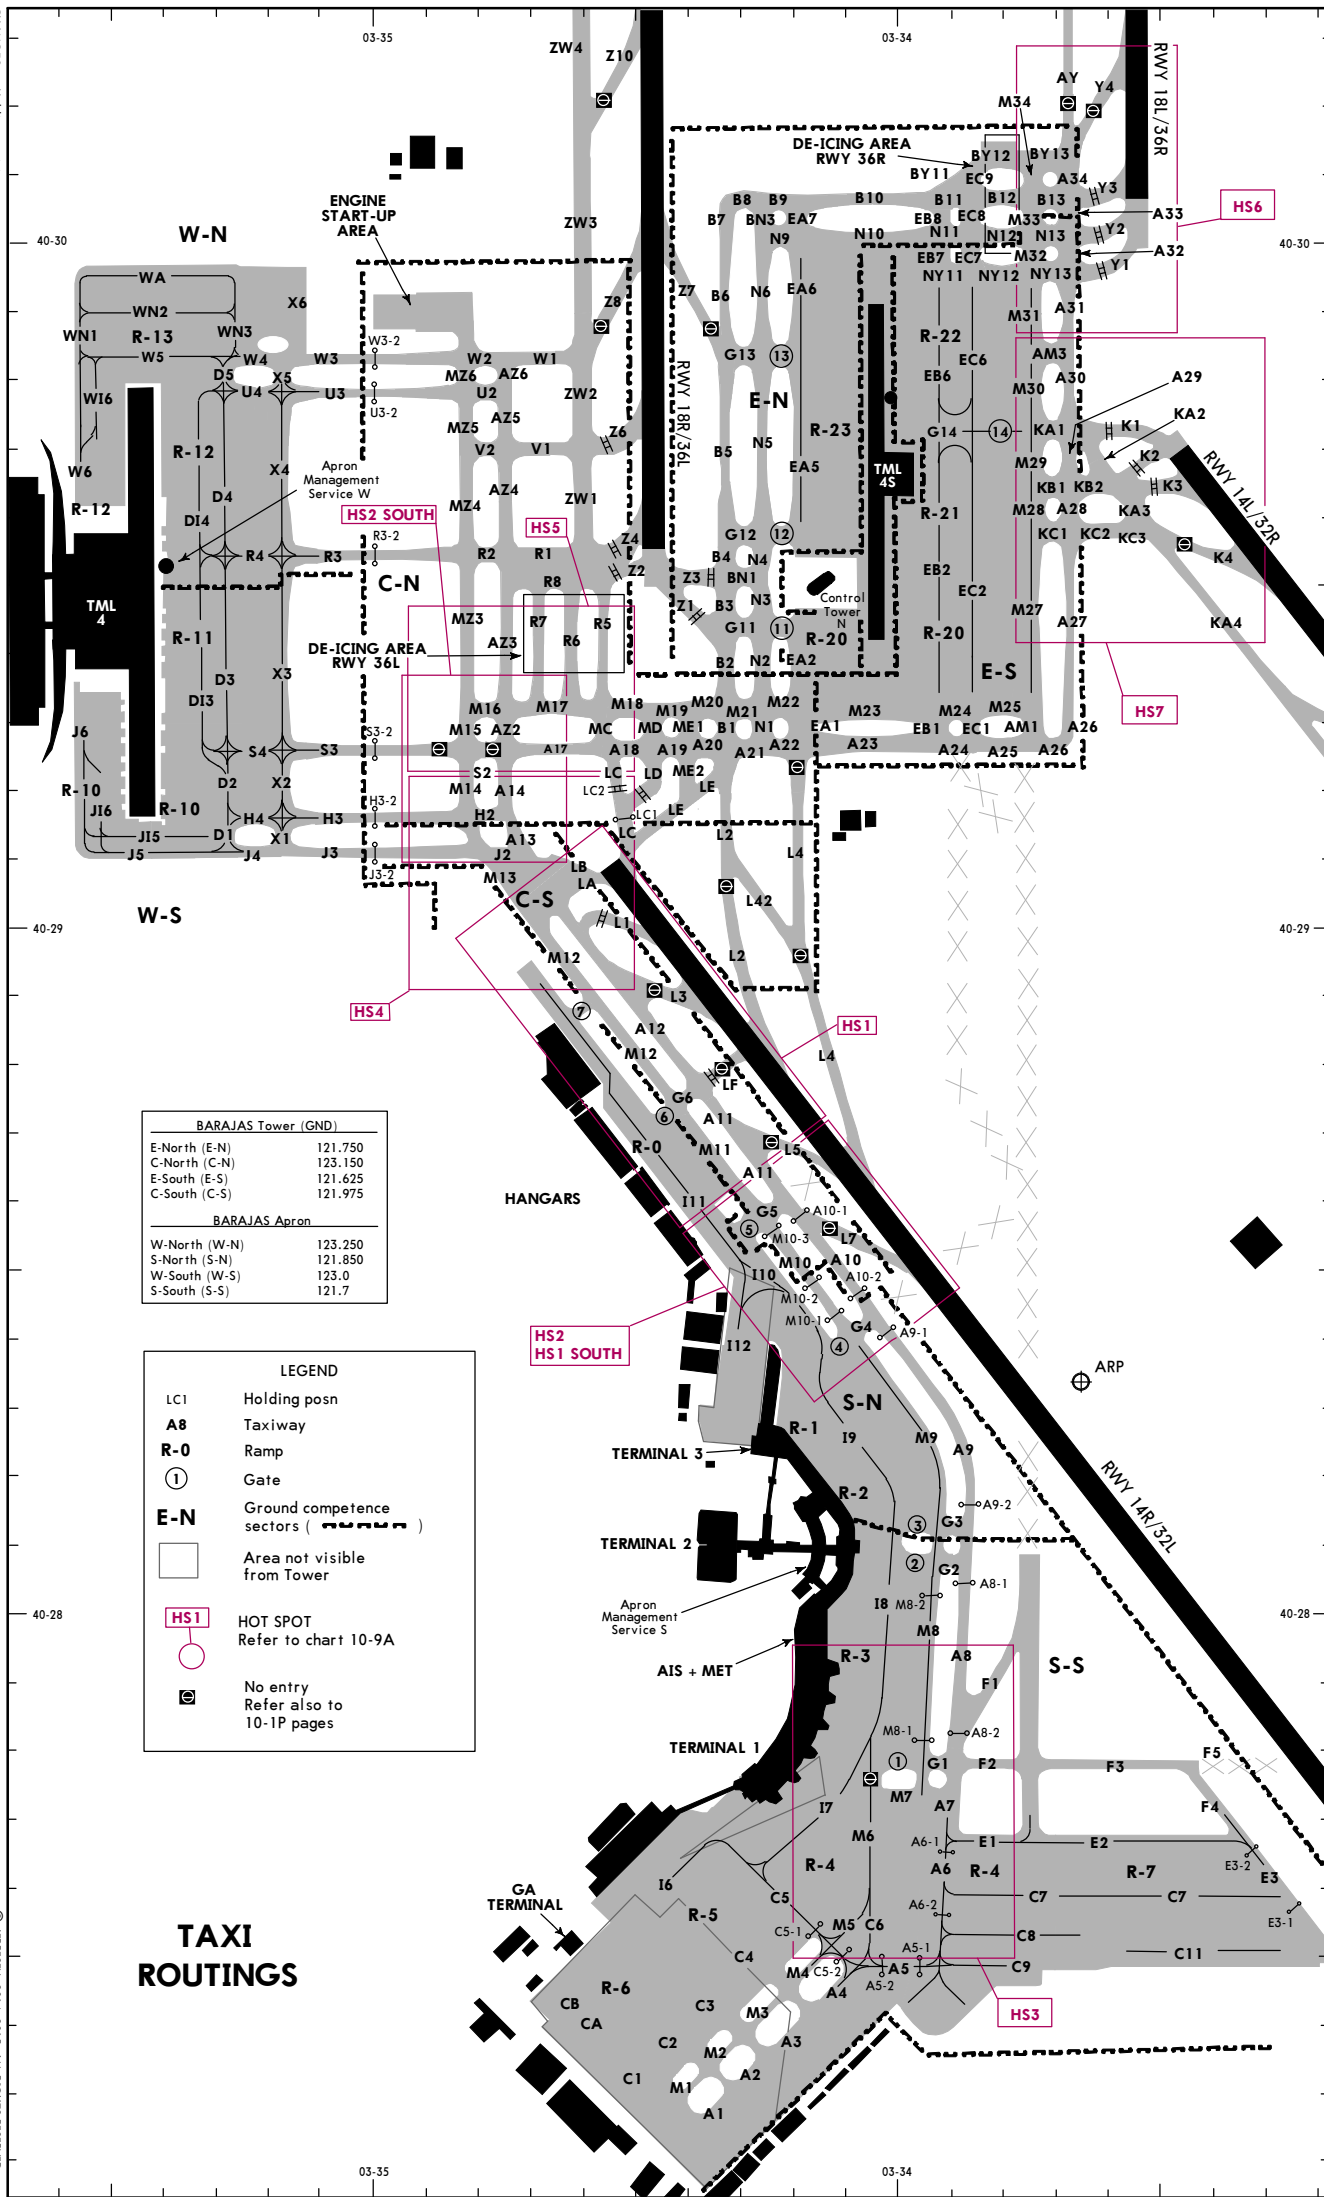


BARAJAS Tower (GND)	
E-North (E-N)	121.750
C-North (C-N)	123.150
E-South (E-S)	121.625
C-South (C-S)	121.975

BARAJAS Apron	
W-North (W-N)	125.250
S-North (S-N)	121.850
W-South (W-S)	123.0
S-South (S-S)	121.7

LEGEND	
LC1	Holding posn
A8	Taxiway
R-0	Ramp
①	Gate
E-N	Ground competence sectors ()
	Area not visible from Tower
HS1	HOT SPOT Refer to chart 10-9A
	No entry Refer also to 10-1P pages

TAXI ROUTINGS

CHANGES: Holding positions.

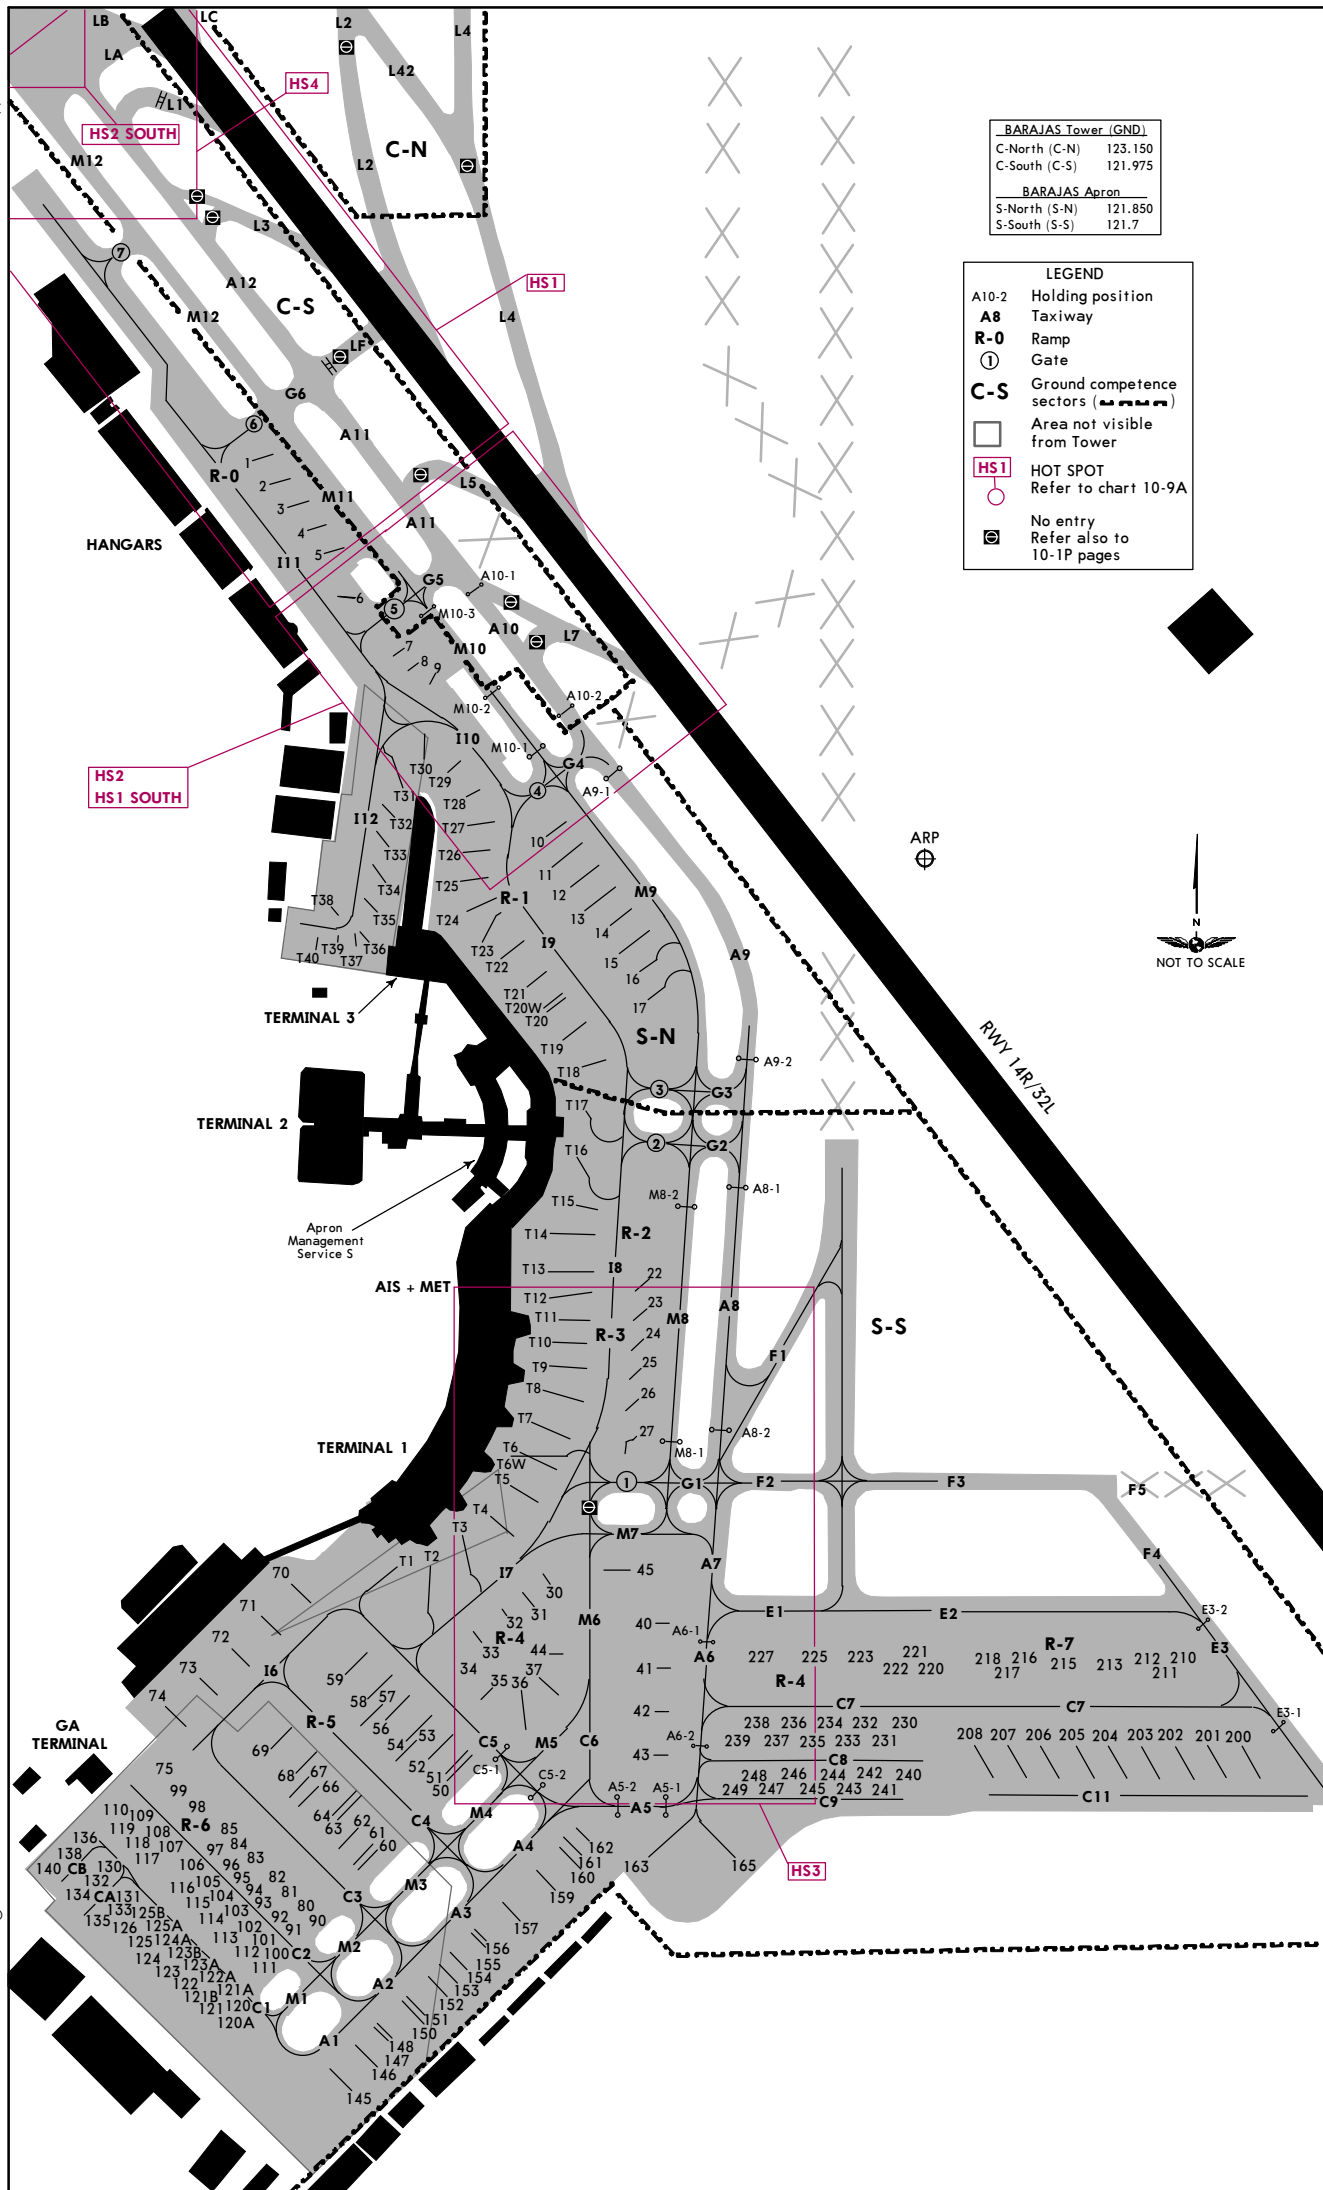

BARAJAS Tower (GND)	
C-North (C-N)	123.150
C-South (C-S)	121.975
BARAJAS Apron	
S-North (S-N)	121.850
S-South (S-S)	121.7

LEGEND	
A10-2	Holding position
A8	Taxiway
R-0	Ramp
①	Gate
C-S	Ground competence sectors (wavy line)
□	Area not visible from Tower
HS1	HOT SPOT Refer to chart 10-9A
⊕	No entry Refer also to 10-1P pages



LEMD/MAD

27 NOV 15
ET 10 D 06 C
JEPPESSEN
10-9D

MADRID, SPAIN
ADOLFO SUAREZ MADRID-BARAJAS



INS COORDINATES				
STAND No.	COORDINATES	STAND No.	COORDINATES	COORDINATES
1	N40 28.7 W003 34.5	157 thru 160	N40 27.4 W003 34.1	N40 29.9 W003 34.0
2	N40 28.7 W003 34.4	161, 162	N40 27.4 W003 34.0	N40 29.8 W003 34.0
3 thru 5	N40 28.6 W003 34.4	163	N40 27.4 W003 34.0	N40 29.7 W003 34.0
6	N40 28.6 W003 34.3	165	N40 27.4 W003 33.9	N40 29.6 W003 34.0
7, 8	N40 28.5 W003 34.3	200, 201	N40 27.5 W003 33.3	N40 29.5 W003 34.0
9	N40 28.5 W003 34.2	202 thru 204	N40 27.5 W003 33.4	N40 29.4 W003 34.0
10 thru 13	N40 28.3 W003 34.1	205 thru 207	N40 27.5 W003 33.5	N40 29.4 W003 34.1
14	N40 28.3 W003 34.0	208	N40 27.5 W003 33.6	N40 29.9 W003 33.8
15 thru 17	N40 28.2 W003 34.0	210 thru 213	N40 27.6 W003 33.4	N40 29.8 W003 33.8
22	N40 28.0 W003 34.0	215, 216	N40 27.6 W003 33.5	N40 29.7 W003 33.8
23 thru 26	N40 27.9 W003 34.0	217, 218	N40 27.6 W003 33.6	N40 29.6 W003 33.8
27	N40 27.8 W003 34.0	220 thru 223	N40 27.6 W003 33.7	N40 29.5 W003 33.8
30, 31	N40 27.7 W003 34.1	225	N40 27.6 W003 33.8	N40 29.4 W003 33.8
32	N40 27.6 W003 34.1	227	N40 27.6 W003 33.9	N40 30.0 W003 35.2
33 thru 35	N40 27.6 W003 34.2	230 thru 232	N40 27.5 W003 33.7	N40 29.9 W003 35.2
36, 37	N40 27.6 W003 34.1	233 thru 237	N40 27.5 W003 33.8	N40 27.7 W003 34.3
40 thru 42	N40 27.6 W003 34.0	238, 239	N40 27.5 W003 33.9	N40 27.7 W003 34.2
43	N40 27.5 W003 34.0	240 thru 242	N40 27.5 W003 33.7	N40 27.8 W003 34.2
44	N40 27.6 W003 34.1	243 thru 247	N40 27.5 W003 33.8	N40 27.8 W003 34.1
45	N40 27.7 W003 34.0	248, 249	N40 27.5 W003 33.9	N40 27.9 W003 34.1
50 thru 53	N40 27.5 W003 34.2	300	N40 29.6 W003 35.5	N40 28.0 W003 34.1
54	N40 27.5 W003 34.3	302 thru 308	N40 29.7 W003 35.5	N40 28.1 W003 34.1
56 thru 59	N40 27.6 W003 34.3	310 thru 322	N40 29.8 W003 35.5	N40 28.2 W003 34.1
60, 61	N40 27.4 W003 34.3	324 thru 328	N40 29.8 W003 35.4	N40 28.2 W003 34.2
62	N40 27.5 W003 34.3	329	N40 29.8 W003 35.3	N40 28.3 W003 34.2
63 thru 69	N40 27.5 W003 34.4	330, 332	N40 29.8 W003 35.4	N40 28.4 W003 34.2
70	N40 27.7 W003 34.4	334 thru 338	N40 29.7 W003 35.4	N40 28.4 W003 34.3
71	N40 27.7 W003 34.5	340 thru 346	N40 29.6 W003 35.4	N40 28.3 W003 34.3
72, 73	N40 27.6 W003 34.5	348 thru 352	N40 29.5 W003 35.4	N40 28.2 W003 34.3
74	N40 27.6 W003 34.6	354 thru 362	N40 29.4 W003 35.4	N40 28.3 W003 34.4
75	N40 27.5 W003 34.6	364 thru 370	N40 29.3 W003 35.4	N40 28.2 W003 34.4
80 thru 84	N40 27.4 W003 34.4	372 thru 378	N40 29.2 W003 35.4	
85, 90	N40 27.4 W003 34.5	380 thru 386	N40 29.2 W003 35.5	
91 thru 93	N40 27.5 W003 34.5	388 thru 394	N40 29.3 W003 35.5	
94 thru 98	N40 27.4 W003 34.4	400, 402	N40 29.9 W003 35.3	
99	N40 27.4 W003 34.5	404, 406	N40 29.9 W003 35.4	
100, 101	N40 27.3 W003 34.4	408 thru 414	N40 29.9 W003 35.5	
102 thru 106	N40 27.4 W003 34.5	415 thru 417	N40 29.9 W003 35.4	
107, 108	N40 27.4 W003 34.6	418, 419	N40 29.9 W003 35.3	
109, 110	N40 27.5 W003 34.6	420	N40 29.8 W003 35.3	
111	N40 27.3 W003 34.4	422 thru 428	N40 29.7 W003 35.3	
112 thru 116	N40 27.4 W003 34.5	430, 432	N40 29.6 W003 35.3	
117	N40 27.4 W003 34.6	434, 436	N40 29.5 W003 35.3	
118, 119	N40 27.5 W003 34.6	438 thru 442	N40 29.4 W003 35.3	
120 thru 123B	N40 27.3 W003 34.5	444, 446	N40 29.3 W003 35.3	
124	N40 27.4 W003 34.6	448	N40 29.2 W003 35.3	
124A	N40 27.3 W003 34.6	500, 501	N40 29.6 W003 34.1	
125 thru 133	N40 27.4 W003 34.6	502 thru 510	N40 29.6 W003 34.1	
134	N40 27.4 W003 34.7	512 thru 520	N40 29.7 W003 34.1	
135	N40 27.4 W003 34.6	522 thru 529	N40 29.8 W003 34.1	
136	N40 27.5 W003 34.7	530 thru 538	N40 29.9 W003 34.1	
138, 140	N40 27.4 W003 34.7	540	N40 30.0 W003 34.0	
145	N40 27.2 W003 34.3			
146 thru 148	N40 27.3 W003 34.3			
150 thru 156	N40 27.3 W003 34.2			

LEMD/MAD

 **JEPPesen**
1 AUG 14 (10-9G)

MADRID, SPAIN
ADOLFO SUAREZ MADRID-BARAJAS

VISUAL DOCKING GUIDANCE SYSTEM

A. GENERAL

This system contains information about azimuth guidance (shows the aircraft position with relation to the centerline of the parking area) and distance to the stop position by means, in both cases, of the achieve of images by an optical sensor that sends the sign to a computer in order to process them and to provide the information to the pilot by a display unit, in front of the cockpit.

B. DISPLAY UNIT

The display unit to the pilot is designed by 5 modules LCD in 2 sections. As a consequence of the pixel technology, each module allows to show letters, numbers and also symbols. The size of the characters of the display allows the reading from a distance of approximately 328'/100m. If the aircraft is seeded, the situation of the aircraft respect of the docking centerline is indicated by means of the symbol of a plane in the low section of the unit. The lateral diversion with regard to the docking centerline of guided and the remaining distance to the stop point are also presented in a clear and unequivocal way. Beginning from a distance of 98'/30m to the stop point, the remaining distance is shown in an additional way in the top section of the unit. When the blocks are placed, the unit presents in an optional way the message "CHOCK ON" using the special push-button installed in the apron area.

C. PILOT INSTRUCTIONS

The following sequence of events identifies how a pilot would use this system to dock an aircraft at this gate.



- 1. GATE READY FOR DOCKING.**
Aircraft type and gate number are alternated in a flashing sequence across the top of display board.



- 2. AIRCRAFT DETECTED.**
When the aircraft is detected, only the aircraft type is displayed steady across the top of the display. At this point, the symbol of a plane is shown across the bottom of the display and the pilot will obtain information about the remaining distance to the stop point as a consequence of passing by fixed distances from stop point as well as azimuth guidance with regard to the centerline:

98'/30m to 66'/20m	16'/5m steps
66'/20m to 33'/10m	7'/2m steps
33'/10m to 3'/1m	3'/1m steps
3'/1m to STOP	0.7'/0.2m steps

LEMD/MAD

 **JEPPESEN**
1 AUG 14 **10-9H**

MADRID, SPAIN
ADOLFO SUAREZ MADRID-BARAJAS


VISUAL DOCKING GUIDANCE SYSTEM




3. AIRCRAFT IS RIGHT OF CENTERLINE.
Correction to the LEFT is required.



4. AIRCRAFT IS LEFT OF CENTERLINE.
Correction to the RIGHT is required.



5. AIRCRAFT IS ON CENTERLINE.
It is 33'/10m to final stop position.
Important: Approach slowly to final stop position.



6. AIRCRAFT IS ON CENTERLINE.
It is 1.3'/0.4m to final stop position.
Prepare to stop the aircraft.



7. STOP.
Stop now, docking point reached.



8. OK.
Successful docking.

LEMD/MAD

 **JEPPESEN**
1 AUG 14 (10-9J)

MADRID, SPAIN
ADOLFO SUAREZ MADRID-BARAJAS

VISUAL DOCKING GUIDANCE SYSTEM




9. TOO FAR.

Aircraft has gone beyond docking position.




10. ESTOP (EMERGENCY STOP).

Stop aircraft immediately,
wait for docking instructions from
TWR to resume docking procedure.



11. CHOCKS INSERTED AND CHOCKS REMOVED.

When the chocks are inserted, the docking guidance
presents the message CHOCK-ON during 5 minutes.



12. When the chocks are removed, the docking
guidance presents the message CHOCK-OFF and
it stays during 10 seconds.

If the following events occur, the pilot must stop the docking procedure,
report problem to TWR and wait for further instructions:

- Displayed aircraft type is not the incoming aircraft.
- Display board becomes unreadable (loss of display).
- ESTOP message is displayed.
- Pilot believes system is transmitting erroneous docking data.
- Display board illuminates error messages.

If the system does not detect the aircraft and the pilot does not get
a steady aircraft type read out on the top of display until the aircraft
nose reached the passengers boarding bridge, pilot should contact
TWR and wait for a marshall guidance.

LEMD/MAD

ADOLFO SUAREZ MADRID-BARAJAS


27 MAR 15
Eff 2 Apr


JEPPESSEN

MADRID, SPAIN


11-1

ILS Z or LOC Rwy 18L

D-ATIS Arrival		MADRID Approach			BARAJAS Tower	For Ground frequencies refer to 10-9
118.250		127.1	127.5	128.7	134.950	118.675
LOC IML 111.5	Final Apch Crs 181°	GS D4.0 IML 3264' (1342')	ILS DA(H) Refer to Minimums	Apt Elev 1998' RWY 1922'		 MSA BRA VOR
MISSED APCH: Climb on rwy heading to BRA VOR. Continue on R-182 BRA until reaching 6000', then turn RIGHT to GE NDB to join holding at 6000'. Do not climb above 6000'.						
Alt Set: hPa Rwy Elev: 68 hPa Trans level: By ATC Trans alt: 13000'						
1. VOR, DME and ADF required. 2. ILS DME reads zero at rwy 18L displ thresh.						

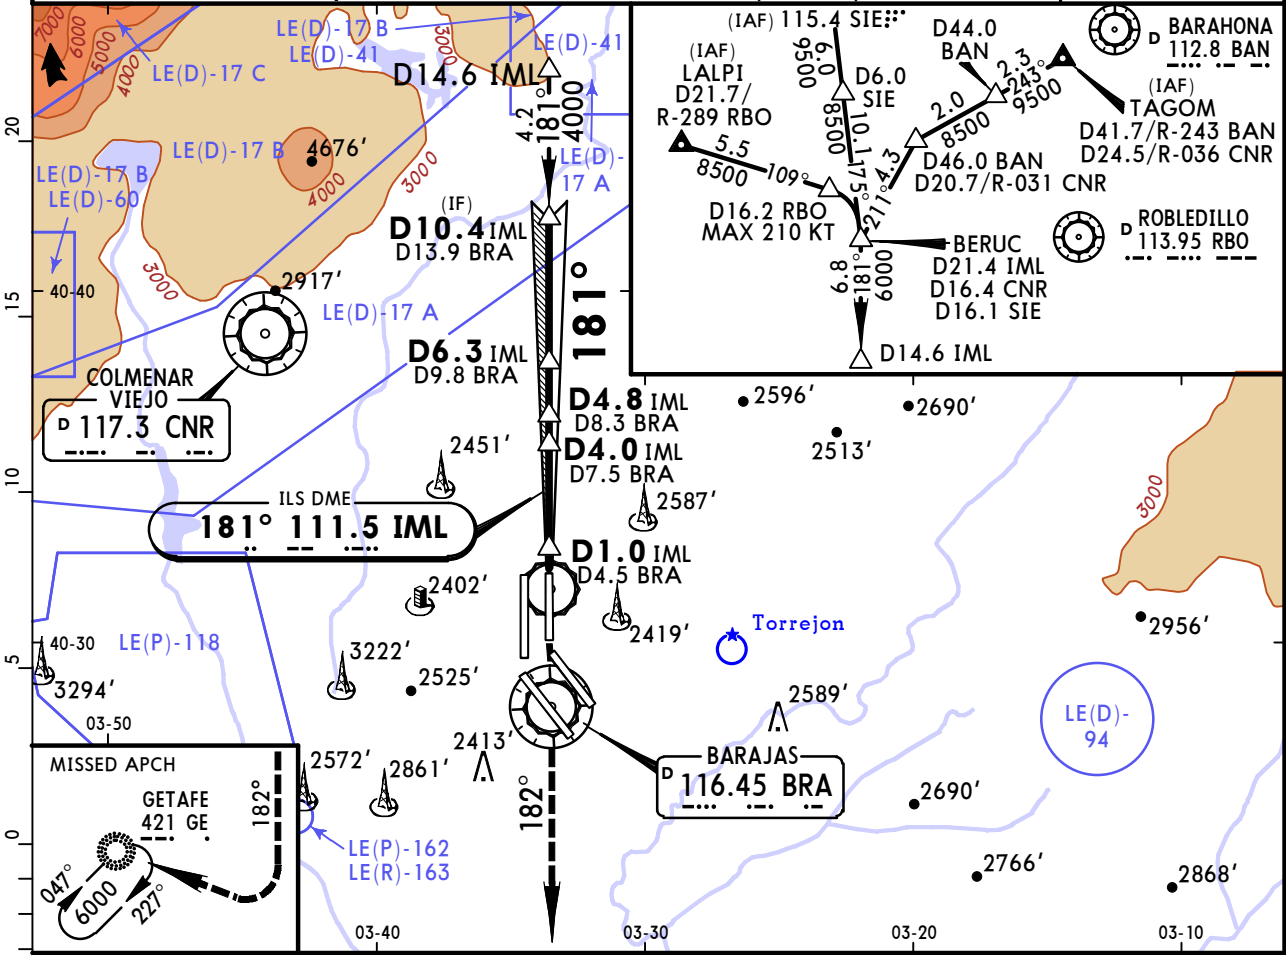

LOC (GS out)	IML DME	2.0	3.0	4.0
	ALTITUDE	2640'	2970'	3300'

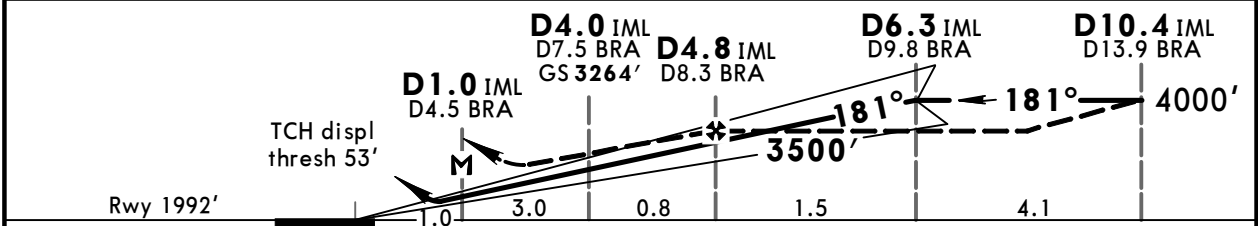

Gnd speed-Kts	70	90	100	120	140	160		BRA 116.45 Rwy on hdg
ILS GS	3.00°	372	478	531	637	743		
LOC Descent Angle	3.10°	384	494	548	658	768		
MAP at D1.0 IML								

STRAIGHT-IN LANDING RWY 18L				LOC (GS out)		CIRCLE-TO-LAND	
DA(H)		C: 2129' (207')		DA(H) 2410' (488')		Max Kts	MDA(H) VIS
AB: 2122' (200')		D: 2140' (218')				100	2720' (722') 1500m
FULL		Limited	ALS out	ALS out		135	2860' (862') 1600m
A	RVR 550m	RVR 750m	RVR 1200m	RVR 1500m		180	3280' (1282') 2400m
B				RVR 1500m		205	3620' (1622') 3600m
C				CMV 2300m			
D							

LEMD/MAD

ADOLFO SUAREZ MADRID-BARAJAS


JEPPESSEN

MADRID, SPAIN

10 JUL 15
Eff 23 Jul

(11-2)


ILS Y Rwy 18L


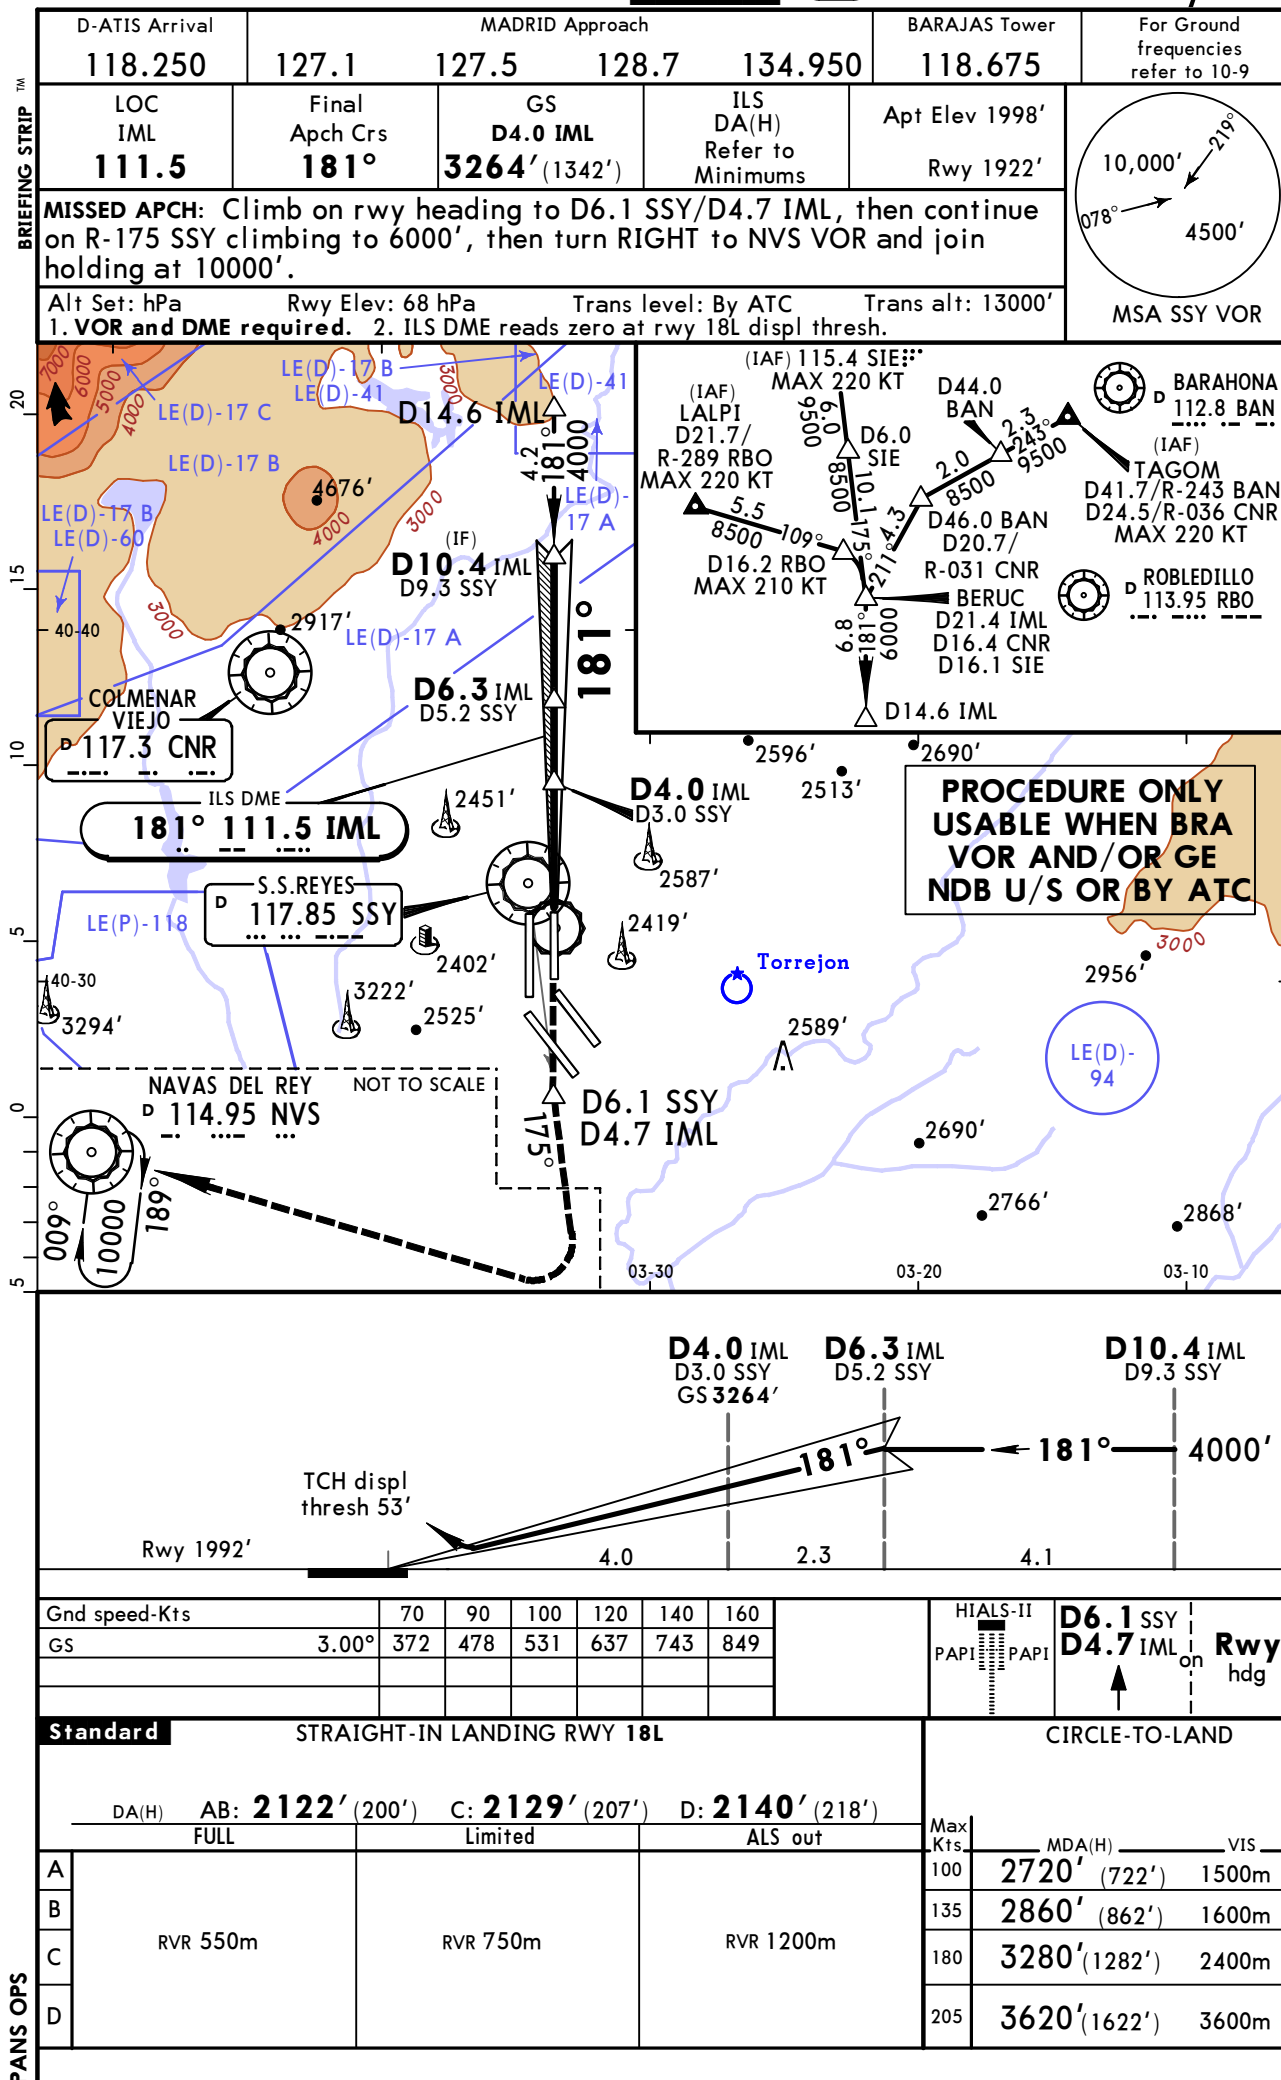


LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS

JEPPESSEN
10 JUL 15
Eff 23 Jul
11-2A

MADRID, SPAIN
CAT II/III ILS Y Rwy 18L

D-ATIS Arrival		MADRID Approach			BARAJAS Tower	For Ground frequencies refer to 10-9
118.250		127.1	127.5	128.7	134.950	118.675
LOC IML 111.5	Final Apch Crs 181°	GS D4.0 IML 3264' (1342')	CAT II & IIIA ILS Refer to Minimums		Apt Elev 1998' RWY 1922'	
MISSED APCH: Climb on rwy heading to D6.1 SSV/D4.7 IML, then continue on R-175 SSV climbing to 6000', then turn RIGHT to NVS VOR and join holding at 10000'.						
Alt Set: hPa Rwy Elev: 68 hPa Trans level: By ATC Trans alt: 13000' 1. VOR and DME required. 2 Special Aircrew & Acft Certification Required. 3. ILS DME reads zero at rwy 18L displ thresh.						

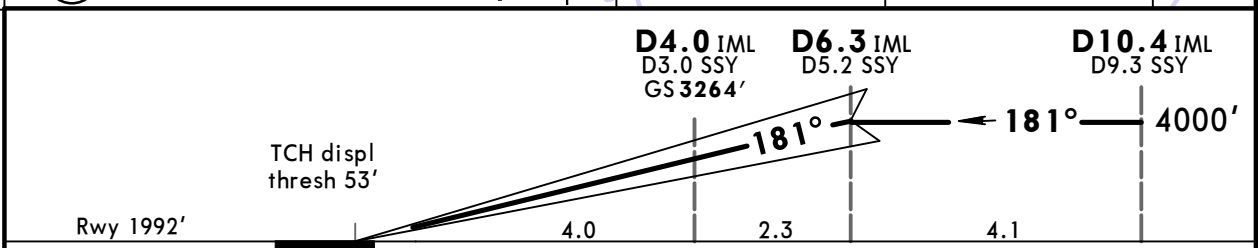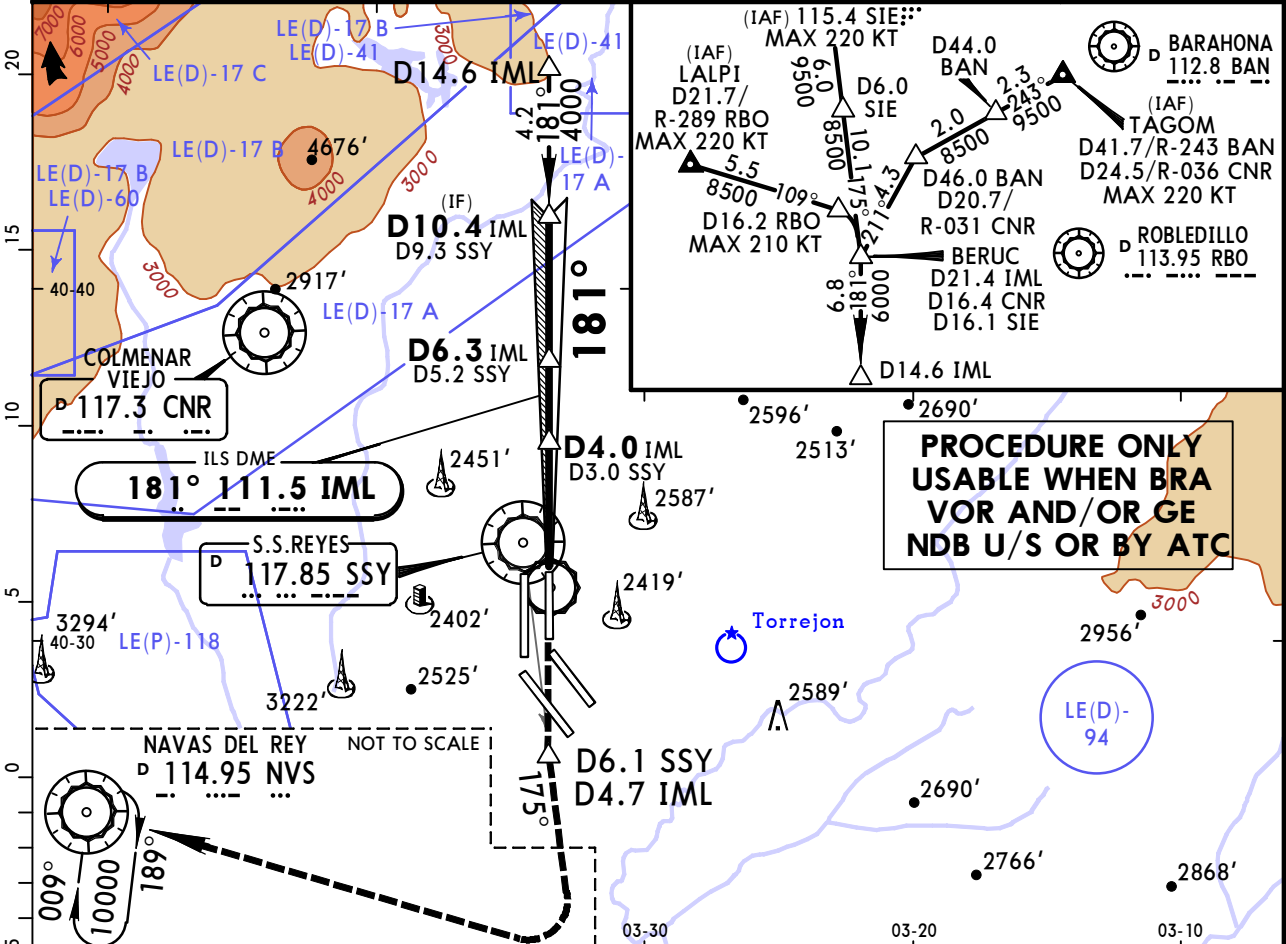

Gnd speed-Kts	70	90	100	120	140	160		D6.1 SSV D4.7 IML on Rwy hdg
GS	3.00°	372	478	531	637	743		

STRAIGHT-IN LANDING RWY 18L			
CAT IIIA ILS	AB RA 104'	C RA 114'	D RA 129'
DH 50'	DA(H) 2022' (100')	DA(H) 2032' (110')	DA(H) 2046' (124')
RVR 200m	RVR 300m		RVR 400m


LEMD/MAD

ADOLFO SUAREZ MADRID-BARAJAS

JEPPESSEN
27 MAR 15
Eff 2 Apr

MADRID, SPAIN

(11-3) ILS Z or LOC Rwy 18R

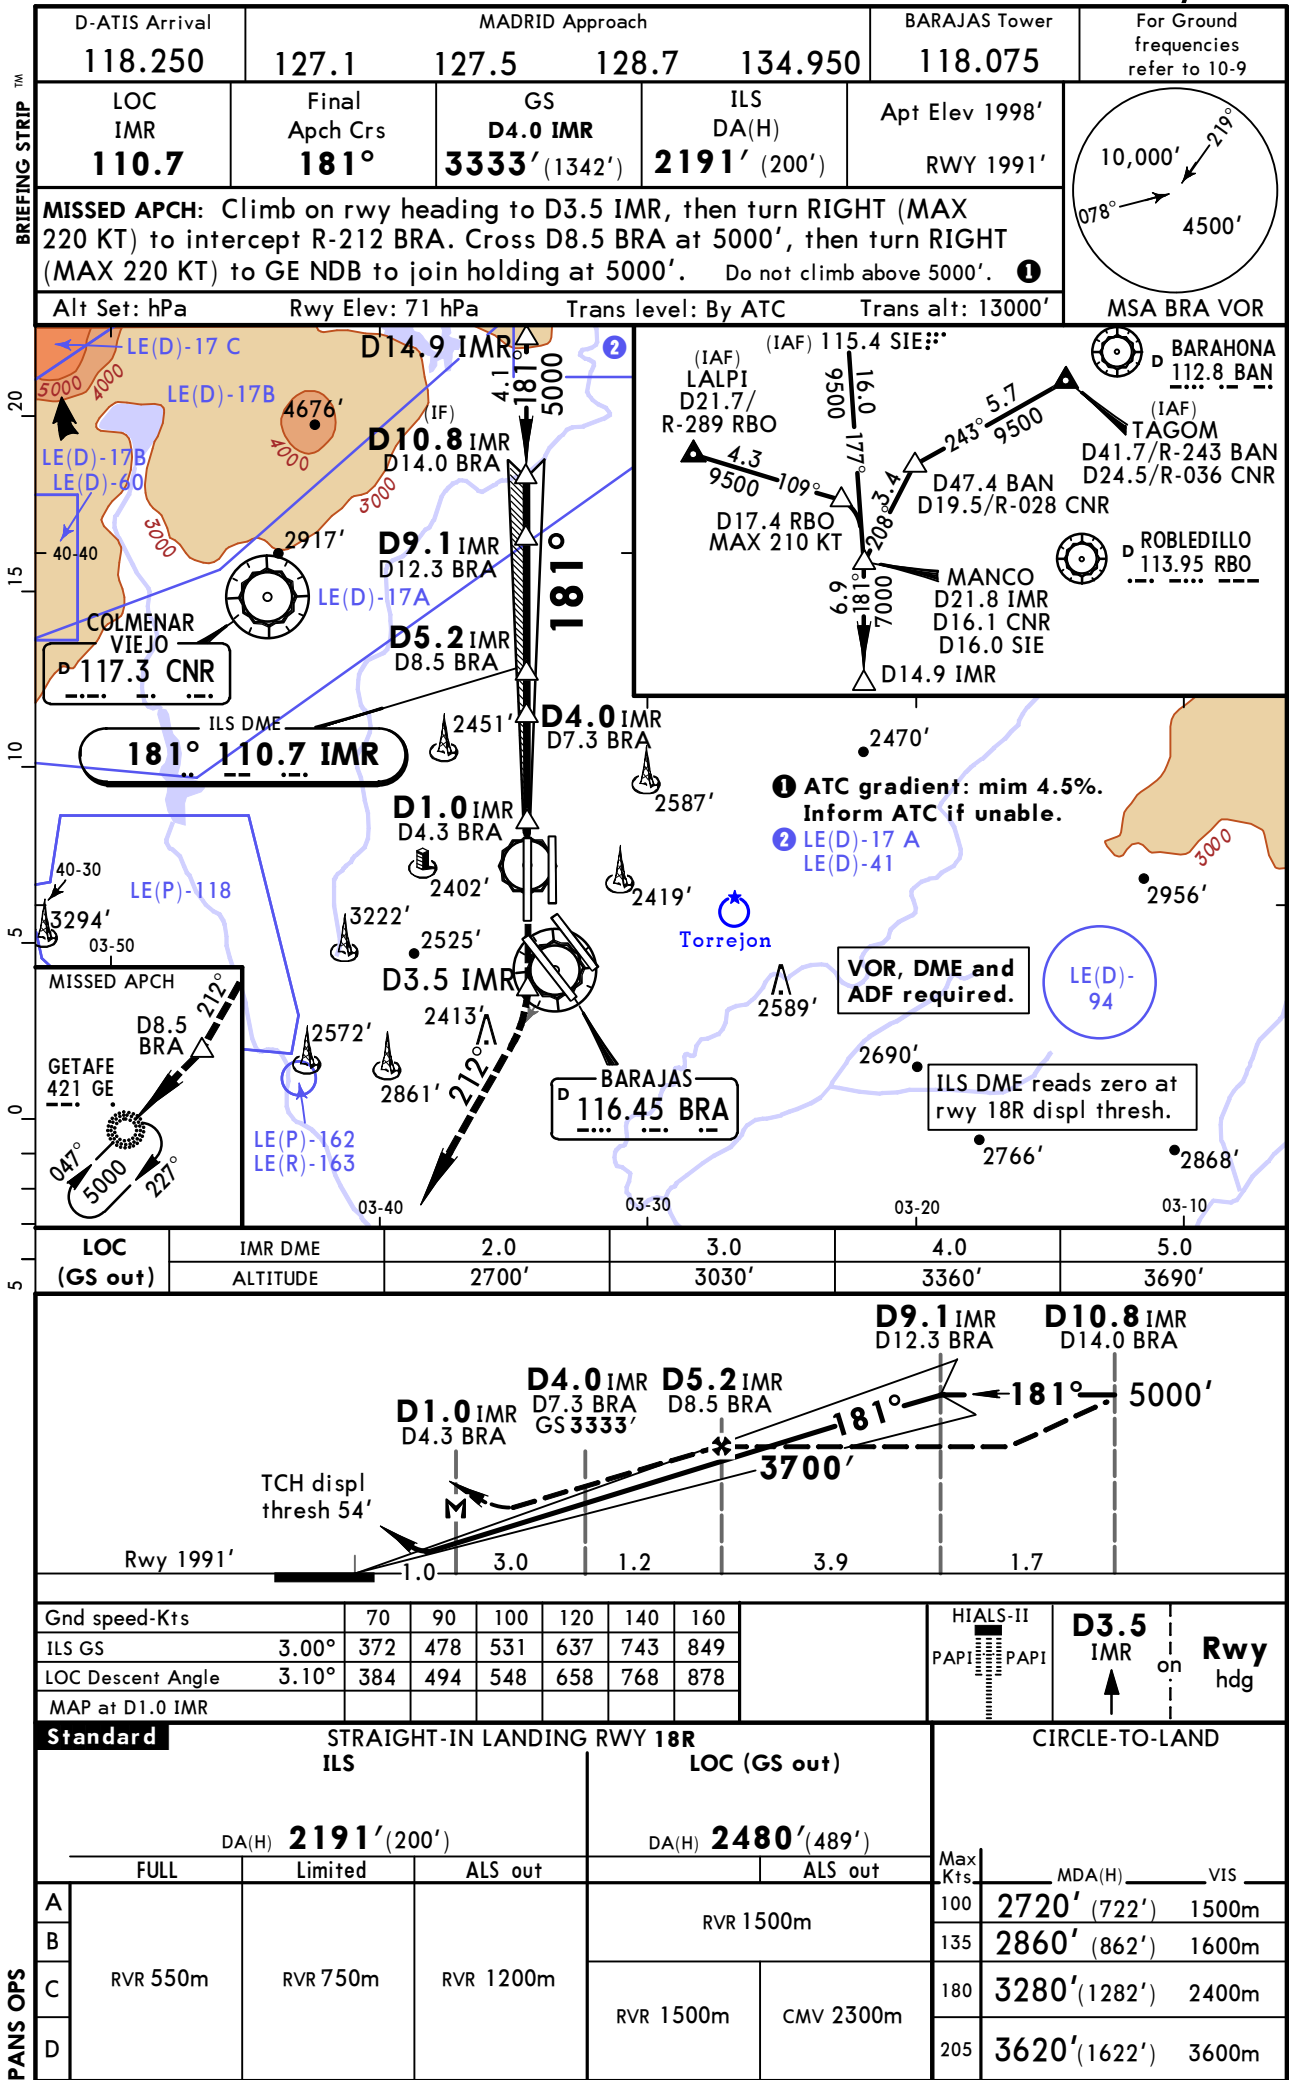

BRIEFING STRIP™

PANS OPS


Standard		STRAIGHT-IN LANDING RWY 18R	
CAT IIIA ILS		CAT II ILS	
ABC		D	
RA 98'		RA 110'	
DA(H) 2091'(100')		DA(H) 2104'(113')	
DH 50'			
RVR 200m		RVR 300m 1	

1 Operators applying U.S. Ops Specs: Autoland or HUD required below RVR 350m

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS

JEPPESSEN
 10 JUL 15
 Eff 23 Jul **11-4A**

MADRID, SPAIN
CAT II/III ILS Y Rwy 18R

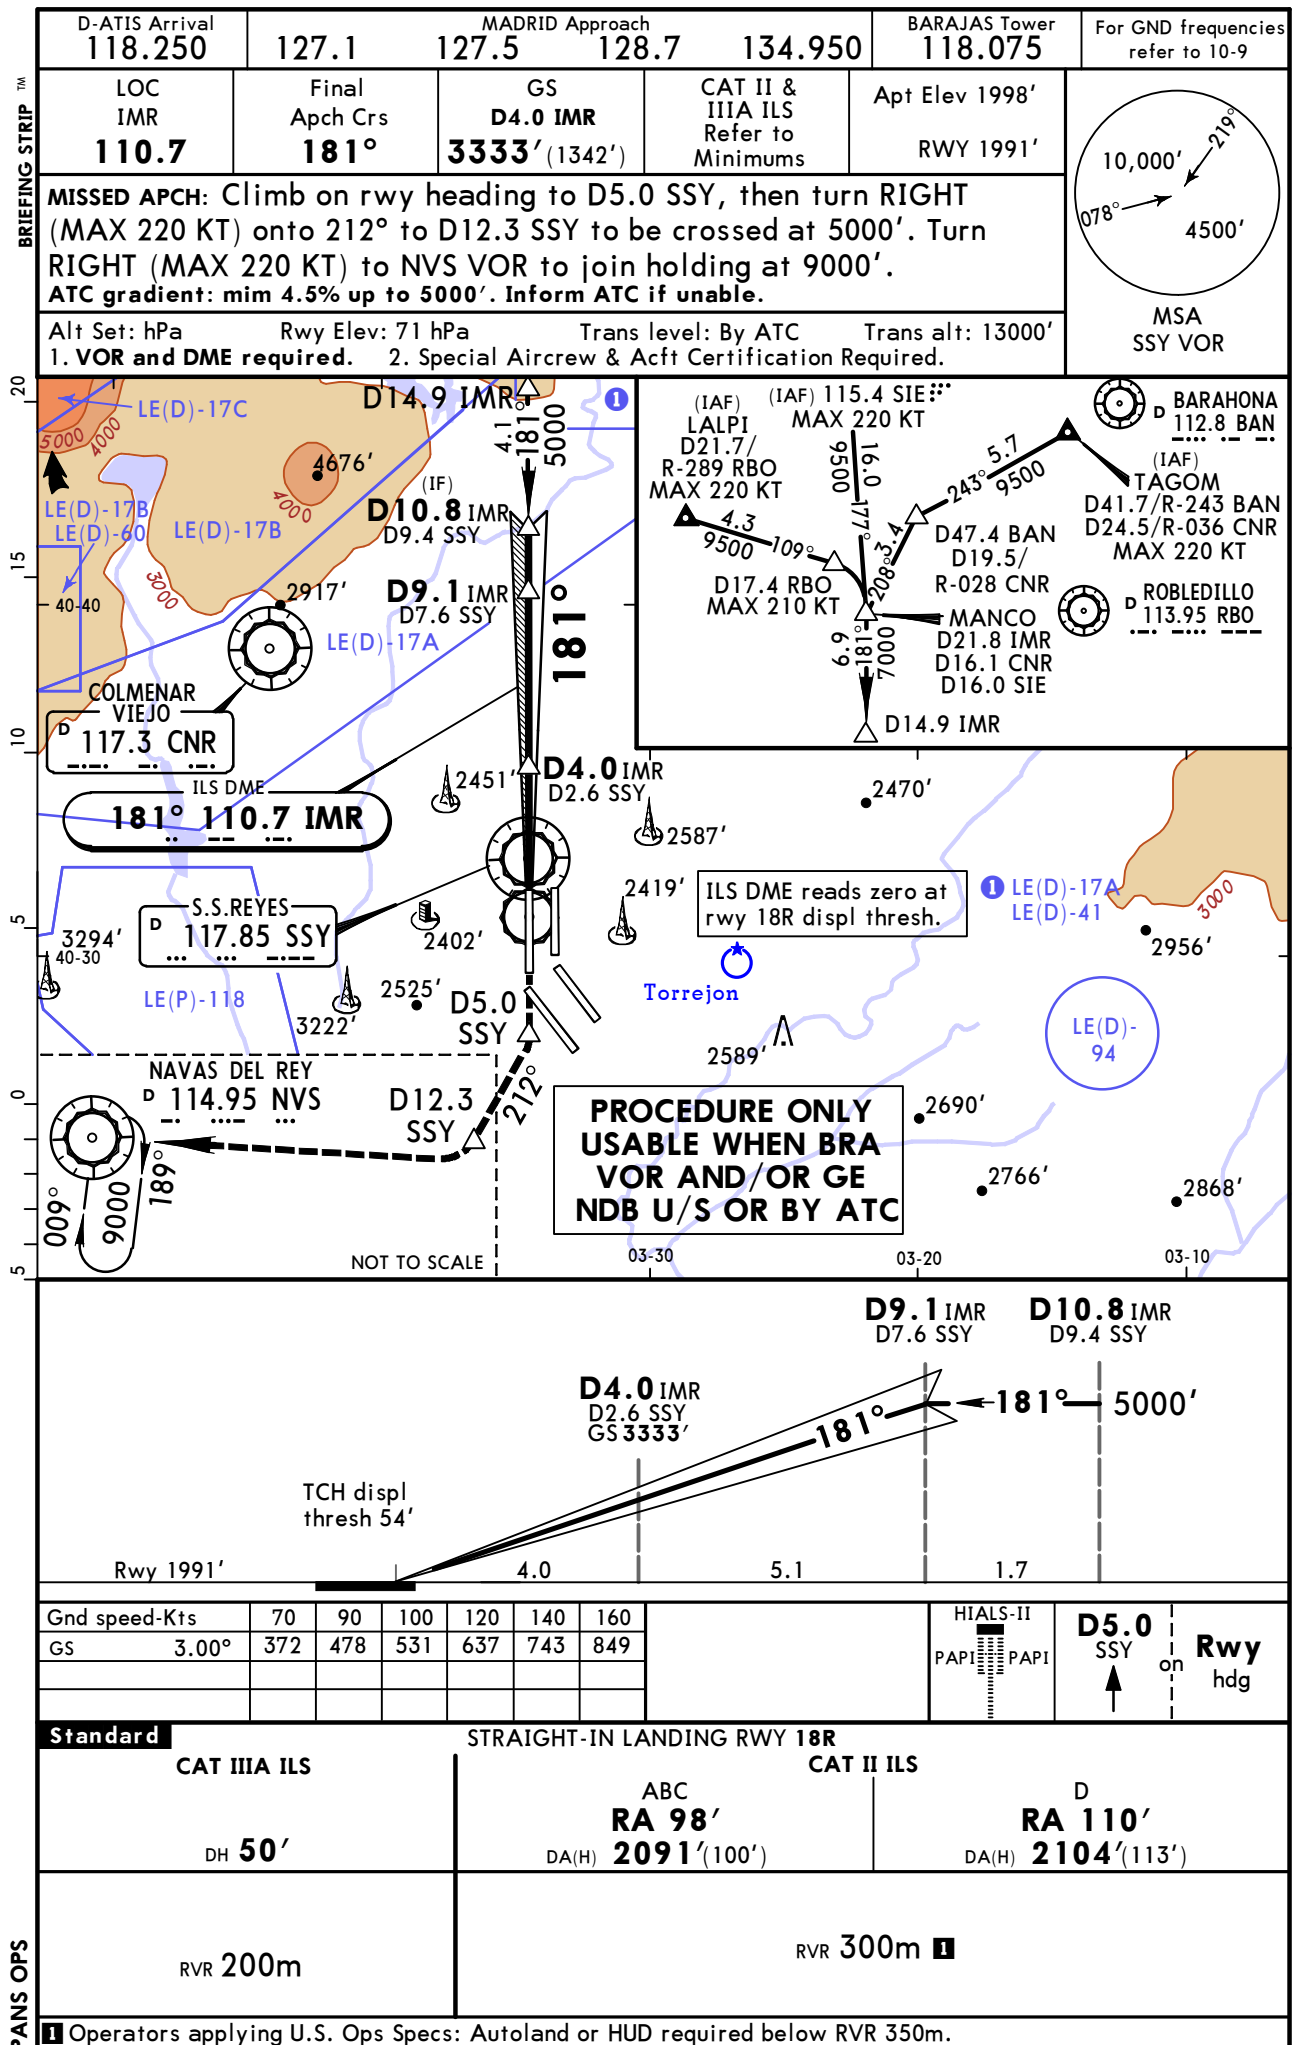


LEMD/MAD

ADOLFO SUAREZ MADRID-BARAJAS

27 MAR 15
Eff 2 Apr

MADRID, SPAIN


11-5 ILS Z or LOC Rwy 32L


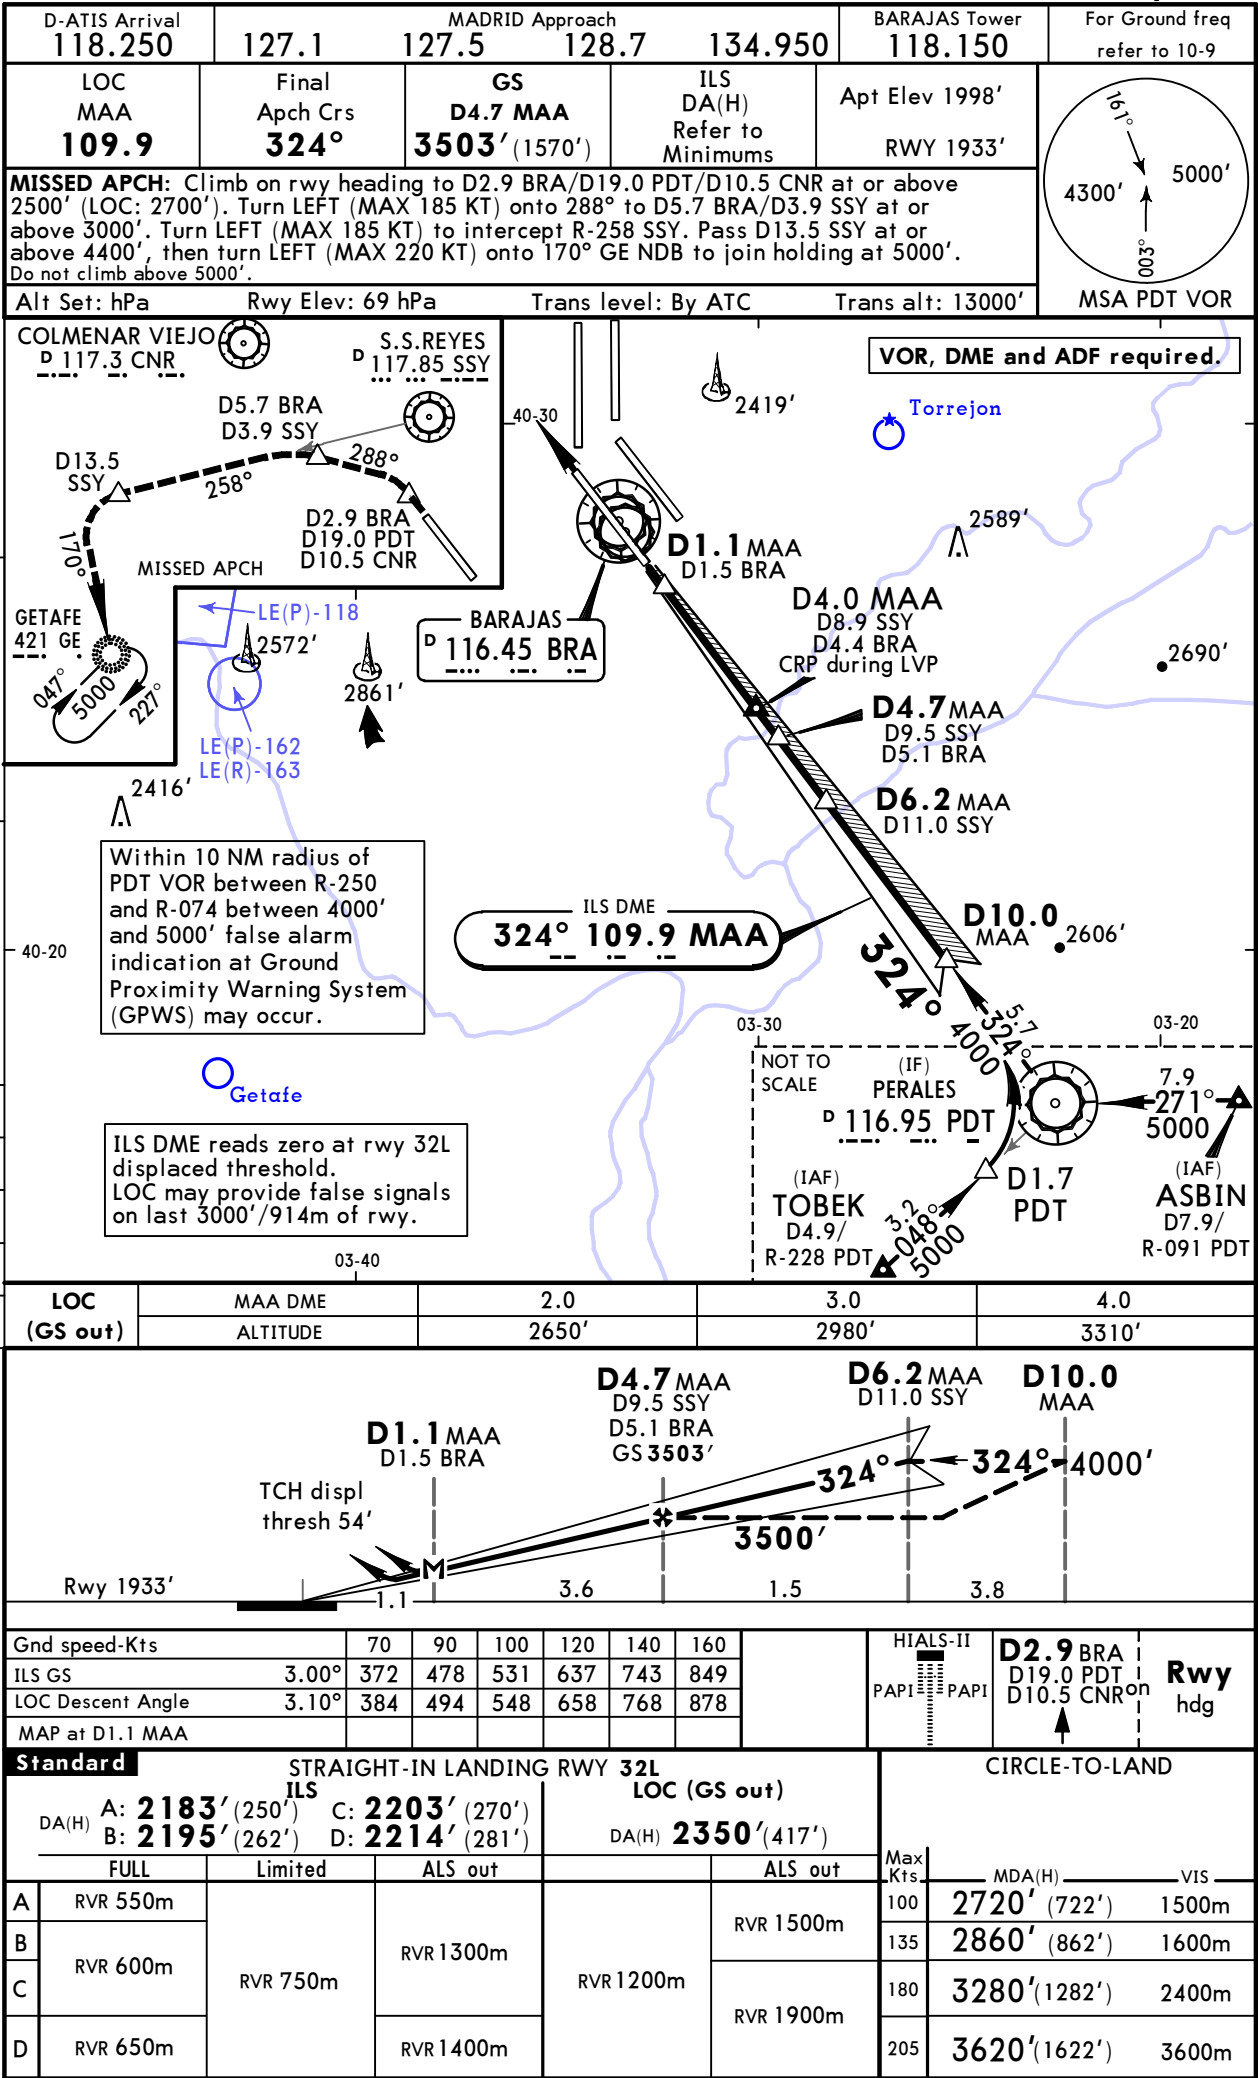



LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS

JEPPESSEN
27 MAR 15
Eff 2 Apr 11-5A

MADRID, SPAIN
CAT II/III ILS Z Rwy 32L

D-ATIS Arrival		MADRID Approach				BARAJAS Tower	For Ground freq frequencies refer to 10-9	
118.250		127.1	127.5	128.7	134.950	118.150		
LOC MAA 109.9	Final Apch Crs 324°	GS D4.7 MAA 3503' (1570')	CAT II & IIIA ILS Refer to Minimums	Apt Elev 1998' RWY 1933'				
MISSED APCH: Climb on rwy hdg to D2.9 BRA/D19.0 PDT/D10.5 CNR at or above 2500'. Turn LEFT (MAX 185 KT) onto 288° to D5.7 BRA/D3.9 SSY at or above 3000'. Turn LEFT (MAX 185 KT) to intercept R-258 SSY. Pass D13.5 SSY at or above 4400', then turn LEFT (MAX 220 KT) onto 170° GE NDB to join holding at 5000'. Do not climb above 5000'.								
Alt Set: hPa		Rwy Elev: 69 hPa		Trans level: By ATC				Trans alt: 13000'
Special Aircrew & Acft Certification Required.								

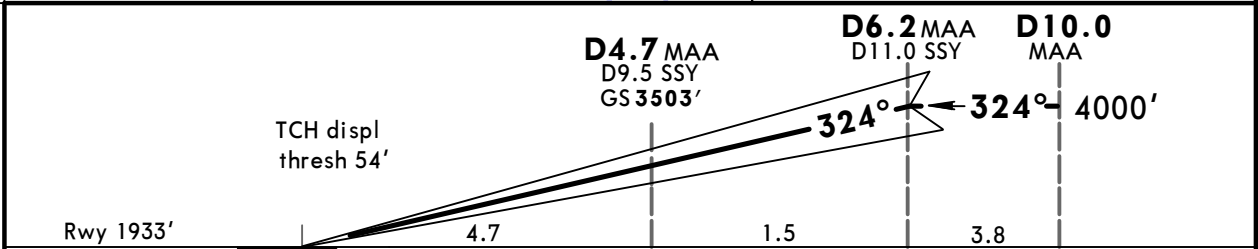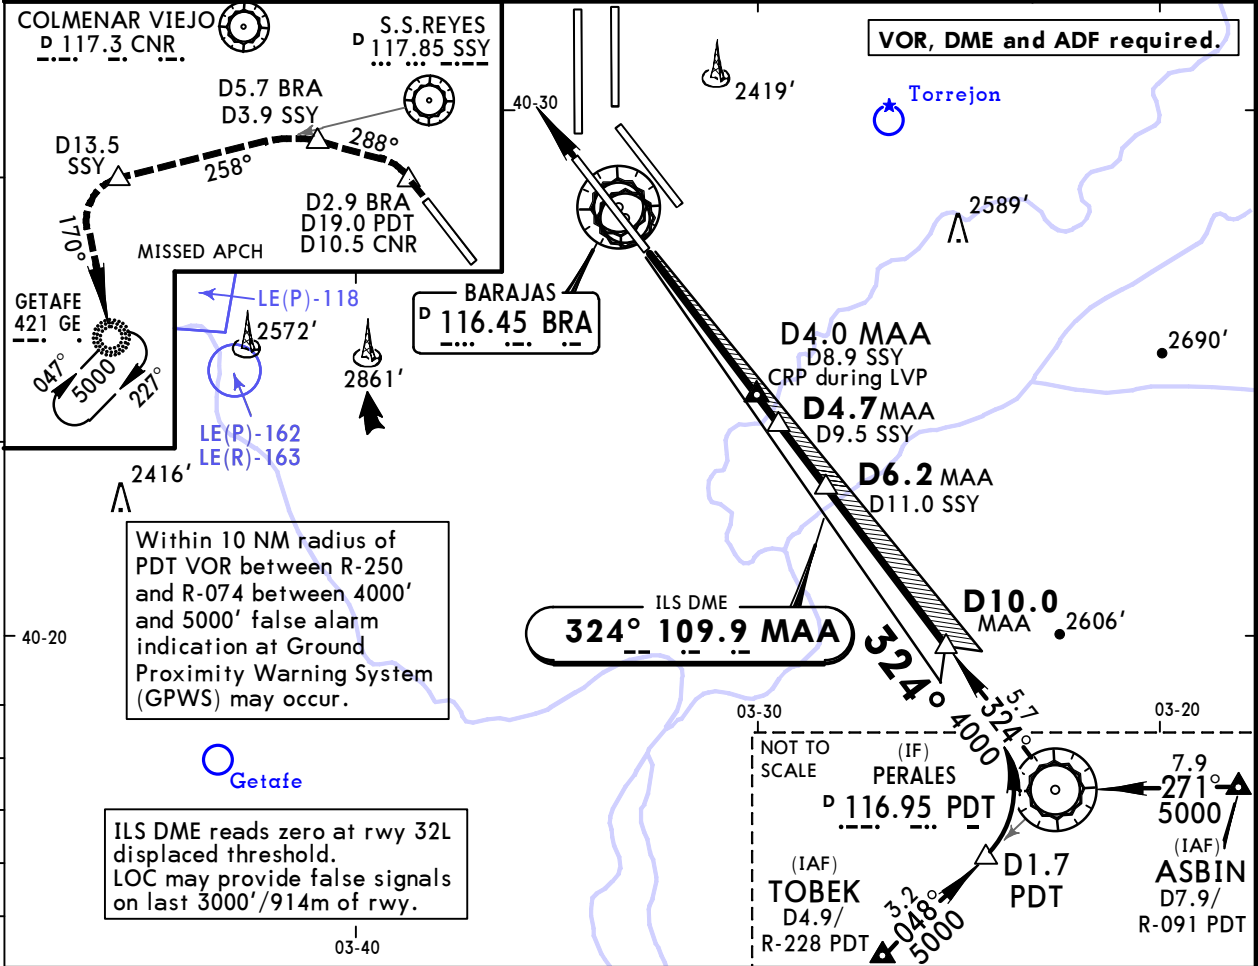

Gnd speed-Kts	70	90	100	120	140	160		D2.9 BRA D19.0 PDT D10.5 CNR on Rwy hdg
GS	3.00°	372	478	531	637	849		

Standard		STRAIGHT-IN LANDING RWY 32L			
CAT IIIA ILS		CAT II ILS			
	A	B	C	D	
	RA 161'	RA 180'	RA 195'	RA 211'	
DH 50'	DA(H) 2081'(148')	DA(H) 2098'(165')	DA(H) 2110'(177')	DA(H) 2124'(191')	
RVR 200m	RVR 450m				

LEMD/MAD

ADOLFO SUAREZ MADRID-BARAJAS

JEPPESSEN

MADRID, SPAIN



10 JUL 15

Eff 23 Jul

11-6

ILS W Rwy 32L

D-ATIS Arrival 118.250	MADRID Approach			BARAJAS Tower 118.150	For Ground frequencies refer to 10-9
LOC MAA 109.9	Final Apch Crs 324°	GS D4.7 MAA 3503' (1570')	ILS DA(H) Refer to Minimums	Apt Elev 1998' RWY 1933'	
MISSED APCH: Climb on rwy heading to D2.5 BRA/D18.6 PDT to be crossed at or above 2400'. Turn LEFT (MAX 185 KT) to intercept and follow R-292 VTZ to cross D9.0 VTZ (D5.7 BRA) at or above 3000'. Turn LEFT (MAX 185 KT) to NVS VOR to join holding at 9000'. Contact ATC before reaching 4000' and follow instructions.					
Alt Set: hPa	Rwy Elev: 69 hPa	Trans level: By ATC	Trans alt: 13000'	MSA PDT VOR	

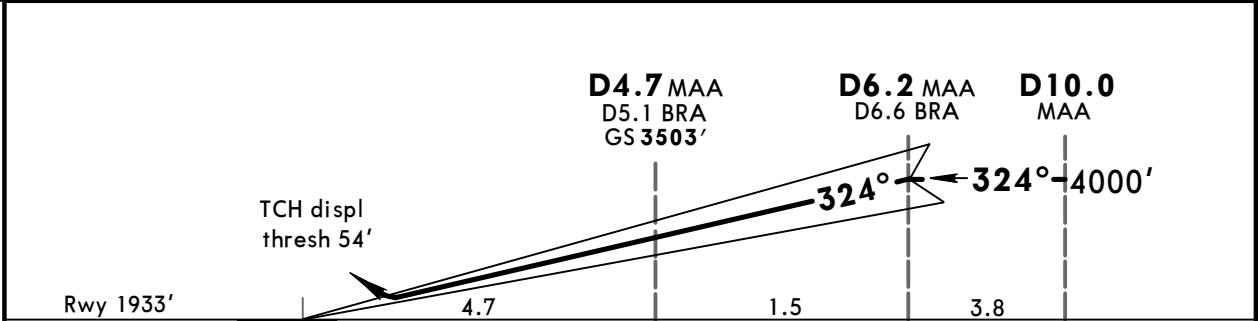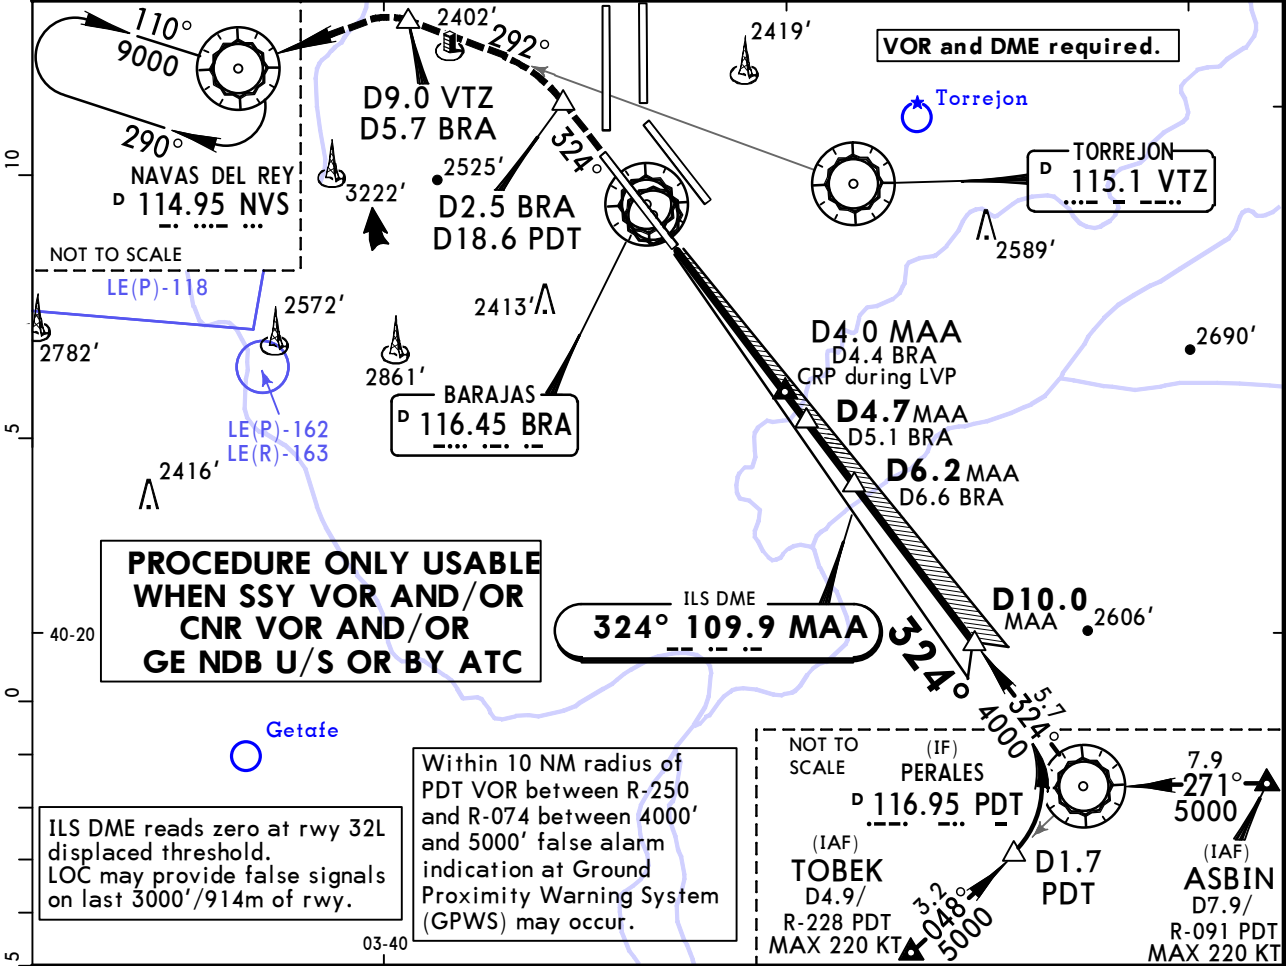

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI PAPI	D2.5 BRA D18.6 PDT on Rwy hdg
GS	3.00°	372	478	531	637	849		



STRAIGHT-IN LANDING RWY 32L				CIRCLE-TO-LAND	
ILS DA(H) A: 2183' (250') C: 2203' (270') B: 2195' (262') D: 2214' (281')				Max Kts	MDA(H) VIS
PANS OPS	FULL	Limited	ALS out	100	2720' (722') 1500m
	A RVR 550m	RVR 750m	RVR 1300m	135	2860' (862') 1600m
	B RVR 600m			180	3280' (1282') 2400m
	C RVR 650m		RVR 1400m	205	3620' (1622') 3600m

LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS

JEPPESSEN
10 JUL 15
Eff 23 Jul **(11-6A)**

MADRID, SPAIN
CAT II/III ILS W Rwy 32L

D-ATIS Arrival 118.250		MADRID Approach 127.1 127.5 128.7 134.950			BARAJAS Tower 118.150	For Ground freq refer to 10-9
LOC MAA 109.9	Final Apch Crs 324°	GS D4.7 MAA 3503' (1570')	CAT II & IIIA ILS Refer to Minimums	Apt Elev 1998' RWY 1933'		
MISSED APCH: Climb on rwy heading to D2.5 BRA/D18.6 PDT to be crossed at or above 2400'. Turn LEFT (MAX 185 KT) to intercept and follow R-292 VTZ to cross D9.0 VTZ (D5.7 BRA) at or above 3000'. Turn LEFT (MAX 185 KT) to NVS VOR to join holding at 9000'. Contact ATC before reaching 4000' and follow instructions.						
Alt Set: hPa		Rwy Elev: 69 hPa	Trans level: By ATC		Trans alt: 13000'	

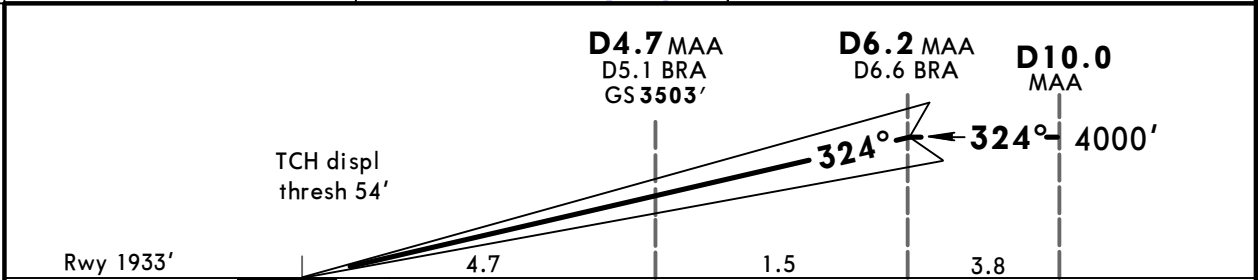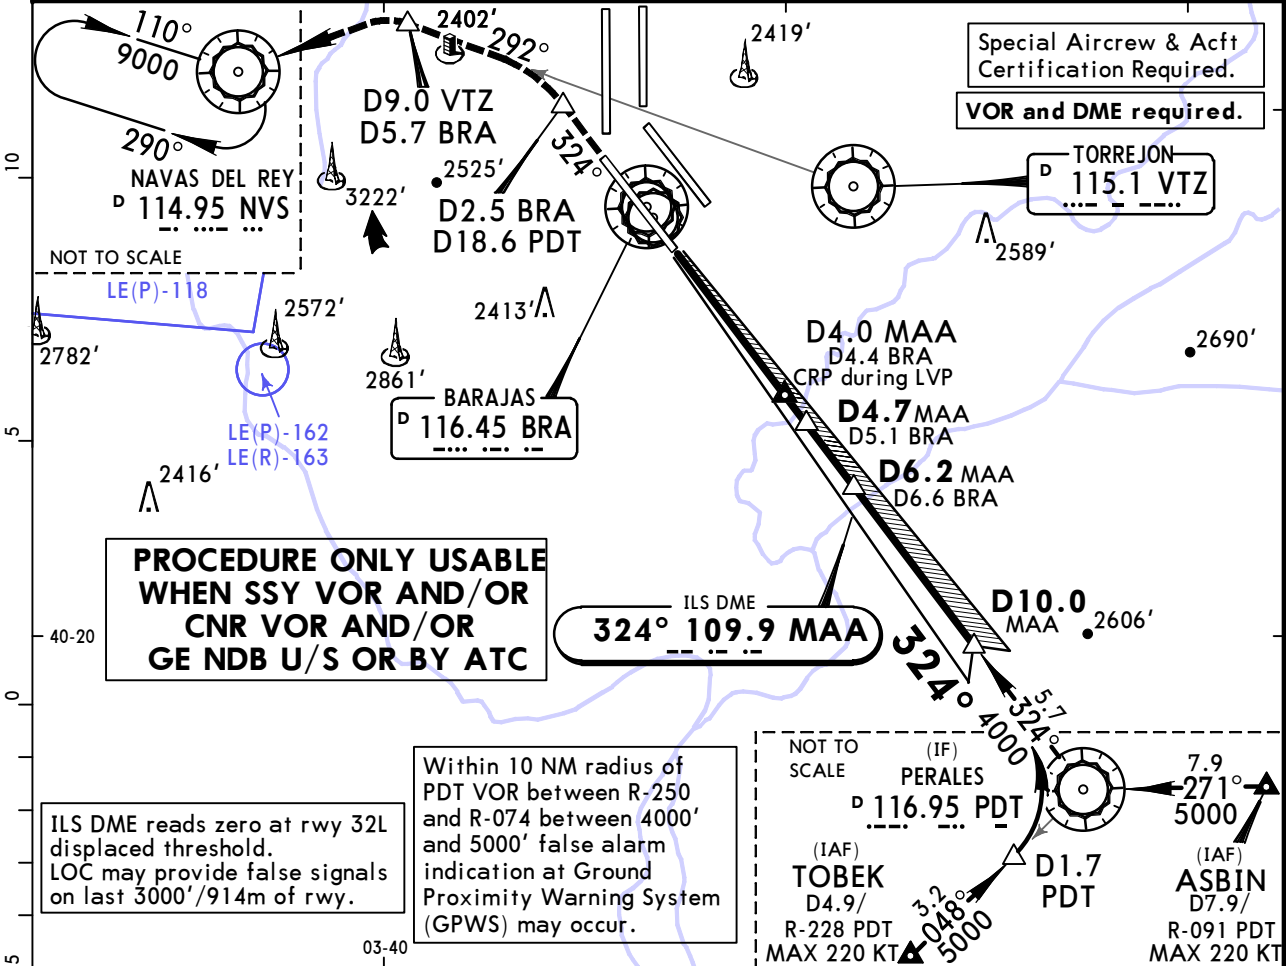

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI PAPI	D2.5 BRA D18.6 PDT on	Rwy hdg
GS 3.00°	372	478	531	637	743	849			


Standard		STRAIGHT-IN LANDING RWY 32L			
CAT IIIA ILS		CAT II ILS			
		A	B	C	D
	RA 161'	RA 180'	RA 195'	RA 211'	
DH 50'	DA(H) 2081'(148')	DA(H) 2098'(165')	DA(H) 2110'(177')	DA(H) 2124'(191')	
RVR 200m	RVR 450m				

LEMD/MAD
ADOLFO SUAREZ MADRID-BARAJAS

10 JUL 15

(11-7)


Eff 23 Jul

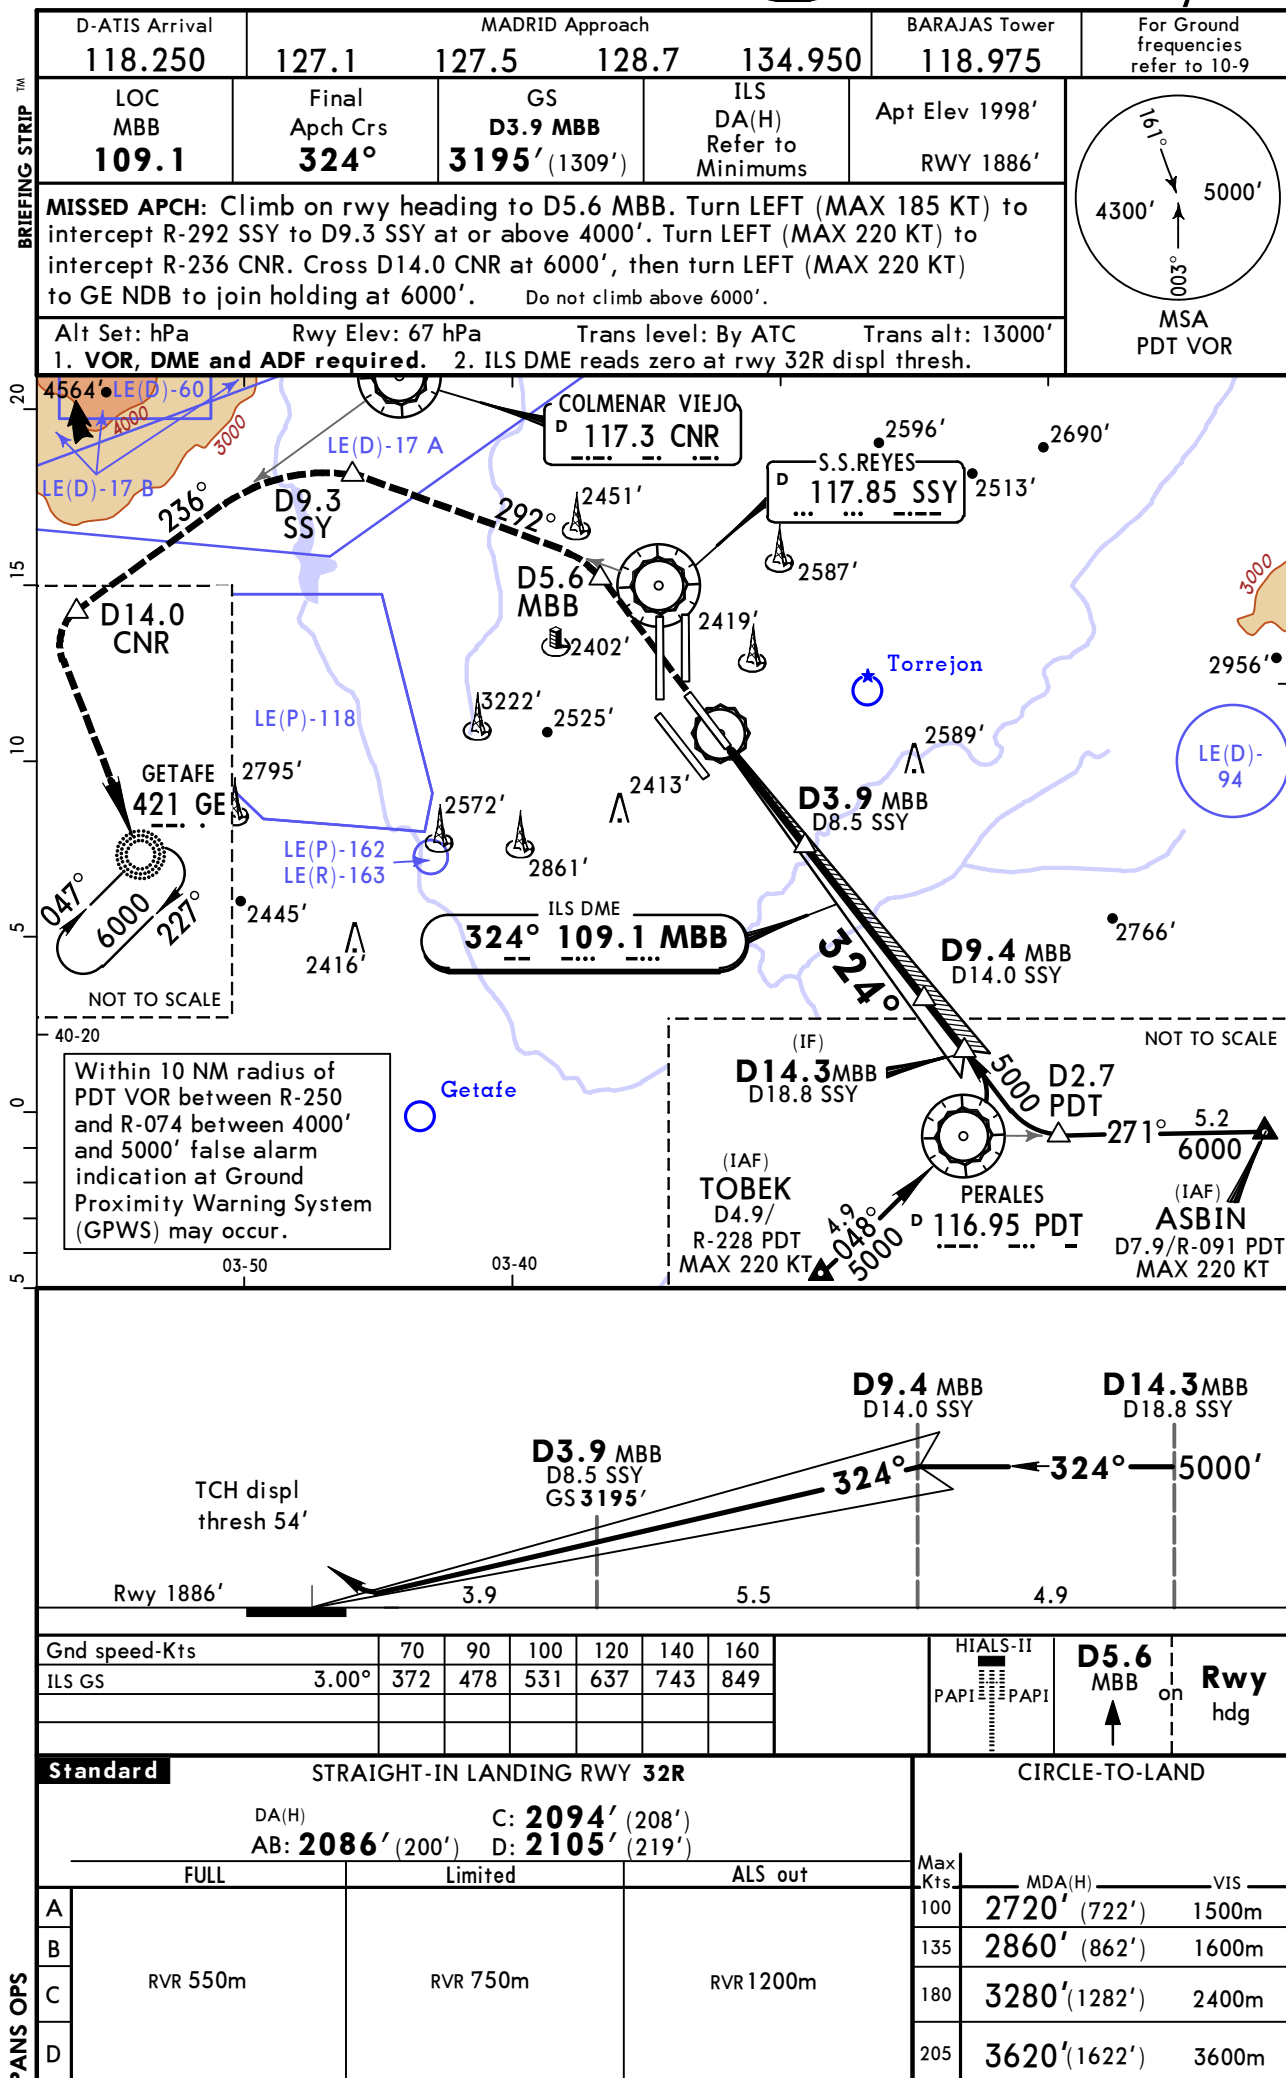MADRID, SPAIN
ILS Z Rwy 32R


LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS


JEPPESSEN
 10 JUL 15
 Eff 23 Jul **(11-7A)**



MADRID, SPAIN
CAT II/III ILS Z Rwy 32R

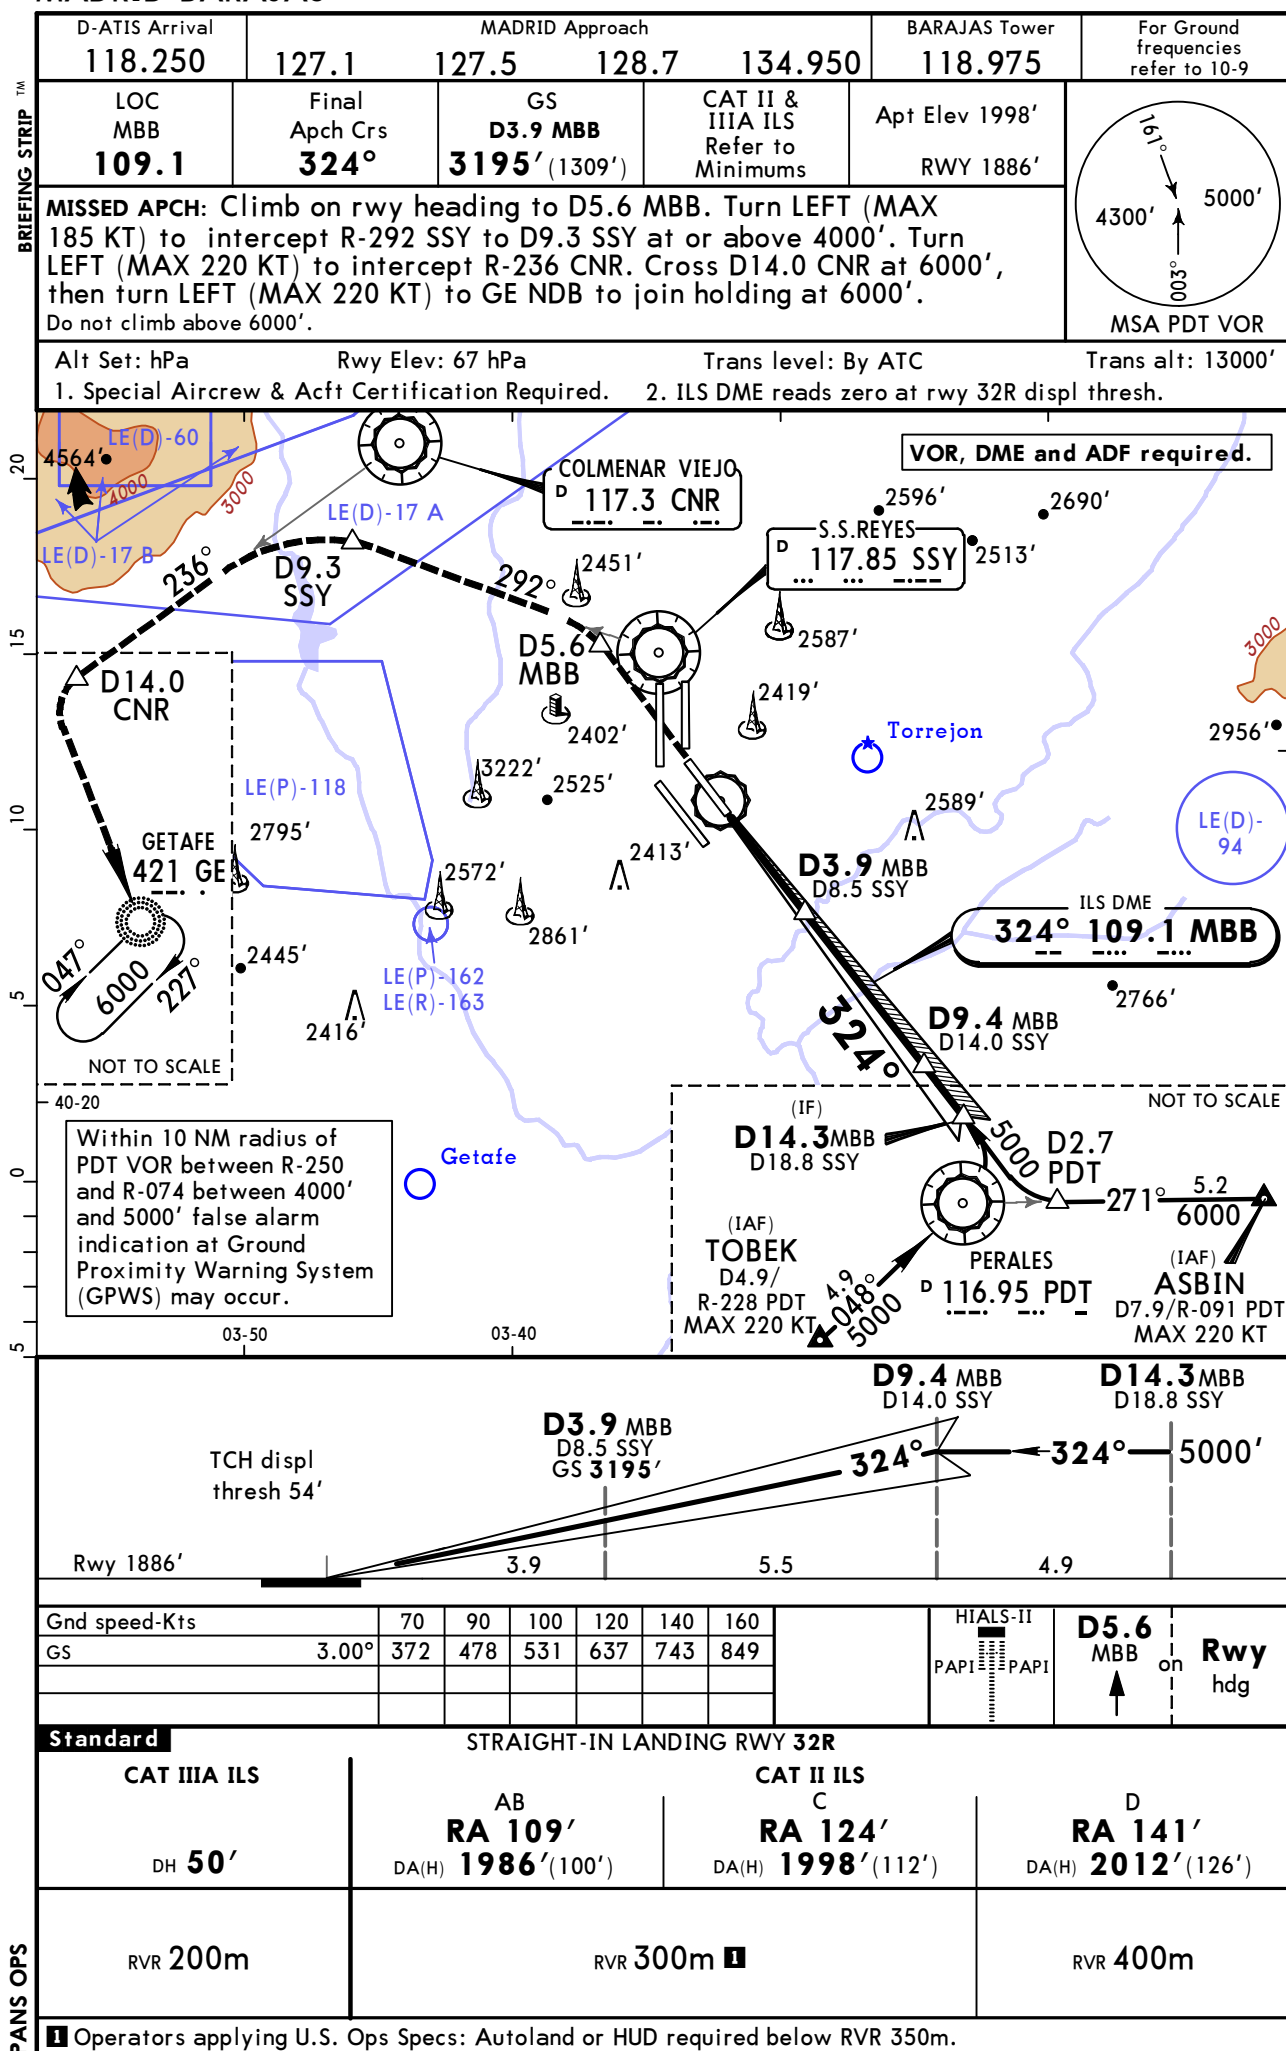


LEMD/MAD
ADOLFO SUAREZ MADRID-BARAJAS
JEPPESSEN
 10 JUL 15
 Eff 23 Jul

11-8
MADRID, SPAIN
ILS W Rwy 32R

BRIEFING STRIP™	D-ATIS Arrival 118.250		MADRID Approach 127.1 127.5 128.7 134.950			BARAJAS Tower 118.975	For Ground frequencies refer to 10-9
	LOC MBB 109.1	Final Apch Crs 324°	GS D3.9 MBB 3195' (1309')	ILS DA(H) Refer to Minimums	Apt Elev 1998' RWY 1886'		
	MISSED APCH: Climb on rwy heading to D5.6 BRA/D5.6 MBB, then turn LEFT (MAX 185 KT) onto 292° to cross D11.5 BRA/D14.5 VTZ at or above 4000'. Turn LEFT (MAX 220 KT) to NVS VOR to join holding at 10000'. Contact ATC before reaching 4000' and follow instructions.						
	Alt Set: hPa Rwy Elev: 67 hPa Trans level: By ATC Trans alt: 13000'						
	1. VOR and DME required. 2. ILS DME reads zero at rwy 32R displ thresh.						

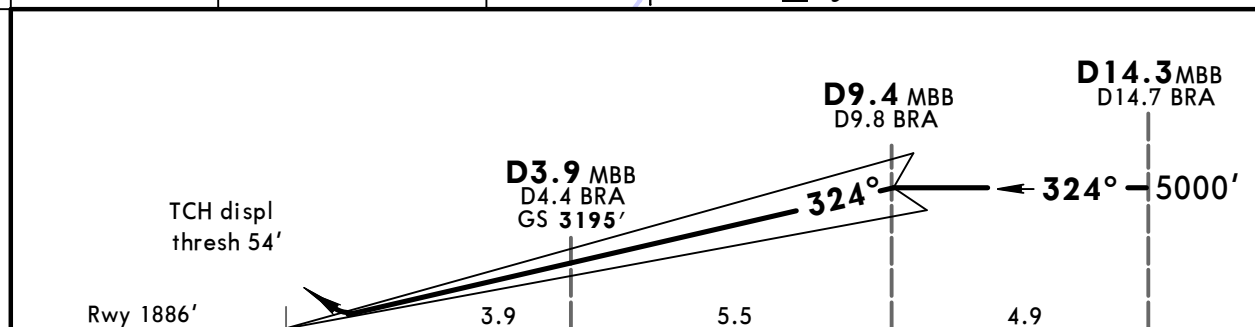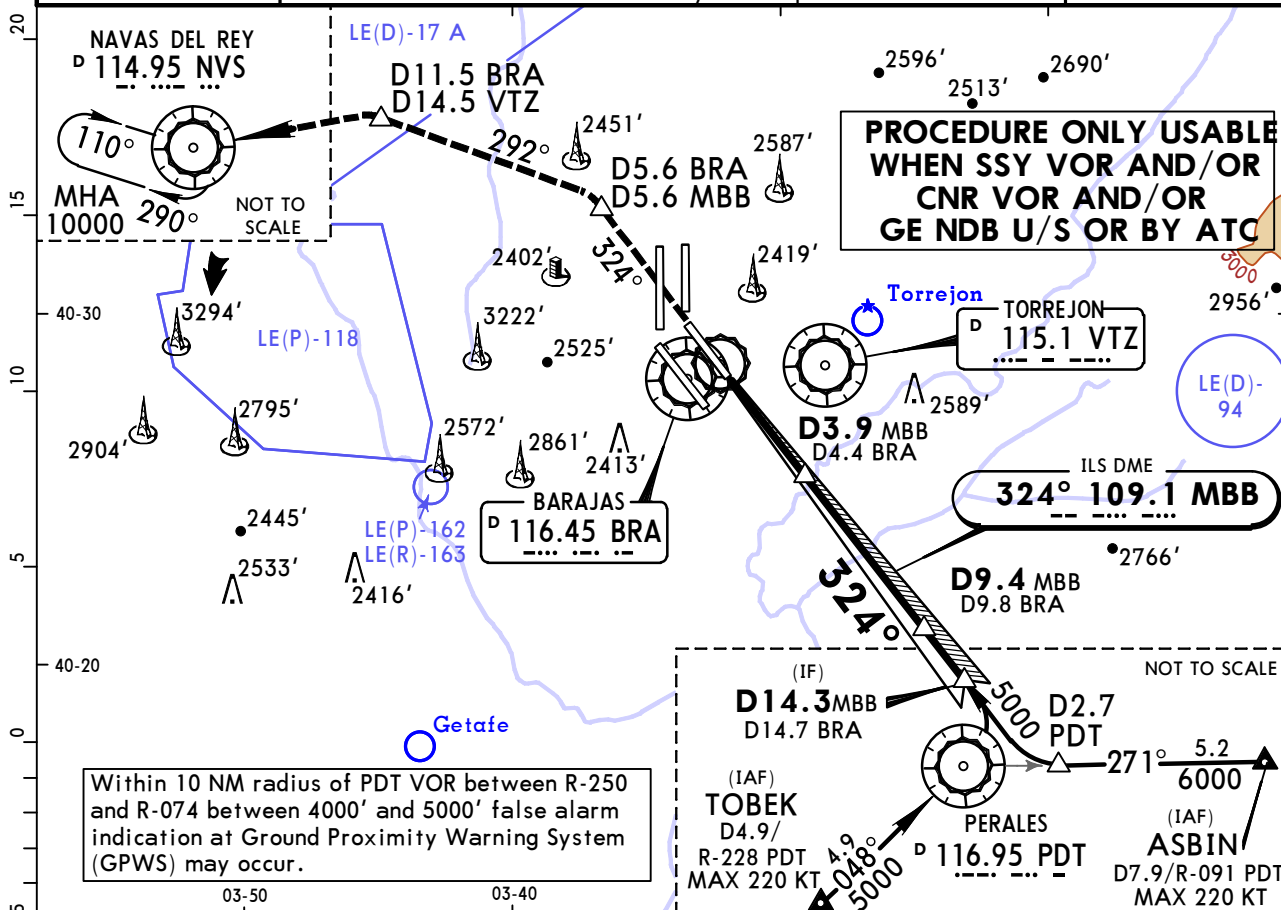

Gnd speed-Kts	70	90	100	120	140	160		D5.6 BRA D5.6 MBB on Rwy hdg
GS	3.00°	372	478	531	637	849		

Standard STRAIGHT-IN LANDING RWY 32R				CIRCLE-TO-LAND	
DA(H) AB: 2086' (200') C: 2094' (208') D: 2105' (219')				Max Kts	MDA(H) VIS
FULL Limited ALS out				100	2720' (722') 1500m
				135	2860' (862') 1600m
				180	3280' (1282') 2400m
				205	3620' (1622') 3600m
PANS OPS	RVR 550m	RVR 750m	RVR 1200m		


CHANGES: Speed restrictions at IAF. Missed apch. Note.



© JEPPESSEN, 2012, 2015. ALL RIGHTS RESERVED.


LEMD/MAD
ADOLFO SUAREZ
MADRID-BARAJAS

JEPPESSEN
10 JUL 15
Eff 23 Jul 11-8A

MADRID, SPAIN
CAT II/III ILS W Rwy 32R

D-ATIS Arrival 118.250		MADRID Approach 127.1 127.5 128.7 134.950			BARAJAS Tower 118.975	For Ground frequencies refer to 10-9
LOC MBB 109.1	Final Apch Crs 324°	GS D3.9 MBB 3195' (1309')	CAT II & IIIA ILS Refer to Minimums	Apt Elev 1998' RWY 1886'		
MISSED APCH: Climb on rwy heading to D5.6 BRA/D5.6 MBB, then turn LEFT (MAX 185 KT) onto 292° to cross D11.5 BRA/D14.5 VTZ at or above 4000'. Turn LEFT (MAX 220 KT) to NVS VOR to join holding at 10000'. Contact ATC before reaching 4000' and follow instructions.						
Alt Set: hPa Rwy Elev: 67 hPa Trans level: By ATC Trans alt: 13000'						
1. VOR and DME required. 2. Special Aircrew & Acft Certification Required. 3. ILS DME reads zero at rwy 32R displ thresh.						

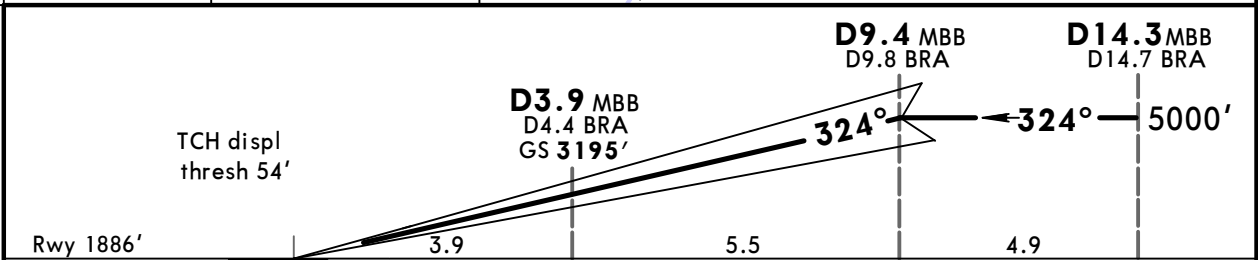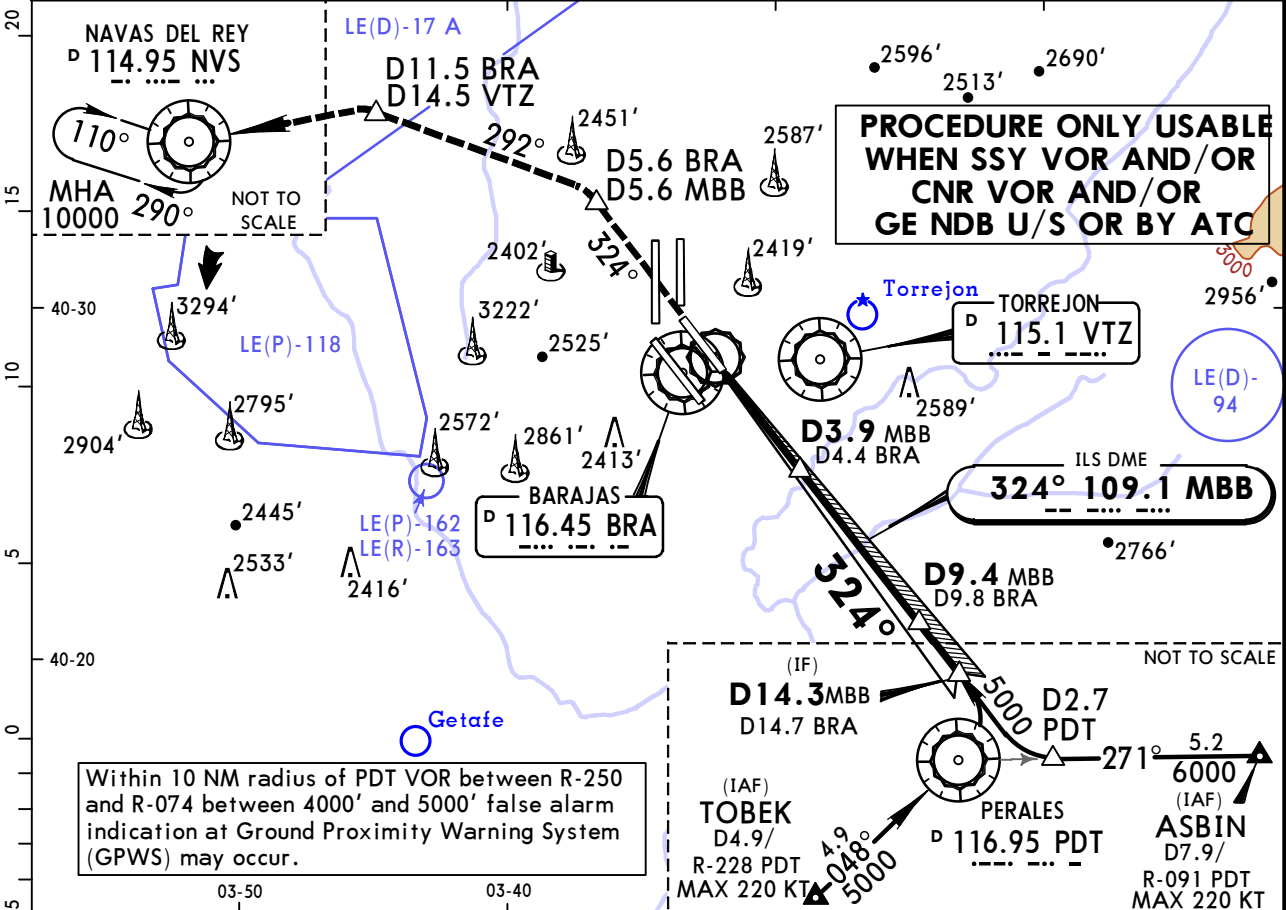


Gnd speed-Kts	70	90	100	120	140	160		D5.6 BRA D5.6 MBB ↑ on hdg
GS	3.00°	372	478	531	637	743		

Standard STRAIGHT-IN LANDING RWY 32R			
CAT IIIA ILS	AB RA 109' DA(H) 1986' (100')	CAT II ILS C RA 124' DA(H) 1998' (112')	D RA 141' DA(H) 2012' (126')
DH 50'			
RVR 200m	RVR 300m 		RVR 400m

LEMD/MAD
ADOLFO SUAREZ MADRID-BARAJAS

10 JUL 15

(11-9)

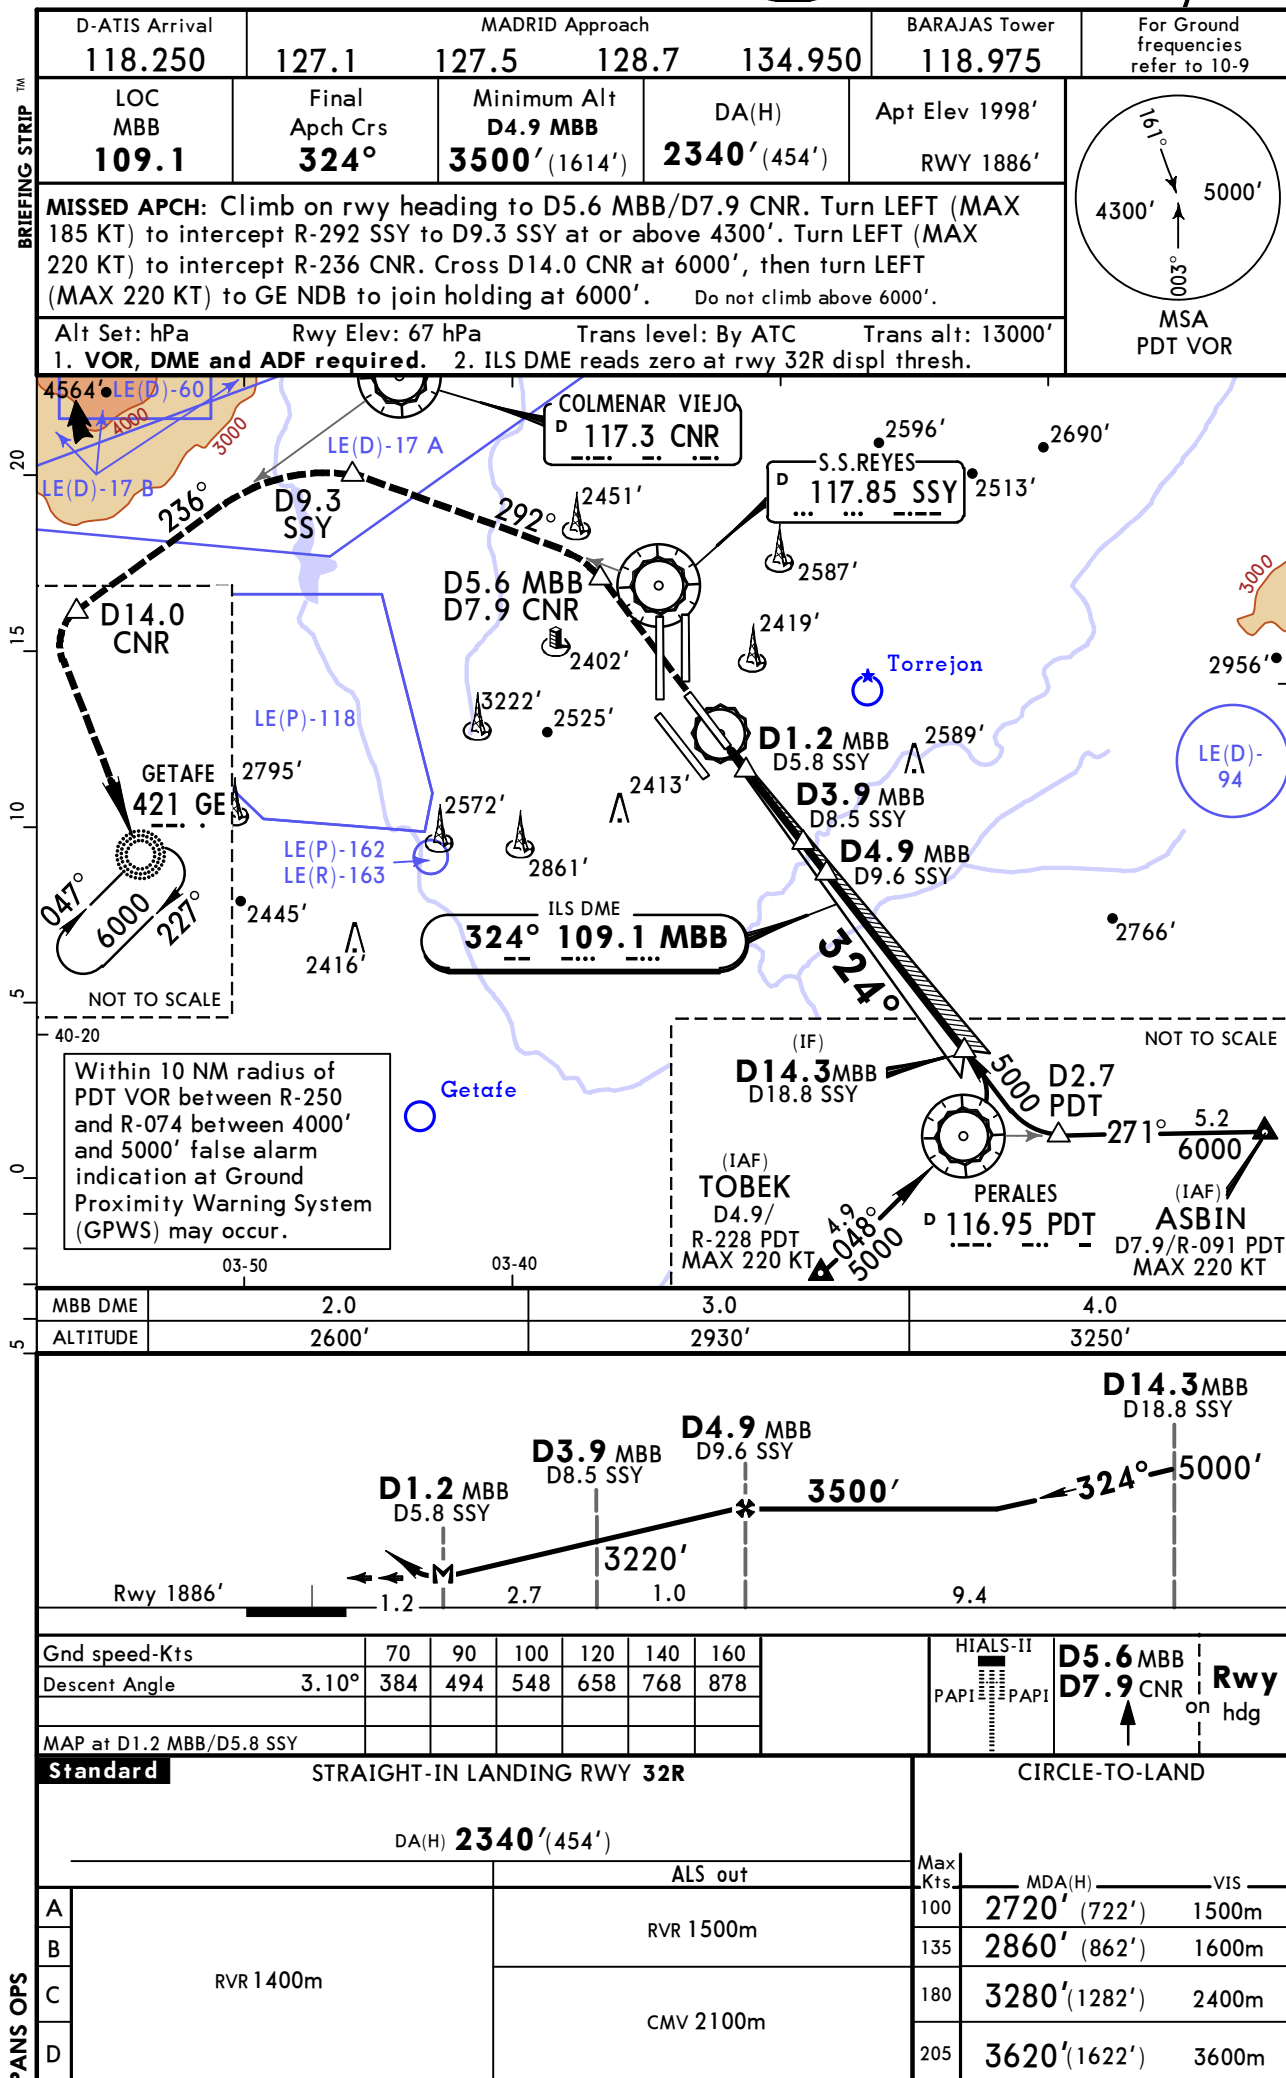Eff 23 Jul
MADRID, SPAIN
LOC Rwy 32R


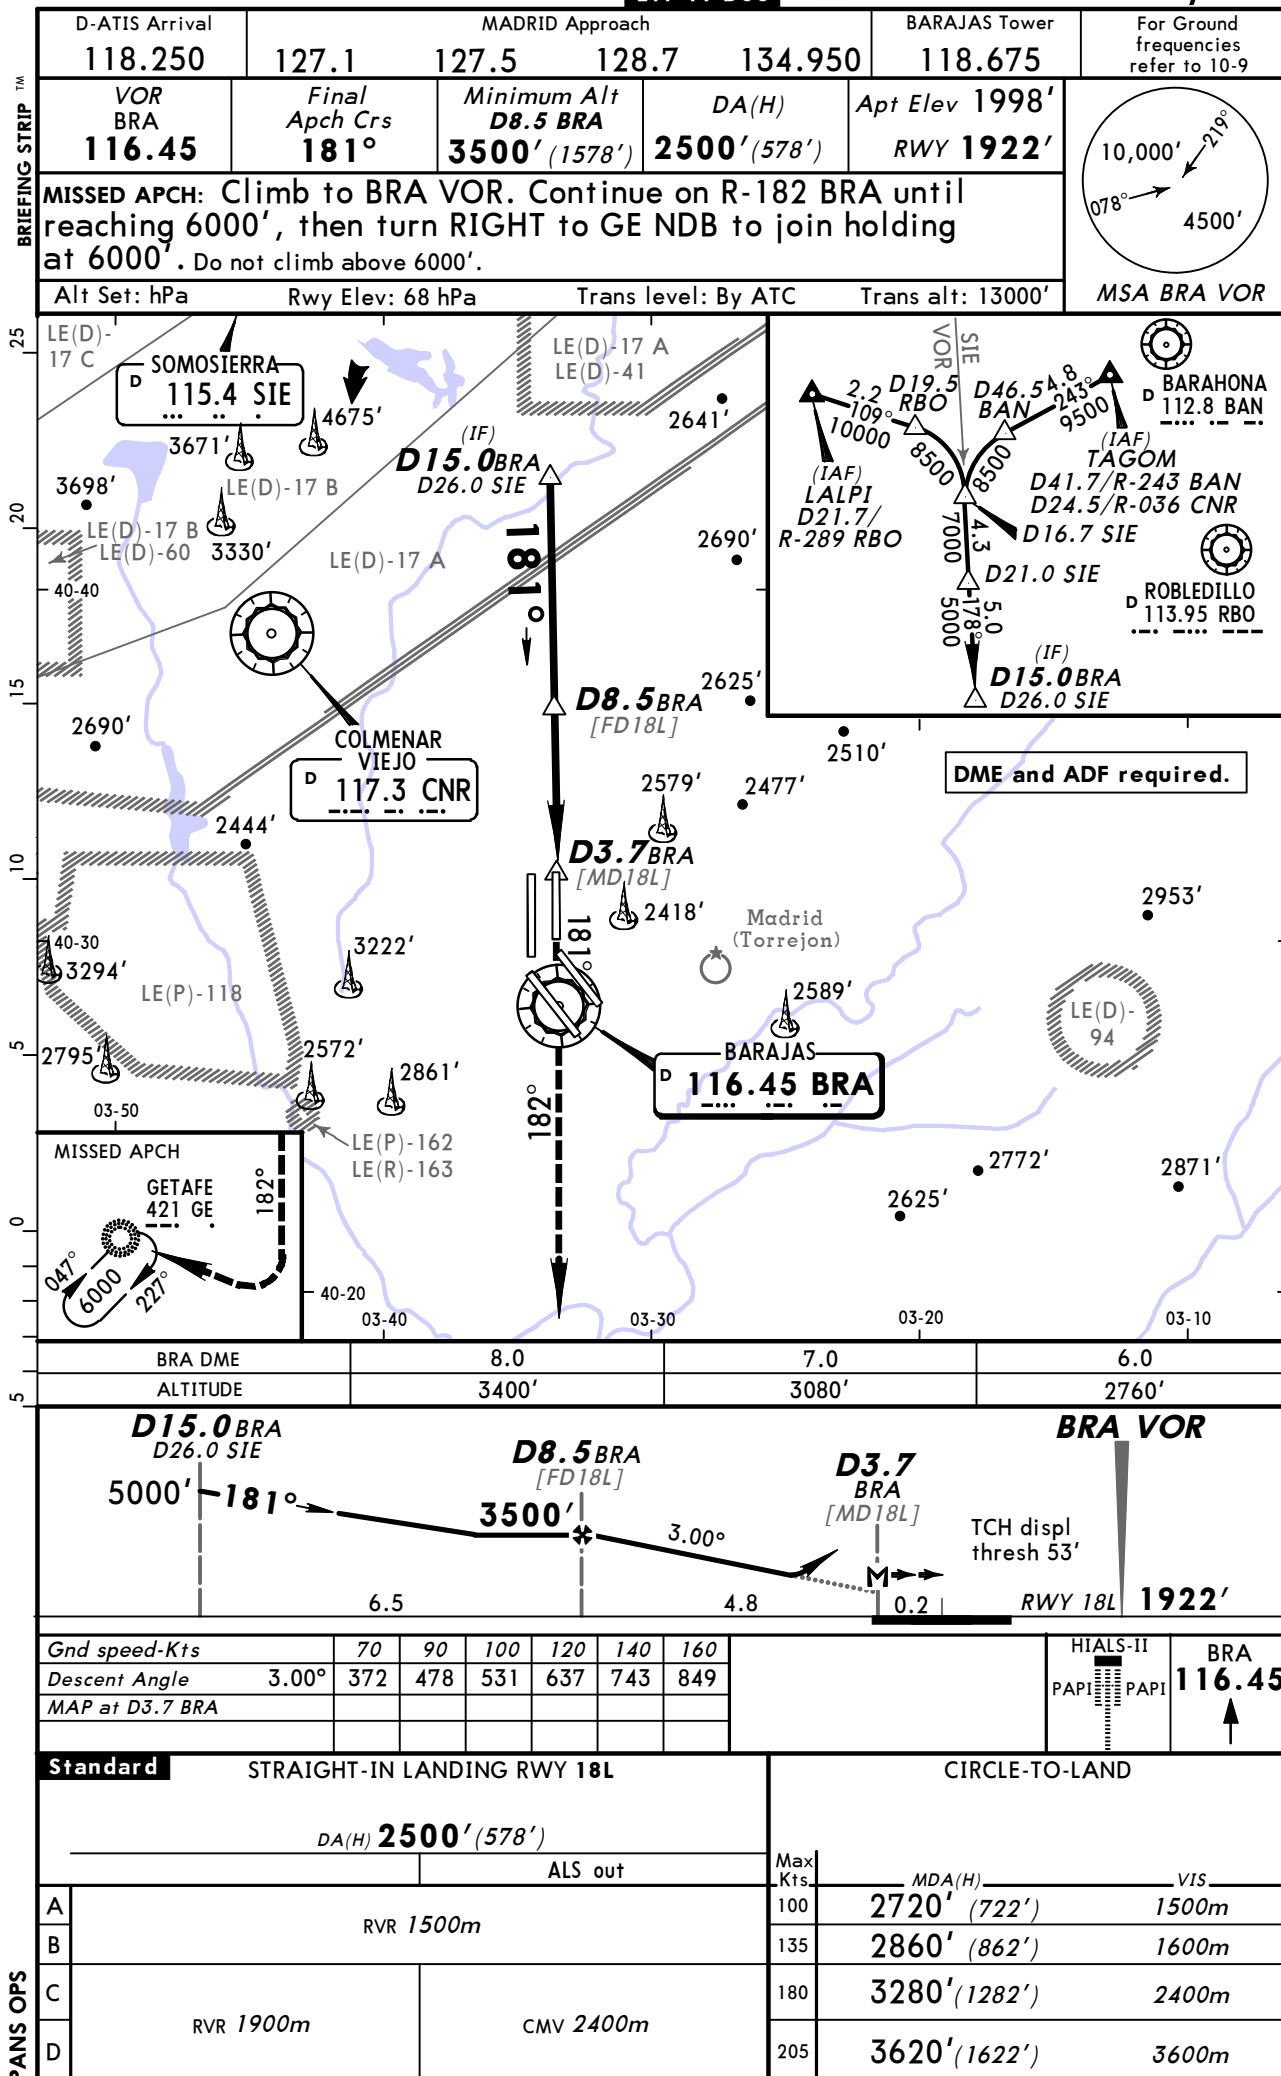
CHANGES: Procedure transferred from 11-7. Missed apch.

© JEPPESEN, 2005, 2015. ALL RIGHTS RESERVED.

LEMD/MAD
ADOLFO SUAREZ MADRID-BARAJAS
JEPPESSEN
MADRID, SPAIN

5 DEC 14

(13-1)


VOR Rwy 18L
Eff 11 Dec


CHANGES: Initial apch.

© JEPPESSEN, 2005, 2014. ALL RIGHTS RESERVED.

LEMD/MAD
ADOLFO SUAREZ MADRID-BARAJAS
JEPPESSEN

5 DEC 14

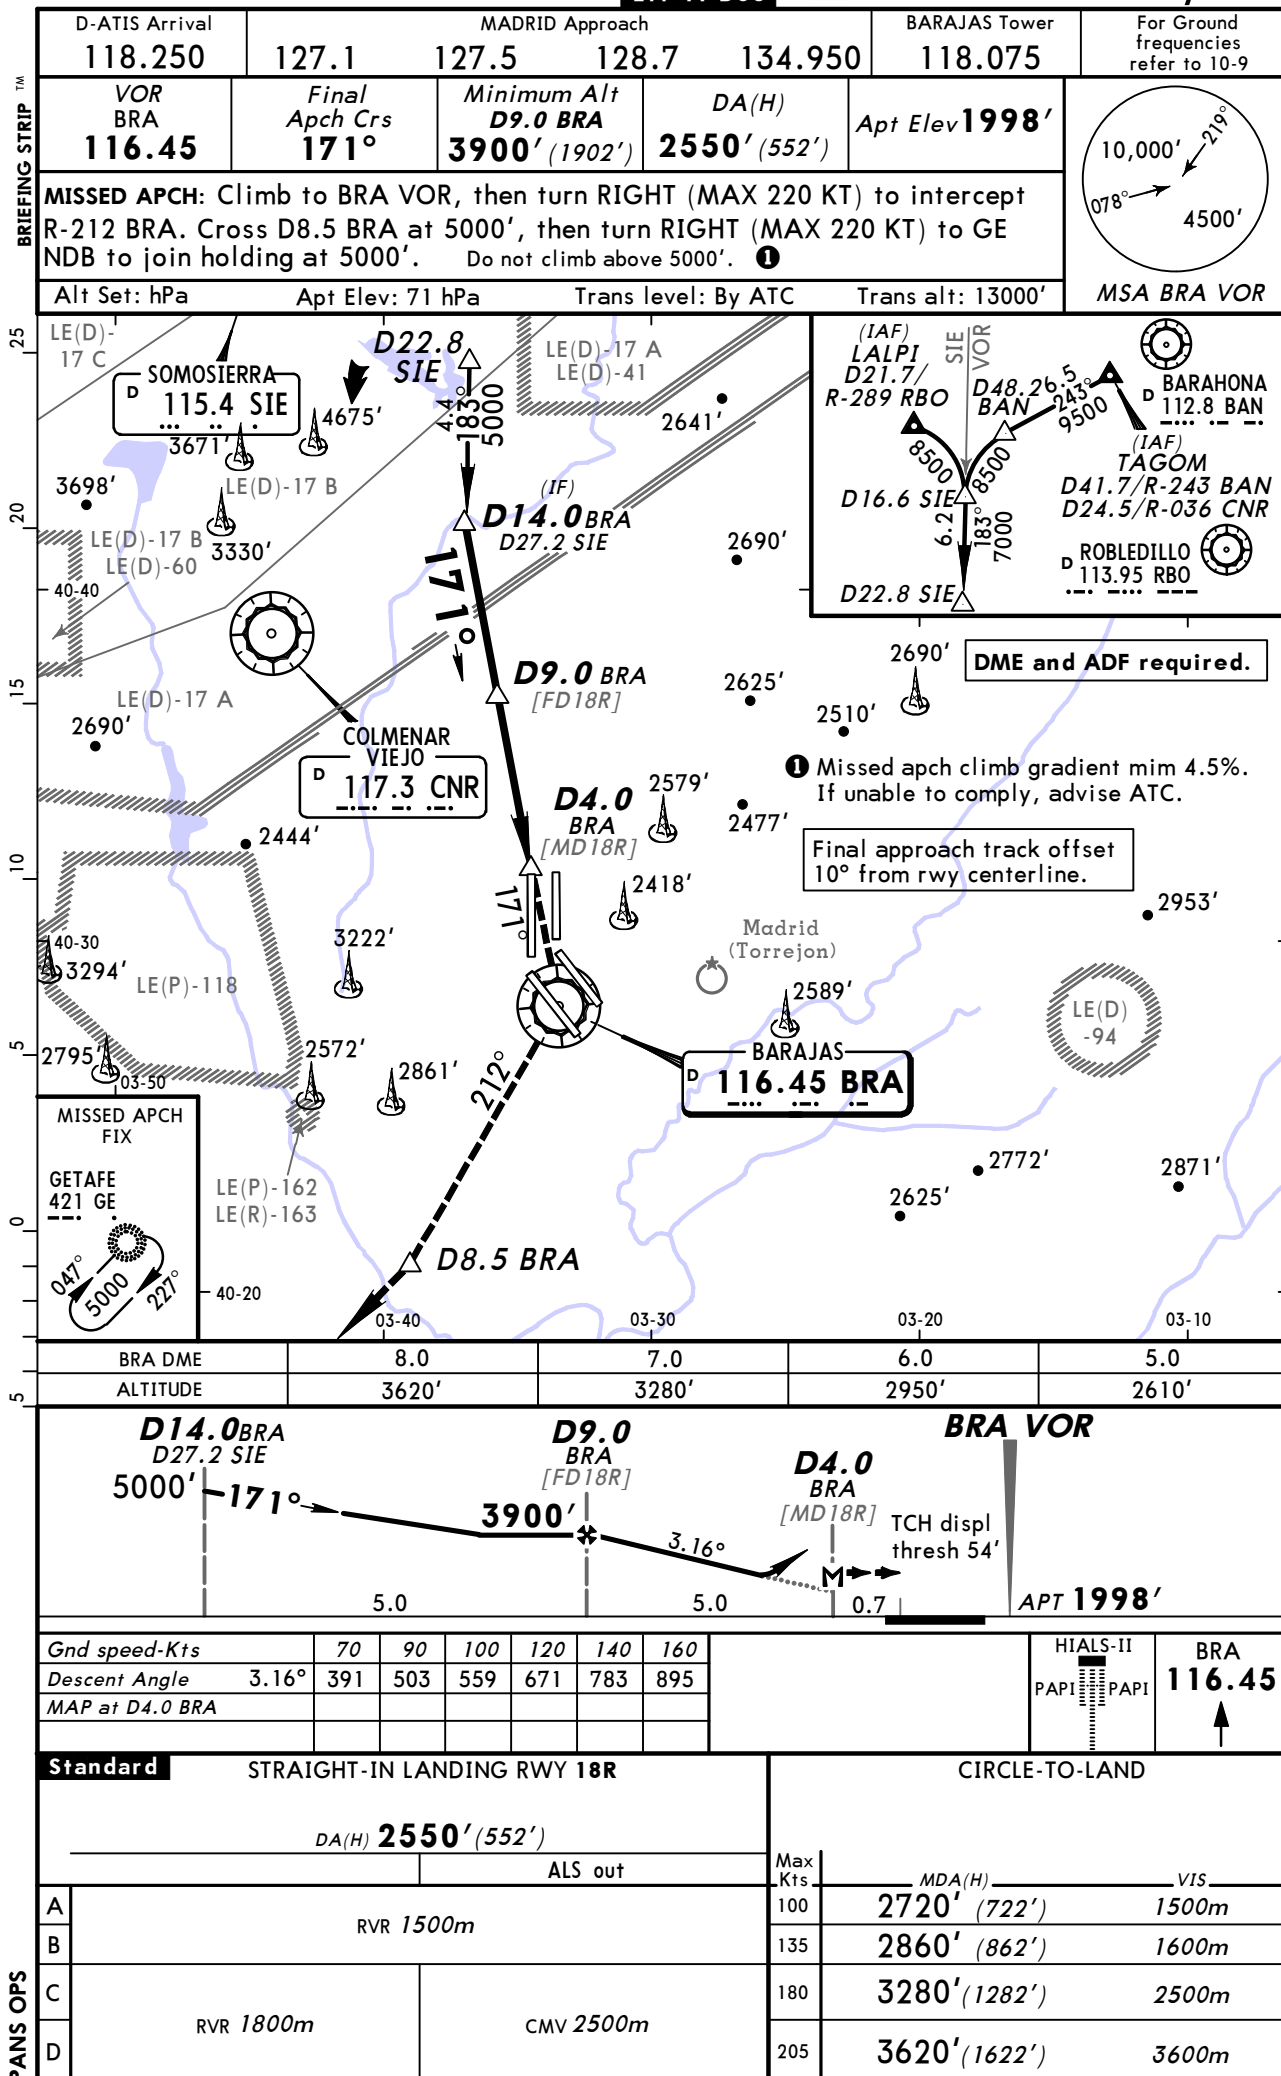
Eff 11 Dec
(13-2)
MADRID, SPAIN
VOR Rwy 18R


LEMD/MAD
ADOLFO SUAREZ MADRID-BARAJAS


27 MAR 15
Eff 2 Apr 13-3

MADRID, SPAIN
VOR Rwy 32L

D-ATIS Arrival	MADRID Approach				BARAJAS Tower	For Ground frequencies refer to 10-9
118.250	127.1	127.5	128.7	134.950	118.150	
VOR BRA 116.45	Final Apch Crs 325°	Minimum Alt D5.1 BRA 3400' (1467')	DA(H) 2420' (487')	Apt Elev 1998' RWY 1933'	 MSA PDT VOR	
MISSED APCH: Climb on R-325 BRA to D2.9 BRA/D19.0 PDT/D10.5 CNR at or above 2700'. Turn LEFT (MAX 185 KT) onto 288° to D5.7 BRA/D3.9 SSY at or above 3000'. Turn LEFT (MAX 185 KT) to intercept R-258 SSY. Pass D13.5 SSY at or above 4400', then turn LEFT (MAX 220 KT) onto 170° GE NDB to join holding at 5000'. Do not climb above 5000'.						
Alt Set: hPa	Rwy Elev: 69 hPa	Trans level: By ATC	Trans alt: 13000'			

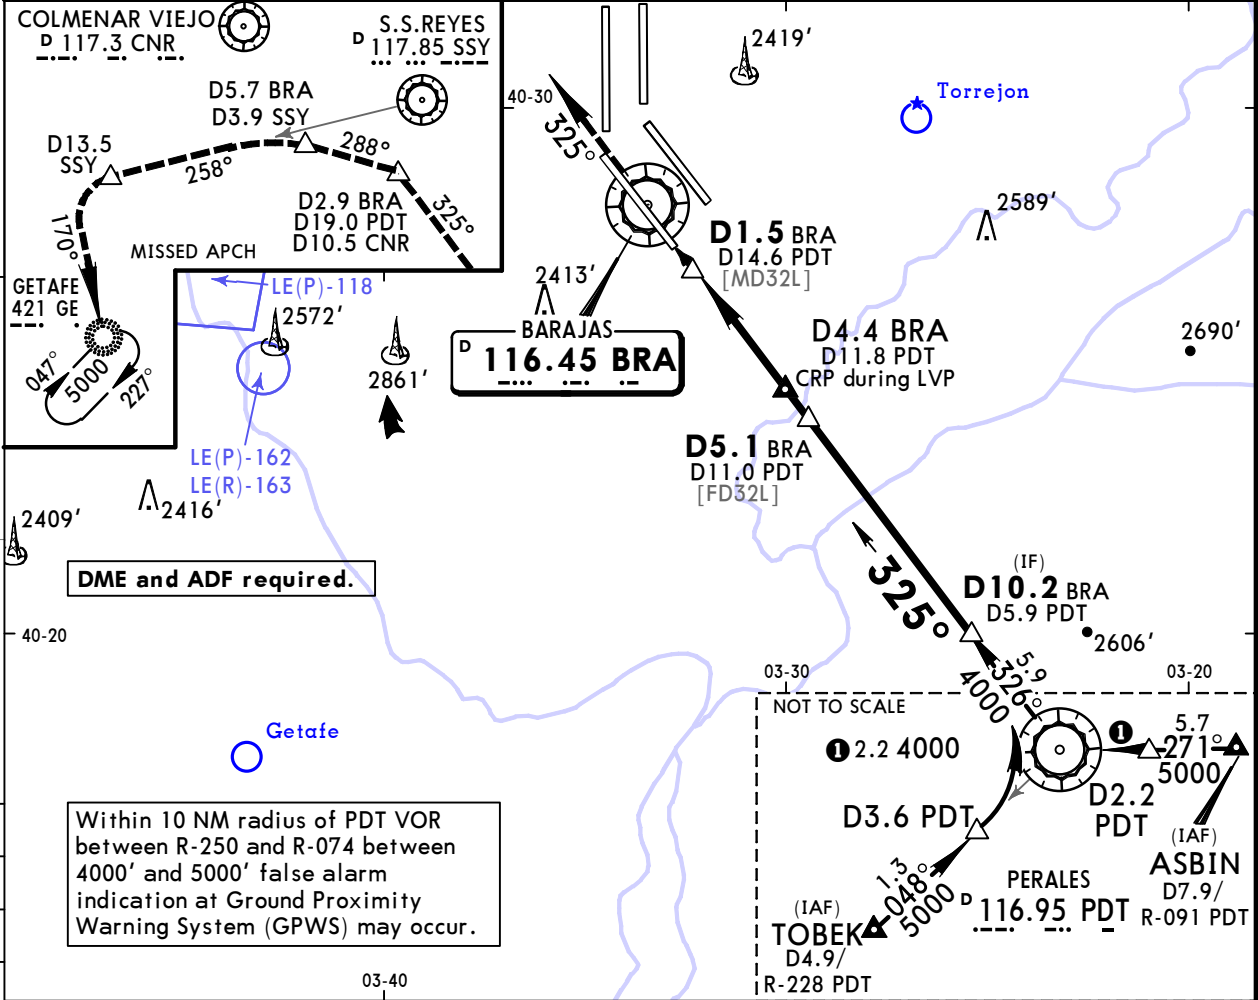


BRA DME	2.0	3.0	4.0	5.0
ALTITUDE	2490'	2800'	3110'	3420'

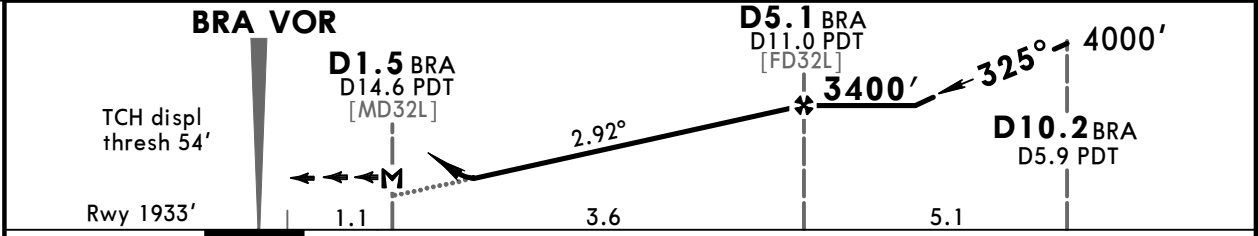

Gnd speed-Kts	70	90	100	120	140	160		D2.9 BRA D19.0 PDT D10.5 CNR on 116.45 R-325
Descent Angle	2.92°	362	465	517	620	723		
MAP at D1.5 BRA/D14.6 PDT								

Standard STRAIGHT-IN LANDING RWY 32L				CIRCLE-TO-LAND			
DA(H) 2420' (487')				Max Kts	MDA(H)	VIS	
ALS out				100	2720' (722')	1500m	
RVR 1500m				135	2860' (862')	1600m	
RVR 1500m				180	3280' (1282')	2400m	
CMV 2300m				205	3620' (1622')	3600m	

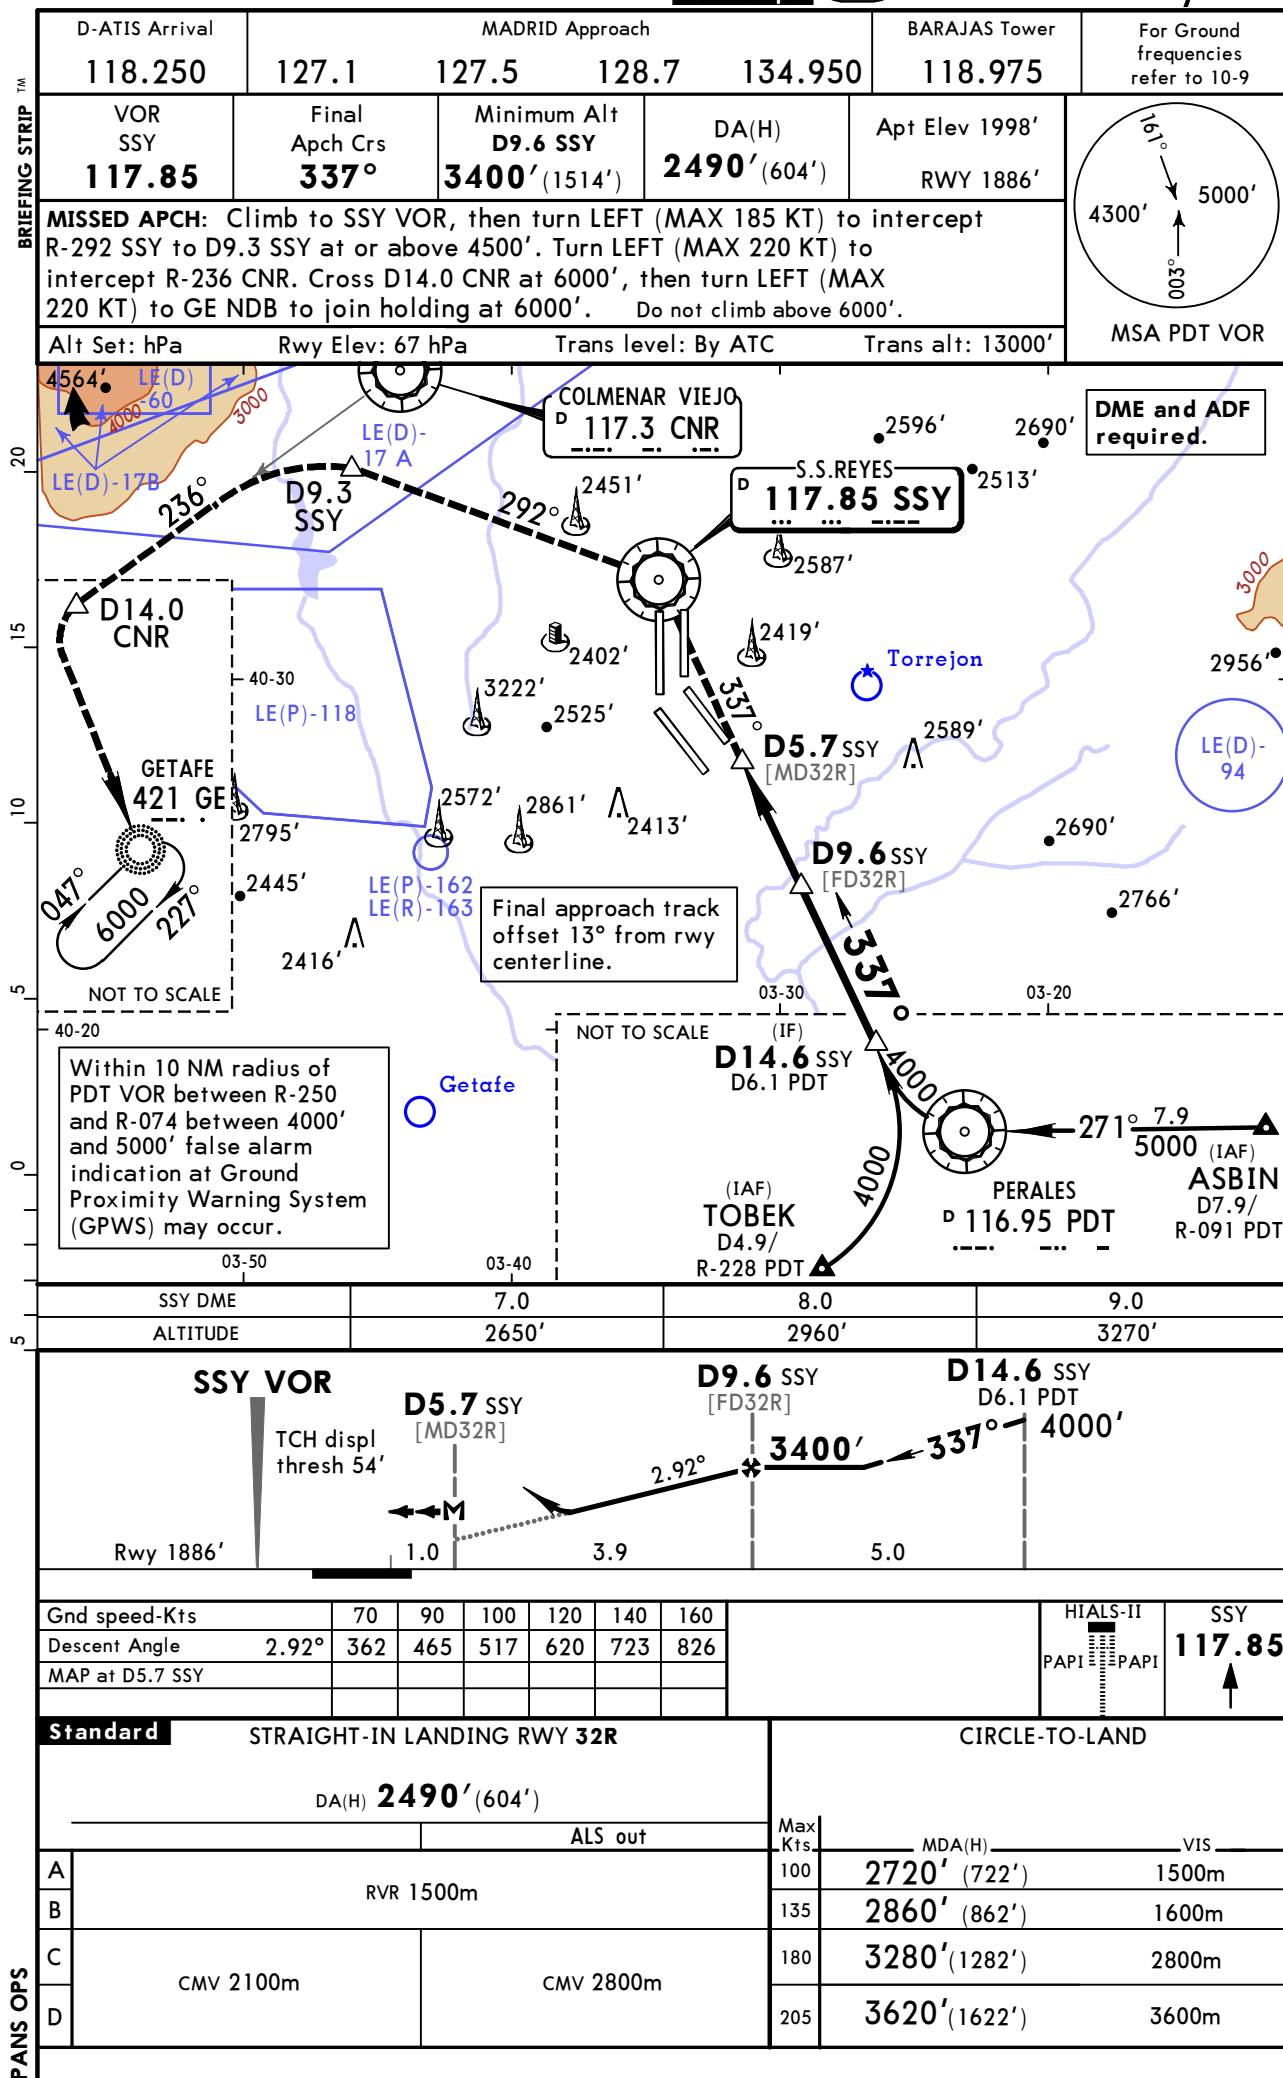LEMD/MAD
ADOLFO SUAREZ MADRID-BARAJAS
27 MAR 15
Eff 2 Apr
13-4
JEPPESSEN MADRID, SPAIN
VOR Rwy 32R


CHANGES: Distances to IAFs added.

© JEPPESSEN, 2005, 2015. ALL RIGHTS RESERVED.

MADRID, (ADOLFO SUAREZ MADRID-BARAJAS - LEMD)

TERMINAL CHART CHANGE NOTICES

Chart Change Notices for Airport LEMD

Type: Terminal

Effectivity: Temporary

Begin Date: 20150205

End Date: 20150523

Construction works on TWY K2 and TWY A28. Refer to temp charts 10-8 thru 10-8C and latest NOTAMs.

Type: Terminal

Effectivity: Temporary

Begin Date: 20150305

End Date: 20150630

Construction works on TWY W5 and TWYs M12 and M13. Refer to temp charts 10-8D thru 10-8H and latest NOTAMs.

Type: Terminal

Effectivity: Temporary

Begin Date: Immediately

End Date: Until Further Notice

(10-3C, 10-3E, 10-3K, 10-3L2, 10-3L3) Initial climb note should read: Do not turn until reaching 2400' or above, instead of: Do not turn to reach 2400' or above.

Type: Terminal

Effectivity: Permanent

Begin Date: 20140529

End Date: No end date

Airport name changed to "Adolfo Suarez Madrid-Barajas".

Type: Terminal

Effectivity: Temporary

Begin Date: 20150723

End Date: 20151130

Construction works on TWYs A18, A19, A20, M18, M19 and TWY M20. Refer to temp charts 10-8V and 10-8W and latest NOTAMs.