

List of pages in this Trip Kit

Trip Kit Index

Airport Information For LGTS

Terminal Charts For LGTS

Revision Letter For Cycle 01-2016

Change Notices

Notebook

General Information

Location: THESSALONIKI GRC
ICAO/IATA: LGTS / SKG
Lat/Long: N40° 31.18', E022° 58.25'
Elevation: 22 ft

Airport Use: Public
Daylight Savings: Observed
UTC Conversion: -2:00 = UTC
Magnetic Variation: 4.0° E

Fuel Types: 100 Octane (LL), Jet A-1
Customs: Yes
Airport Type: IFR
Landing Fee: Yes
Control Tower: Yes
Jet Start Unit: No
LLWS Alert: No
Beacon: Yes

Sunrise: 0551 Z
Sunset: 1520 Z

Runway Information

Runway: 16
Length x Width: 7907 ft x 197 ft
Surface Type: asphalt
TDZ-Elev: 12 ft
Lighting: Edge, ALS, Centerline, TDZ

Runway: 28
Length x Width: 8005 ft x 164 ft
Surface Type: asphalt
TDZ-Elev: 19 ft
Lighting: Edge, ALS

Runway: 34
Length x Width: 7907 ft x 197 ft
Surface Type: asphalt
TDZ-Elev: 22 ft
Lighting: Edge, ALS, Centerline

Runway: 10
Length x Width: 8005 ft x 164 ft
Surface Type: asphalt
TDZ-Elev: 8 ft
Lighting: Edge, ALS

Communication Information

ATIS: 127.550

Makedonia Tower: 122.100

Makedonia Tower: 118.100

Makedonia Tower: 25.780 Military

Makedonia Tower: 118.050

Makedonia Ground Ground: 121.700

Makedonia Clearance Delivery: 118.050

Thessaloniki Approach: 122.100

Thessaloniki Approach: 120.800

Thessaloniki Approach: 36.230 Military

Thessaloniki Approach: 118.275

Thessaloniki Director Radar: 118.275

Thessaloniki Radar: 120.800

Thessaloniki Radar: 36.230 Military

Makedonia Radio: 563.700 Air-Ground

Makedonia Radio: 298.900 Air-Ground

LGTS/SKG
MAKEDONIA

JEPPESEN
30 DEC 11 **10-1P**

THESSALONIKI, GREECE
Eff 12 Jan **AIRPORT BRIEFING**

1. GENERAL

1.1. ATIS

ATIS 127.55

1.2. LOW VISIBILITY PROCEDURES (LVP)

RWY 16 is equipped with ILS and is approved for CAT II operations.

The operations phase will be commenced when the RVR falls to 800m or below and the ceiling is at or below 200'. LVPs will be terminated when RVR is greater than 1400m and ceiling is greater than 400' and a continuing improvement in these conditions is anticipated.

ACFT landing on RWY 16 must exit either at the end of the RWY or via taxi link D. When on TWY A, pilots shall report 'RWY vacated' in order to denote that the ACFT is out of the ILS localizer sensitive area. Pilots will not be refused permission to land or take off on "pilot's discretion" solely because of bad weather conditions. Guided take-off is not provided.

Taxiing is restricted to TWY "A" and TLINKS "C" and "D", equipped with centre line lights as indicated on the aerodrome chart. On receiving taxi clearance ACFT must only proceed when a green centre line path is illuminated. In the event of failure of the TWY lights and/or stopbars, ACFT are only to taxi on the direction of a Follow me car. During operations phase, taxiing within the apron is permitted only under the guidance of a Follow me car.

Intersection take-offs are not permitted.

During LVPs RWY 16 is used for landings and take-offs. It is however possible for an ACFT - due to performance requirements - to use RWY 34 for take-off on pilot's request and ATC's approval. Delays and, probably, a CTOT extension must be anticipated.

1.3. TAXI PROCEDURES

1.3.1. GROUND MOVEMENT

All ACFT shall follow the Stand Lead-in Line when taxiing within the apron. No deviations or short-cuts are permitted unless guided by a Follow me car.

Unless guided by a Follow me car, ACFT are permitted to taxi only if permanent radio contact with ATC can be maintained during the entire taxiing manoeuvre.

ACFT are permitted to taxi only at the indispensable minimum engine speed.

Taxiing across stop bars is strictly prohibited when they are switched on. Clearances of any kind do not cover permission for taxiing across an operating stop bar. In case of a complete failure of the stop bar system, the information is broadcasted on the ATIS and crossing is permitted only under the guidance of a Follow me car.

1.3.2. ACFT TOWING

Towing of ACFT requires the prior permission of ATC.

During night hours or during LVP in operation towed ACFT shall be illuminated.

1.4. OTHER INFORMATION

Birds in vicinity of APT.

RWYs 10 & 16 right-hand circuit.

Turns on RWY 10/28 shall only be made to the RIGHT and on the concrete part of RWY end. Lower engine power should be used to avoid possible damage to the ACFT barrier.

LGTS/SKG
MAKEDONIA

JEPPESEN
30 DEC 11 **10-1P1**

THESSALONIKI, GREECE
Eff 12 Jan **AIRPORT BRIEFING**

2. ARRIVAL

2.1. CAT II OPERATIONS

RWY 16 approved for CAT II operations, special aircrew and ACFT certification required.

2.2. OTHER INFORMATION

For Radar Minimums see Terminal page E-51 etc.

Due to significant obstructions in approach area to RWY 34, touchdown point should be selected making due allowance for ACFT performance, height of obstacles and landing distance required.

3. DEPARTURE

3.1. DE-ICING

ACFT de/anti-icing activities are performed under the responsibility of the ACFT operator and/or the Ground Handler ACFT de/anti-icing at all parking stands. Prior coordination with the Airport Operations Department is required.

3.2. START-UP PROCEDURES

Pilots shall request clearance for starting the engines and ATC clearance on the Start-Up/Clearance Delivery frequency (118.050 MHz). Request for ATC clearance may take place at the earliest 10 minutes prior to engine start-up. Upon receiving Start-Up and ATC clearance, pilots will be instructed to contact the Tower frequency (118.100 MHz) for Taxi clearance. Pilots shall inform the Start-Up /Clearance Delivery frequency, if unable to be ready to taxi within 10 minutes from Start-Up time.


When Pilots request Taxi, they shall indicate their aircraft parking stand. Taxi-out clearance may only be requested if the pilot can perform the manoeuvre immediately.

Commencement of taxiing with some of the engines shut down is not permitted.

LGTS/SKG
MAKEDONIA

JEPPESEN
2 MAR 07 10-1R

THESSALONIKI, GREECE
RADAR MINIMUM ALTITUDES

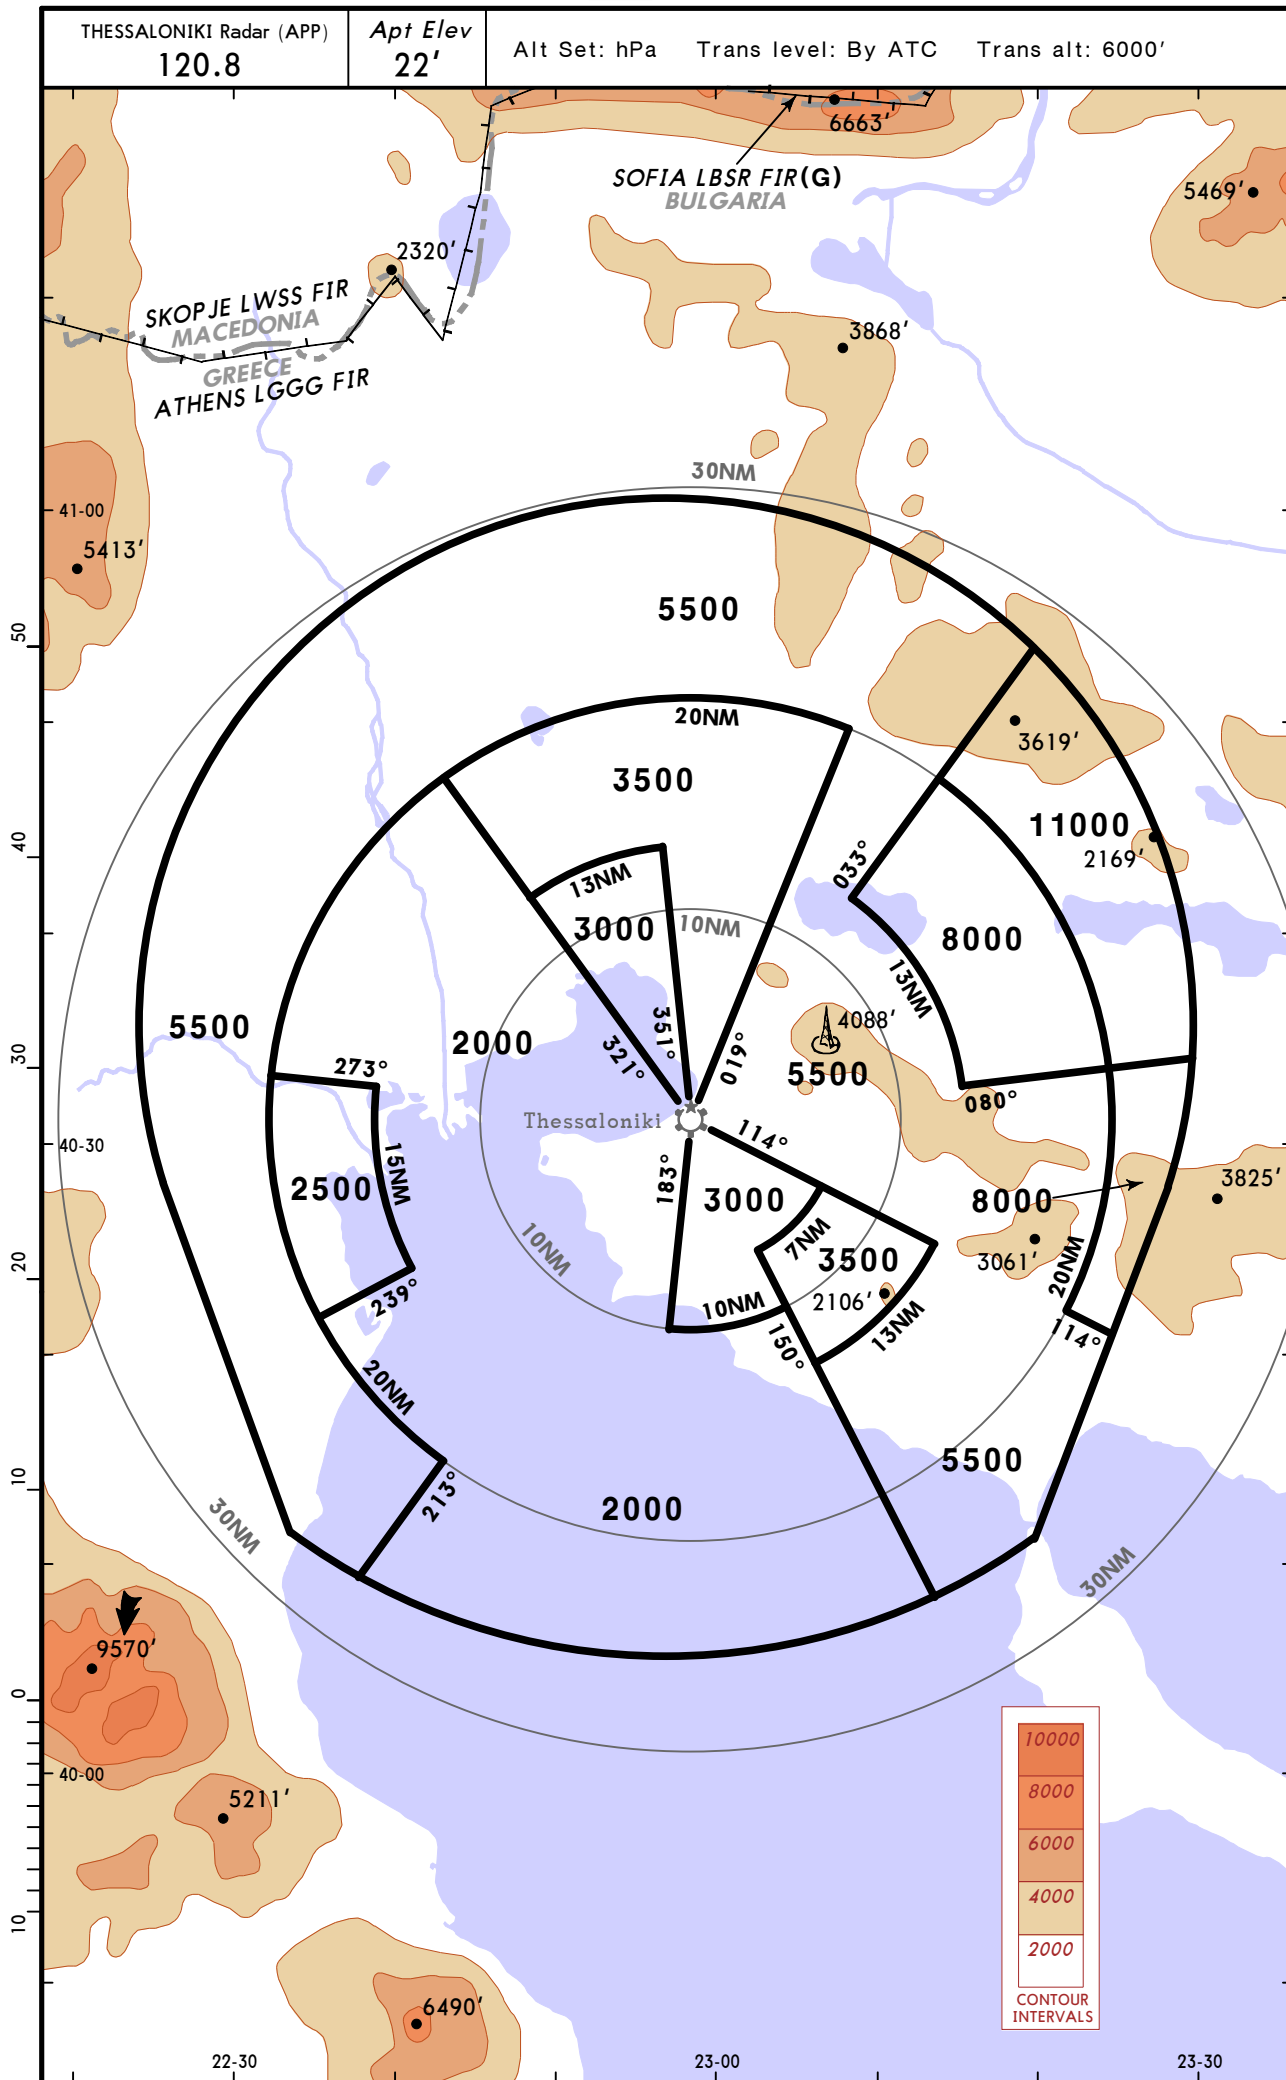

358°

178°

MHA FL150
MAX FL240


© JEPPESEN, 2003, 2015. ALL RIGHTS RESERVED.

LGTS/SKG
MAKEDONIA

JEPPESSEN
1 JAN 16 10-2A

THESSALONIKI, GREECE

STAR

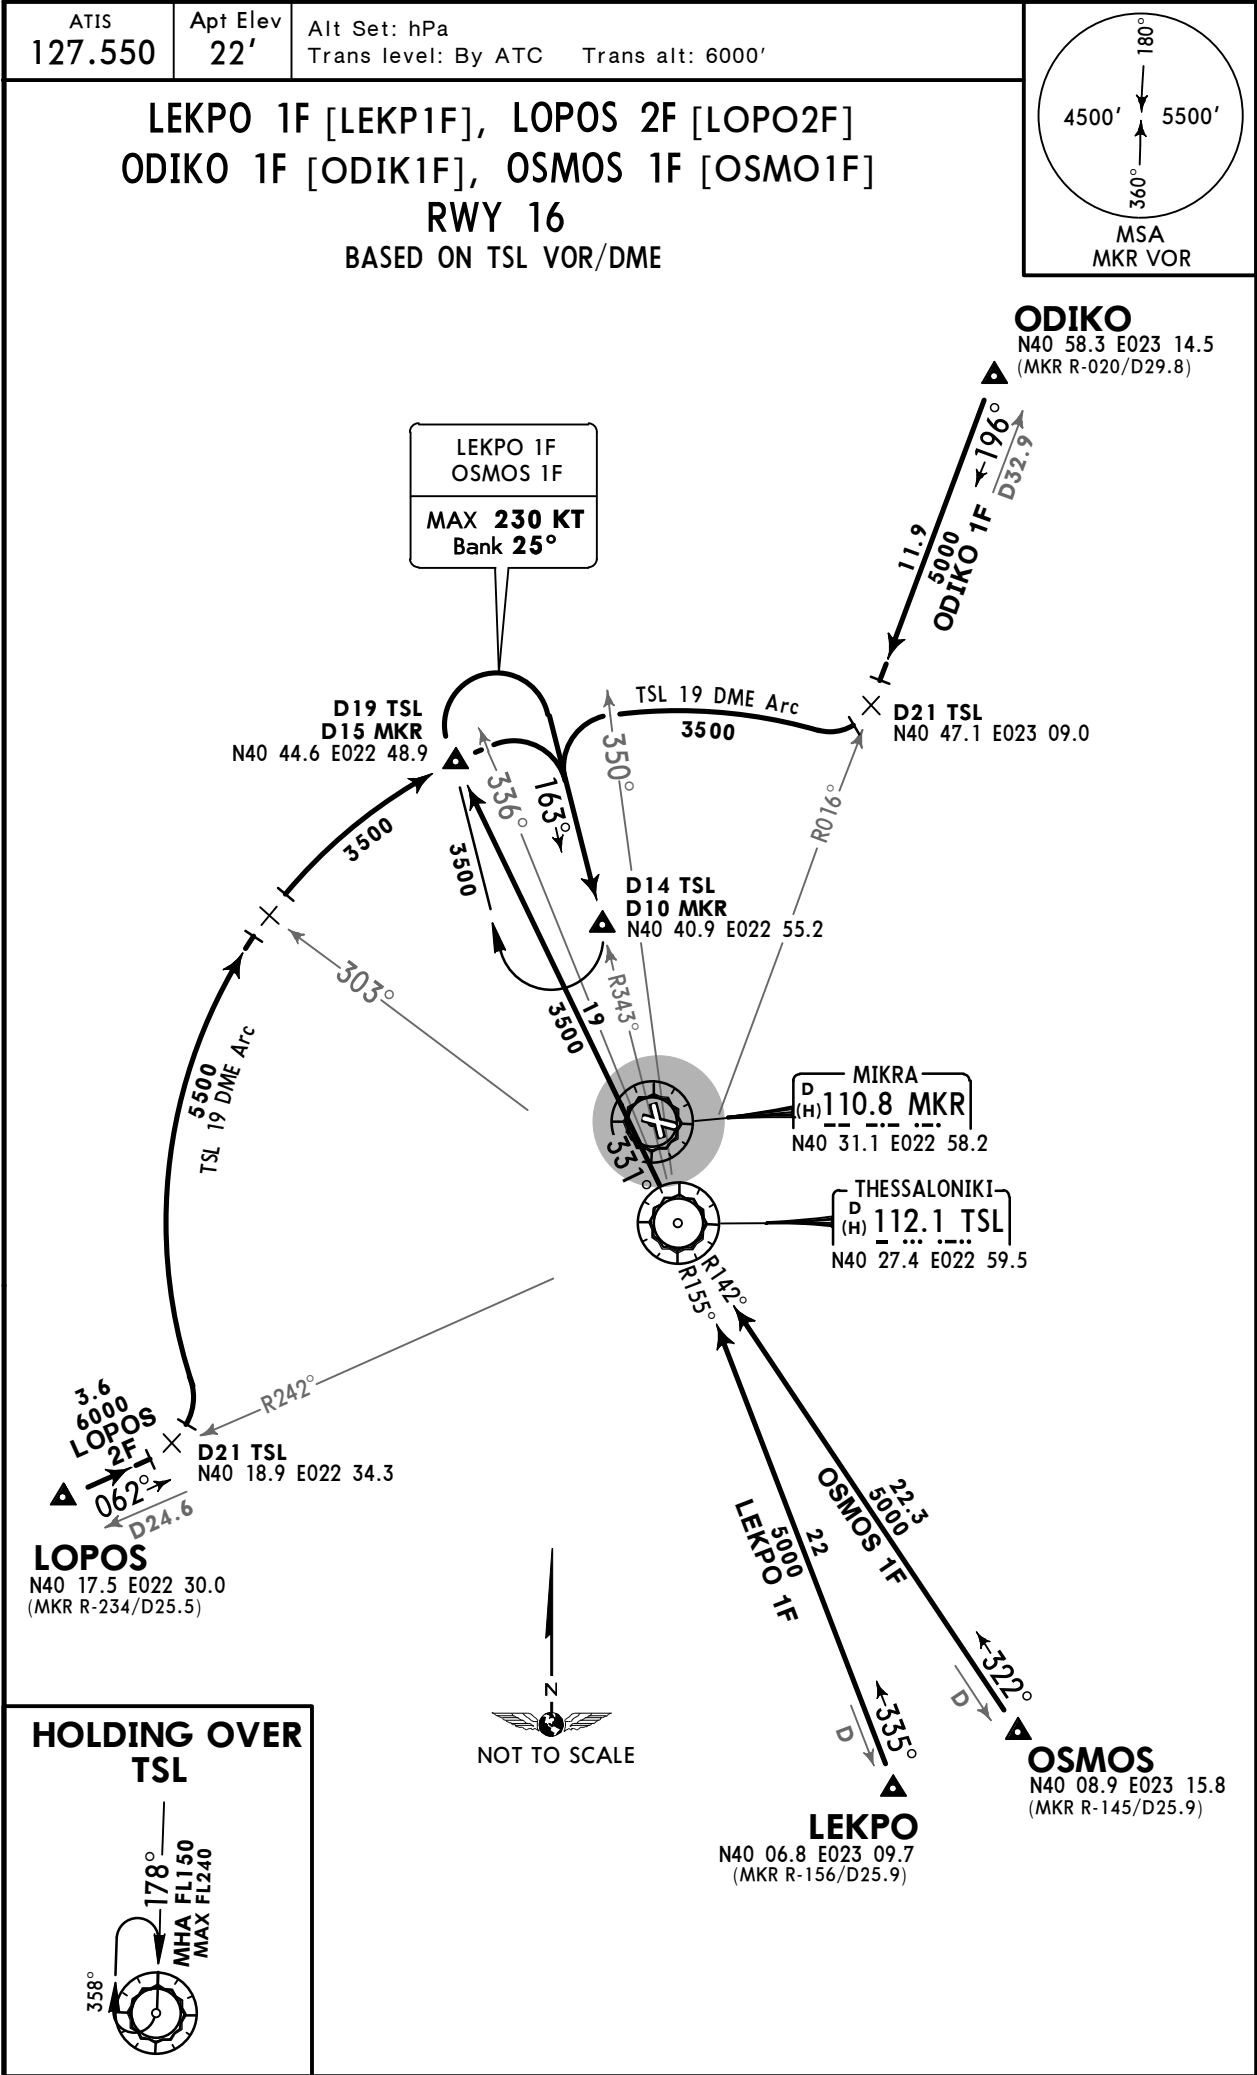


FSK 3H
MAX **230 KT**
Bank **25°**

LGTS/SKG
MAKEDONIA

JEPPESEN
1 JAN 16 (10-2C)

THESSALONIKI, GREECE
STAR

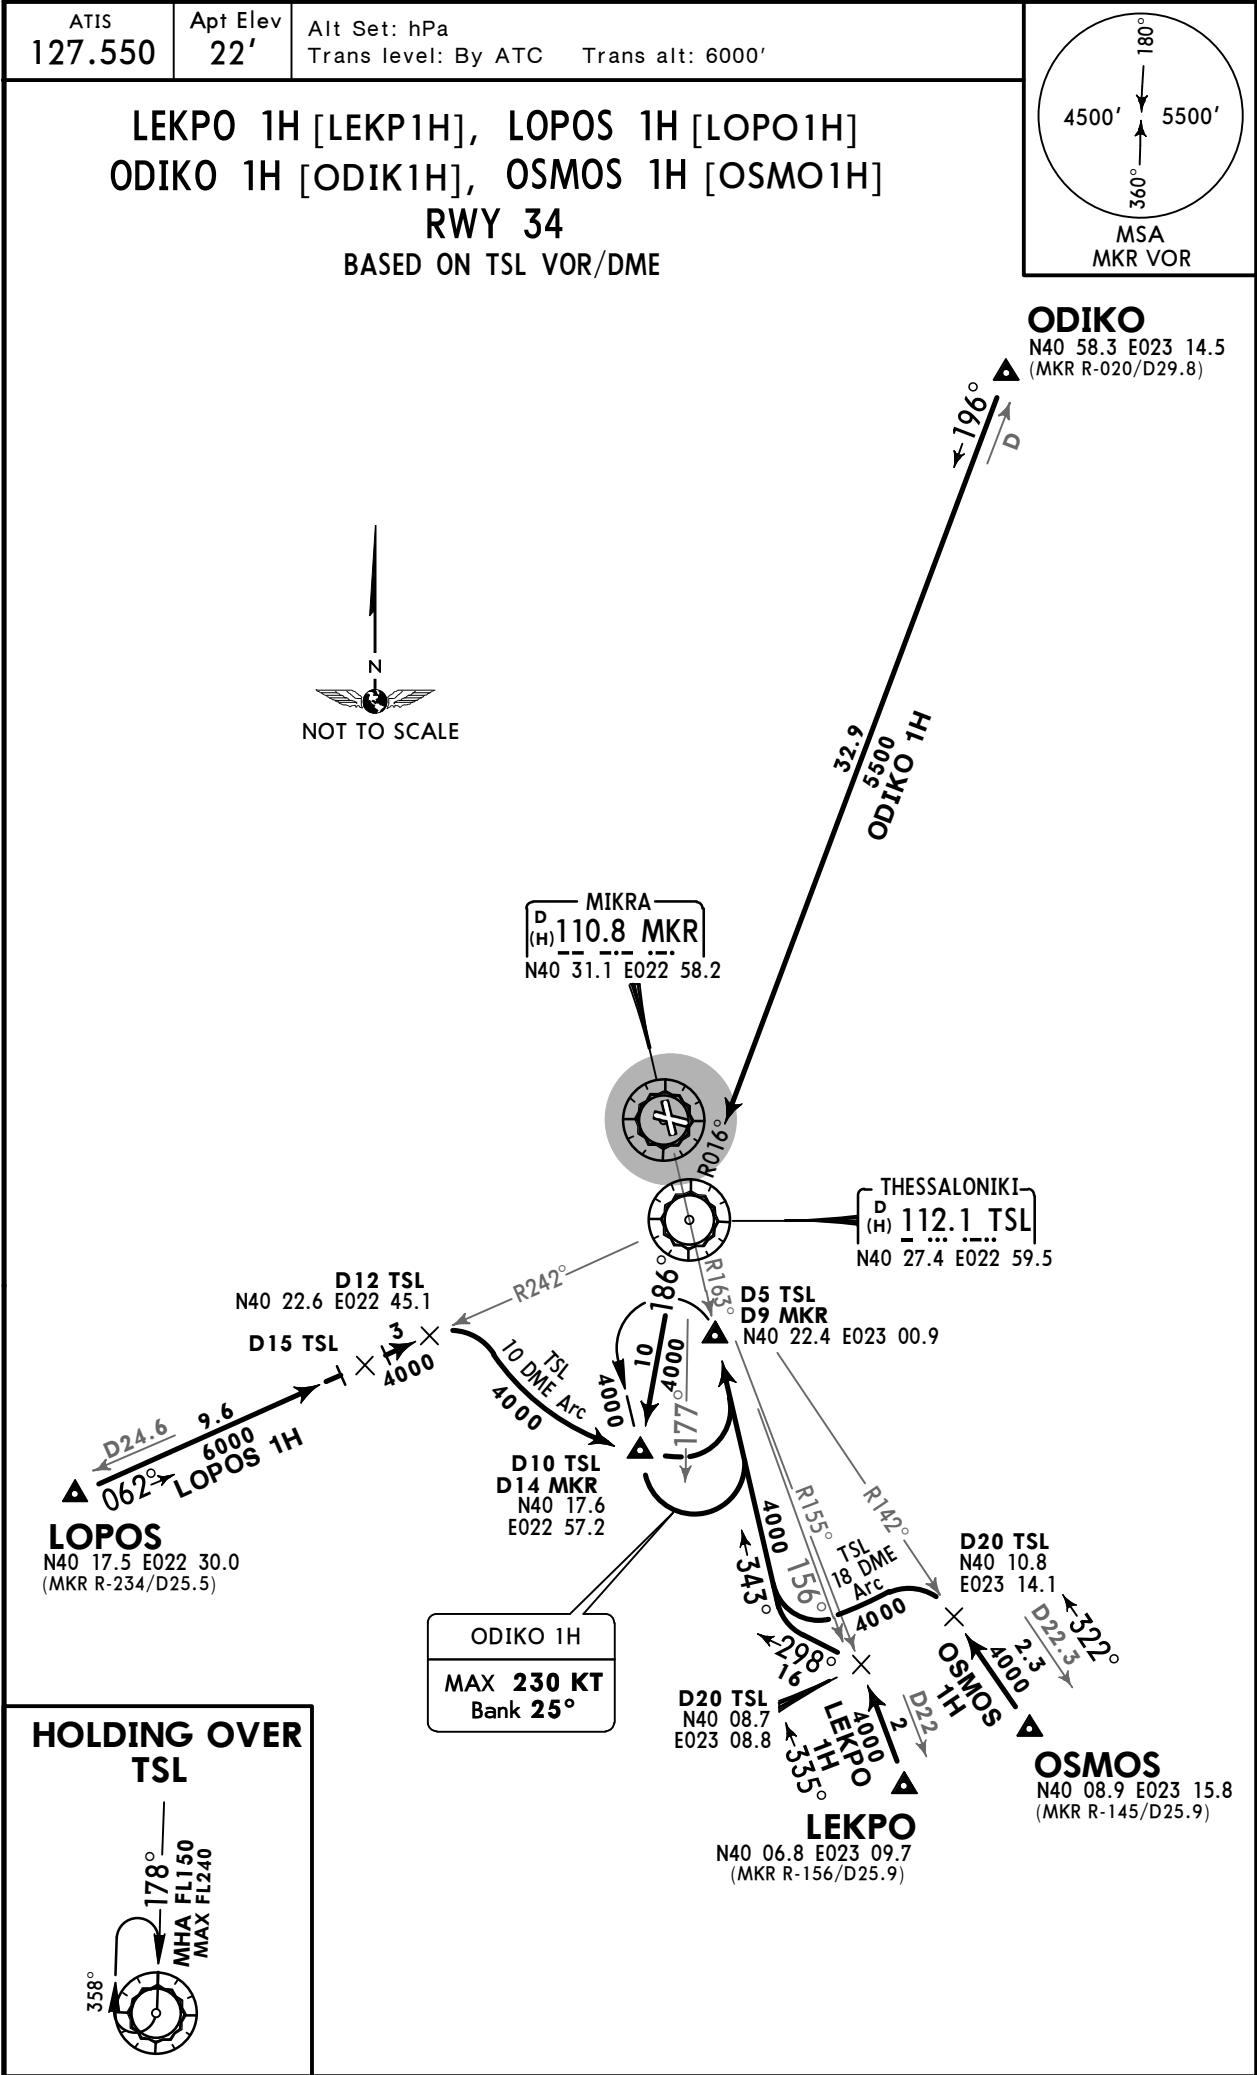

© JEPPESEN, 2005, 2015. ALL RIGHTS RESERVED.

LGTS/SKG
MAKEDONIA

JEPPESEN

THESSALONIKI, GREECE

1 JAN 16

10-2E


Eff 7 Jan

STAR

ATIS
127.550

Apt Elev
22'

Alt Set: hPa
Trans level: By ATC Trans alt: 6000'



LEKPO 1L [LEKP1L], LOPOS 2L [LOPO2L]
ODIKO 1L [ODIK1L], OSMOS 1L [OSMO1L]
RWY 16
BASED ON MKR VOR/DME

ODIKO
N40 58.3 E023 14.5
(TSL R-016/D32.9)

LEKPO 1L
OSMOS 1L
MAX 230 KT
Bank 25°

D15 MKR
D19 TSL
N40 44.4 E022 48.9

D10 MKR
D14 TSL
N40 40.9 E022 55.2

D17 MKR
N40 46.6 E023 07.5

MIKRA
D(H) 110.8 MKR
N40 31.1 E022 58.2

THESSALONIKI
D(H) 112.1 TSL
N40 27.4 E022 59.5


D17 MKR
N40 22.0 E022 39.4

LOPOS
N40 17.5 E022 30.0
(TSL R-242/D24.6)

LEKPO
N40 06.8 E023 09.7
(TSL R-155/D22)

OSMOS
N40 08.9 E023 15.8
(TSL R-142/D22.3)

HOLDING OVER
TSL




LGTS/SKG
MAKEDONIA

JEPPESSEN
1 JAN 16 10-2F


THESSALONIKI, GREECE

STAR

ATIS 127.550	Apt Elev 22'	Alt Set: hPa	Trans level: By ATC	Trans alt: 6000'
-----------------	-----------------	--------------	---------------------	------------------



ALIKO 1P [ALIK1P], ARNAS 1P [ARNA1P]
EDASI 1P [EDAS1P], FSK 3P
RWY 34
BASED ON MKR VOR/DME

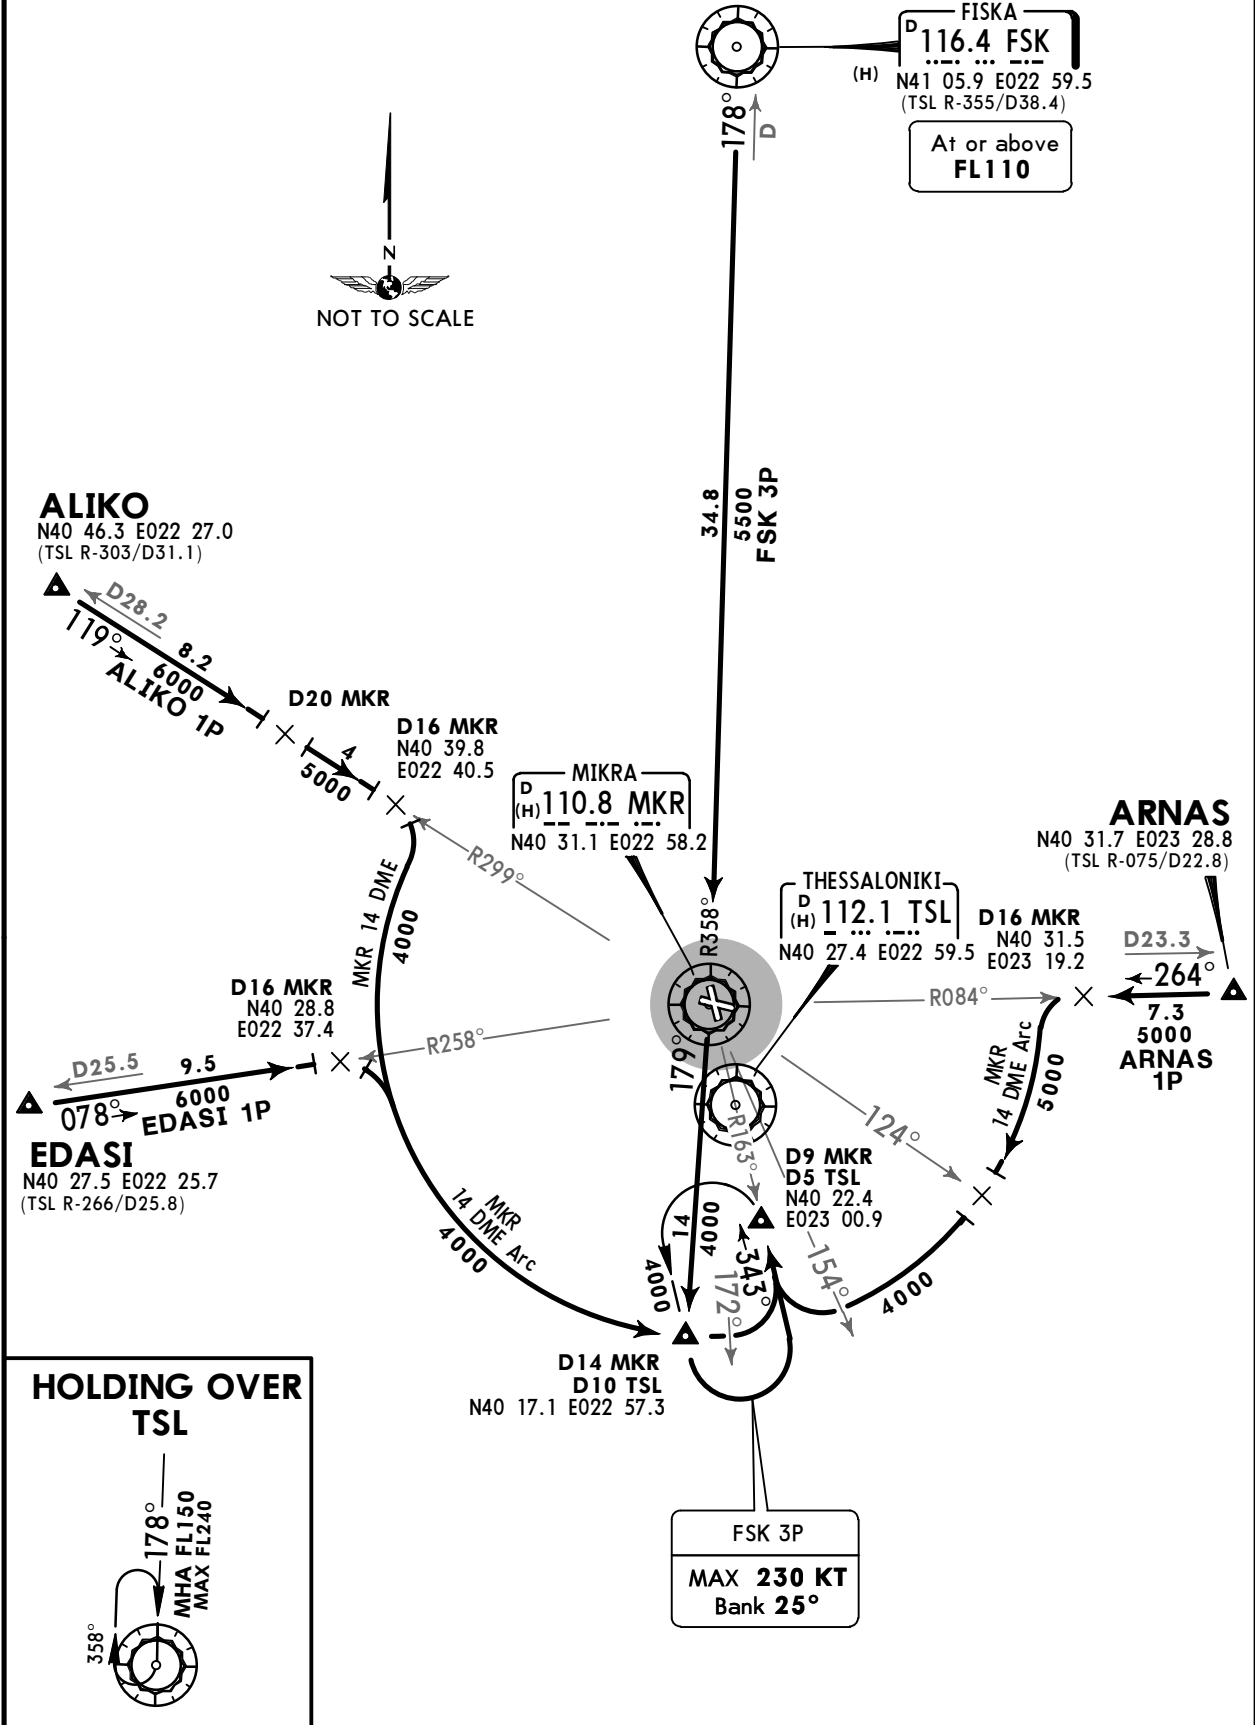


© JEPPESEN, 2005, 2015. ALL RIGHTS RESERVED.

LGTS/SKG
MAKEDONIA

JEPPesen
1 JAN 16 10-3

THESSALONIKI, GREECE


SID

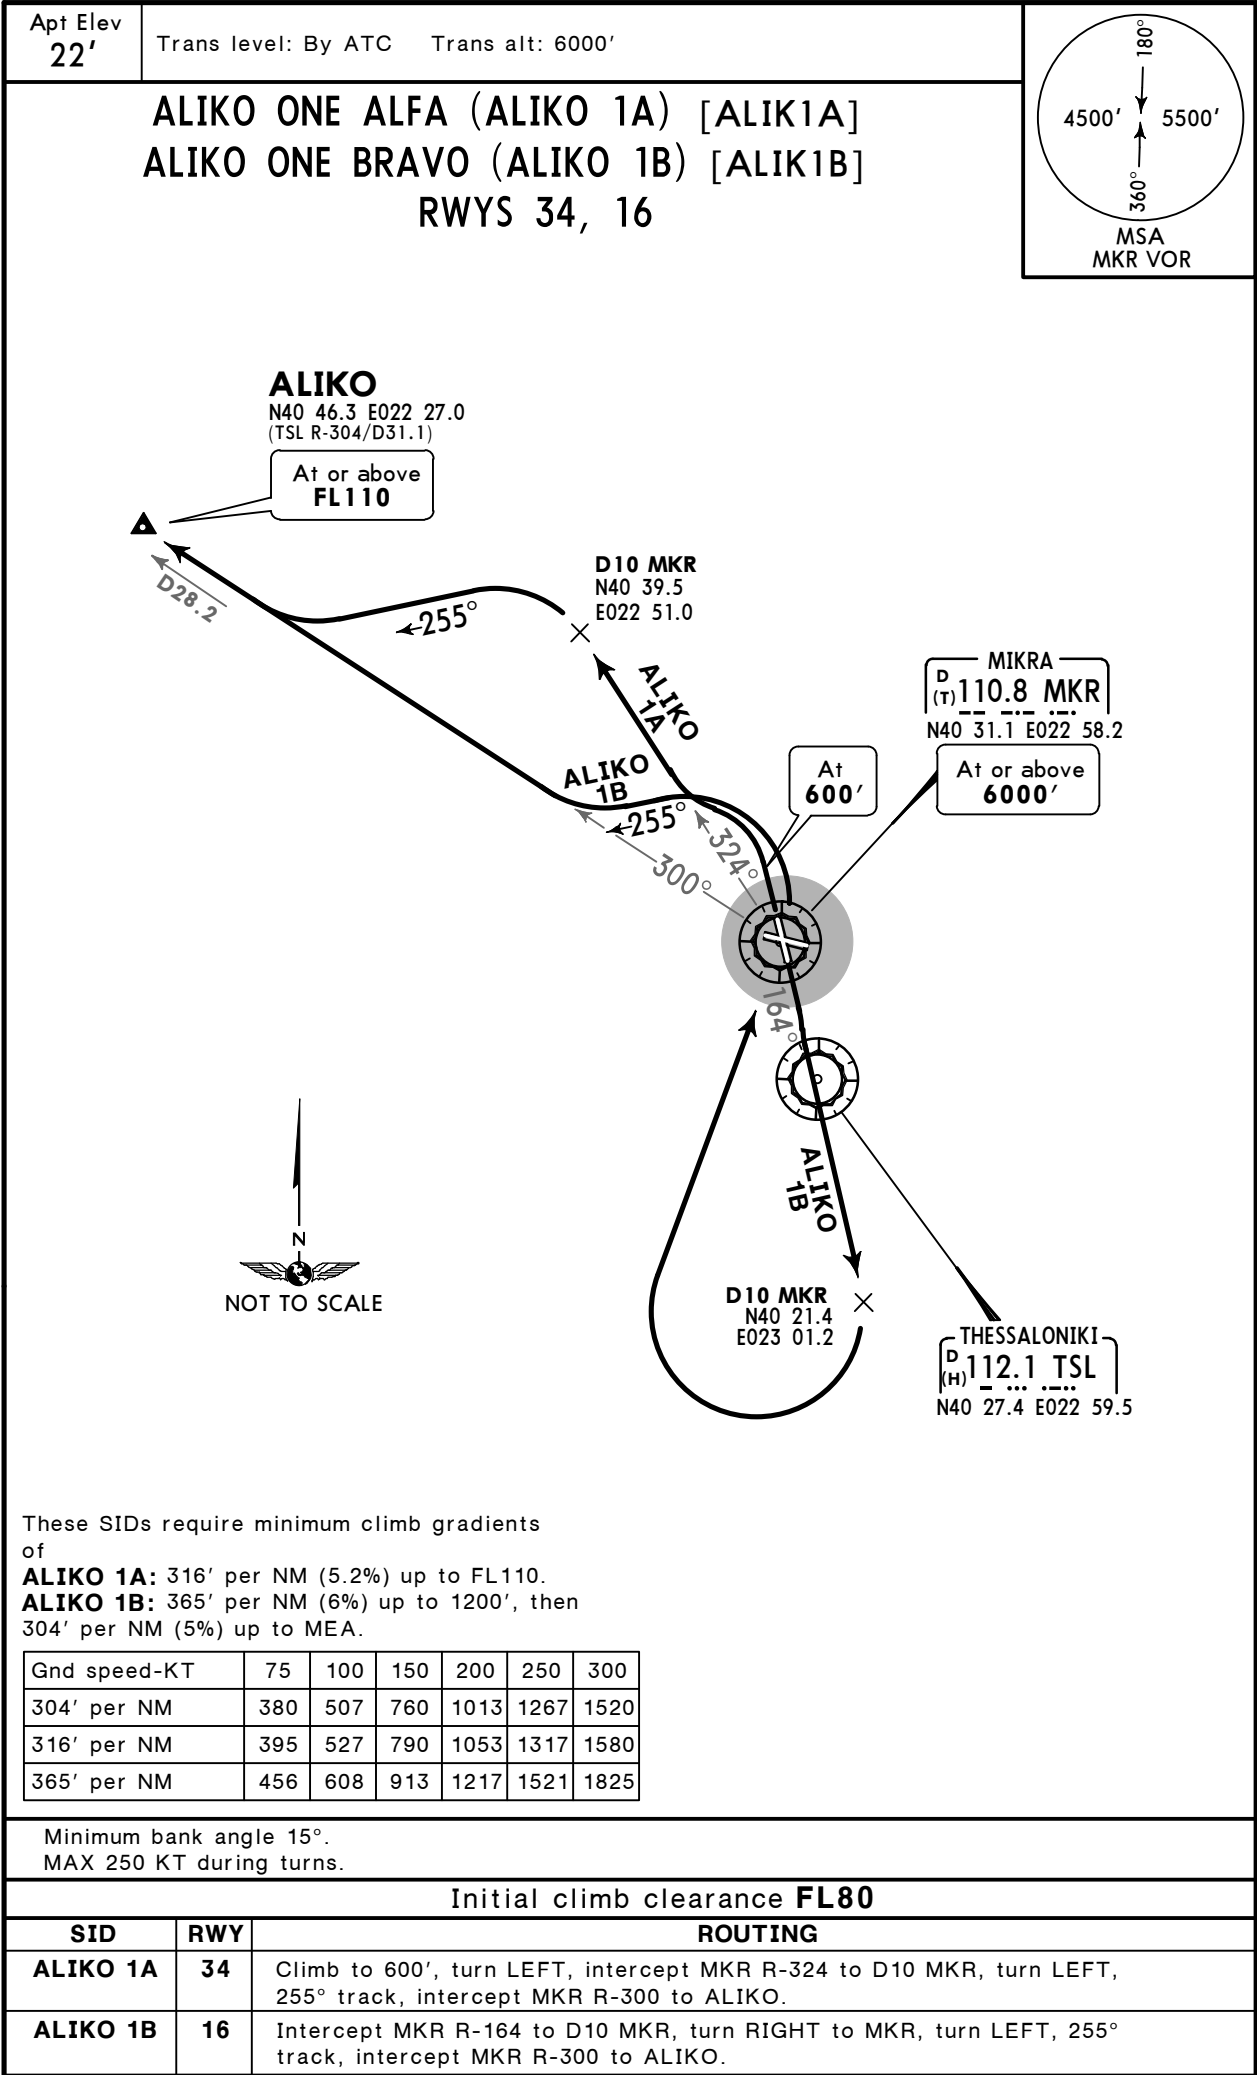

LGTS/SKG
MAKEDONIA

JEPPESSEN
1 JAN 16 (10-3A) Eff 7 Jan


THESSALONIKI, GREECE
SID

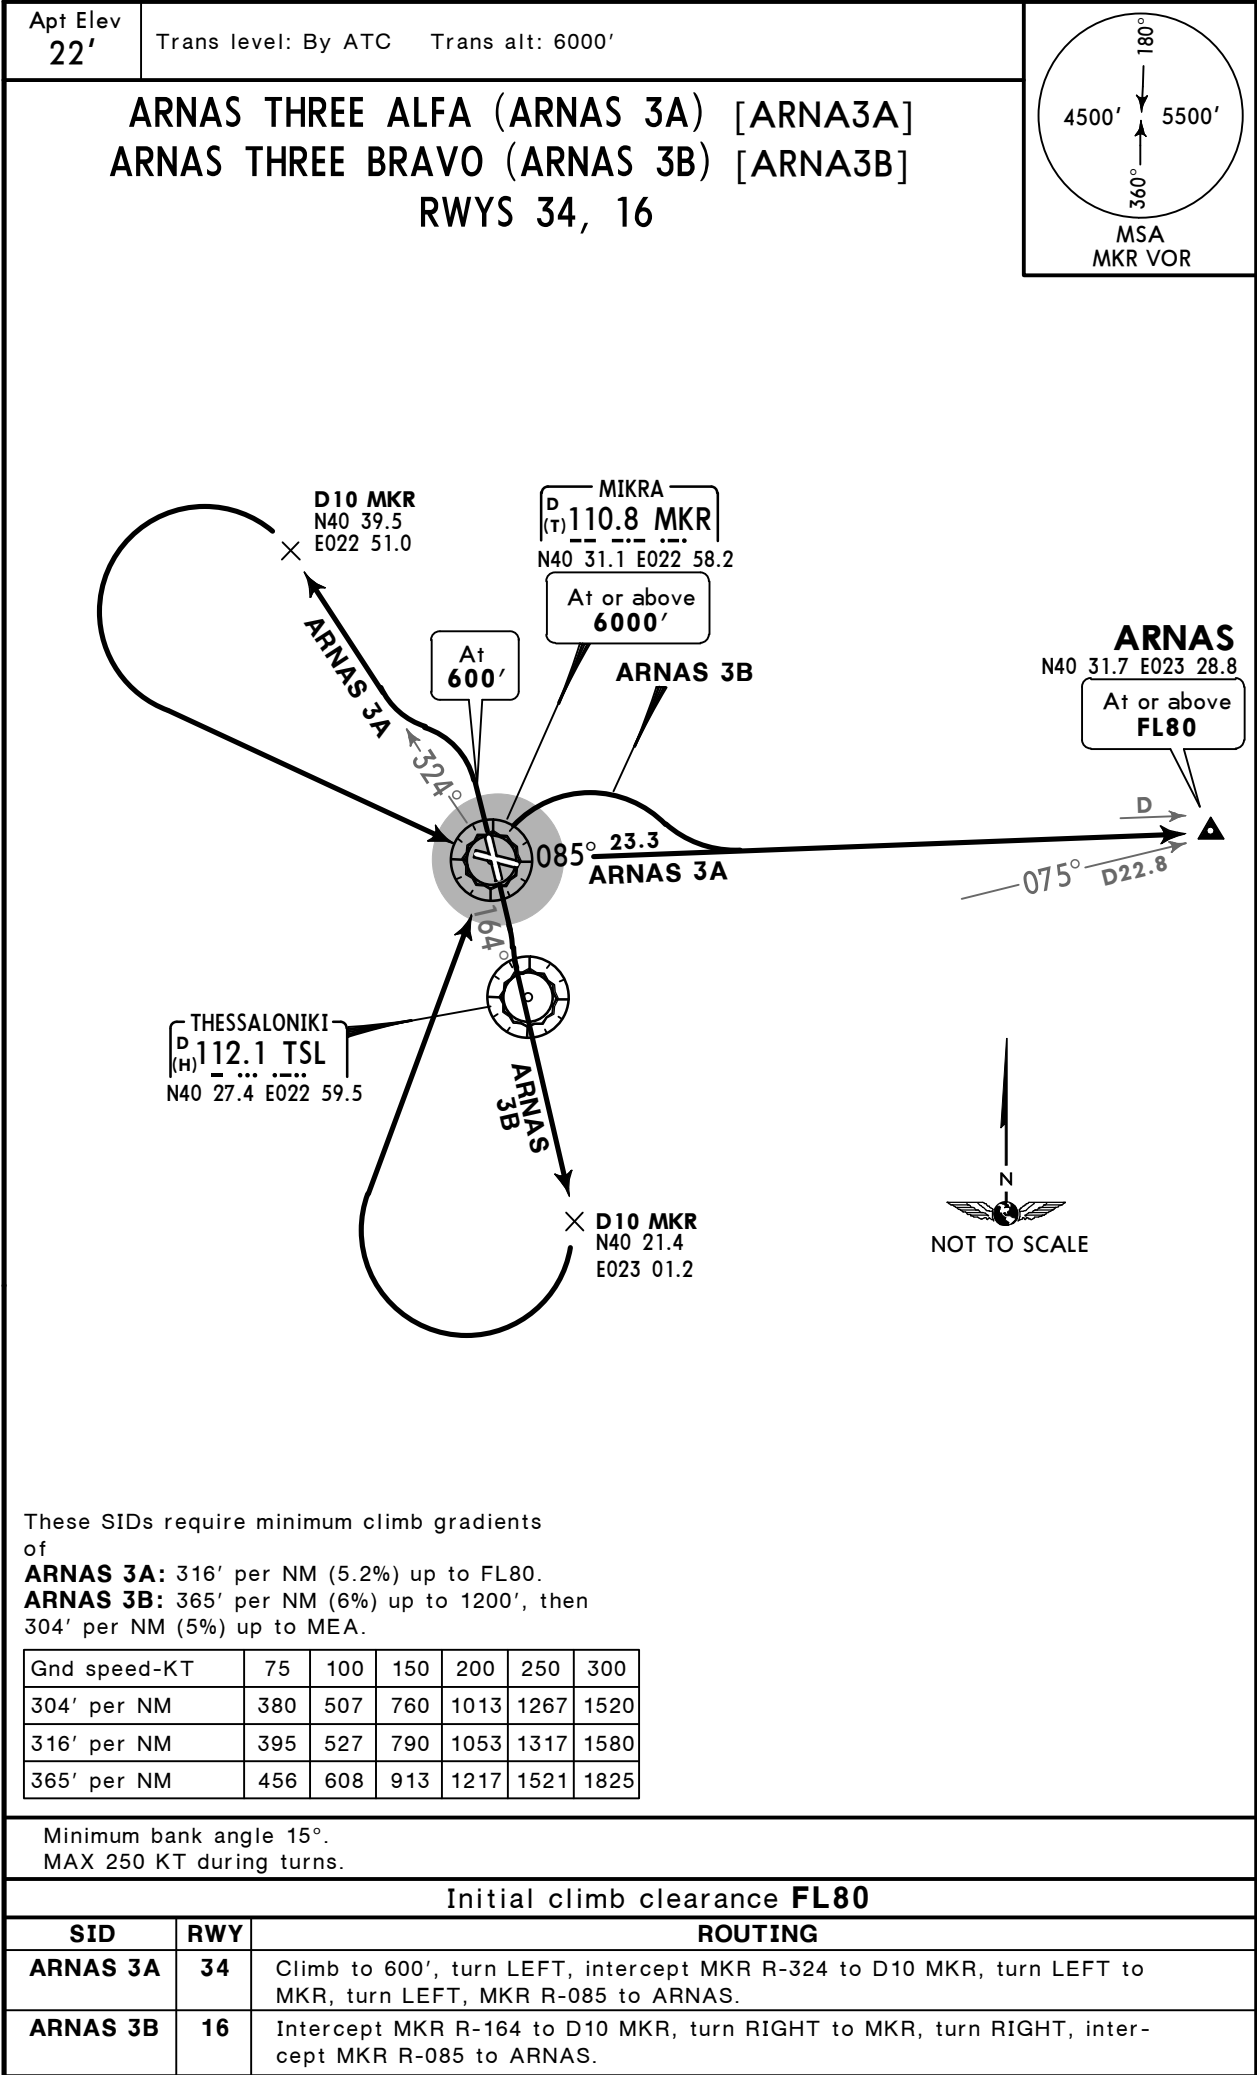

LGTS/SKG
MAKEDONIA

JEPPESEN
1 JAN 16 10-3B

THESSALONIKI, GREECE
SID

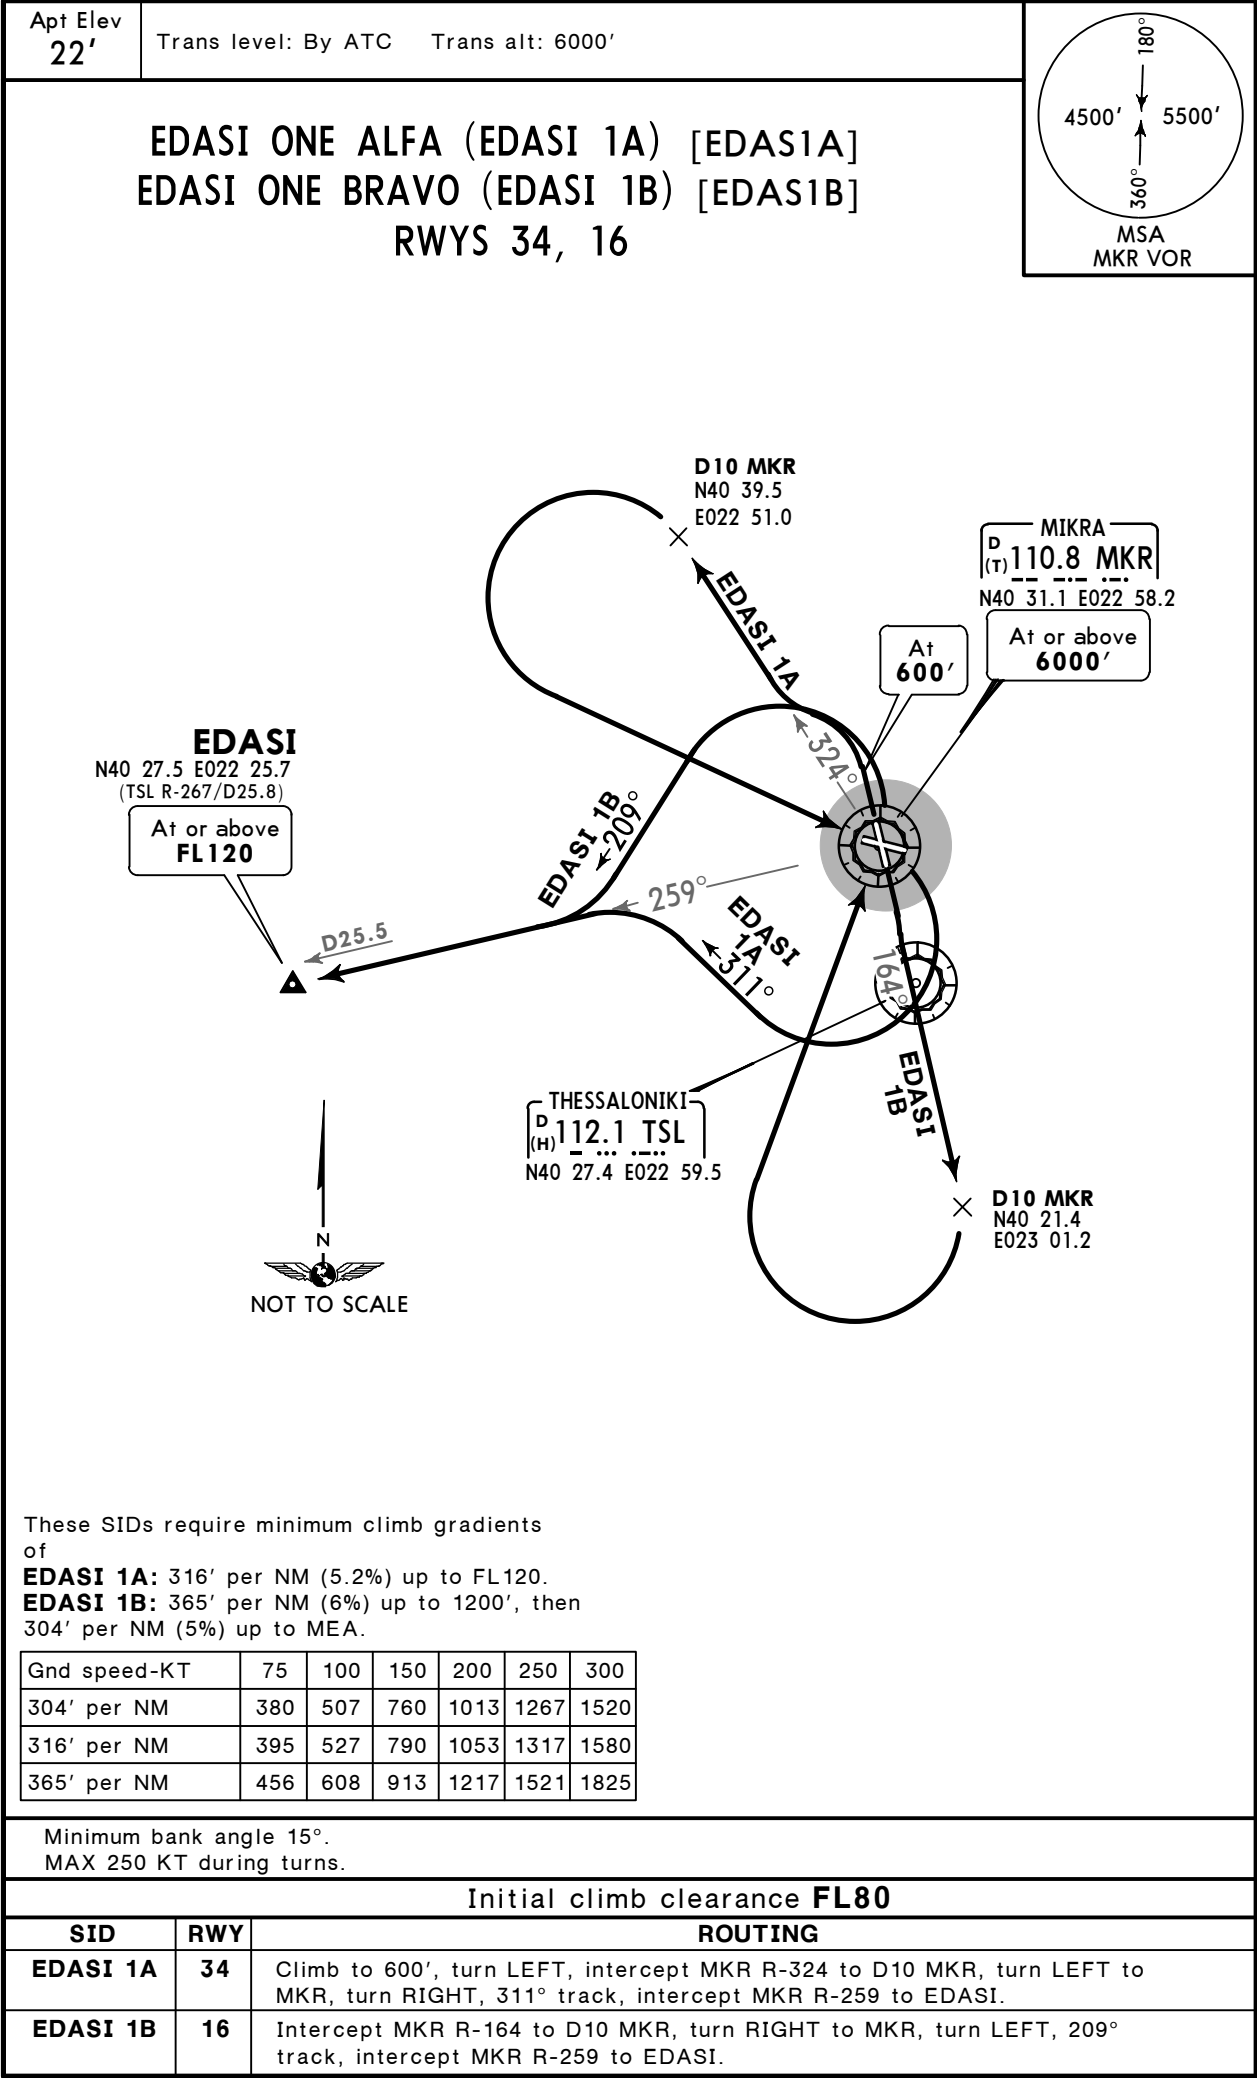

© JEPPESEN, 2004, 2015. ALL RIGHTS RESERVED.

LGTS/SKG
MAKEDONIA

1 JAN 16 10-3D


Eff 7 Jan

THESSALONIKI, GREECE


SID

Apt Elev
22'

Trans level: By ATC Trans alt: 6000'



LEKPO ONE ALFA (LEKPO 1A) [LEKP1A]
LEKPO ONE BRAVO (LEKPO 1B) [LEKP1B]
RWYS 34, 16

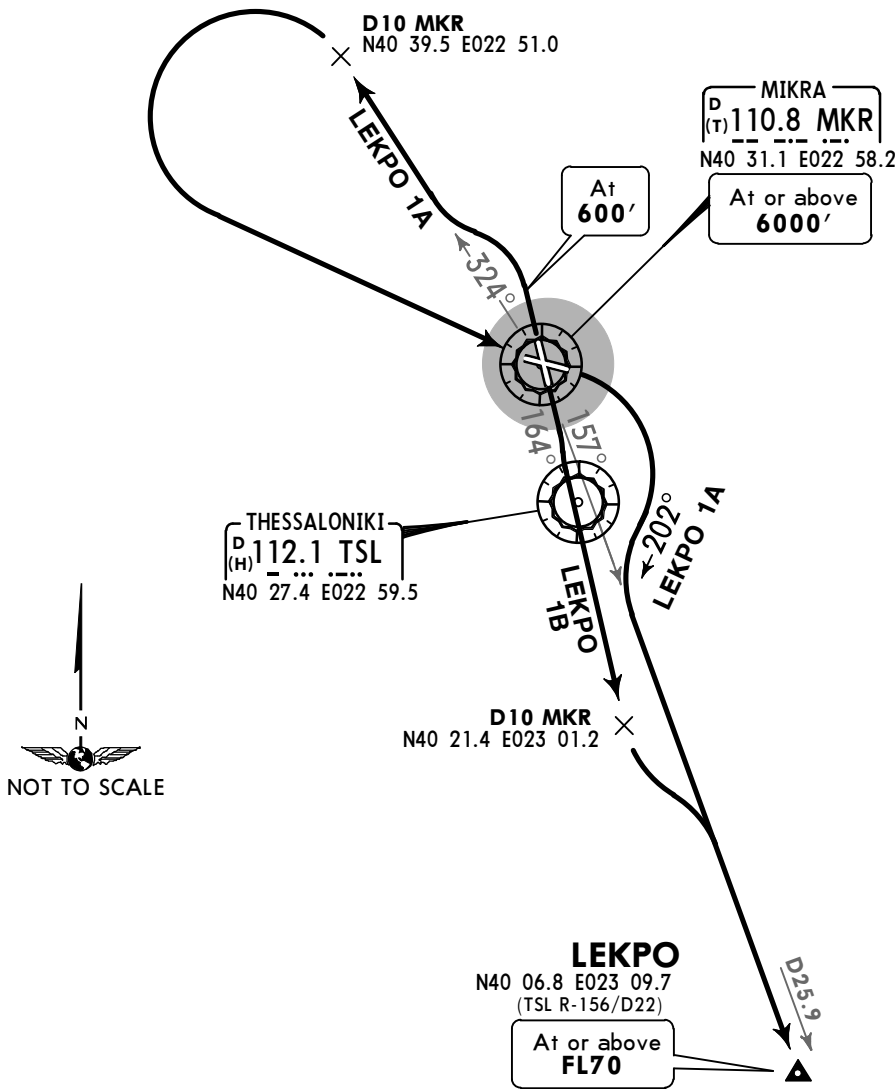

These SIDs require minimum climb gradients
of

LEKPO 1A: 316' per NM (5.2%) up to FL70.

LEKPO 1B: 365' per NM (6%) up to 1200', then
304' per NM (5%) up to MEA.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	507	760	1013	1267	1520
316' per NM	395	527	790	1053	1317	1580
365' per NM	456	608	913	1217	1521	1825

Minimum bank angle 15°.
MAX 250 KT during turns.

Initial climb clearance **FL80**

SID	RWY	ROUTING
LEKPO 1A	34	Climb to 600', turn LEFT, intercept MKR R-324 to D10 MKR, turn LEFT to MKR, turn RIGHT, 202° track, intercept MKR R-157 to LEKPO.
LEKPO 1B	16	Intercept MKR R-164 to D10 MKR, turn LEFT, intercept MKR R-157 to LEKPO.

CHANGES: SIDs LEKPO 1C & 1E withdrawn.

© JEPPESEN, 2004, 2015. ALL RIGHTS RESERVED.

LGTS/SKG
MAKEDONIA

JEPPesen

THESSALONIKI, GREECE

1 JAN 16


10-3E

Eff 7 Jan


SID

Apt Elev
22'

Trans level: By ATC Trans alt: 6000'



LOPOS THREE ALFA (LOPOS 3A) [LOPO3A]
LOPOS THREE BRAVO (LOPOS 3B) [LOPO3B]
RWYS 34, 16

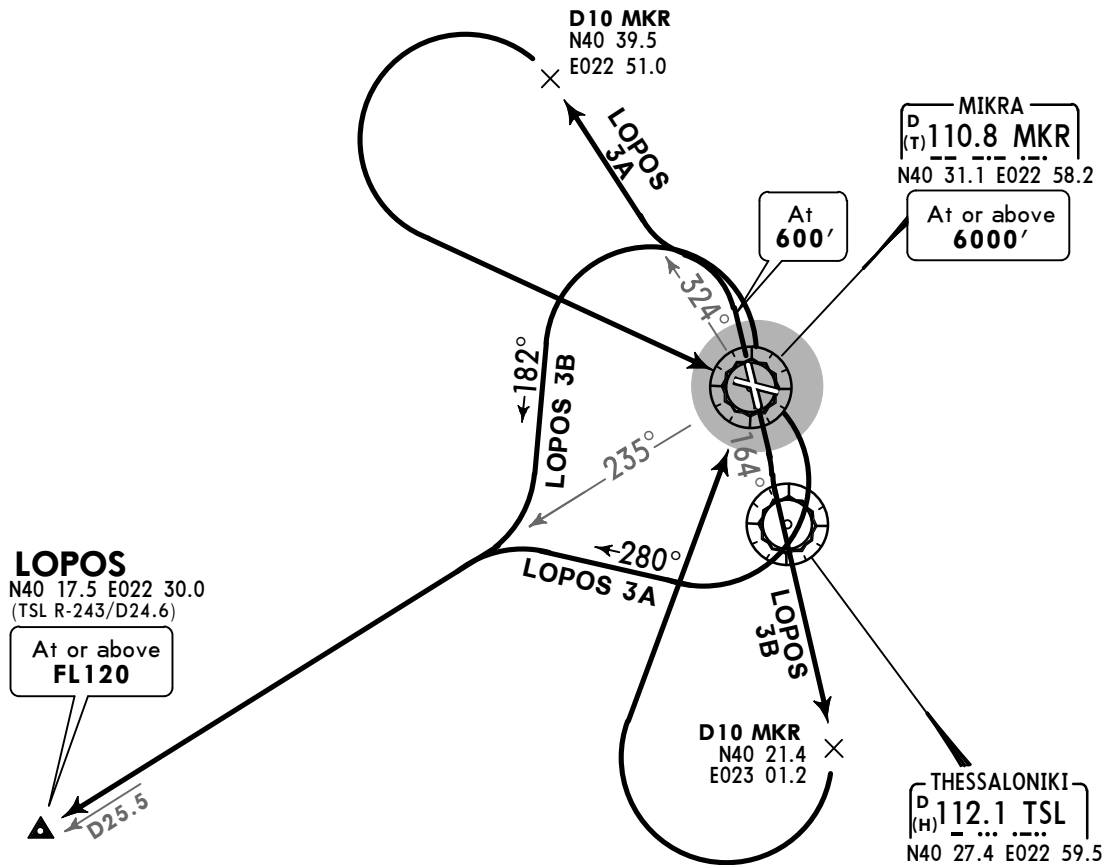

These SIDs require minimum climb gradients of

LOPOS 3A: 316' per NM (5.2%) up to FL120.

LOPOS 3B: 365' per NM (6%) up to 1200', then 304' per NM (5%) up to MEA.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	507	760	1013	1267	1520
316' per NM	395	527	790	1053	1317	1580
365' per NM	456	608	913	1217	1521	1825

Minimum bank angle 15°.
MAX 250 KT during turns.

Initial climb clearance **FL80**

SID	RWY	ROUTING
LOPOS 3A	34	Climb to 600', turn LEFT, intercept MKR R-324 to D10 MKR, turn LEFT to MKR, turn RIGHT, 280° track, intercept MKR R-235 to LOPOS.
LOPOS 3B	16	Intercept MKR R-164 to D10 MKR, turn RIGHT to MKR, turn LEFT, 182° track, intercept MKR R-235 to LOPOS.

CHANGES: SIDs LOPOS 3C & 3E withdrawn.

© JEPPESEN, 2004, 2015. ALL RIGHTS RESERVED.


LGTS/SKG
MAKEDONIA

JEPPesen
1 JAN 16 10-3G

Eff 7 Jan

THESSALONIKI, GREECE

SID

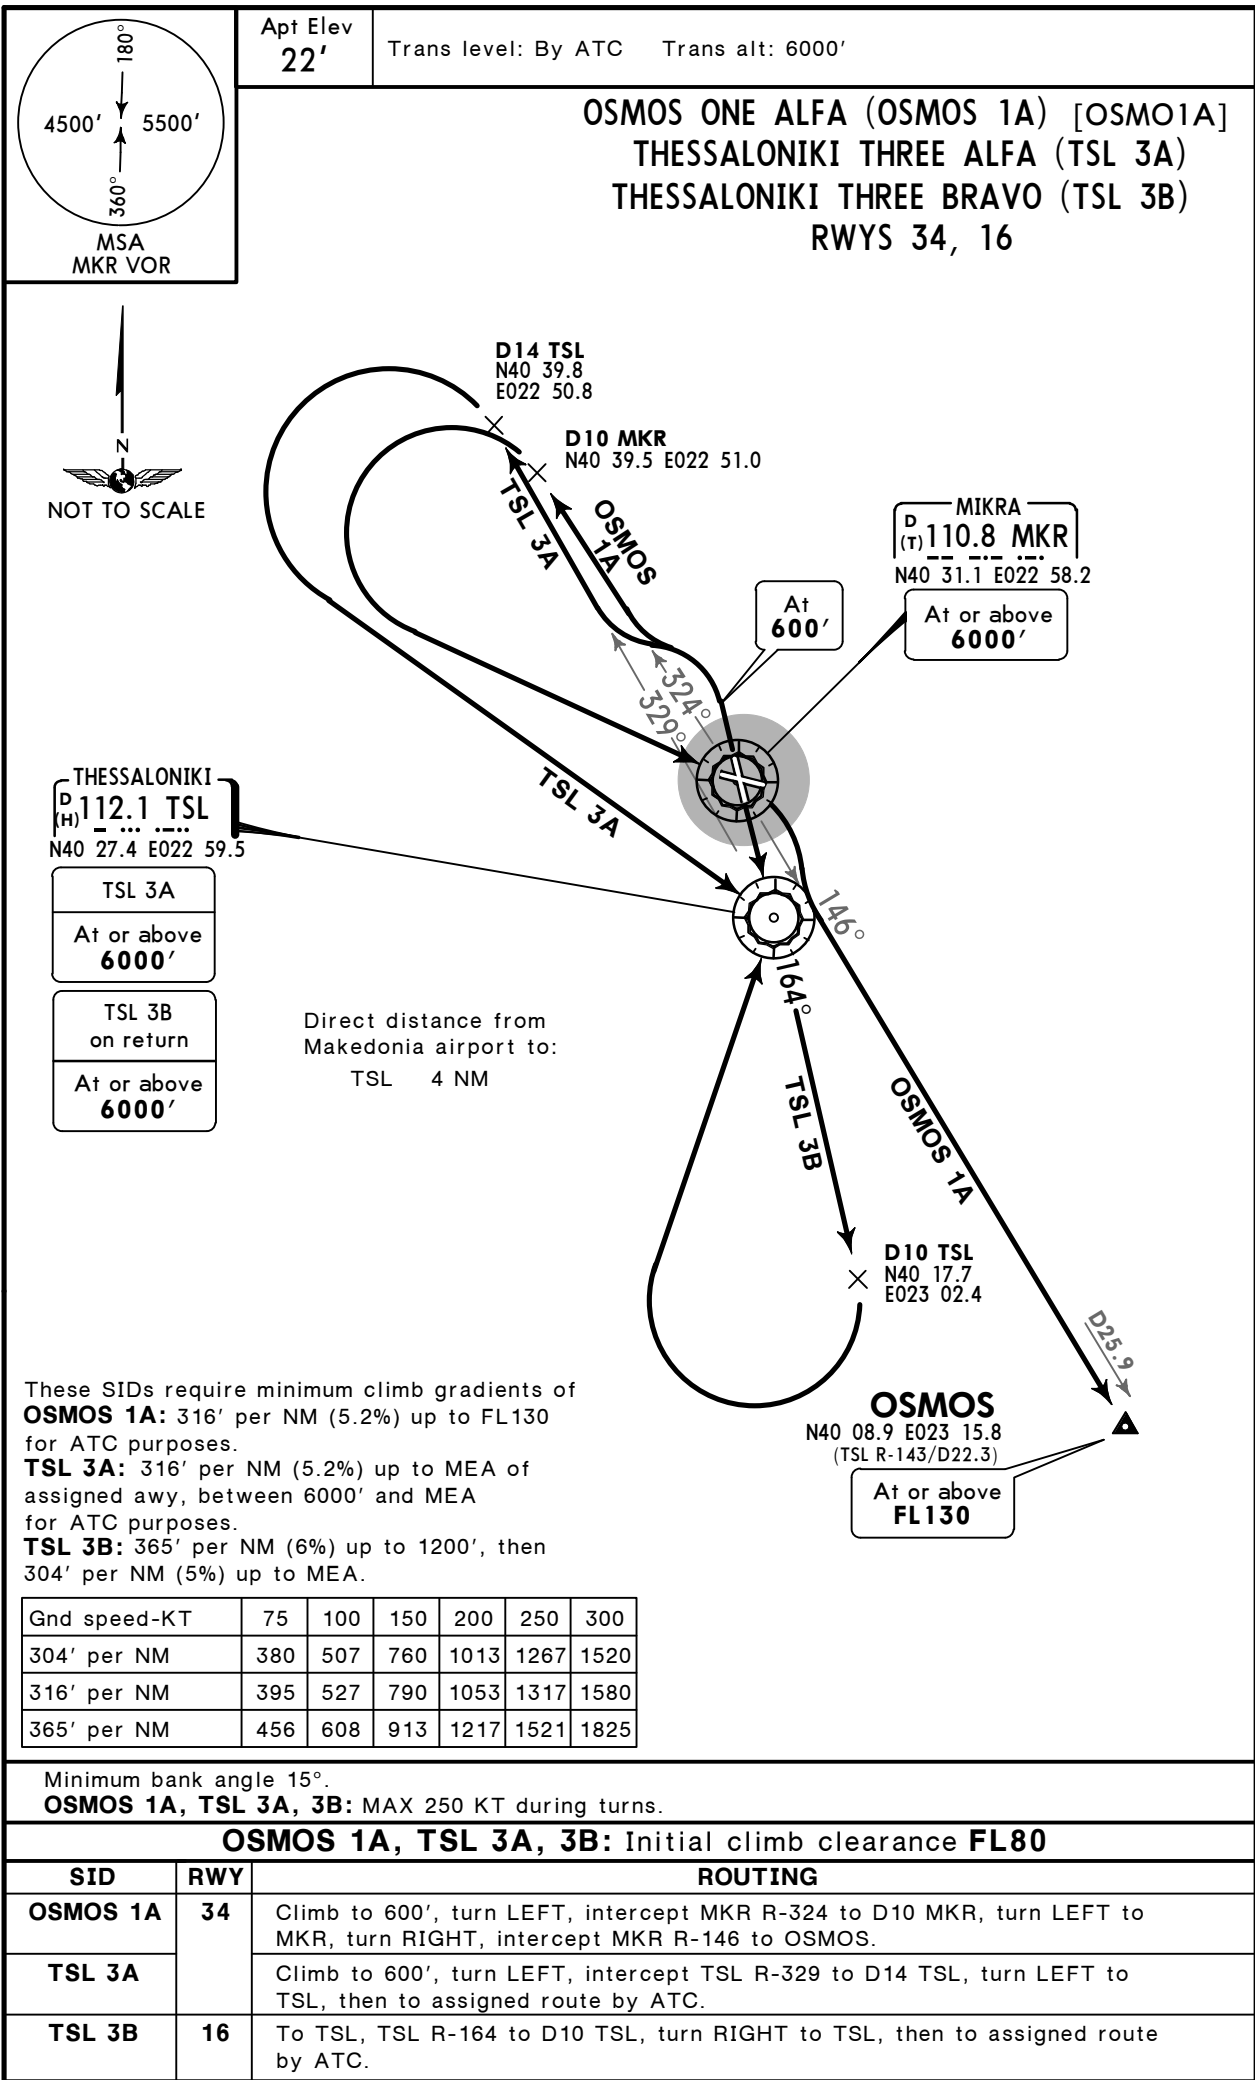


LGTS/SKG

Apt Elev **22'**
N40 31.2 E022 58.3

JEPPesen

27 FEB 15

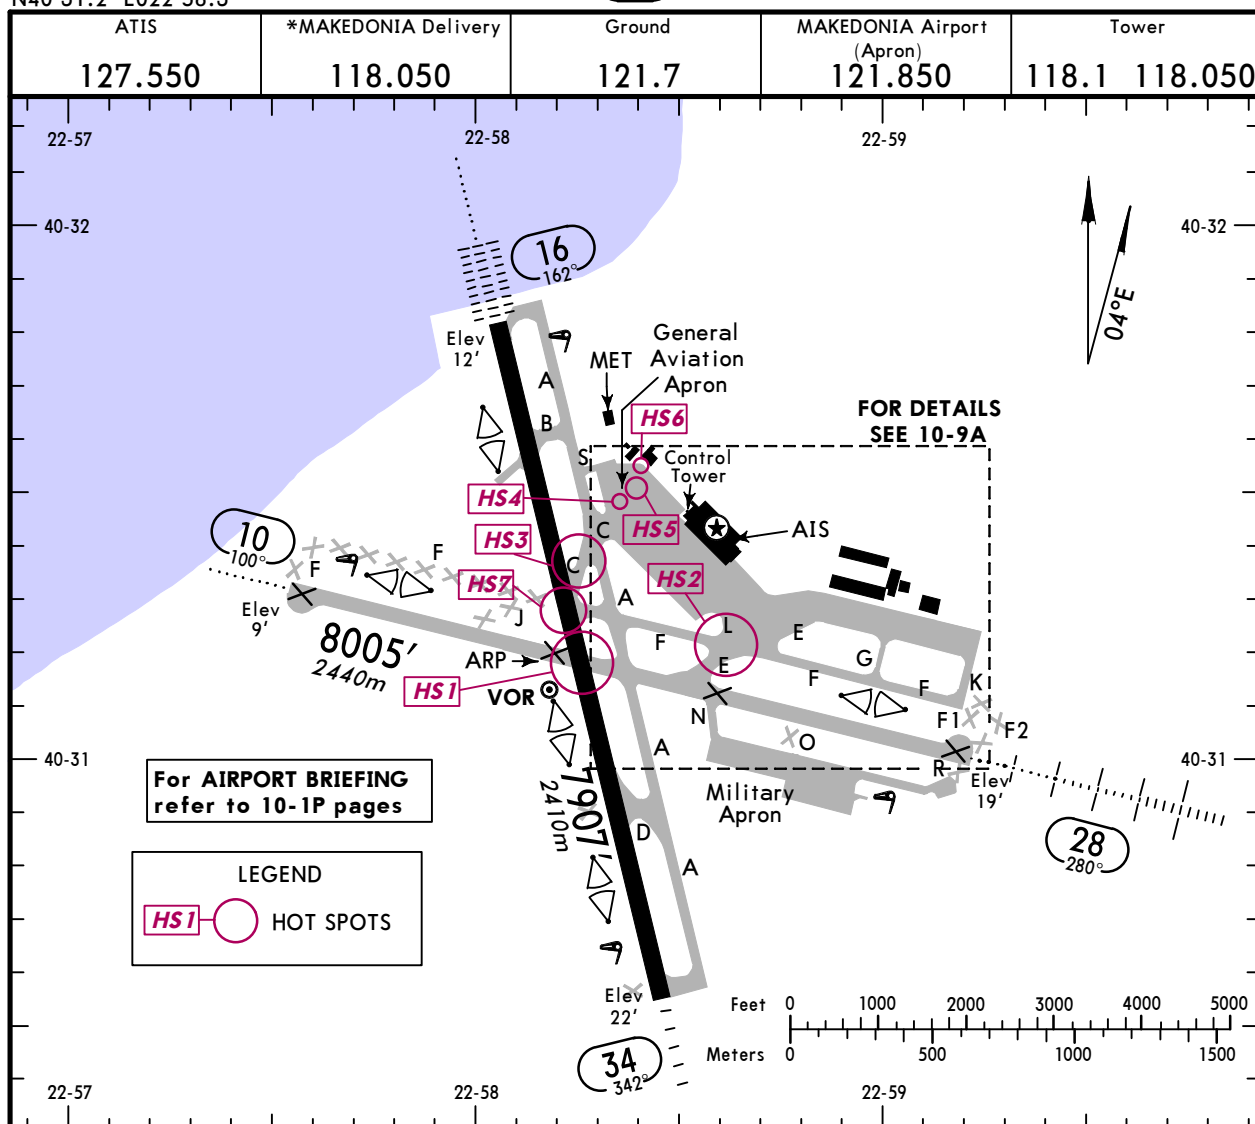10-9
Eff 5 Mar
THESSALONIKI, GREECE
MAKEDONIA


ADDITIONAL RUNWAY INFORMATION

RWY				USABLE LENGTHS			WIDTH
				Threshold	Landing Beyond Glide Slope	Take-off	
10	HIRL (60m) HIALS PAPI-L (3.1°)	RVR			7033' 2144m	7808' 2380m	164'
28	HIRL (60m) HIALS PAPI-L (3.07°)	RVR					50m
16	HIRL (60m) CL (15m) HIALS-II SFL TDZ ❶	RVR			6703' 2043m		197'
34	HIRL (60m) CL (15m) HIALS PAPI-L (3.78°)	RVR					60m

❶ PAPI-R (3.03°)

HOT SPOTS

- HS1 Intersection of rwys: Intersection with no visual aids apart from pavement markings to warn against entry to runway.
- HS2 Intersection of twys F,E and L: Wide opening. Where applicable make sure of correct turn from apron to twy F before runway 10/28.
- HS3 Taxiway C not to be used as rapid exit taxiway.
- HS4 Lead-out lines only.
- HS5 Make sure of correct turn along apron twy.
- HS6 Vehicle crossing.
- HS7 Intersection of runway with twy F: Intersection with no visual aids apart from pavement markings to warn against entry to runway.

Standard
TAKE-OFF ❶

	LVP must be in Force				
	RL, CL & mult. RVR req	RL & CL	RCLM (DAY only) or RL	RCLM (DAY only) or RL	
A					
B	150m	200m	250m	400m	500m
C					
D	200m	250m	300m		

❶ Operators applying U.S. Ops Specs: CL required below 300m.

CHANGES: Hot spots.

© JEPPESEN, 1998, 2015. ALL RIGHTS RESERVED.

LGTS/SKG

JEPPESEN


THESSALONIKI, GREECE

27 FEB 15

10-9A

Eff 5 Mar

MAKEDONIA

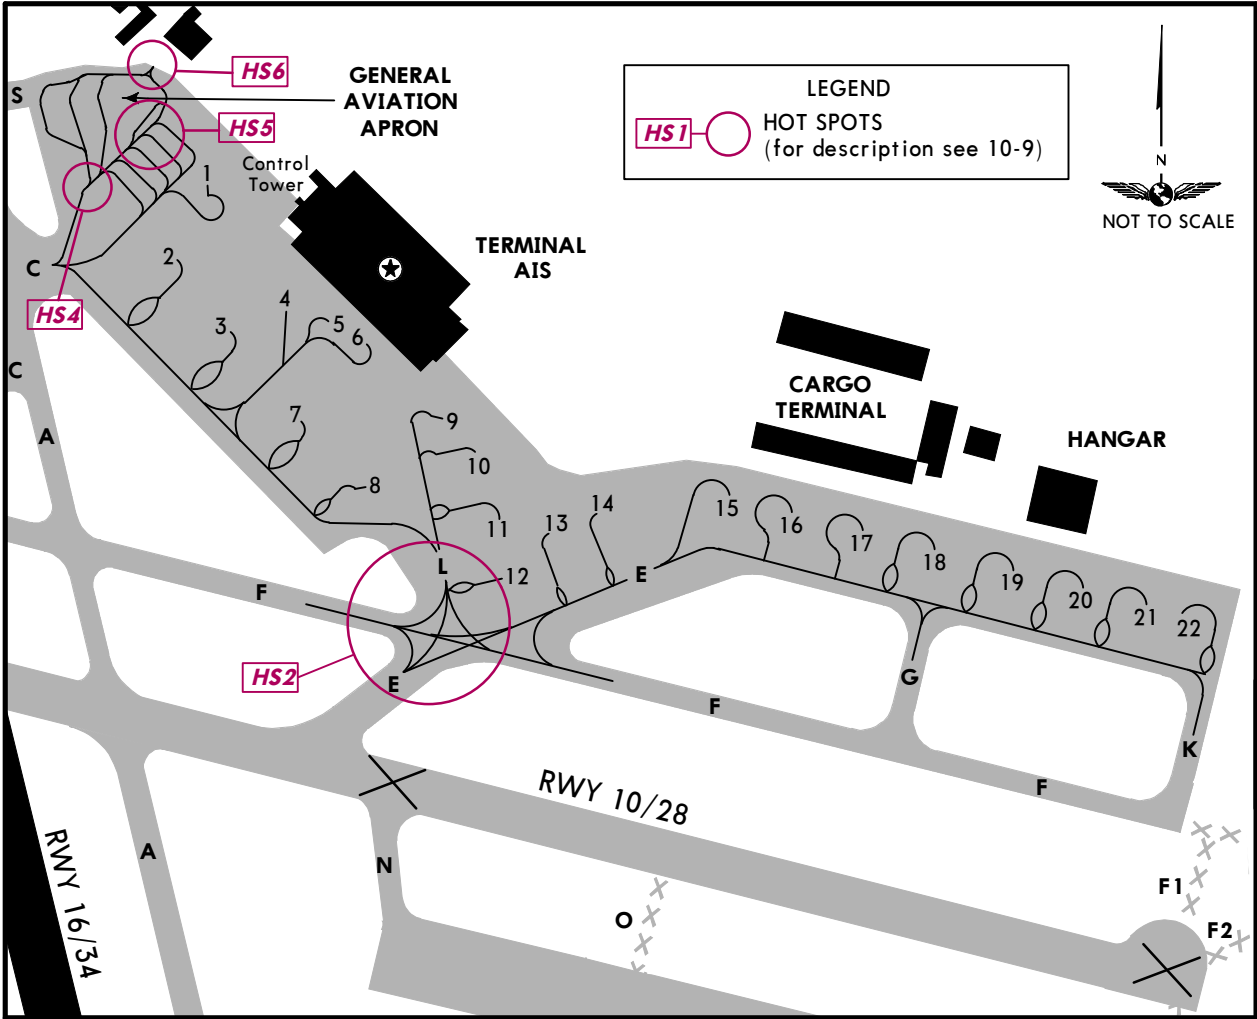

INS COORDINATES

STAND No.	COORDINATES	ELEV	STAND No.	COORDINATES	ELEV
1	N40 31.5 E022 58.5	9	15	N40 31.3 E022 58.8	16
2	N40 31.4 E022 58.4	8	16	N40 31.3 E022 58.9	16
3, 4, 5	N40 31.4 E022 58.5	9	17, 18	N40 31.3 E022 59.0	16
6	N40 31.4 E022 58.6	9	19, 20	N40 31.3 E022 59.1	16
7	N40 31.3 E022 58.5	9	21, 22	N40 31.2 E022 59.2	16
8, 9	N40 31.3 E022 58.6	9			
10	N40 31.3 E022 58.7	9			
11, 12	N40 31.3 E022 58.7	10			
13	N40 31.3 E022 58.7	11			
14	N40 31.3 E022 58.8	13			

LGTS/SKG
MAKEDONIA

JEPPESSEN
28 FEB 14 **11-1** **Eff 6 Mar**

THESSALONIKI, GREECE
ILS DME Rwy 10

BRIEFING STRIP

TM

ATIS		THESSALONIKI Approach (R)		MAKEDONIA Tower		Ground		
127.55		120.8		118.27		118.1	118.05	121.7
LOC IMAK 109.5		Final Apch Crs 100°		GS D5.0 IMAK 1655' (1646')		ILS DA(H) Refer to Minimums		Apt Elev 22' RWY 9'
MISSED APCH: Climb STRAIGHT AHEAD. At D7.0 IMAK turn RIGHT (MAX 220 KT) to TSL VOR. Intercept R-278 TSL. At D16.0 TSL turn RIGHT and join holding. Climb to 3000'.								
Alt Set: hPa ILS DME reads zero at rwy 10 threshold.		Rwy Elev: 0 hPa		Trans level: By ATC		Trans alt: 6000'		

180°



4500'

5500'

360°

MSA

MKR VOR

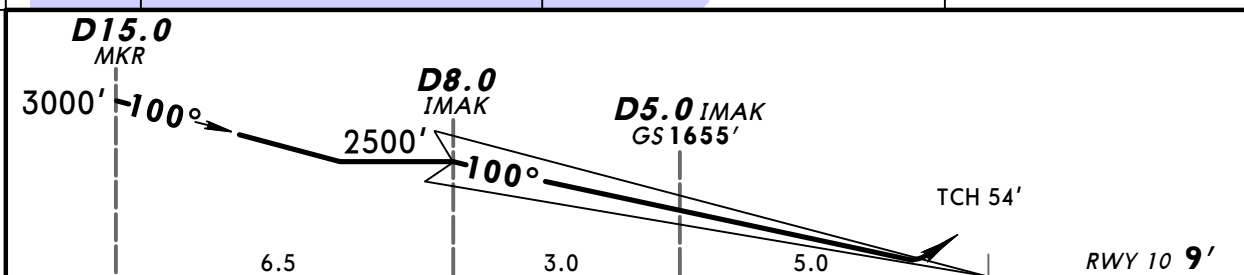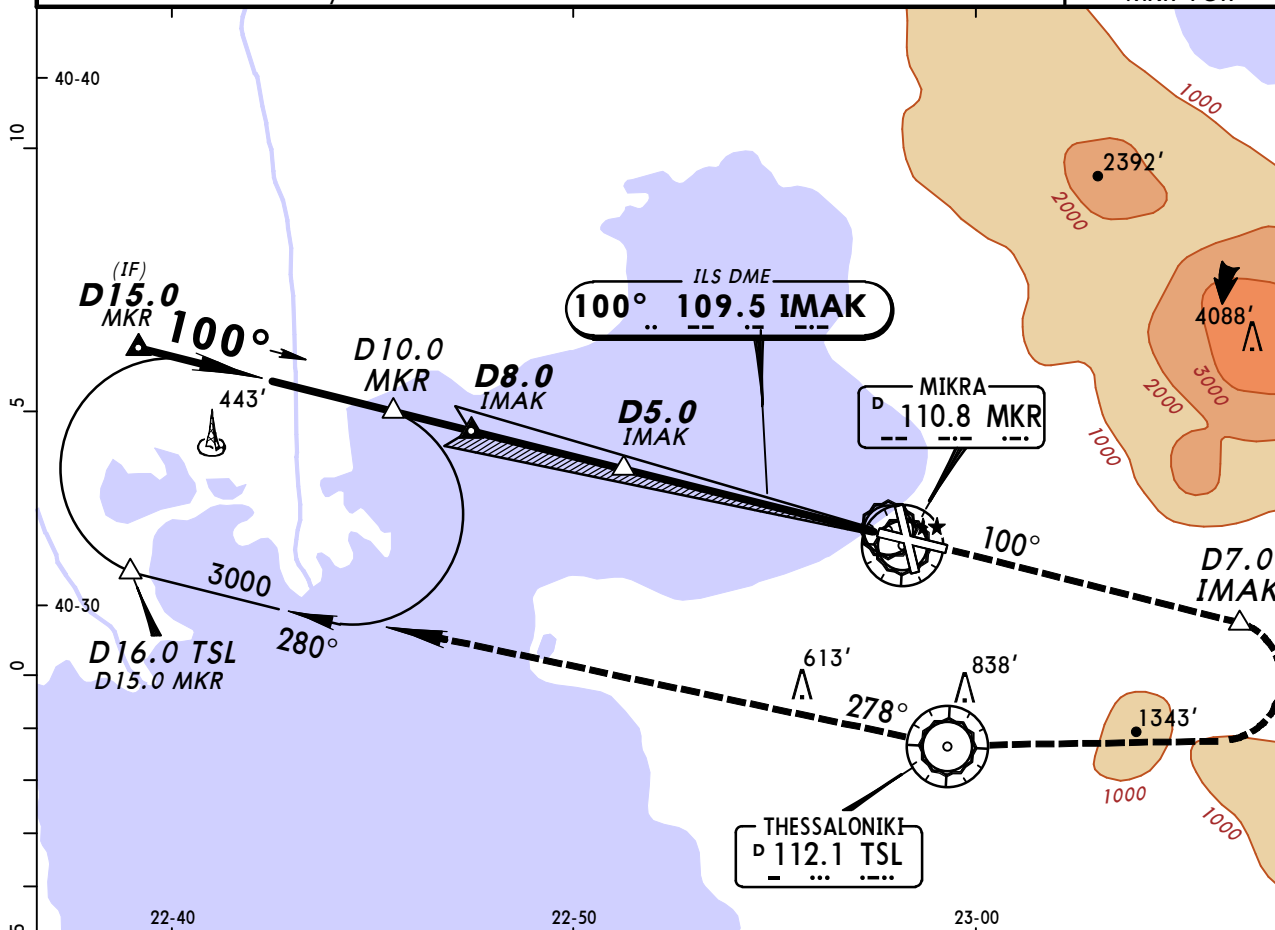

Gnd speed-Kts	70	90	100	120	140	160	HIALS		D7.0 IMAK	220 KT	TSL
ILS GS	3.00°	372	478	531	637	743	849	PAPI	↑	MAX	112.1
										RT	

Standard STRAIGHT-IN LANDING RWY 10				LOC (GS out)		CIRCLE-TO-LAND	
Missed apch climb gradient mim 4.0%		Missed apch climb gradient mim 2.5%				Not auth in sector inbound 162° to 280° clockwise	
ABC: 209' (200') DA(H): D: 214' (205')		A: 604' (595') C: 624' (615') B: 614' (605') D: 634' (625')					
FULL/Limited	ALS out	FULL/Limited	ALS out			Max Kts	MDA(H) VIS
A						100	900' (878') 1500m
B	RVR 1000m	RVR 1200m		RVR 1500m		135	1050' (1028') 1600m
C						180	1400' (1378') 2400m
D				CMV 2400m		205	1800' (1778') 3600m

▣ Climb gradient up to 2000'.

CHANGES: Bearings.

© JEPPESSEN, 2001, 2014. ALL RIGHTS RESERVED.


LGTS/SKG
MAKEDONIA



JEPPESEN
25 APR 14 **(11-2)** **Eff 1 May**

THESSALONIKI, GREECE
ILS Rwy 16

TM

BRIEFING STRIP

ATIS	THESSALONIKI Approach (R)		MAKEDONIA Tower		Ground
127.55	120.8	118.27	118.1	118.05	121.7
LOC ITSL 110.3	Final Apch Crs 162°	GS D6.0 ITSL 1974' (1962')	ILS DA(H) Refer to Minimums	Apt Elev 22' RWY 12'	 MSA MKR VOR
MISSED APCH: Climb STRAIGHT AHEAD to D7.0 ITSL, then turn RIGHT to reach VOR at 3500'. Follow R-328 to D15.0 MKR, then turn RIGHT and join holding at 3500'.					
Alt Set: hPa Rwy Elev: 1 hPa Trans level: By ATC Trans alt: 6000' 1. CAUTION: Raising terrain at missed apch course. 2. ILS DME reads zero at rwy 16 threshold.					

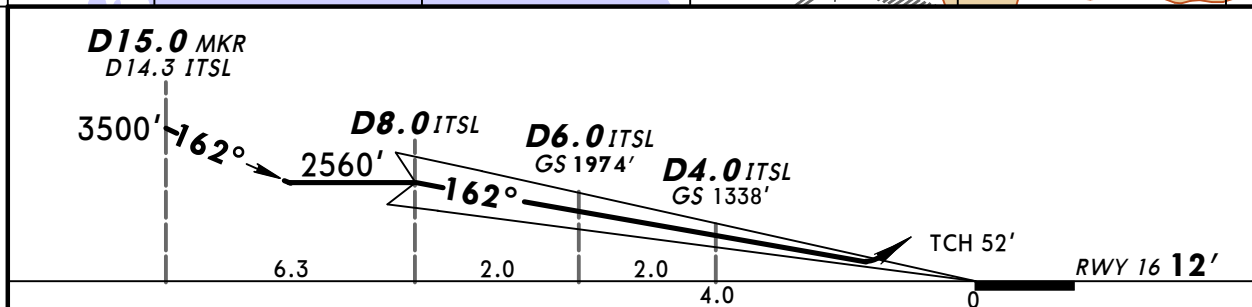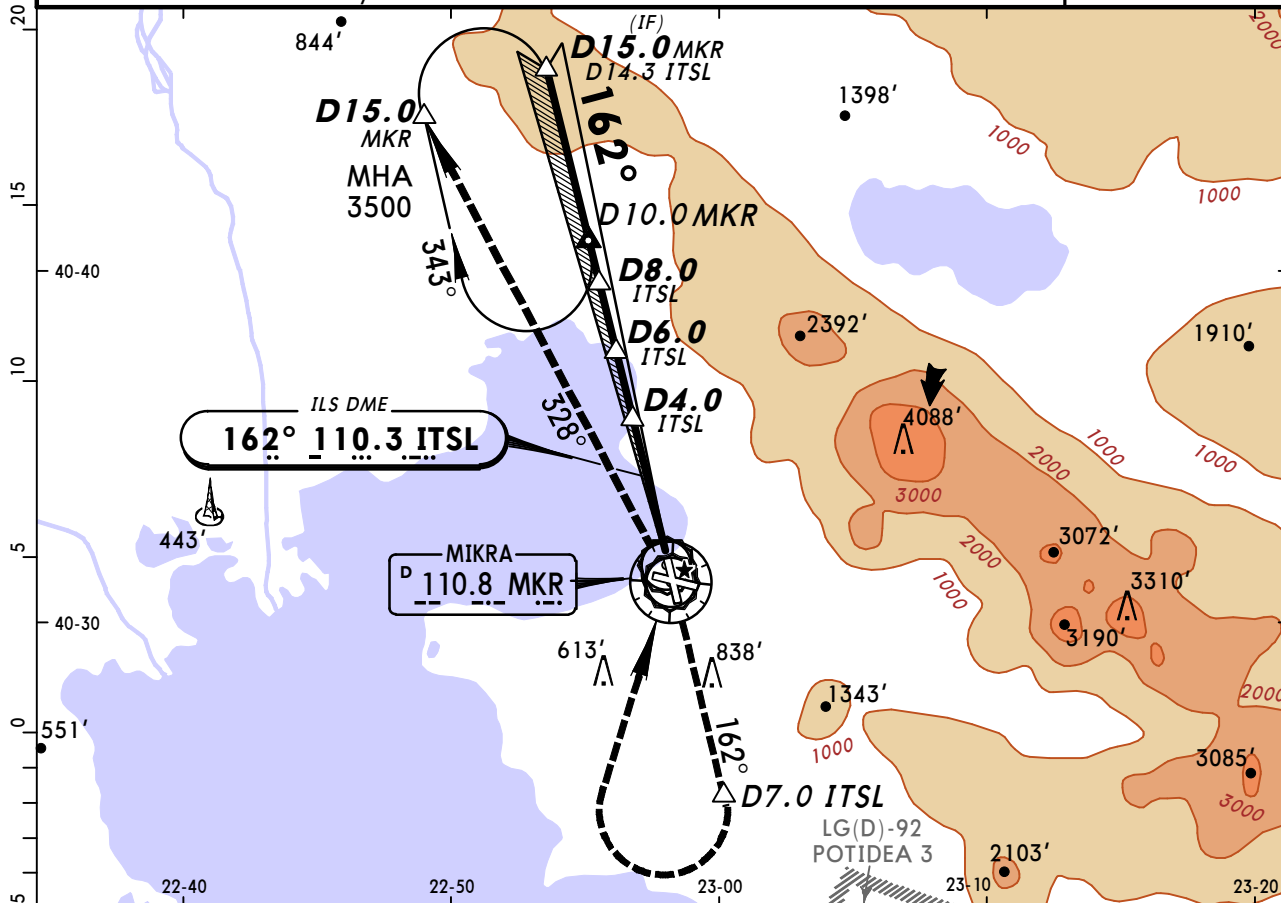

Gnd speed-Kts	70	90	100	120	140	160		
ILS GS	3.00°	372	478	531	637	743		

Standard		STRAIGHT-IN LANDING RWY 16				CIRCLE-TO-LAND	
Missed apch climb gradient mim 4.0% I		ILS Missed apch climb gradient mim 2.5%		LOC (GS out)		Not authorized in sector inbound 162° to 280° clockwise	
DA(H) 214' (202')		DA(H) A: 354' (342') C: 374' (362') B: 364' (352') D: 383' (371')					
FULL/Limited		ALS out				Max Kts	
						MDA(H) _____ VIS _____	
A	RVR 750m	RVR 1200m	RVR 1200m	RVR 1500m	NOT APPLICABLE	100	900' (878') 1500m
B						135	1050' (1028') 1600m
C						180	1400' (1378') 2400m
D			RVR 1300m	RVR 1700m		205	1800' (1778') 3600m
I Climb gradient up to 1500'.							

Climb gradient up to 1500'.

CHANGES: Procedure. Minimums.

© JEPPESEN, 2001, 2014. ALL RIGHTS RESERVED.

LGTS/SKG
MAKEDONIA

JEPPESSEN
25 APR 14
Eff 1 May **11-2A**

THESSALONIKI, GREECE
CAT II ILS Rwy 16
MISSED APCH CLIMB
GRAD MIN 4.0%

BRIEFING STRIP™

ATIS		THESSALONIKI Approach (R)		MAKEDONIA Tower		Ground		
127.55		120.8		118.27		118.1	118.05	121.7
LOC ITSL 110.3		Final Apch Crs 162°		GS D6.0 ITSL 1974' (1962')		CAT II ILS RA/DA(H) Refer to Minimums		Apt Elev 22' RWY 12'
MISSED APCH: Climb STRAIGHT AHEAD to D7.0 ITSL, then turn RIGHT to reach VOR at 3500'. Follow R-328 to D15.0 MKR, then turn RIGHT and join holding at 3500'.								
Alt Set: hPa Rwy Elev: 1 hPa Trans level: By ATC Trans alt: 6000' 1. CAUTION: Raising terrain at missed apch course. 2. ILS DME reads zero at rwy 16 threshold. 3. Special Aircrew & Acft Certification Required.								



180°

4500'


5500'

360°

MSA
MKR VOR

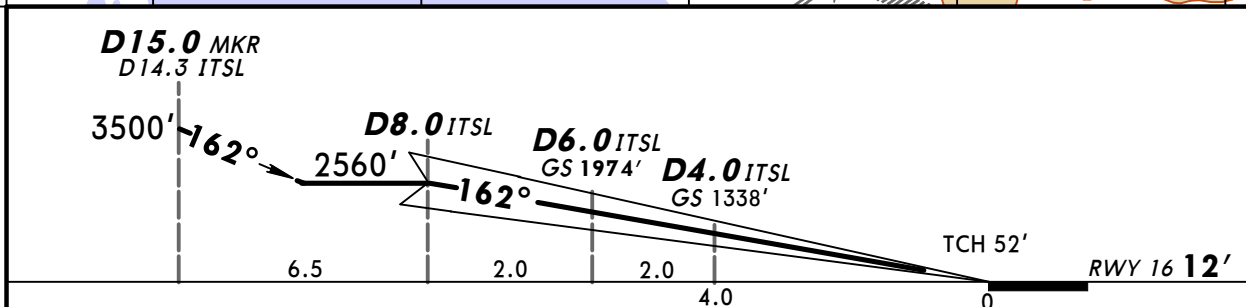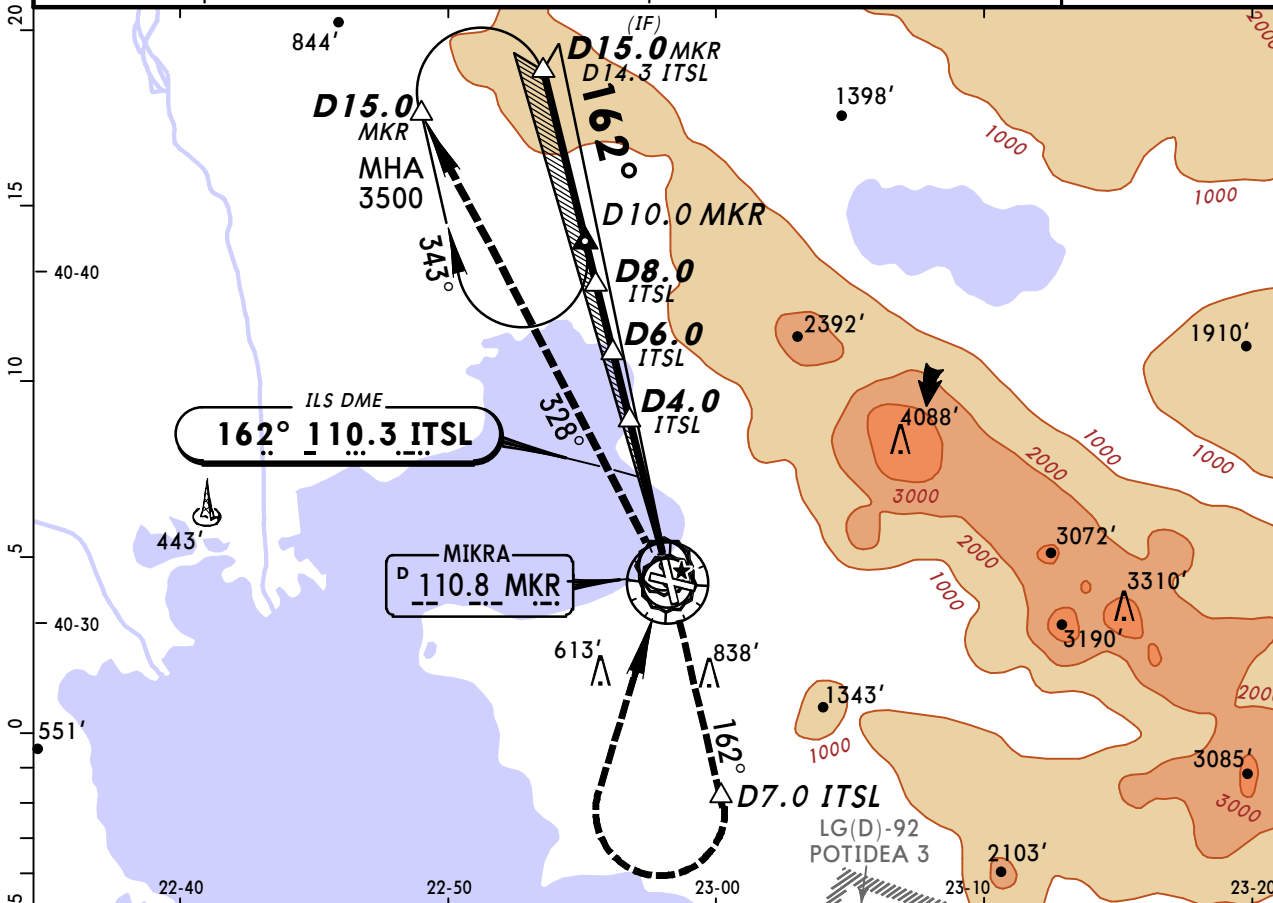

<i>Gnd speed-Kts</i>	70	90	100	120	140	160
GS 3.00°	372	478	531	637	743	849



Standard		STRAIGHT-IN LANDING RWY 16	
ABC		CAT II ILS	
RA 162'		Missed apch climb gradient min 4.0% 1	
DA(H) 164'(152')		D	
		RA 172'	
		DA(H) 174'(162')	
RVR 450m			
1 Climb gradient up to 1500'.			


CHANGES: Procedure.



© JEPPESSEN, 2001, 2014. ALL RIGHTS RESERVED.

LGTS/SKG
MAKEDONIA

JEPPESSEN
25 APR 14 (13-1) Eff 1 May

THESSALONIKI, GREECE
VOR DME Rwy 10

BRIEFING STRIP™	ATIS		THESSALONIKI Approach (R)		MAKEDONIA Tower		Ground		
	127.55		120.8		118.27		118.1	118.05	121.7
	VOR MKR 110.8		Final Apch Crs 100°		Minimum Alt D8.0 2500' (2491')		DA(H) 760' (751')		Apt Elev 22' RWY 9'
	MISSED APCH: Turn RIGHT (MAX 200 KT) onto 311° to intercept R-266. At D15.0 turn RIGHT and join holding. Climb to 3000'.								
	Alt Set: hPa		Rwy Elev: 0 hPa		Trans level: By ATC		Trans alt: 6000'		

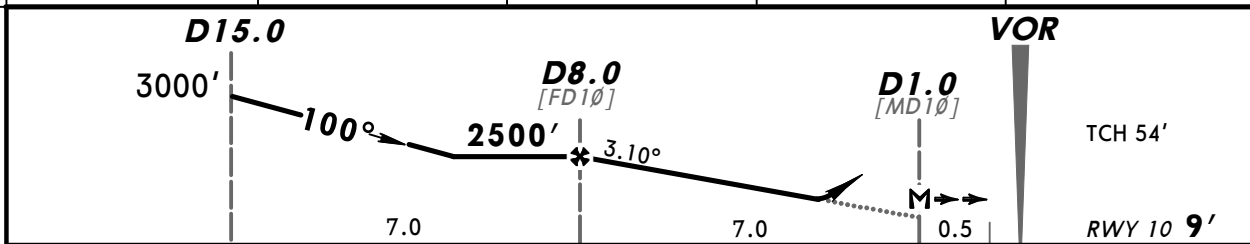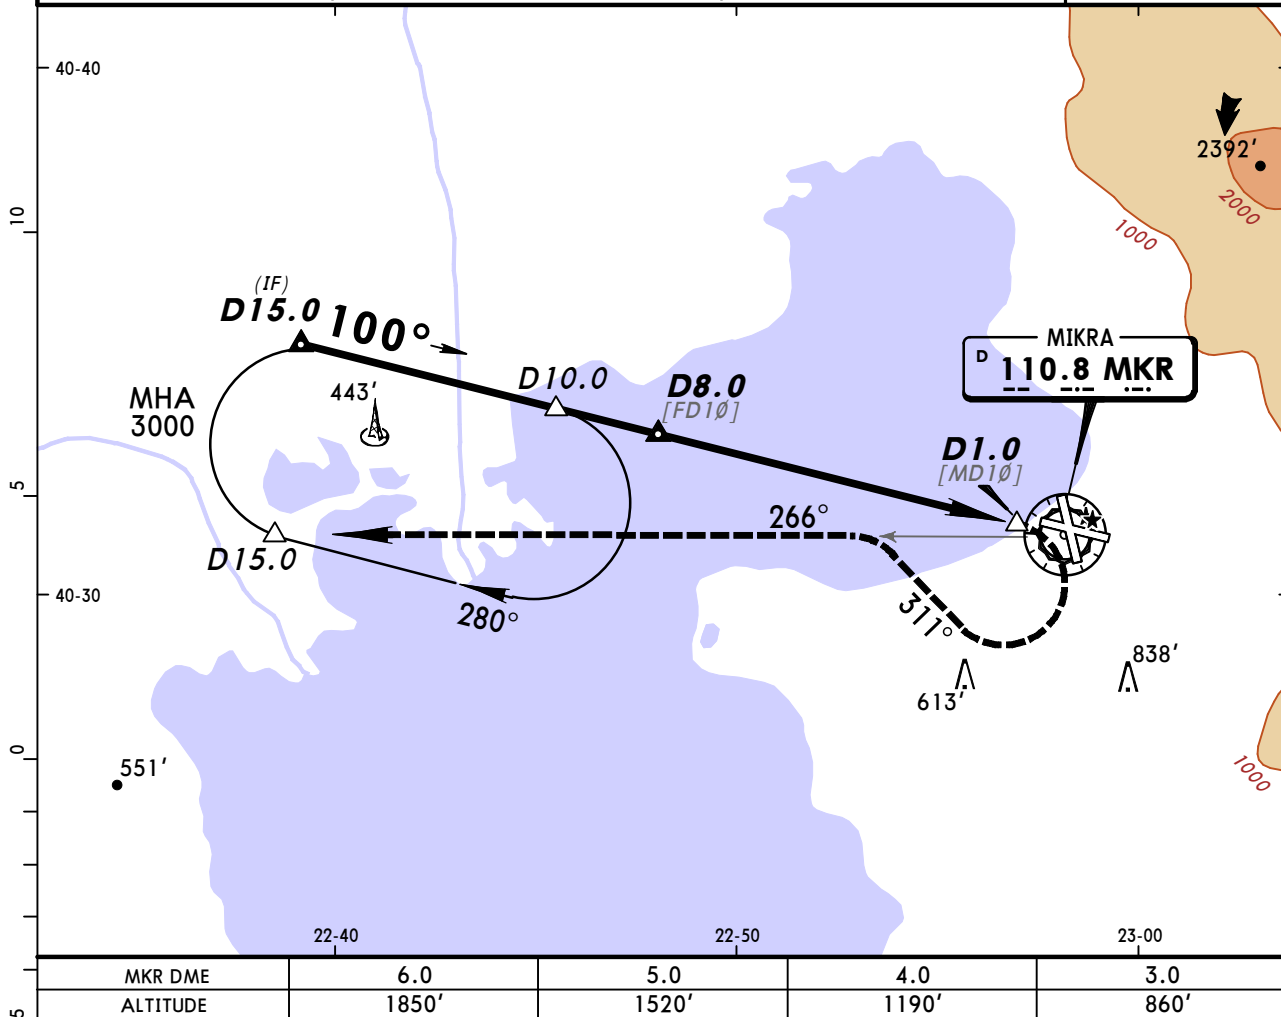

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle	3.10°	384	494	548	658	768
MAP at D1.0						

ALS	311°	200 KT
PAPI	RT	MAX

PANS OPS	Standard STRAIGHT-IN LANDING RWY 10		CIRCLE-TO-LAND	
	DA(H) 760' (751')		Not authorized in sector inbound 162° to 280° clockwise	
	ALS out		Max Kts	MDA(H) VIS
	RVR 1500m		100	900' (878') 1500m
	CMV 2400m		135	1050' (1028') 1600m
			180	1400' (1378') 2400m
			205	1800' (1778') 3600m

CHANGES: None.

© JEPPESSEN, 1998, 2014. ALL RIGHTS RESERVED.

LGTS/SKG
MAKEDONIA


JEPPESSEN
25 APR 14 (13-2) Eff 1 May

THESSALONIKI, GREECE
VOR DME Rwy 16

TM



BRIEFING STRIP

ATIS		THESSALONIKI Approach (R)		MAKEDONIA Tower		Ground		
127.55		120.8		118.27		118.1	118.05	121.7
VOR MKR 110.8		Final Apch Crs 163°		Minimum Alt D10.0 3000' (2988')		DA(H) 660' (648')		Apt Elev 22' RWY 12'
MISSED APCH: Climb on R-163 to D6.0, then turn RIGHT to reach VOR at 3500'. Turn LEFT. Follow R-328 to D15.0, then turn RIGHT and join holding at 3500'.								
Alt Set: hPa Rwy Elev: 1 hPa Trans level: By ATC Trans alt: 6000' CAUTION: Raising terrain at missed apch course.								



180°
4500'
5500'
360°

MSA
MKR VOR

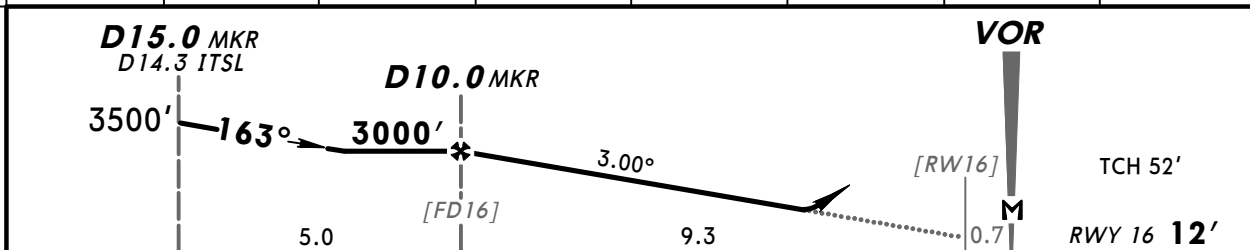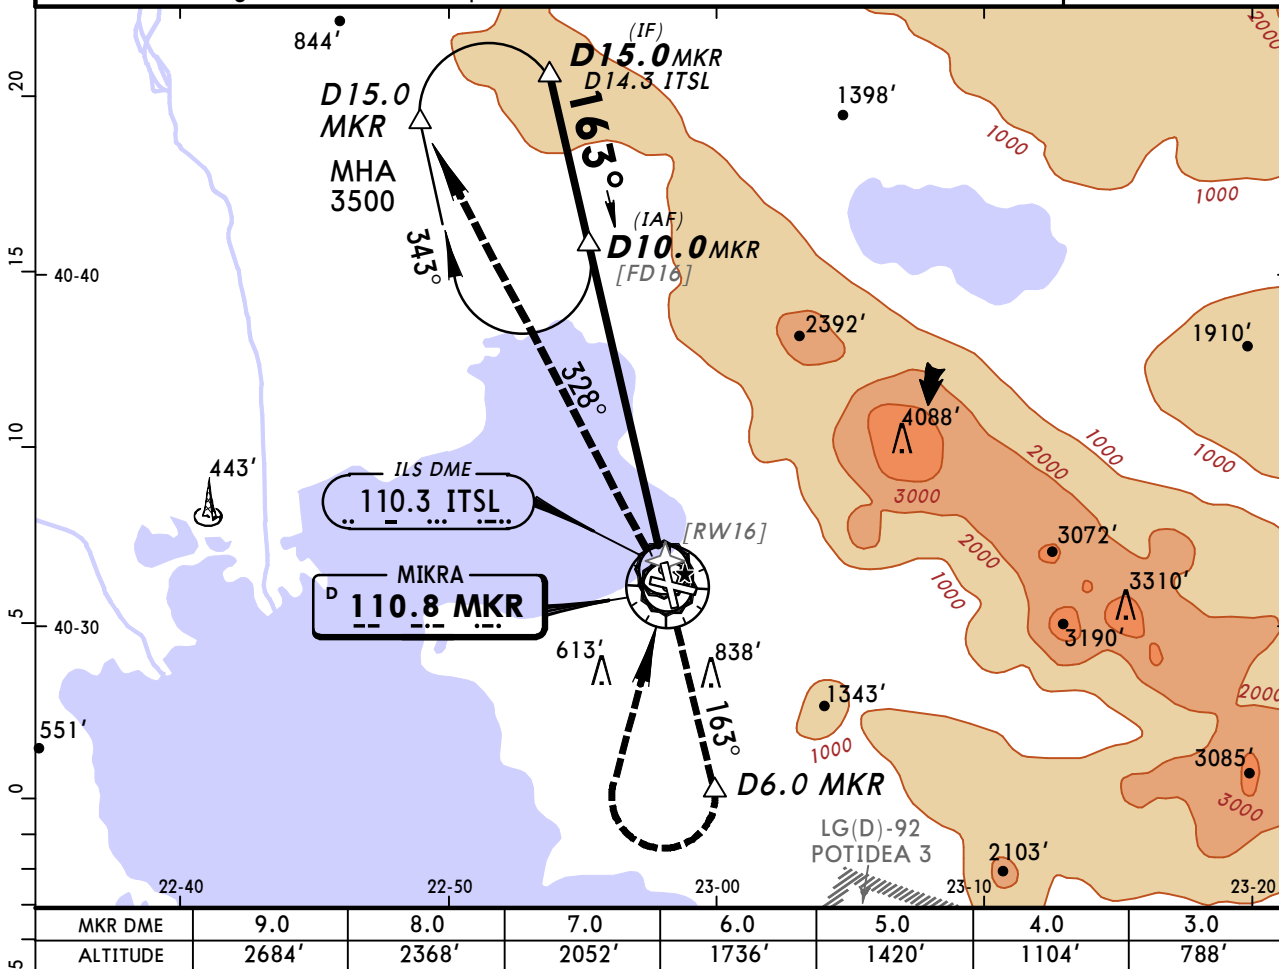

Gnd speed-Kts	70	90	100	120	140	160		D6.0 MKR on 110.8 R-163
Descent Angle	3.00°	372	478	532	638	744		
MAP at VOR								


PANS OPS	Standard STRAIGHT-IN LANDING RWY 16			CIRCLE-TO-LAND		
	DA(H) 660' (648')			Not authorized in sector inbound 162° to 280° clockwise.		
	ALS out			Max Kts	MDA(H)	VIS
	A RVR 1500m			100	900' (878')	1500m
	B			135	1050' (1028')	1600m
	C CMV 2400m			180	1400' (1378')	2400m
D				205	1800' (1778')	3600m

CHANGES: Procedure.

LGTS/SKG
MAKEDONIA

JEPPESSEN
28 FEB 14 (13-4) Eff 6 Mar

THESSALONIKI, GREECE
VOR Y Rwy 34

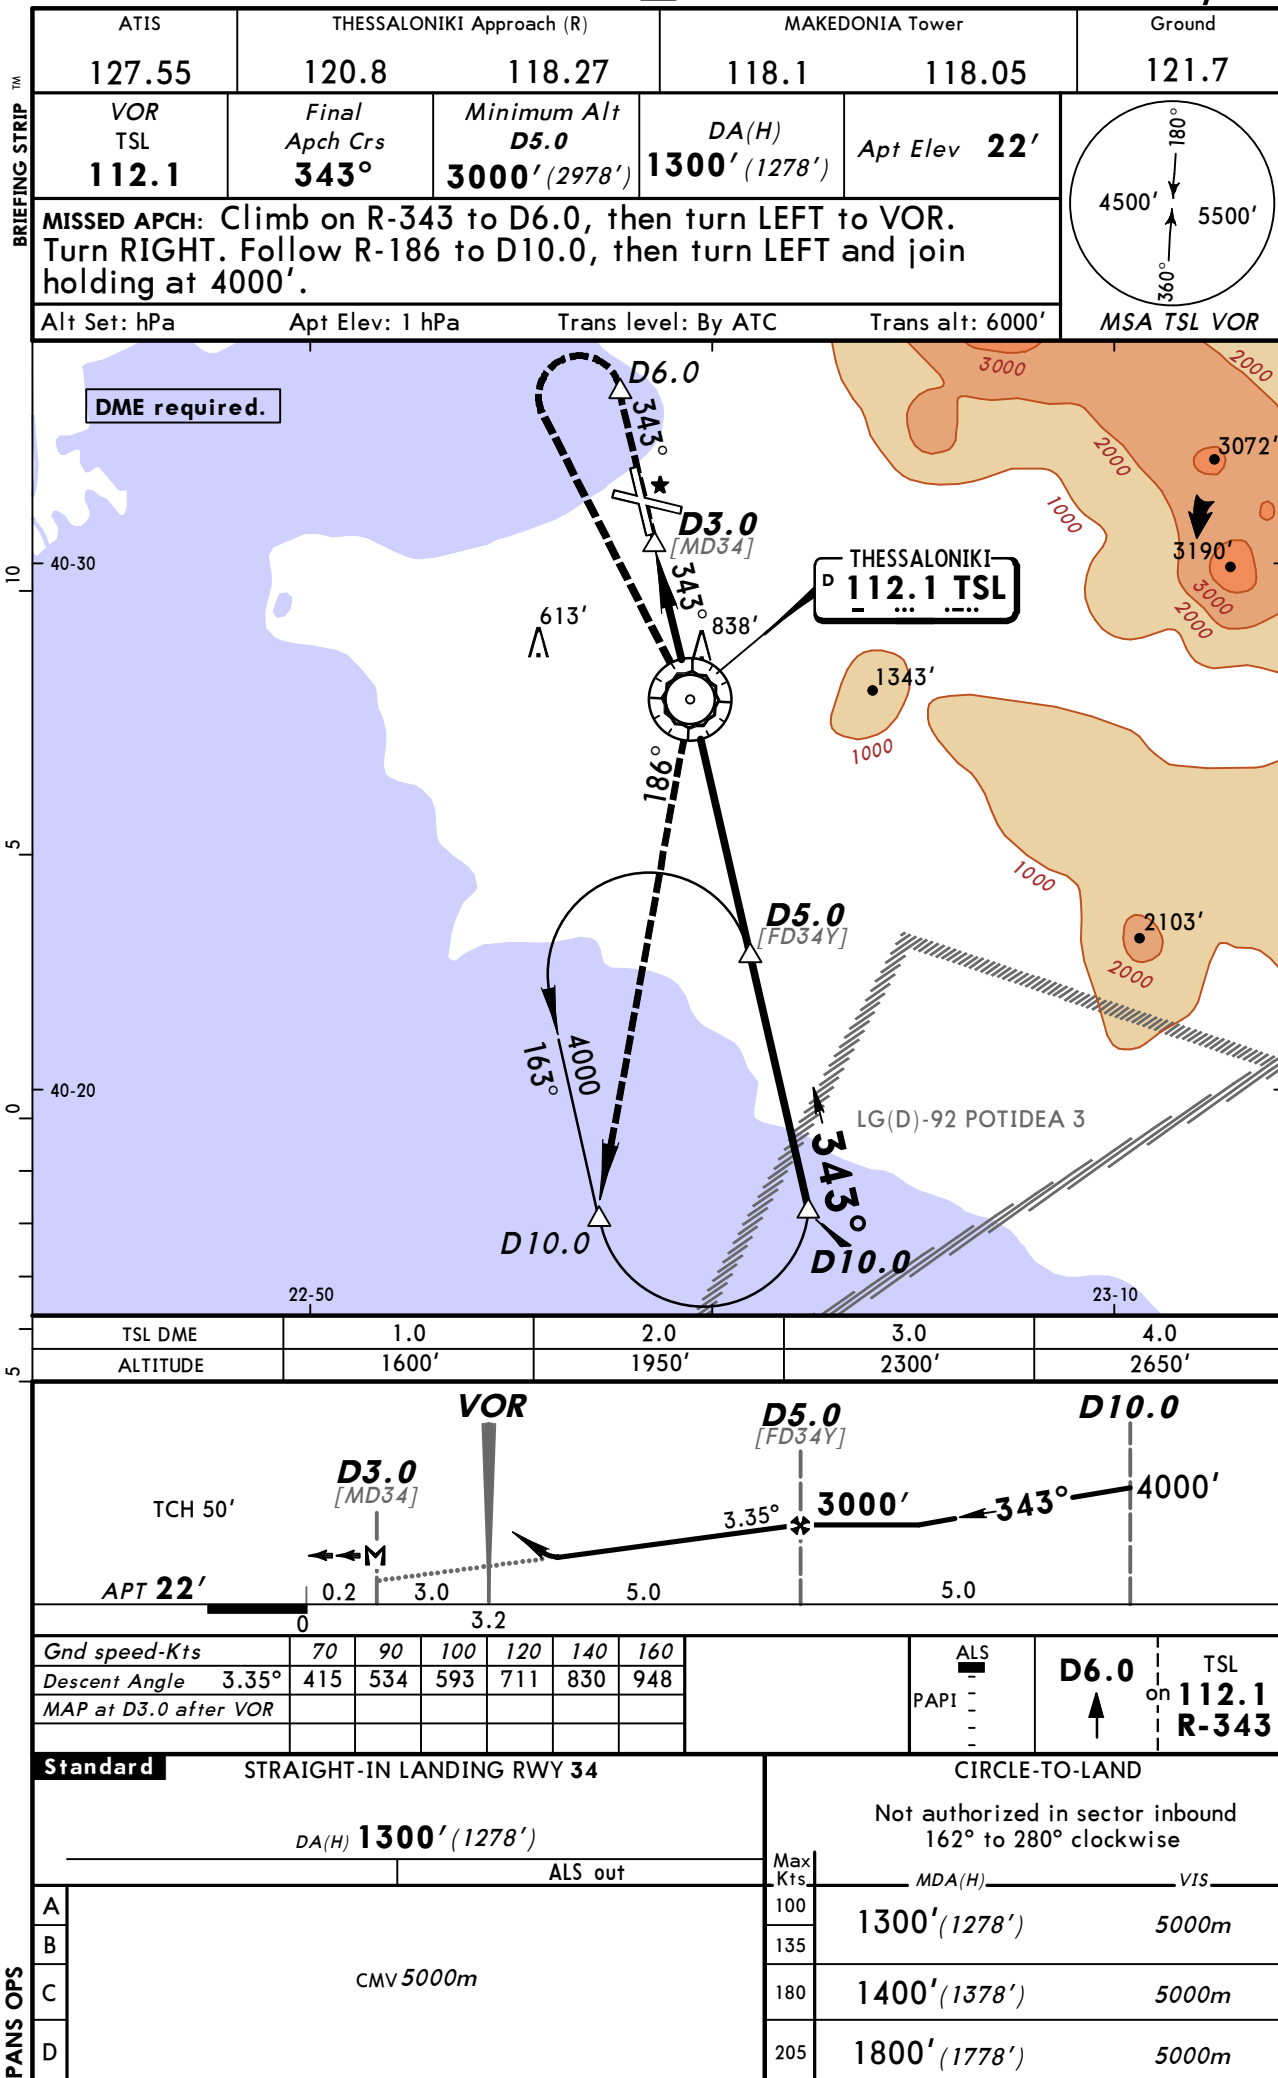

CHANGES: Procedure title. Bearings. Descent angle.

© JEPPESSEN, 1998, 2014. ALL RIGHTS RESERVED.

Chart changes since cycle 26-2015

ADD = added chart, REV = revised chart, DEL = deleted chart.

ACT	PROCEDURE IDENT	INDEX	REV DATE	EFF DATE
THESSALONIKI, (MAKEDONIA - LGTS)				
DEL	ALIKO & EDASI 1D, ARNAS &...	10-2	01 Jan 2016	07 Jan 2016
ADD	ALIKO, EDASI & FISKA 1F, ...	10-2	01 Jan 2016	07 Jan 2016
DEL	LEKPO, ODIKO & OSMOS 1D, ...	10-2A	01 Jan 2016	07 Jan 2016
ADD	LEKPO, ODIKO & OSMOS 1F, ...	10-2A	01 Jan 2016	07 Jan 2016
ADD	ALIKO, ARNAS & EDASI 1H, ...	10-2B	01 Jan 2016	07 Jan 2016
DEL	ALIKO, EDASI & FISKA 1F, ...	10-2B	01 Jan 2016	07 Jan 2016
ADD	LEKPO, LOPOS, ODIKO & OSM...	10-2C	01 Jan 2016	07 Jan 2016
DEL	LEKPO, ODIKO & OSMOS 1F, ...	10-2C	01 Jan 2016	07 Jan 2016
ADD	ALIKO & EDASI 1L, ARNAS 2...	10-2D	01 Jan 2016	07 Jan 2016
DEL	ALIKO, ARNAS & EDASI 1H, ...	10-2D	01 Jan 2016	07 Jan 2016
DEL	LEKPO, LOPOS, ODIKO & OSM...	10-2E	01 Jan 2016	07 Jan 2016
ADD	LEKPO, ODIKO & OSMOS 1L, ...	10-2E	01 Jan 2016	07 Jan 2016
DEL	ALIKO & EDASI 1L, ARNAS 2...	10-2F	01 Jan 2016	07 Jan 2016
ADD	ALIKO, ARNAS & EDASI 1P, ...	10-2F	01 Jan 2016	07 Jan 2016
ADD	LEKPO, LOPOS, ODIKO & OSM...	10-2G	01 Jan 2016	07 Jan 2016
DEL	LEKPO, ODIKO & OSMOS 1L, ...	10-2G	01 Jan 2016	07 Jan 2016
DEL	ALIKO, ARNAS & EDASI 1P, ...	10-2H	01 Jan 2016	07 Jan 2016
DEL	LEKPO, LOPOS, ODIKO & OSM...	10-2J	01 Jan 2016	07 Jan 2016
ADD	ALIKO 1A & 1B DEPS	10-3	01 Jan 2016	07 Jan 2016
DEL	ALIKO 1A, 1B, 1C & 1E DEP...	10-3	01 Jan 2016	07 Jan 2016
ADD	ARNAS 3A & 3B DEPS	10-3A	01 Jan 2016	07 Jan 2016
DEL	ARNAS 3A, 3B, 3C, 3E & 3G...	10-3A	01 Jan 2016	07 Jan 2016
ADD	EDASI 1A & 1B DEPS	10-3B	01 Jan 2016	07 Jan 2016
DEL	EDASI 1A, 1B, 1C & 1E DEP...	10-3B	01 Jan 2016	07 Jan 2016
ADD	FISKA 4A & 4B DEPS	10-3C	01 Jan 2016	07 Jan 2016
DEL	FISKA 4A, 4B, 4C & 3E DEP...	10-3C	01 Jan 2016	07 Jan 2016
ADD	LEKPO 1A & 1B DEPS	10-3D	01 Jan 2016	07 Jan 2016
DEL	LEKPO 1A, 1B, 1C & 1E DEP...	10-3D	01 Jan 2016	07 Jan 2016
ADD	LOPOS 3A & 3B DEPS	10-3E	01 Jan 2016	07 Jan 2016
DEL	LOPOS 3A, 3B, 3C & 3E DEP...	10-3E	01 Jan 2016	07 Jan 2016
ADD	ODIKO 1A & 1B DEPS	10-3F	01 Jan 2016	07 Jan 2016
DEL	ODIKO 1A, 1B, 1C & 1E DEP...	10-3F	01 Jan 2016	07 Jan 2016
ADD	OSMOS 1A, THESSALONIKI 3A...	10-3G	01 Jan 2016	07 Jan 2016
DEL	OSMOS 1A, THESSALONIKI 3A...	10-3G	01 Jan 2016	07 Jan 2016

TERMINAL CHART CHANGE NOTICES

Chart Change Notices for Airport LGTS

Type: Terminal

Effectivity: Temporary

Begin Date: 20160107

End Date: Until Further Notice

(11-1, 13-1) ILS DME RWY 10 and VOR DME RWY 10 are withdrawn due to WIP.