

List of pages in this Trip Kit

Trip Kit Index

Airport Information For LROP

Terminal Charts For LROP

Revision Letter For Cycle 01-2016

Change Notices

Notebook

General Information

Location: BUCHAREST ROU
ICAO/IATA: LROP / OTP
Lat/Long: N44° 34.27', E026° 05.10'
Elevation: 314 ft

Airport Use: Public
Daylight Savings: Observed
UTC Conversion: -2:00 = UTC
Magnetic Variation: 5.0° E

Fuel Types: 100 Octane (LL), Jet A-1
Repair Types: Minor Airframe, Minor Engine
Customs: Yes
Airport Type: IFR
Landing Fee: Yes
Control Tower: Yes
Jet Start Unit: No
LLWS Alert: No
Beacon: No

Sunrise: 0551 Z
Sunset: 1455 Z

Runway Information

Runway: 08L
Length x Width: 7339 ft x 148 ft
Surface Type: asphalt
TDZ-Elev: 309 ft
Lighting: Edge, Centerline

Runway: 08R
Length x Width: 11483 ft x 148 ft
Surface Type: asphalt
TDZ-Elev: 314 ft
Lighting: Edge, ALS, Centerline, TDZ

Runway: 26L
Length x Width: 11483 ft x 148 ft
Surface Type: asphalt
TDZ-Elev: 303 ft
Lighting: Edge, ALS, Centerline

Runway: 26R
Length x Width: 7339 ft x 148 ft
Surface Type: asphalt
TDZ-Elev: 304 ft
Lighting: Edge, ALS, Centerline

Communication Information

ATIS: 118.500

Otopeni Tower: 120.900

Otopeni Tower: 121.850

Otopeni Ground: 118.800 Secondary

Otopeni Ground: 121.700

Bucharest Approach: 120.600 Secondary

Bucharest Approach: 118.250

LROP/OTP
HENRI COANDA

JEPPESEN

15 MAY 15

20-1P

Eff 28 May

BUCHAREST, ROMANIA

AIRPORT BRIEFING

1. GENERAL

1.1. ATIS

ATIS 118.5

1.2. NOISE ABATEMENT PROCEDURES

1.2.1. REVERSE THRUST

Avoid reverse thrust after landing, consistent with safe operation of ACFT, especially between 2300-0700LT.

1.2.2. RUN-UP TESTS

ATC will approve idle ground engine runs.

Permission for ground testing in excess of idle must commence in the Engine Test Bay and must be requested through the marshaller, ext. 3426, at all times.

Times of operation are 0600-2300LT.

Engine testing on the open airfield will only be allowed for Chapter 2 ACFT between 0900-1700LT and Chapter 3 ACFT between 0600-2300LT. Propeller-driven ACFT are to be classified as Chapter 3.

1.2.3. USE OF APU

The APU is permitted functioning maximum 15 min after block-on time and may be started over 30 min before standard.

1.3. LOW VISIBILITY PROCEDURES (LVP)

The preparation phase will be implemented when VIS falls below 1500m and is deteriorated to 800m or ceiling is 500' and is deteriorated to 200' and CAT II/III operations are expected.

The operation phase will be commenced when RVR falls below 600m (VIS falls below 800m) or ceiling is below 200'.

LVP will be terminated when RVR is greater than 600m (VIS greater than 800m) and ceiling is greater than 200' and a continuing improvement in these conditions is anticipated.

If LVP operations are not in force, Low Visibility Take-off must be requested a minimum of 30 min in advance to permit the appropriate preparations.

ACFT movements on manoeuvring area to/from RWYs should be made using the Standard Taxi Routes.

Upon receiving taxi clearance, ACFT must only proceed when a green centerline path is illuminated.

ACFT movements on TWYs P and C and on aprons must be carried out with Follow-me car.

Red stop bars at all intersections of RWYs with TWYs except TWYs used only for exit (rapid exit TWY W and V).

Pilots wishing to conduct a guided take-off must inform ATC on start-up in order to ensure that protection of the localizer sensitive area is provided.

Intersection take-offs are not permitted.

LROP/OTP
HENRI COANDA

JEPPESEN
15 MAY 15 **(20-1P1)**

BUCHAREST, ROMANIA
Eff 28 May **AIRPORT BRIEFING**

1. GENERAL

1.4 OPERATION OF MODE S TRANSPONDERS WHEN ACFT IS ON THE GROUND

ACFT operators shall ensure that the Mode S transponders are able to operate when ACFT is on the ground, according to ICAO specifications (Annex 10, volume IV, 3.1.2.8.5.3 and 3.1.2.10.3.10).

Aircrews shall select the assigned Mode A code and activate the Mode S by selecting AUTO, ON, XPNDR, or the equivalent according to specific installation and assigned Mode A code under the following conditions:

- From request of push-back or taxi, whichever is earlier;
- After landing, continuously until the ACFT is fully parked on the stand.

The transponder shall be switched off immediately after parking.

Whenever the ACFT is capable of reporting flight identification (i.e. call sign used in flight), the flight identification should also be entered from the request for push-back or taxi, whichever is earlier (through the FMS or the transponder control panel). Aircrews shall use the format as defined in field 7 of the ICAO flight plan for entry of the flight identification.

To ensure that the performance of the systems based on SSR frequencies (including airborne TCAS units and SSR radars) is not compromised, TCAS shall not be activated before receiving the clearance to line up. After landing, it shall be deactivated after vacating the runway.

1.5. TAXI PROCEDURES

On the aprons ACFT are permitted to taxi only at the indispensable minimum engine speed.

Taxiing of ACFT with wingspan greater than 171'/52m is permitted only with engines 1 and 4 on idle power.

Pilots are to delay call "RWY vacated" until ACFT has completely passed the end of green/yellow TWY centerline lights.

Orange guidelines are mandatory for:

A300, A310, B707-320, B757-200, B767-200, B777, DC10-30, IL18, IL62, IL76, IL86, L100-30, L1011-500, TU154, B747-200 and B747-400.

TWY L MAX wingspan 118'/36m.

TWY I MAX wingspan 171'/52m.

TWY M MAX wingspan 213'/65m.

1.6. PARKING INFORMATION

Floodlight poles close to stands 106, 107, 109, 110, 120 and 121.

Apron 1: Stands 101, 102 and 113 thru 115 are equipped with stand entry guidance SAFEDOCK T-3 and stands 103 thru 107 and 109 thru 112 with SAFEDOCK T-1.

Stands 101 thru 118 on apron 1 push-back required.

Stands 119 thru 122 on Apron 1 and stands 202 thru 223 on Apron 2:

Self-parking procedure, stop ACFT when yellow STOP marking is in line with pilots eye view at an angle of 90° to the lead-in line.

2. ARRIVAL

2.1. CAT II/III OPERATIONS

RWYs 08L/R approved for CAT II/III operations, special aircrew and ACFT certification required.

LROP/OTP
HENRI COANDA

JEPPESEN

15 MAY 15

20-1P2

Eff 28 May

BUCHAREST, ROMANIA

AIRPORT BRIEFING

2. ARRIVAL

2.2. TAXI PROCEDURES

2.2.1. STANDARD TAXI ROUTES

2.2.1.1. RWY 08L

Taxi route	Apron	TWY to be followed	Remarks
Arrival 1D	Apron 1	V, O, N	
Arrival 1E		O, N	
Arrival 2C	Apron 2	V, O, P, C	For ACFT with wingspan less than 171'/52m
Arrival 2D		O, P, C	For ACFT with wingspan less than 171'/52m
Arrival 3C	Apron 3	O, P	
Arrival 3D		V, N, C, P	For ACFT with wingspan less than 171'/52m

2.2.1.2. RWY 08R

Taxi route	Apron	TWY to be followed	Remarks
Arrival 1A	Apron 1	D, C	For ACFT with wingspan less than 171'/52m
Arrival 1B		D, P, O, N	
Arrival 1C		G	
Arrival 2A	Apron 2	D, C	For ACFT with wingspan less than 171'/52m
Arrival 2B		G, C	For ACFT with wingspan less than 171'/52m
Arrival 3A	Apron 3	D, P	
Arrival 3B		G, C, P	For ACFT with wingspan less than 171'/52m

2.2.1.3. RWY 26L

Taxi route	Apron	TWY to be followed	Remarks
Arrival 7D	Apron 1	G, N	
Arrival 7E		A, B	
Arrival 8C	Apron 2	G, C	For ACFT with wingspan less than 171'/52m
Arrival 8D		A, B, C	For ACFT with wingspan less than 171'/52m
Arrival 9C	Apron 3	G, C, P	For ACFT with wingspan less than 171'/52m
Arrival 9D		A, B, C, P	For ACFT with wingspan less than 171'/52m

2.2.1.4. RWY 26R

Taxi route	Apron	TWY to be followed	Remarks
Arrival 4A	Apron 1	W, O, N	
Arrival 4B		N	
Arrival 5A	Apron 2	W, P, C	For ACFT with wingspan less than 171'/52m
Arrival 5B		W, O, N, C	For ACFT with wingspan less than 171'/52m
Arrival 6A	Apron 3	W, P	
Arrival 6B			For ACFT with wingspan less than 171'/52m

2. ARRIVAL

2.3. PARKING PROCEDURES

When taxiing into ACFT stands, ACFT shall generally not stop in curves between the centerlines of apron TWYs or ACFT stand taxi lanes and the centerlines of ACFT stands so as to avoid the further appliance of break-away power.

If in the course of a manoeuvre as described above, an ACFT inadvertently comes to a stop, prior to increasing engine power again to continue, the pilot shall notify Ground Control and await further instructions.

Parking of ACFT at positions not provided with SEG is only permitted according to the signals of the marshaller.

3. DEPARTURE

3.1. TAXI PROCEDURES

3.1.1. STANDARD TAXI ROUTES

3.1.1.1. RWY 08L

Apron	Taxi route	Holding position	TWY to be followed	Remarks
Apron 1	Departure 1C	N	N	
	Departure 1D	O	C, P,O, taxi on RWY backtrack and line-up THR	For ACFT with wingspan less than 171'/52m
Apron 2	Departure 2C	N	C, N	For ACFT with wingspan less than 171'/52m
	Departure 2D	O	C, P,O, taxi on RWY backtrack and line-up THR	For ACFT with wingspan less than 171'/52m
Apron 3	Departure 3C	N	P, O, N	
	Departure 3D	O	P,O, taxi on RWY back-track and line-up THR	

3.1.1.2. RWY 08R

Apron	Taxi route	Holding position	TWY to be followed	Remarks
Apron 1	Departure 1A	A	A	
	Departure 1B	G	G, turn RIGHT taxi to end of RWY and line-up THR	
Apron 2	Departure 2A	A	C, B, A	For ACFT with wingspan less than 171'/52m
	Departure 2B	G	C, G, turn RIGHT taxi to end of RWY and line-up THR	
Apron 3	Departure 3A	A	P, C, B, A	
	Departure 3B	G	P, C, G, turn RIGHT taxi to end of RWY and line-up THR	

3. DEPARTURE

3.1.1.3. RWY 26L

Apron	Taxi route	Holding position	TWY to be followed	Remarks
Apron 1	Departure 1E	D	C, D, turn LEFT taxi to end of RWY, turn around and line-up THR	For ACFT with wing-span less than 171'/52m
	Departure 1F	G	G, turn LEFT taxi to end of RWY, turn around and line-up THR	For ACFT with wing-span less than 171'/52m
Apron 2	Departure 2E	D	C, D, turn LEFT taxi to end of RWY, turn around and line-up THR	For ACFT with wing-span less than 171'/52m
	Departure 2F	G	C, G, turn LEFT taxi to end of RWY, turn around and line-up THR	
Apron 3	Departure 3E	D	P, D, turn LEFT taxi to end of RWY, turn around and line-up THR	
	Departure 3F	G	P, C, G, turn LEFT taxi to end of RWY, turn around and line-up THR	For ACFT with wing-span less than 171'/52m

3.1.1.4. RWY 26R

Apron	Taxi route	Holding position	TWY to be followed	Remarks
Apron 1	Departure 1G	O	N, O and line-up THR	For ACFT with wing-span more than 171'/52m only with Follow-me.
	Departure 1H	N	N, taxi on RWY, back-track and line-up THR	
Apron 2	Departure 2G	O	C, P, O and line-up THR	For ACFT with wing-span less than 171'/52m
	Departure 2H	N	C, N, taxi on RWY, back-track and line-up THR	For ACFT with wing-span less than 171'/52m
Apron 3	Departure 3G	O	P, O and line-up THR	For ACFT with wing-span more than 171'/52m only with Follow-me.
	Departure 3H	N	P, O, N, turn RIGHT taxi on RWY, back-track and line-up THR	

LROP/OTP HENRI COANDA

JEPPESSEN

BUCHAREST, ROMANIA

18 JUL 14

20-1R


Eff 24 Jul

RADAR MINIMUM ALTITUDES

BUCHAREST
Approach (R)
118.25

Apt Elev
314'

Alt Set: hPa (MM on request)
Trans level: By ATC Trans alt: 4000'
Chart only to be used for cross-checking of altitudes assigned
while under radar control.

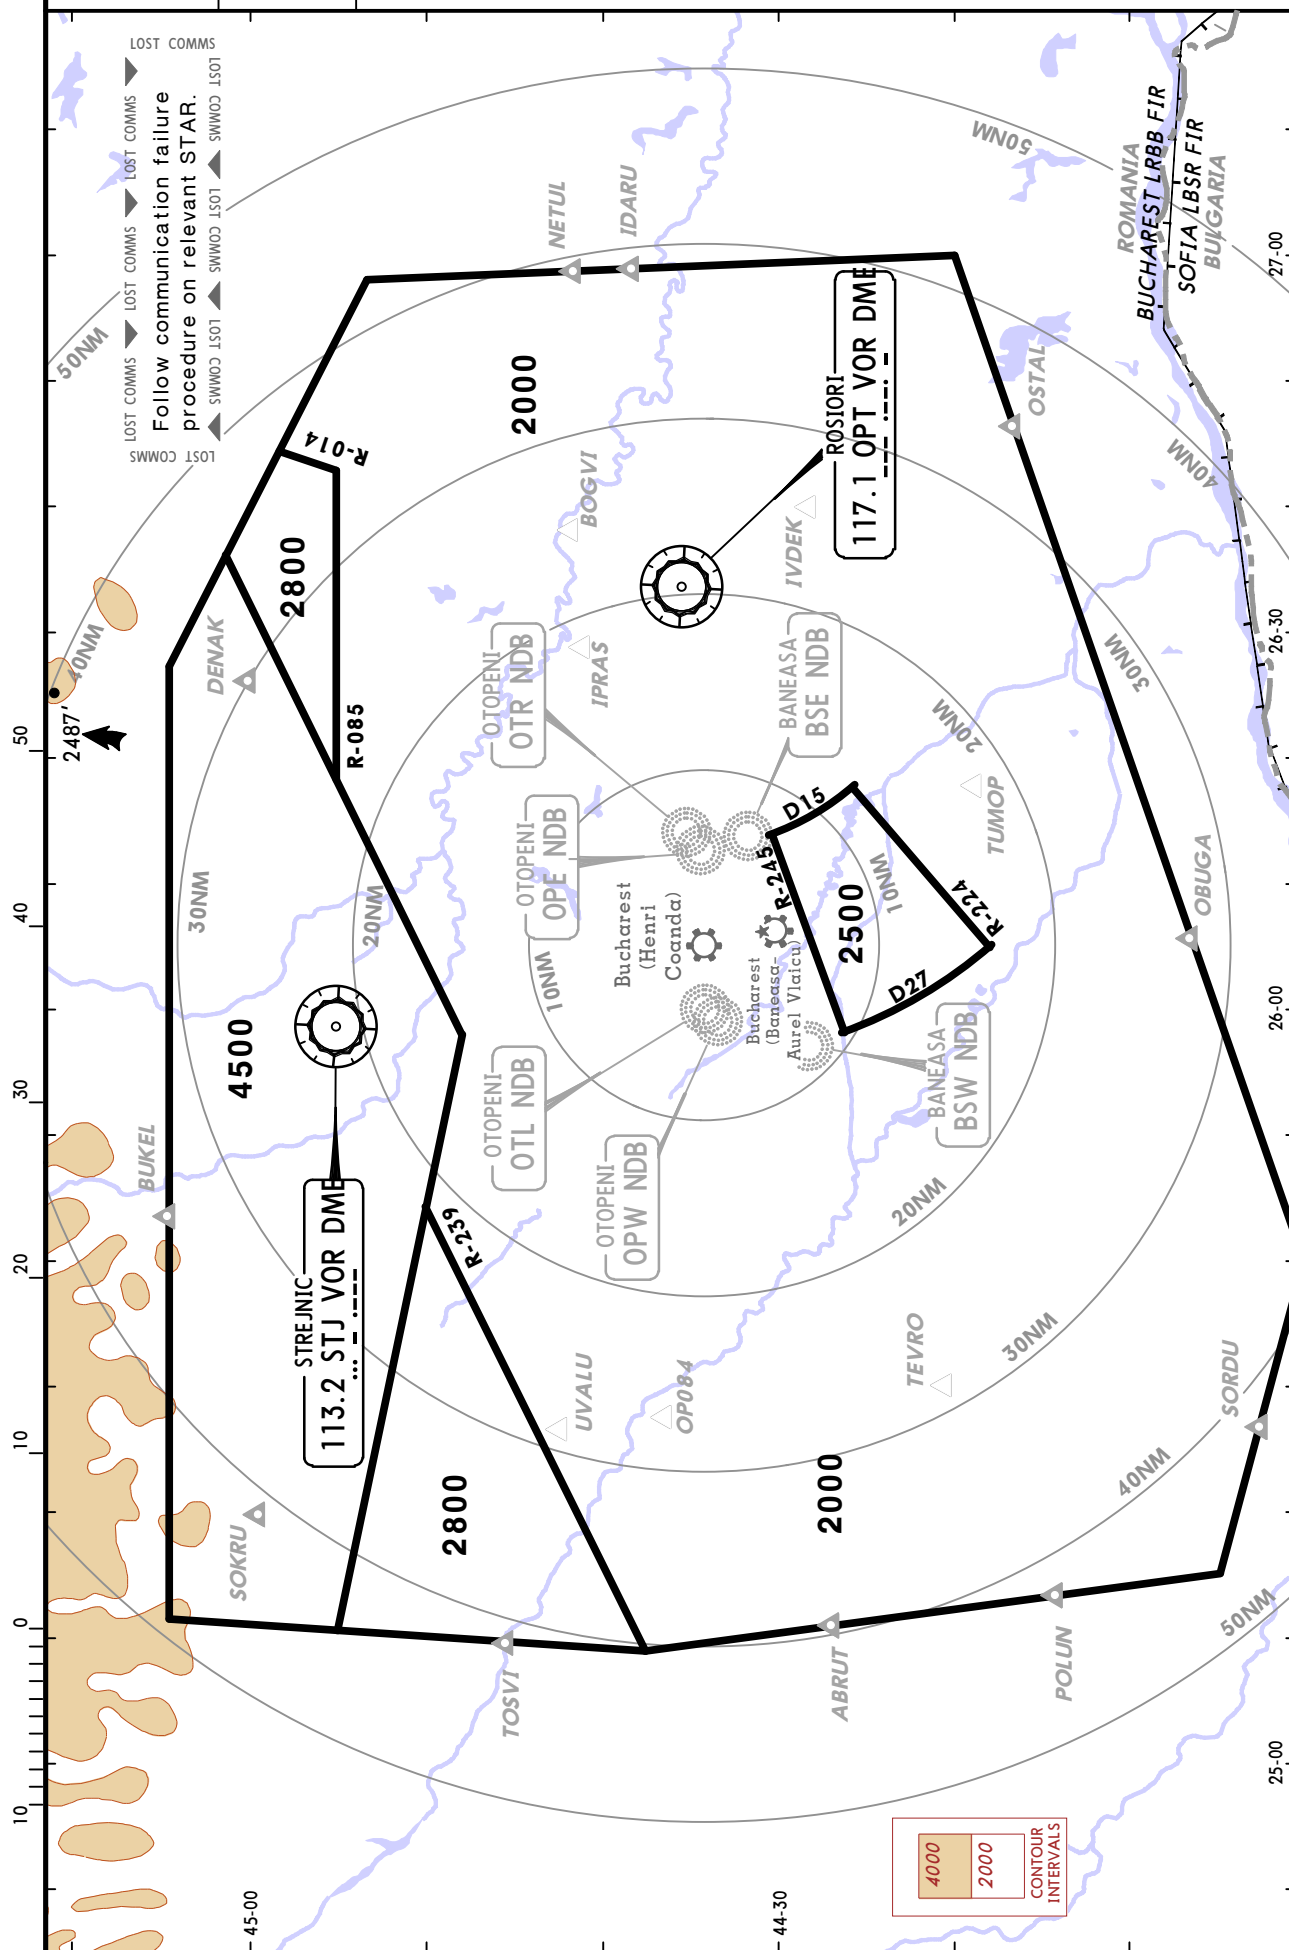

CHANGES: Sector and sector altitudes.

© JEPPESSEN, 2011, 2014. ALL RIGHTS RESERVED.


LROP/OTP
HENRI COANDA

JEPPesen
22 FEB 13 20-2 Eff 7 Mar

BUCHAREST, ROMANIA

RNAV STAR

ATIS 118.5	Alt Set: hPa (MM on request) Trans level: By ATC Trans alt: 4000' 1. Aircrews should plan for possible descent clearance in accordance with vertical restrictions specified on chart. Actual descent clearance will be as directed by ATC. 2. EXPECT direct routing/shortcuts by ATC whenever possible, including short-cuts on downwind to final approach. 3. 112.2 FLR, 117.1 OPT and 113.2 STJ must all be serviceable for DME/DME operation. 4. OBELA/DILAS is a tactical fix for non-standard shorter approach, used only after request or approval by aircrews.
Apt Elev 314'	

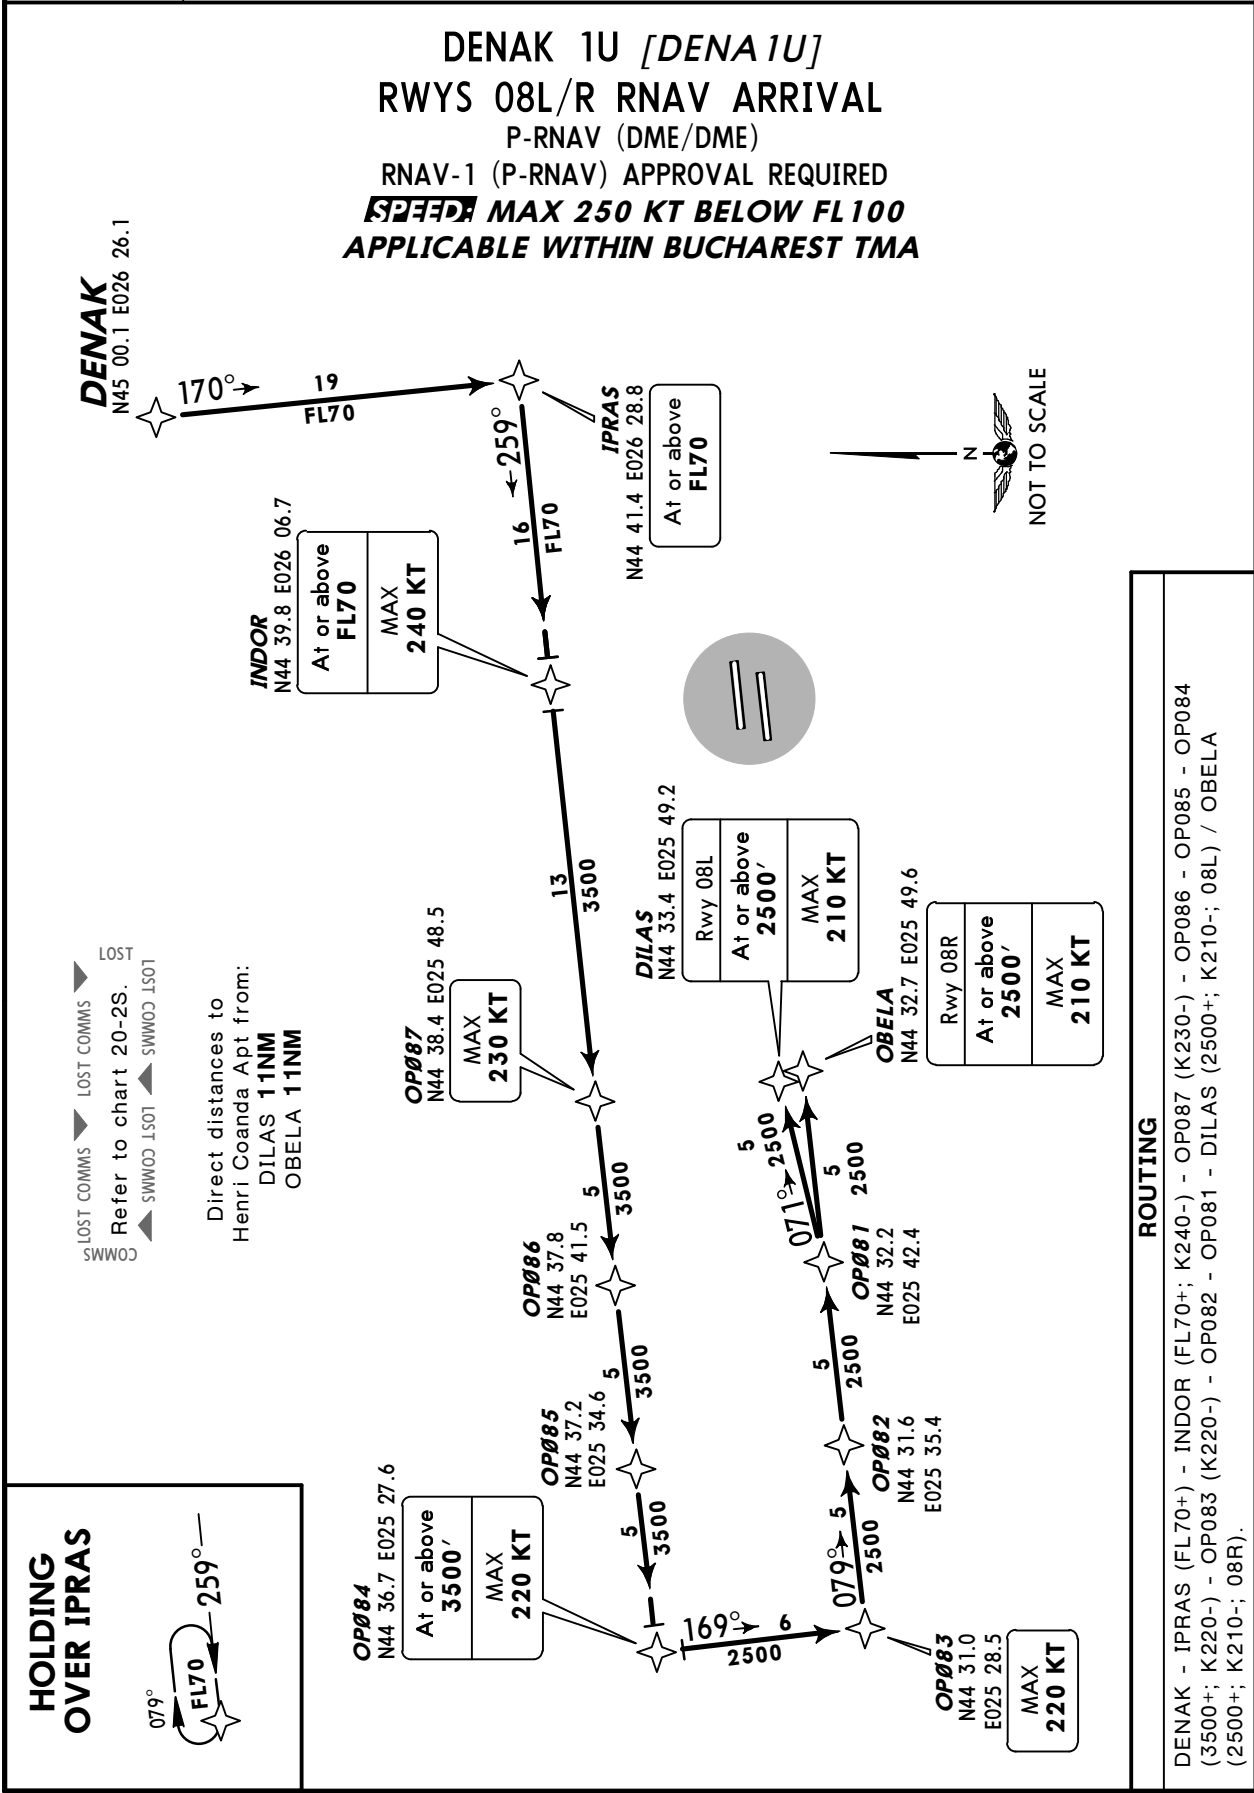

LROP/OTP
HENRI COANDA


JEPPESSEN
22 FEB 13 **(20-2A)** **Eff 7 Mar**

BUCHAREST, ROMANIA

RNAV STAR

ATIS 118.5	Alt Set: hPa (MM on request) Trans level: By ATC Trans alt: 4000' 1. Aircrews should plan for possible descent clearance in accordance with vertical restrictions specified on chart. Actual descent clearance will be as directed by ATC. 2. EXPECT direct routing/shortcuts by ATC whenever possible, including short-cuts on downwind to final approach. 3. 112.2 FLR, 117.1 OPT and 113.2 STJ must all be serviceable for DME/DME operation. 4. RARIT/LEVTA is a tactical fix for non-standard shorter approach, used only after request or approval by aircrews.
Apt Elev 314'	

DENAK 2X [DENA2X]
RWYS 26L/R RNAV ARRIVAL
P-RNAV (DME/DME)
RNAV-1 (P-RNAV) APPROVAL REQUIRED
~~SPEED~~ MAX 250 KT BELOW FL100
APPLICABLE WITHIN BUCHAREST TMA

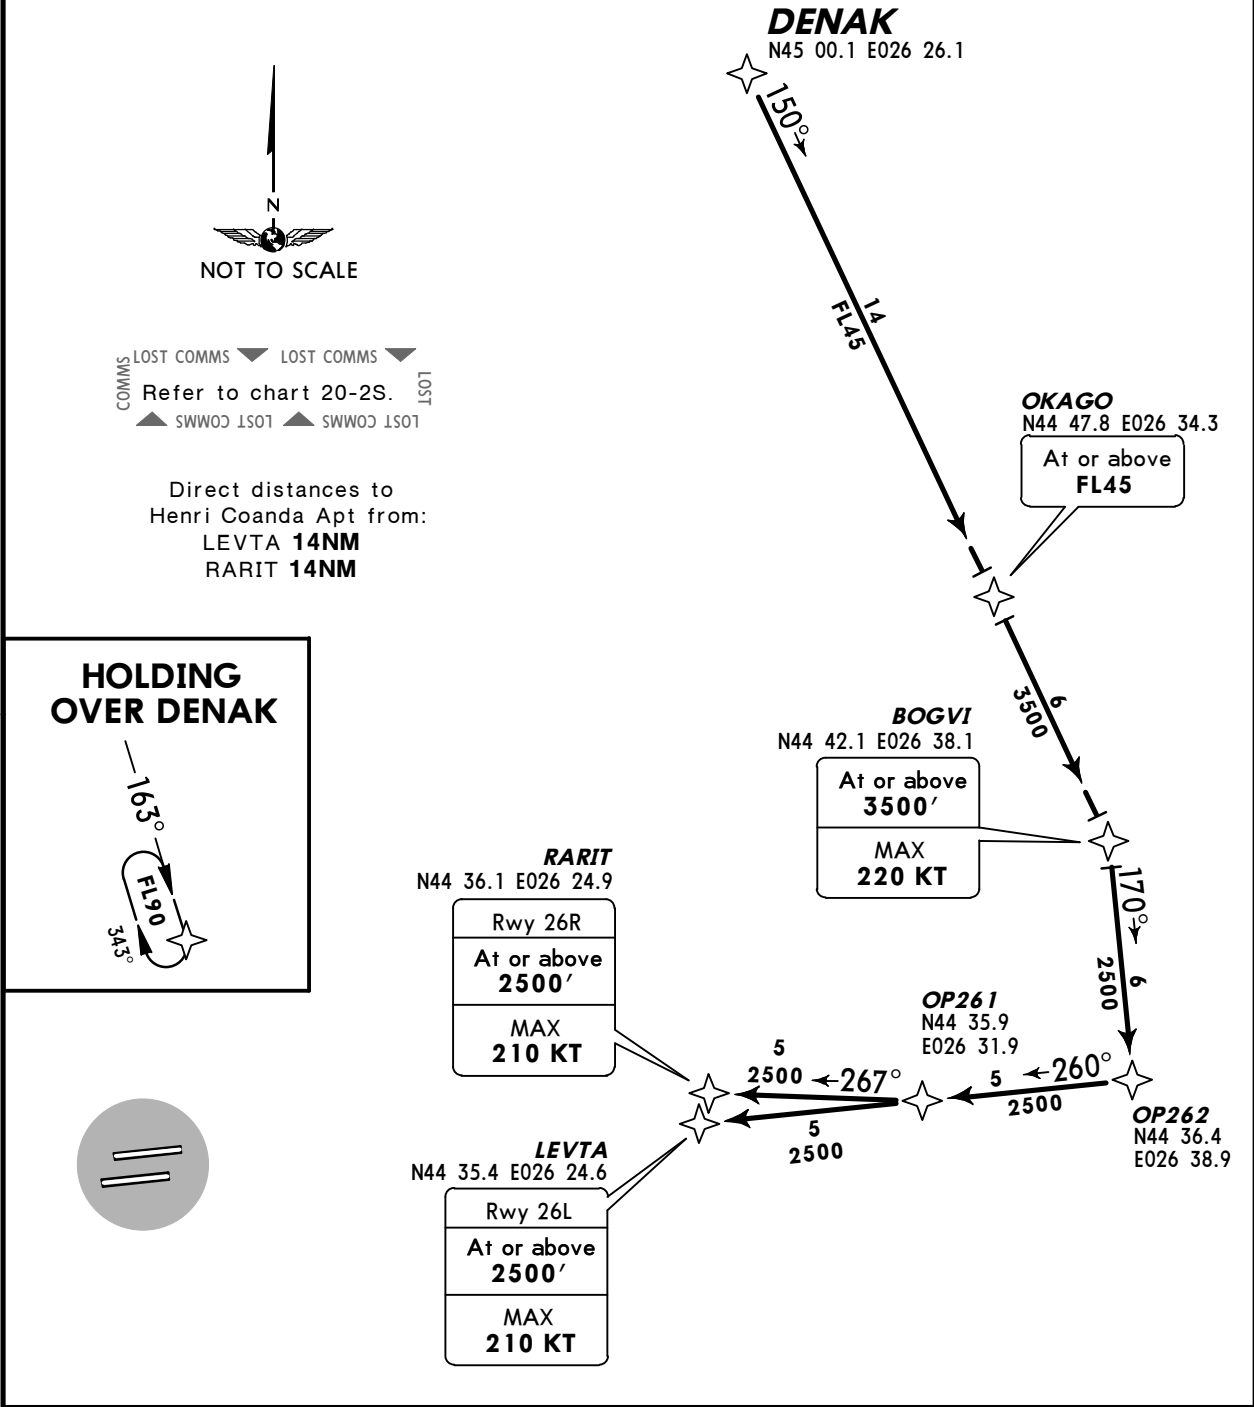

LROP/OTP
HENRI COANDA


22 MAR 13

20-2B

Eff 4 Apr

BUCHAREST, ROMANIA

RNAV STAR

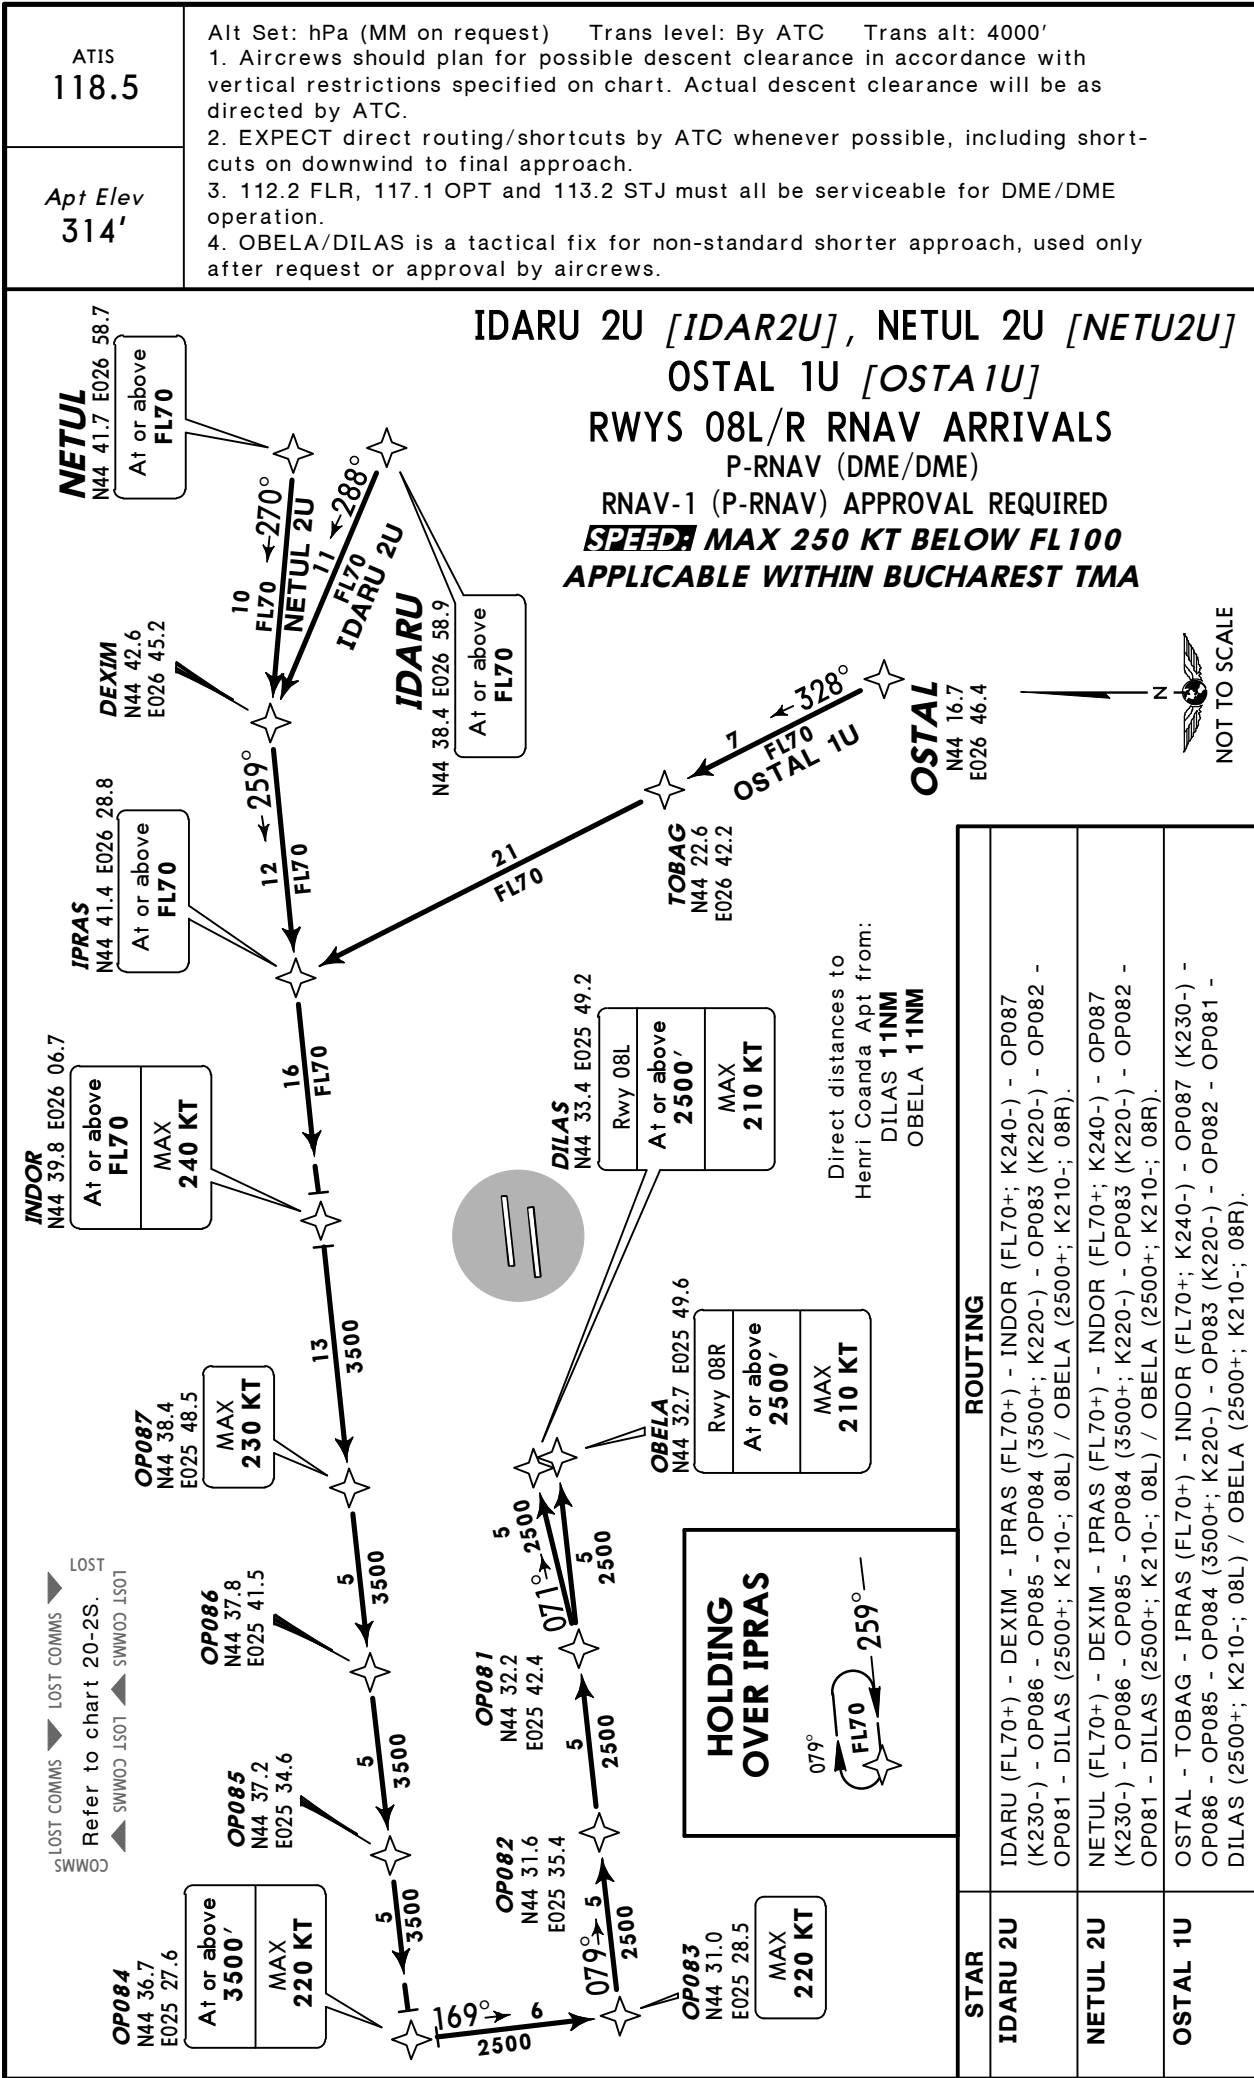

LROP/OTP
HENRI COANDA

1 FEB 13


20-2D

Eff 7 Feb

BUCHAREST, ROMANIA

RNAV STAR

ATIS 118.5	Alt Set: hPa (MM on request) Trans level: By ATC Trans alt: 4000' 1. Aircrews should plan for possible descent clearance in accordance with vertical restrictions specified on chart. Actual descent clearance will be as directed by ATC. 2. EXPECT direct routing/shortcuts by ATC whenever possible, including short-cuts on downwind to final approach. 3. 112.2 FLR, 117.1 OPT and 113.2 STJ must all be serviceable for DME/DME operation. 4. OBELA/DILAS is a tactical fix for non-standard shorter approach, used only after request or approval by aircrews.
Apt Elev 314'	

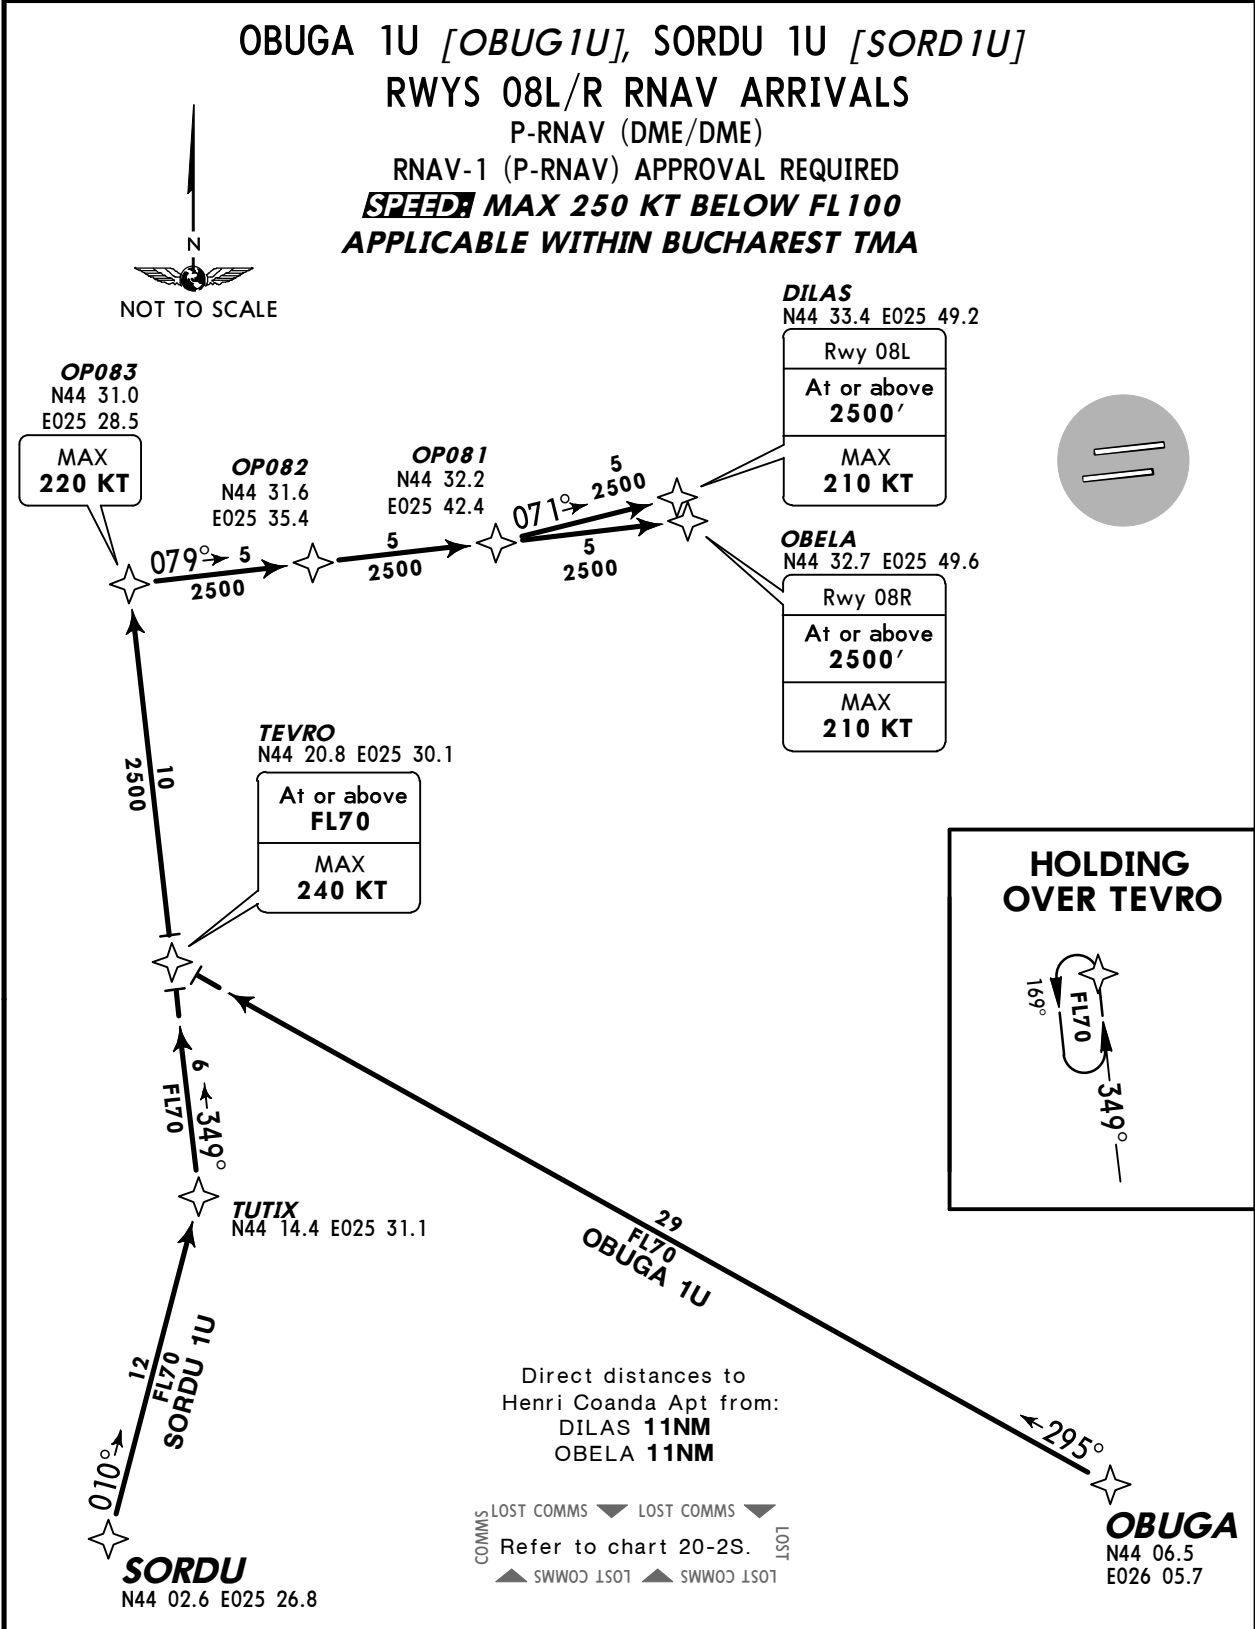


STAR	ROUTING
OBUGA 1U	OBUGA - TEVRO (FL70+; K240-) - OP083 (K220-) - OP082 - OP081 - DILAS (2500+; K210-; 08L) / OBELA (2500+; K210-; 08R).
SORDU 1U	SORDU - TUTIX - TEVRO (FL70+; K240-) - OP083 (K220-) - OP082 - OP081 - DILAS (2500+; K210-; 08L) / OBELA (2500+; K210-; 08R).

LROP/OTP
HENRI COANDA

JEPPESSEN BUCHAREST, ROMANIA
1 FEB 13 (20-2E) Eff 7 Feb RNAV STAR

ATIS 118.5	Alt Set: hPa (MM on request) Trans level: By ATC Trans alt: 4000' 1. Aircrews should plan for possible descent clearance in accordance with vertical restrictions specified on chart. Actual descent clearance will be as directed by ATC. 2. EXPECT direct routing/shortcuts by ATC whenever possible, including short-cuts on downwind to final approach. 3. 112.2 FLR, 117.1 OPT and 113.2 STJ must all be serviceable for DME/DME operation. 4. RARIT/LEVTA is a tactical fix for non-standard shorter approach, used only after request or approval by aircrews.
Apt Elev 314'	

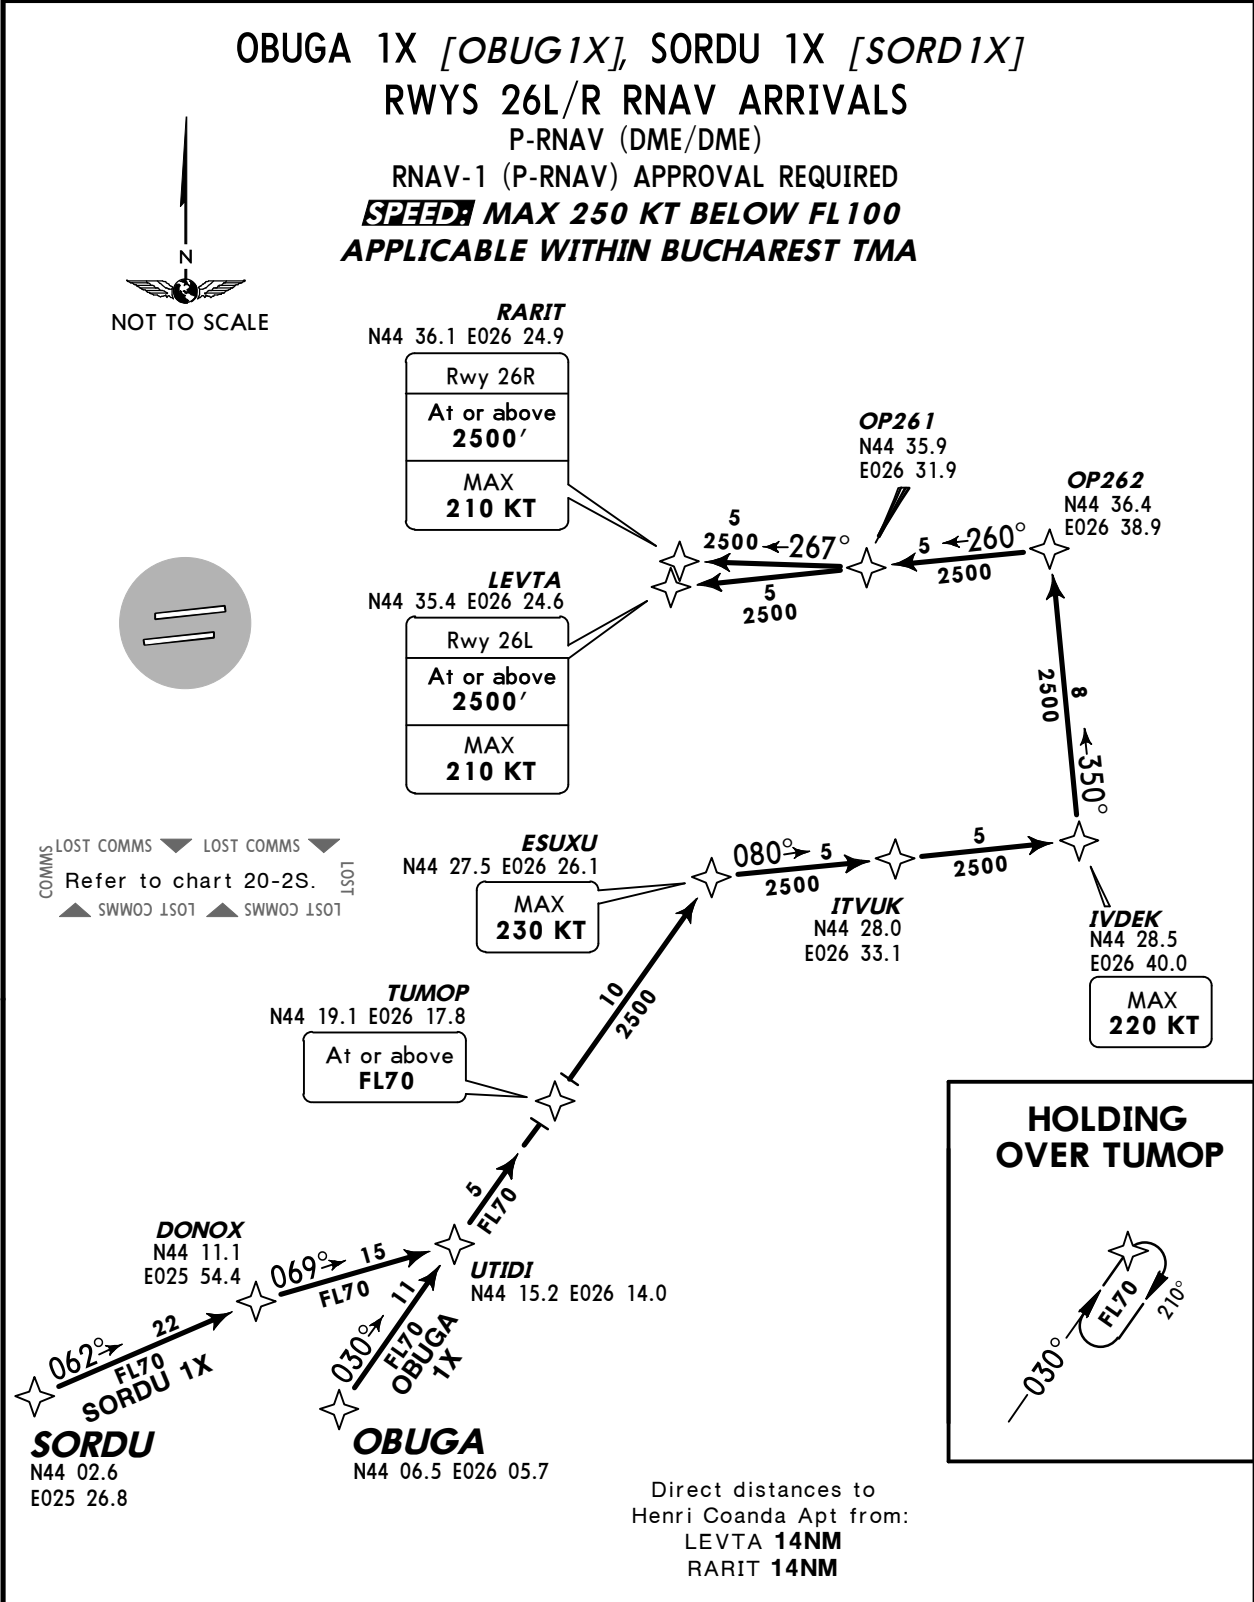

STAR	ROUTING
OBUGA 1X	OBUGA - UTIDI - TUMOP (FL70+) - ESUXU (K230-) - ITVUK - IVDEK (K220-) - OP262 - OP261 - LEVTA (2500+; K210-; 26L) / RARIT (2500+; K210-; 26R).
SORDU 1X	SORDU - DONOX - UTIDI - TUMOP (FL70+) - ESUXU (K230-) - ITVUK - IVDEK (K220-) - OP262 - OP261 - LEVTA (2500+; K210-; 26L) / RARIT (2500+; K210-; 26R).

LROP/OTP
HENRI COANDA


5 SEP 14

20-2F

BUCHAREST, ROMANIA
RNAV STAR

ATIS 118.5	Alt Set: hPa (MM on request) Trans level: By ATC Trans alt: 4000' 1. Aircrews should plan for possible descent clearance in accordance with vertical restrictions specified on chart. Actual descent clearance will be as directed by ATC. 2. EXPECT direct routing/shortcuts by ATC whenever possible, including short-cuts on downwind to final approach. 3. 112.2 FLR, 117.1 OPT and 113.2 STJ must all be serviceable for DME/DME operation. 4. OBELA/DILAS is a tactical fix for non-standard shorter approach, used only after request or approval by aircrews.
Apt Elev 314'	

TOSVI 2U [TOSV2U]
RWYS 08L/R RNAV ARRIVAL
P-RNAV (DME/DME)
RNAV-1 (P-RNAV) APPROVAL REQUIRED
~~SPEED~~ MAX 250 KT BELOW FL100
APPLICABLE WITHIN BUCHAREST TMA

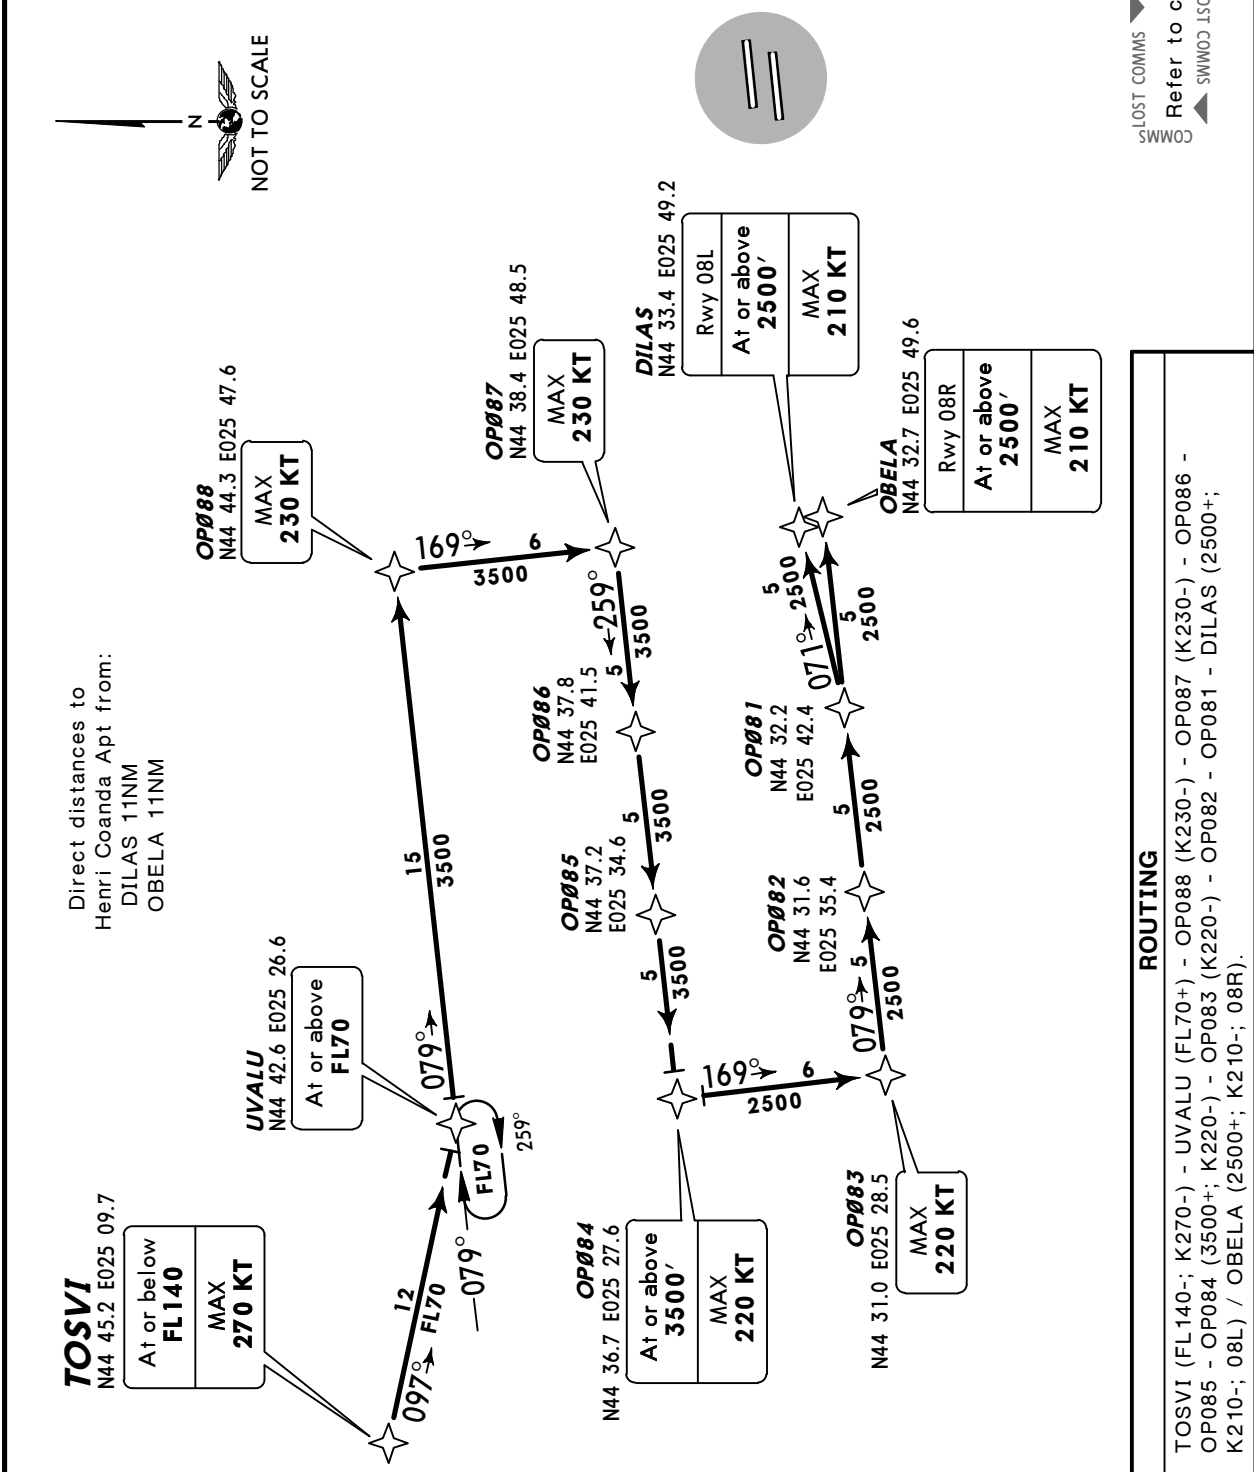

ROUTING


TOSVI (FL140-; K270-) - UVALU (FL70+) - OP088 (K230-) - OP087 (K230-) - OP086 - OP085 - OP084 (3500+; K220-) - OP083 (K220-) - OP082 - OP081 - DILAS (2500+; K210-; 08L) / OBELA (2500+; K210-; 08R).

LROP/OTP
HENRI COANDA

5 SEP 14
20-2G

BUCHAREST, ROMANIA
RNAV STAR

ATIS 118.5	Alt Set: hPa (MM on request) Trans level: By ATC Trans alt: 4000' 1. Aircrews should plan for possible descent clearance in accordance with vertical restrictions specified on chart. Actual descent clearance will be as directed by ATC. 2. EXPECT direct routing/shortcuts by ATC whenever possible, including short-cuts on downwind to final approach. 3. 112.2 FLR, 117.1 OPT and 113.2 STJ must all be serviceable for DME/DME operation. 4. RARIT/LEVTA is a tactical fix for non-standard shorter approach, used only after request or approval by aircrews.
Apt Elev 314'	

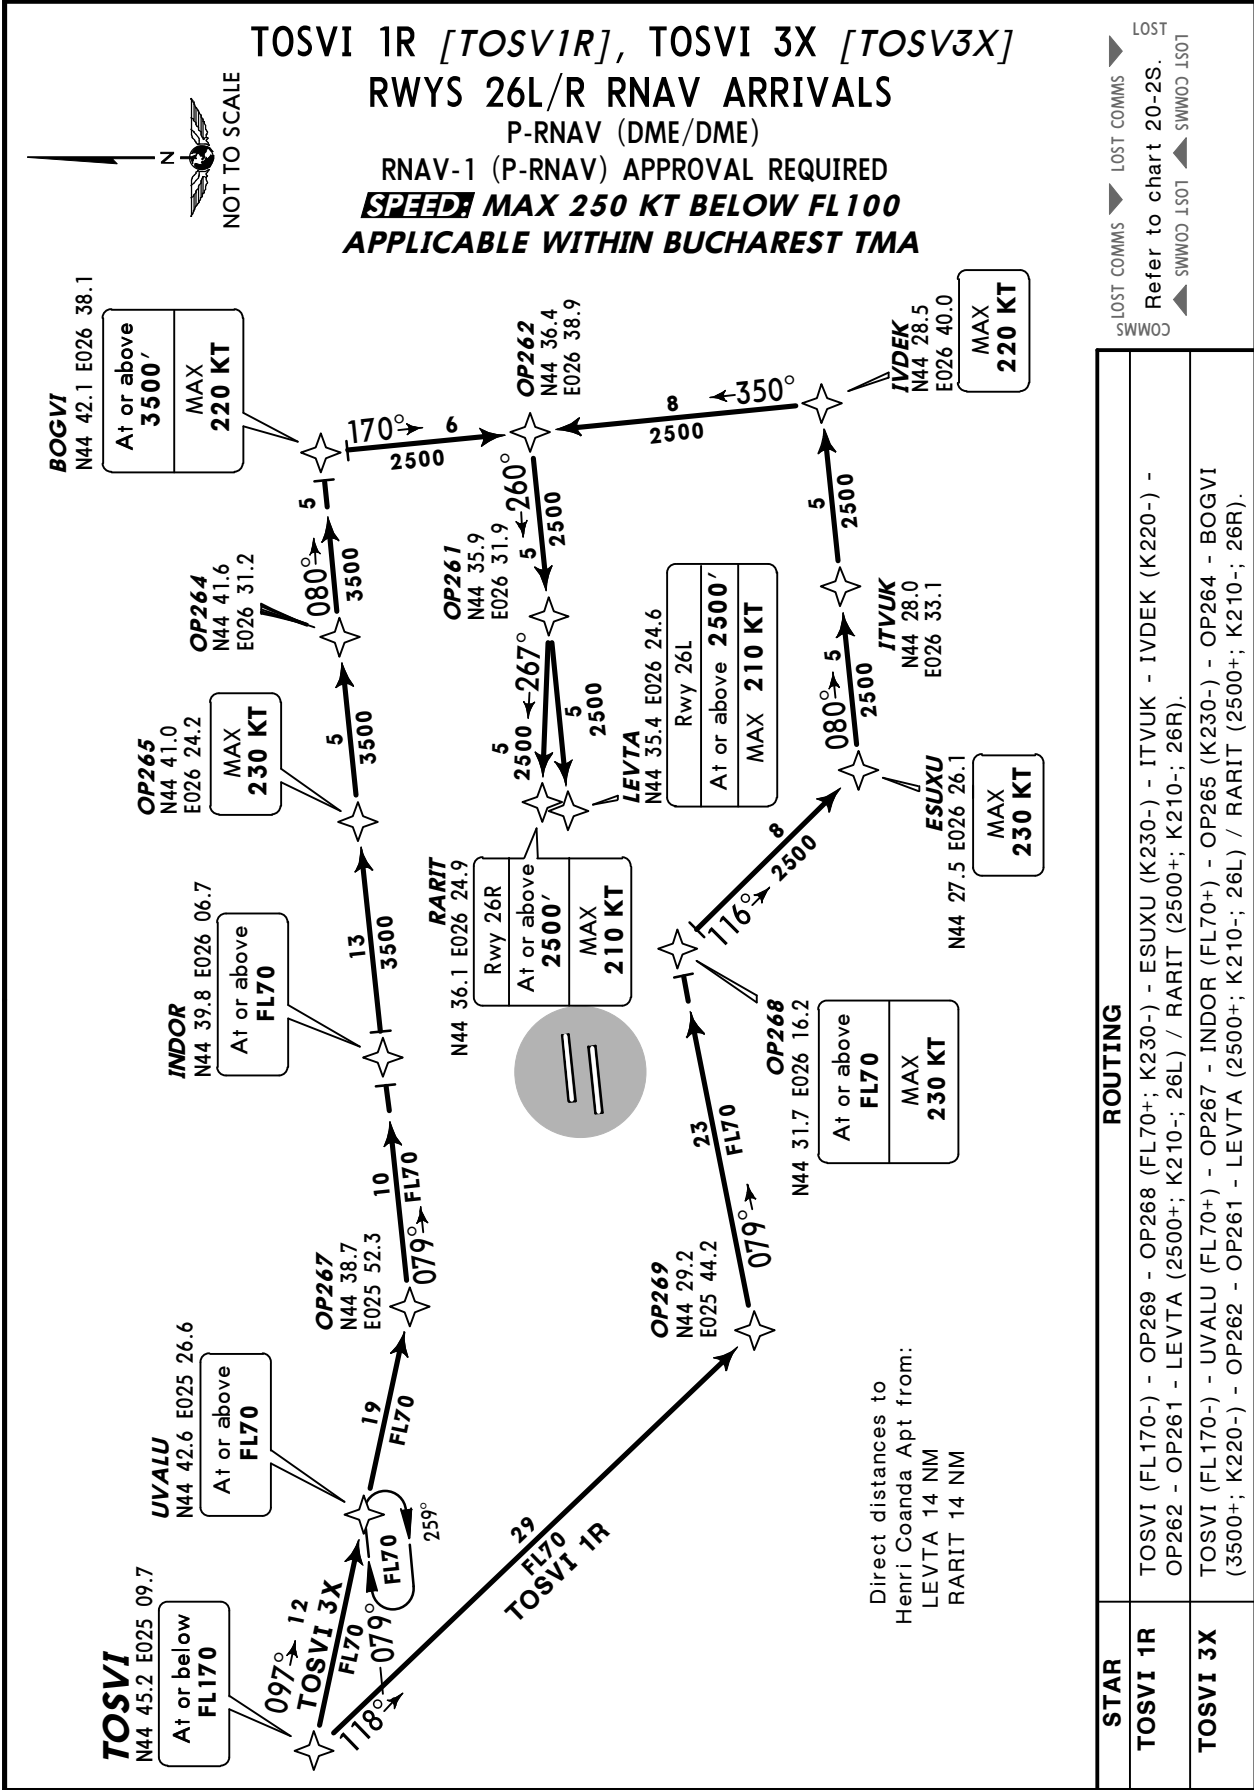

LROP/OTP
HENRI COANDA

JEPPESSEN

BUCHAREST, ROMANIA

1 FEB 13

20-2H

Eff 7 Feb

STAR


ATIS
118.5

Apt Elev
314'

Alt Set: hPa (MM on request)
Trans level: By ATC Trans alt: 4000'

DENAK 3E [DENA3E]
RWYS 08L/R ARRIVAL
~~SPEED~~ MAX 250 KT BELOW FL100
APPLICABLE WITHIN BUCHAREST TMA

COMMS LOST COMMS LOST COMMS LOST
Refer to chart 20-2S.
▲ SWWOC 1S01 ▲ SWWOC 1S01

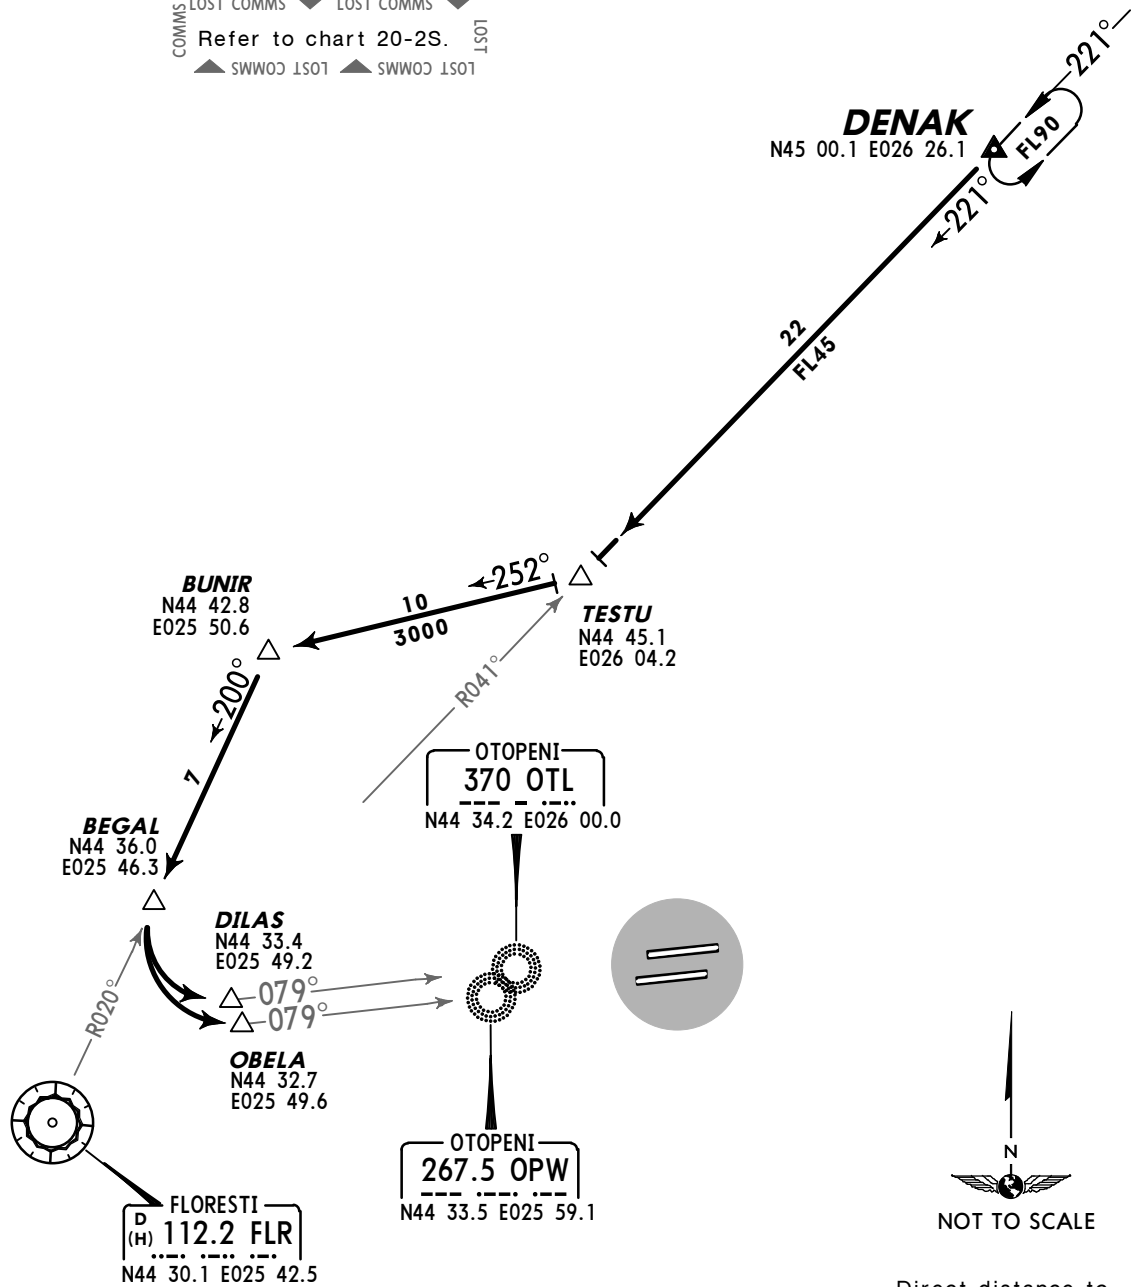

ROUTING

Intercept FLR R-041 inbound to TESTU, 252° track to BUNIR, intercept FLR R-020 inbound to BEGAL, turn LEFT to DILAS (Rwy 08L) or OBELA (Rwy 08R).

LROP/OTP
HENRI COANDA

JEPPESSEN

BUCHAREST, ROMANIA

1 FEB 13

20-2J

Eff 7 Feb

STAR

ATIS
118.5

Apt Elev
314'


Alt Set: hPa (MM on request)
Trans level: By ATC Trans alt: 4000'

DENAK 3F [DENA3F]
RWYS 26L/R ARRIVAL
~~SPEED~~ MAX 250 KT BELOW FL100
APPLICABLE WITHIN BUCHAREST TMA



COMMS LOST COMMS LOST COMMS LOST
Refer to chart 20-2S.
▲ SWW03 1501 ▲ SWW03 1501

Direct distance to
Henri Coanda Apt from:
LEVTA 14 NM
RARIT 14 NM



OTOPENI
318 OTR
N44 35.3 E026 14.1

OTOPENI
349 OPE
N44 34.5 E026 12.7


RARIT
N44 36.1 E026 24.9

LEVTA
N44 35.4 E026 24.6

DENAK
N45 00.1 E026 26.1
FL90
163°
163°

FL45
22

LUROD
N44 38.5 E026 32.7



ROSIORI
D (H) 117.1 OPT
N44 35.6 E026 33.6

ROUTING

Intercept OPT R-343 inbound to LUROD, turn RIGHT, intercept 259° bearing towards OPE to LEVTA (Rwy 26L) or towards OTR to RARIT (Rwy 26R).

LROP/OTP
HENRI COANDA

JEPPESSEN


BUCHAREST, ROMANIA

1 FEB 13

20-2K

Eff 7 Feb

STAR

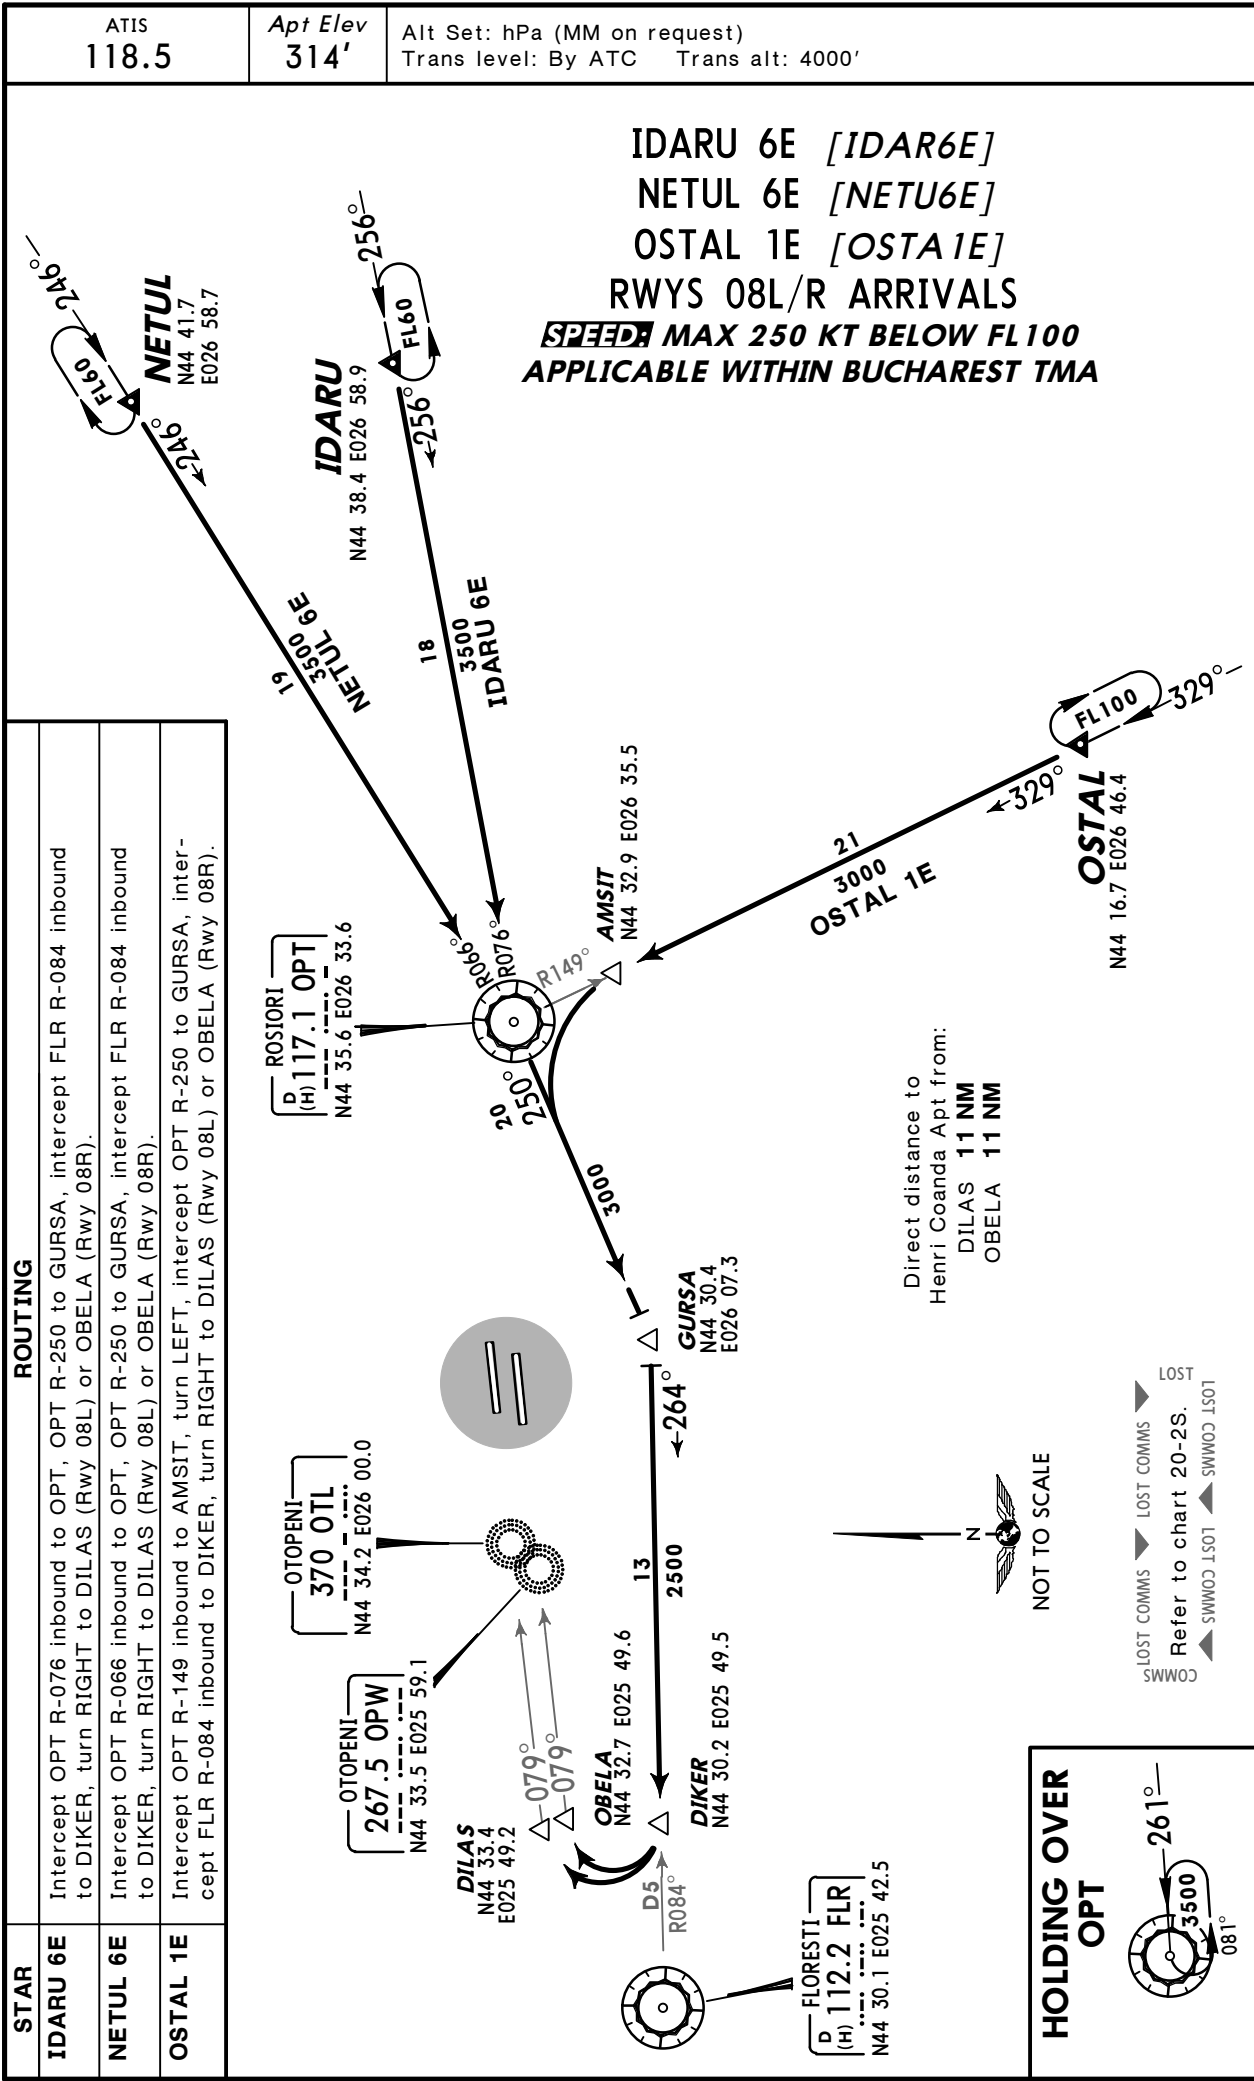

LROP/OTP
HENRI COANDA

JEPPESSEN


BUCHAREST, ROMANIA

1 FEB 13

20-2L

Eff 7 Feb

STAR

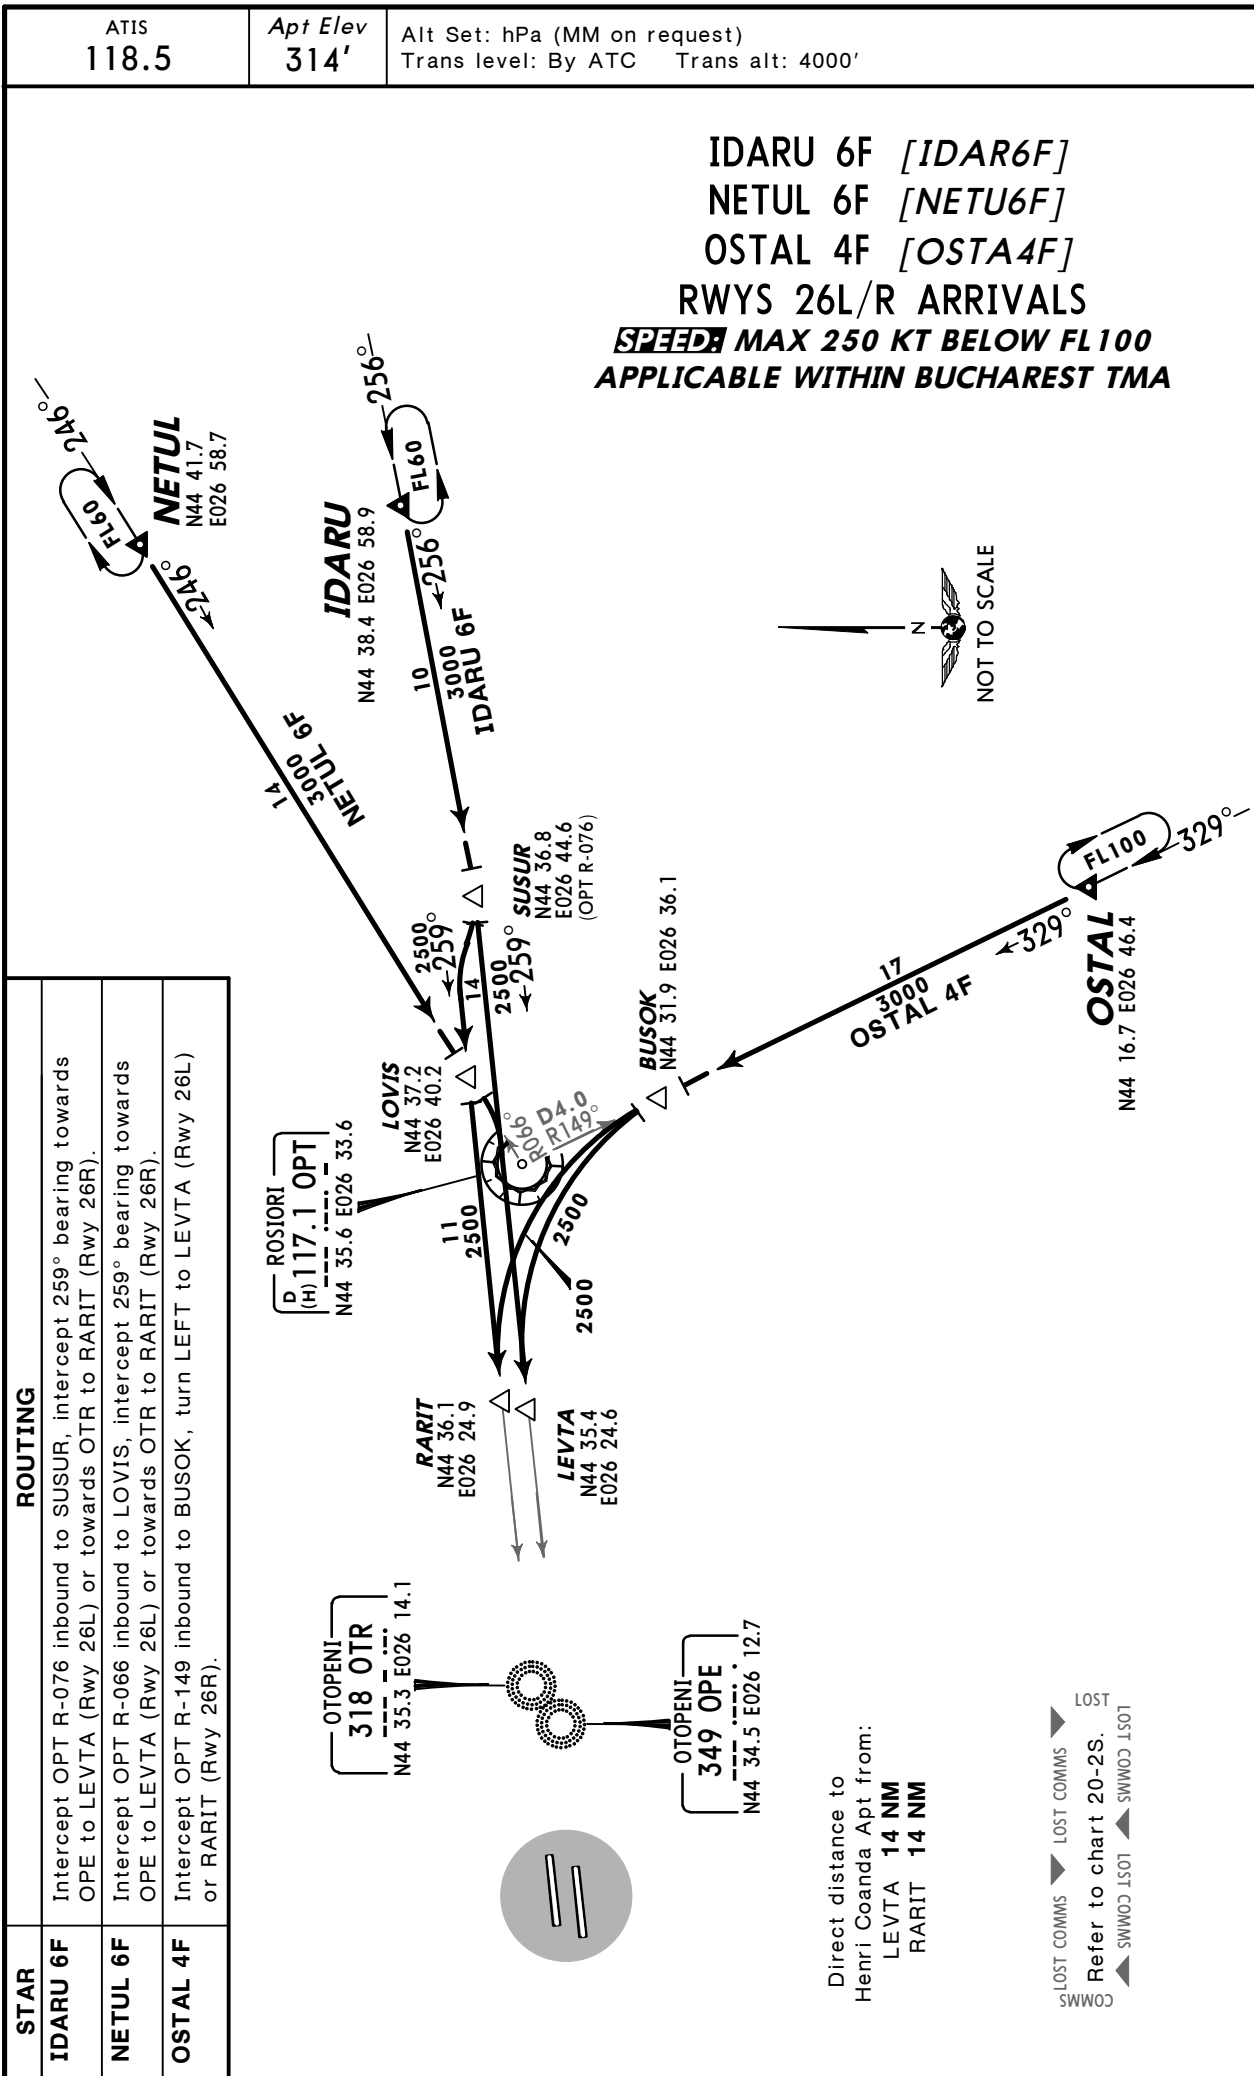

LROP/OTP
HENRI COANDA

JEPPesen

BUCHAREST, ROMANIA

1 FEB 13

20-2N

Eff 7 Feb

STAR

ATIS
118.5


Apt Elev
314'

Alt Set: hPa (MM on request)
Trans level: By ATC Trans alt: 4000'

OBUGA 5F [OBUG5F]
SORDU 3F [SORD3F]
RWYS 26L/R ARRIVALS
~~SPEED~~ MAX 250 KT BELOW FL100
APPLICABLE WITHIN BUCHAREST TMA

COMMS LOST COMMS LOST COMMS
Refer to chart 20-2S.
▲ SWWOC LSOT ▲ SWWOC LSOT

Direct distance to
Henri Coanda Apt from:
LEVTA 14 NM
RARIT 14 NM

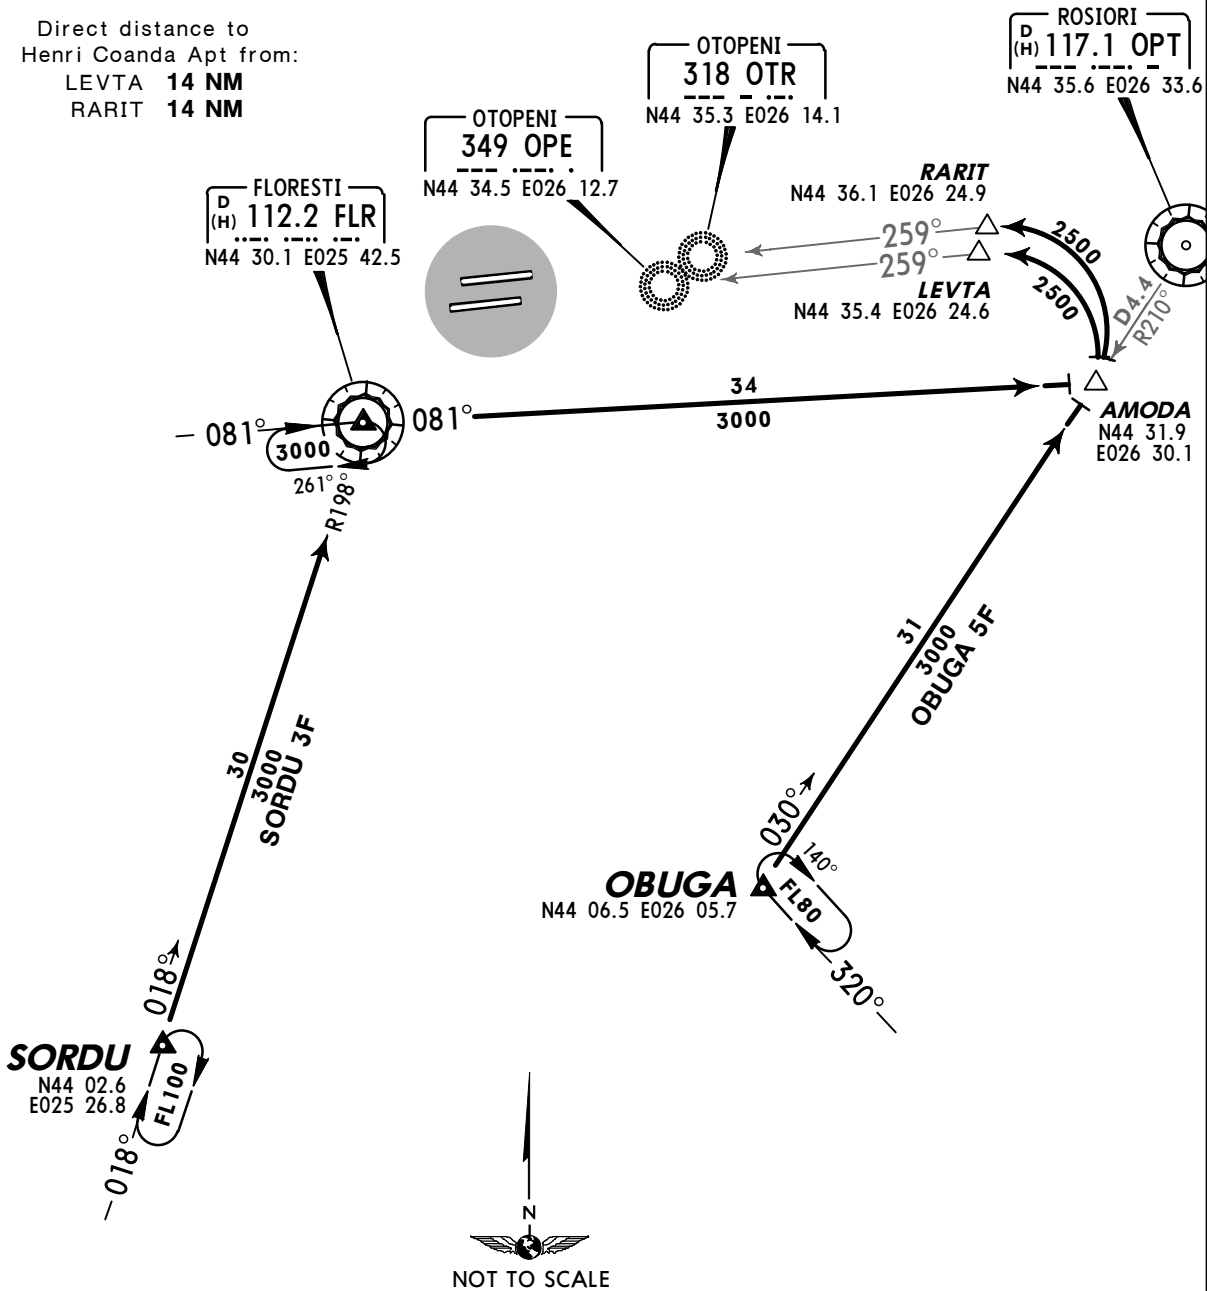

STAR	ROUTING
OBUGA 5F	Intercept OPT R-210 inbound to AMODA, turn LEFT to LEVTA (Rwy 26L) or RARIT (Rwy 26R).
SORDU 3F	Intercept FLR R-198 inbound to FLR, turn RIGHT, FLR R-081 to AMODA, turn LEFT to LEVTA (Rwy 26L) or RARIT (Rwy 26R).

LROP/OTP
HENRI COANDA

JEPPesen

BUCHAREST, ROMANIA

1 FEB 13

20-2P

Eff 7 Feb


STAR

ATIS
118.5

Apt Elev
314'

Alt Set: hPa (MM on request)
Trans level: By ATC Trans alt: 4000'

TOSVI 1E [TOSV1E]
RWYS 08L/R ARRIVAL
~~SPEED~~ MAX 250 KT BELOW FL100
APPLICABLE WITHIN BUCHAREST TMA

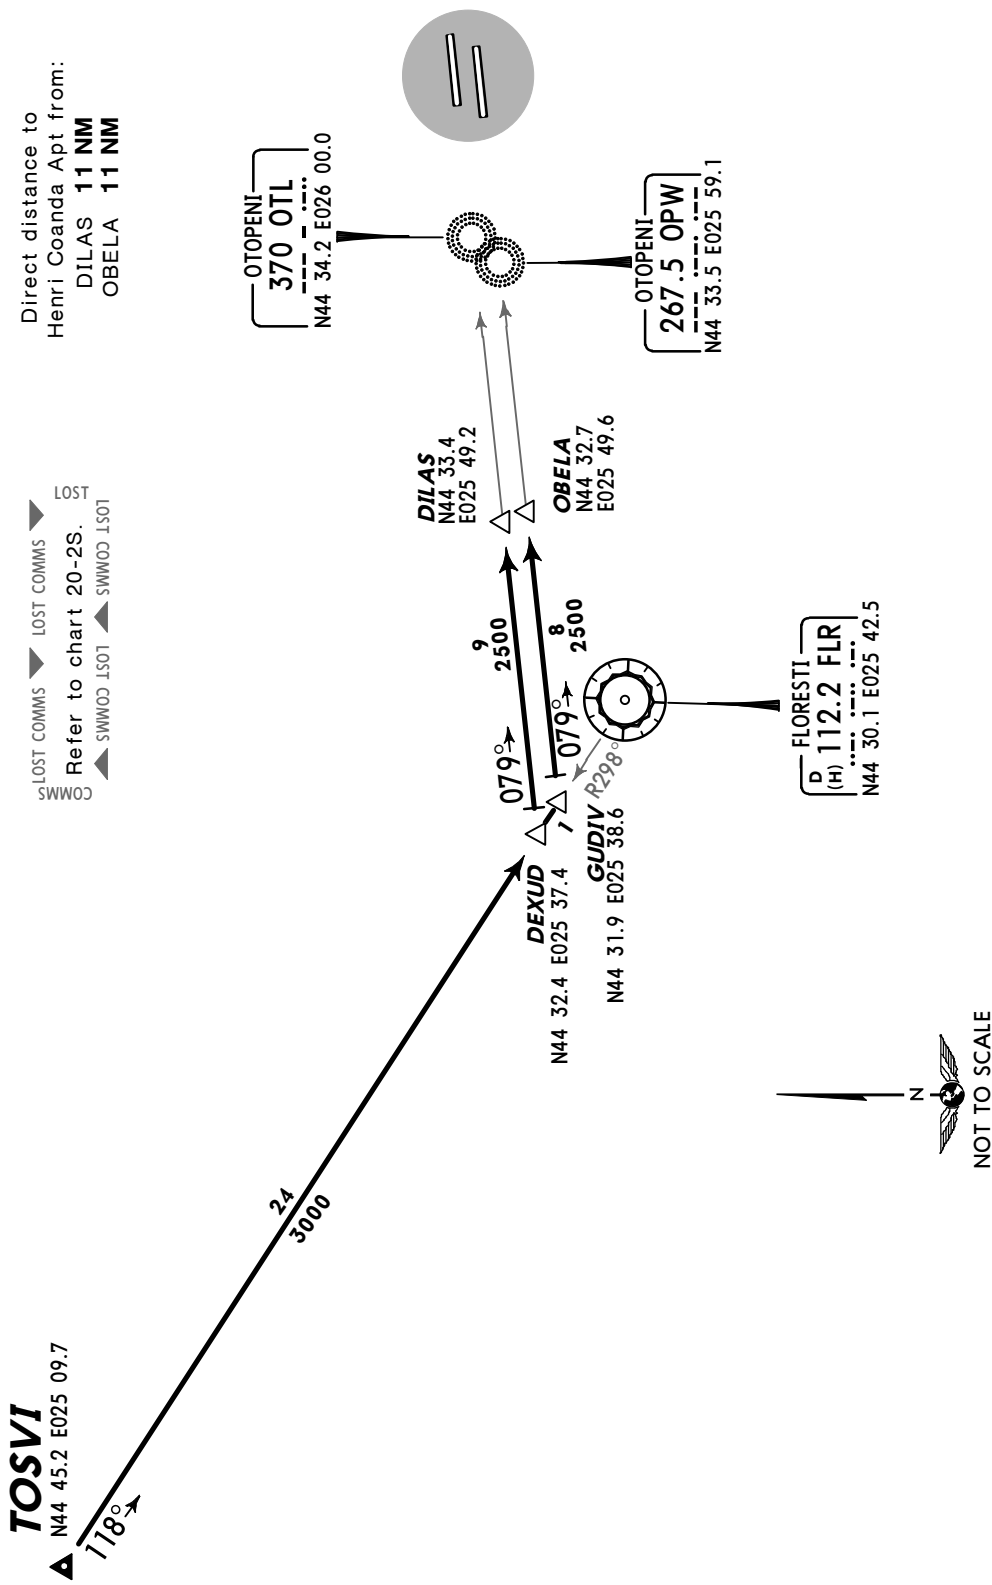

LOST COMMS
Refer to chart 20-2S.
LOST COMMS
Refer to chart 20-2S.
LOST COMMS
Refer to chart 20-2S.

ROUTING

Intercept FLR R-298 inbound to DEXUD (Rwy 08L) or GUDIV (Rwy 08R), intercept 079° bearing towards OTL to DILAS (Rwy 08L) or towards OPW to OBELA (Rwy 08R).

LROP/OTP
HENRI COANDA

1 FEB 13 20-2Q

Eff 7 Feb

BUCHAREST, ROMANIA


STAR

ATIS
118.5

Apt Elev
314'

Alt Set: hPa (MM on request)
Trans level: By ATC Trans alt: 4000'

TOSVI 1F [TOSV1F]
RWYS 26L/R ARRIVAL
~~SPEED~~ MAX 250 KT BELOW FL100
APPLICABLE WITHIN BUCHAREST TMA

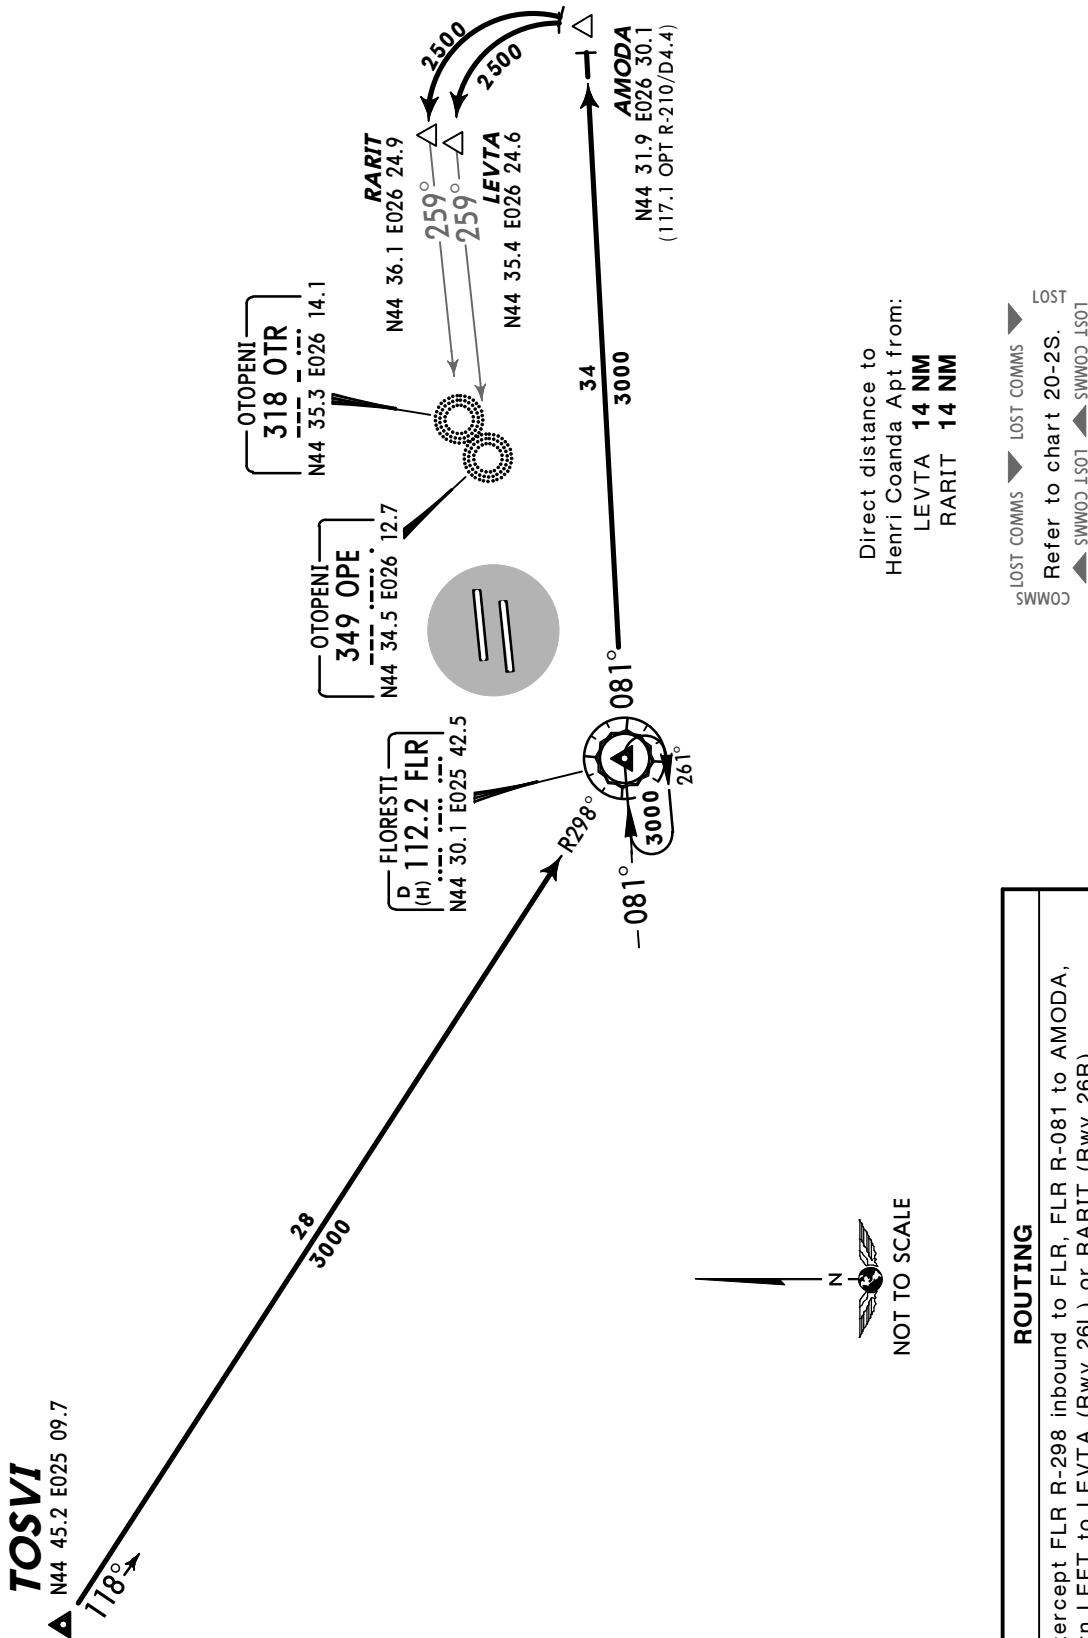

LROP/OTP
HENRI COANDA

JEPPesen
1 FEB 13

20-2S

Eff 7 Feb

BUCHAREST, ROMANIA

STAR


COMMUNICATION FAILURE PROCEDURES

1. FLIGHTS ABLE TO PERFORM RNAV ARRIVAL

- if RWY was assigned or received by ATC or ATIS, set transponder 7600, proceed according FPL and assigned or designated STAR. Descending shall be executed in accordance with vertical restrictions specified on chart after 2 min from setting 7600.
- if RWY was assigned or received by ATC or ATIS and vectoring was initiated, set transponder 7600 and continue on assigned heading and last cleared and acknowledged altitude for 2 min from setting 7600. Then proceed direct to OBELA(RWY 08R)/DILAS(RWY08L) or RARIT(RWY 26R)/LEVTA(RWY 26L). Descending shall be executed in accordance with minimum altitude of BUCHAREST TMA or vertical restrictions specified on 20-1R, whichever is greater, but not less than 2500'.
- if STAR was not assigned and RWY not assigned or received by ATC or ATIS, set transponder 7600, proceed according to FPL and FPL STAR. Descending shall be executed in accordance with vertical restrictions specified on chart after 2 min from setting 7600.

2. FLIGHTS UNABLE TO PERFORM RNAV ARRIVAL

- if RWY was assigned or received by ATC or ATIS, set transponder 7600, proceed according FPL and assigned or designated STAR. Descending shall be executed in accordance with vertical restrictions specified on chart after 2 min from setting 7600.
- if RWY was assigned or received by ATC or ATIS and vectoring was initiated, set transponder 7600 and continue on assigned heading and last cleared and acknowledged altitude for 2 min from setting 7600. Then proceed direct to FLR VOR/DME, then to OBELA (RWY 08R)/DILAS (RWY08L) or direct to OPT VOR/DME, then OPT R-264 to LEVTA (RWY 26L)/OPT R-270 to RARIT (RWY 26R). Descending shall be executed in accordance with minimum altitude of BUCHAREST TMA or vertical restrictions specified on 20-1R, whichever is greater, but not less than 2500'.
- if STAR was not assigned and RWY not assigned or received by ATC or ATIS, set transponder 7600, proceed according to FPL and FPL STAR. Descending shall be executed in accordance with vertical restrictions specified on chart after 2 min from setting 7600.

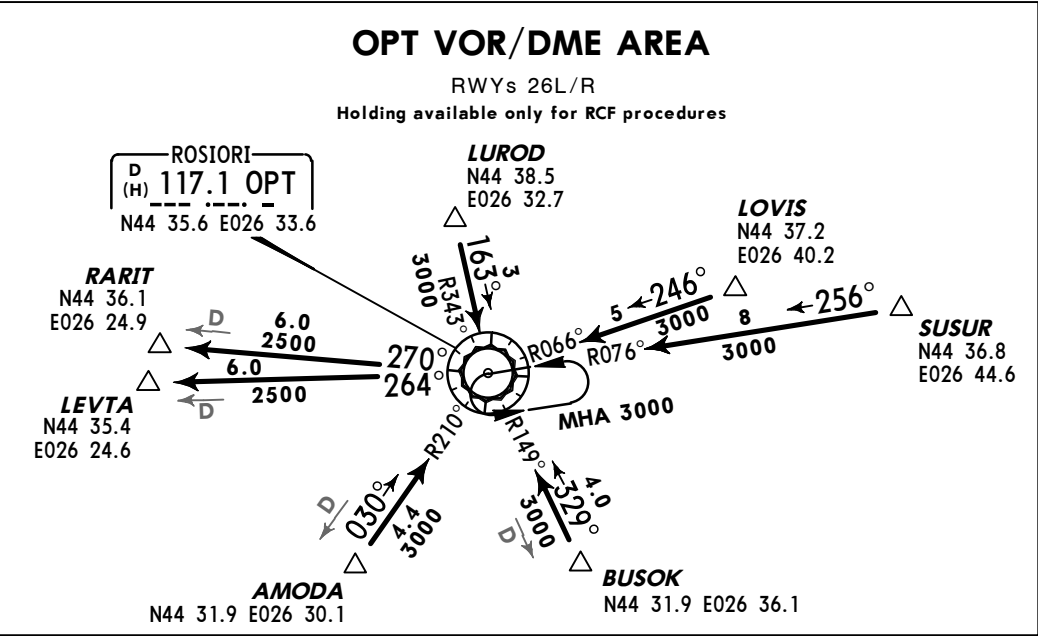

LROP/OTP
HENRI COANDA


JEPPESSEN
9 MAY 14 20-3

BUCHAREST, ROMANIA
RNAV SID

Apt Elev
314'

Trans level: By ATC Trans alt: 4000'
1. 112.2 FLR, 117.1 OPT and 113.2 STJ must all be serviceable for DME/DME operation.
2. Aircraft unable to achieve SID profile restrictions must request non-standard departure from ATC before start-up.

BUKEL 1K [BUKE1K]
RWYS 08L/R RNAV DEPARTURE
RNAV (DME/DME)
RNAV-1 (P-RNAV) APPROVAL REQUIRED
NOT AVAILABLE FOR TRAFFIC TO NEPOT

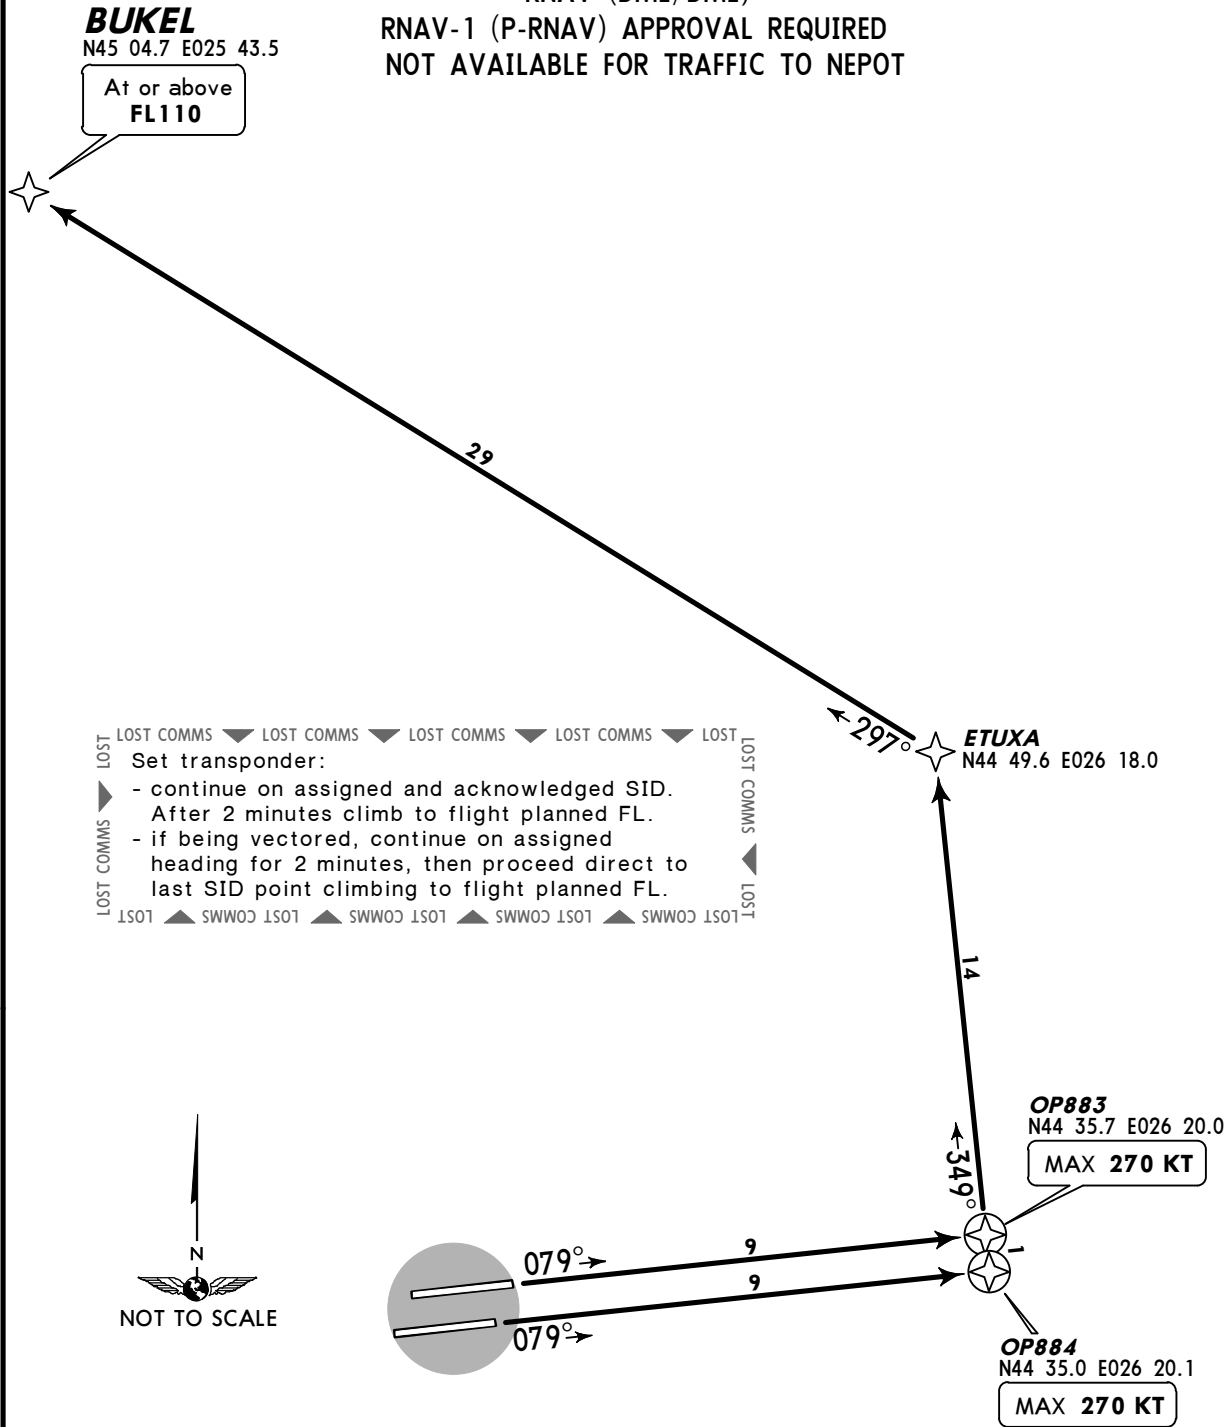

This SID requires a minimum climb gradient of 3.5% until BUKEL due to airspace structure.

Gnd speed-KT	75	100	150	200	250	300
3.5% V/V(fpm)	266	354	532	709	886	1063

If unable to comply, contact ATC before start-up.

ROUTING

OP883 (08L; K270-)/OP884 (08R; K270-) - ETUXA - BUKEL (FL110+).

LROP/OTP
HENRI COANDA


JEPPESSEN
9 MAY 14 (20-3A)

BUCHAREST, ROMANIA
RNAV SID

Apt Elev
314'

- Trans level: By ATC Trans alt: 4000'
1. 112.2 FLR, 117.1 OPT and 113.2 STJ must all be serviceable for DME/DME operation.
 2. Aircraft unable to achieve SID profile restrictions must request non-standard departure from ATC before start-up.
 3. EXPECT close-in obstacles.

BUKEL 1M [BUKE1M]
RWYS 26L/R RNAV DEPARTURE
RNAV (DME/DME)
RNAV-1 (P-RNAV) APPROVAL REQUIRED
NOT AVAILABLE FOR TRAFFIC TO NEPOT

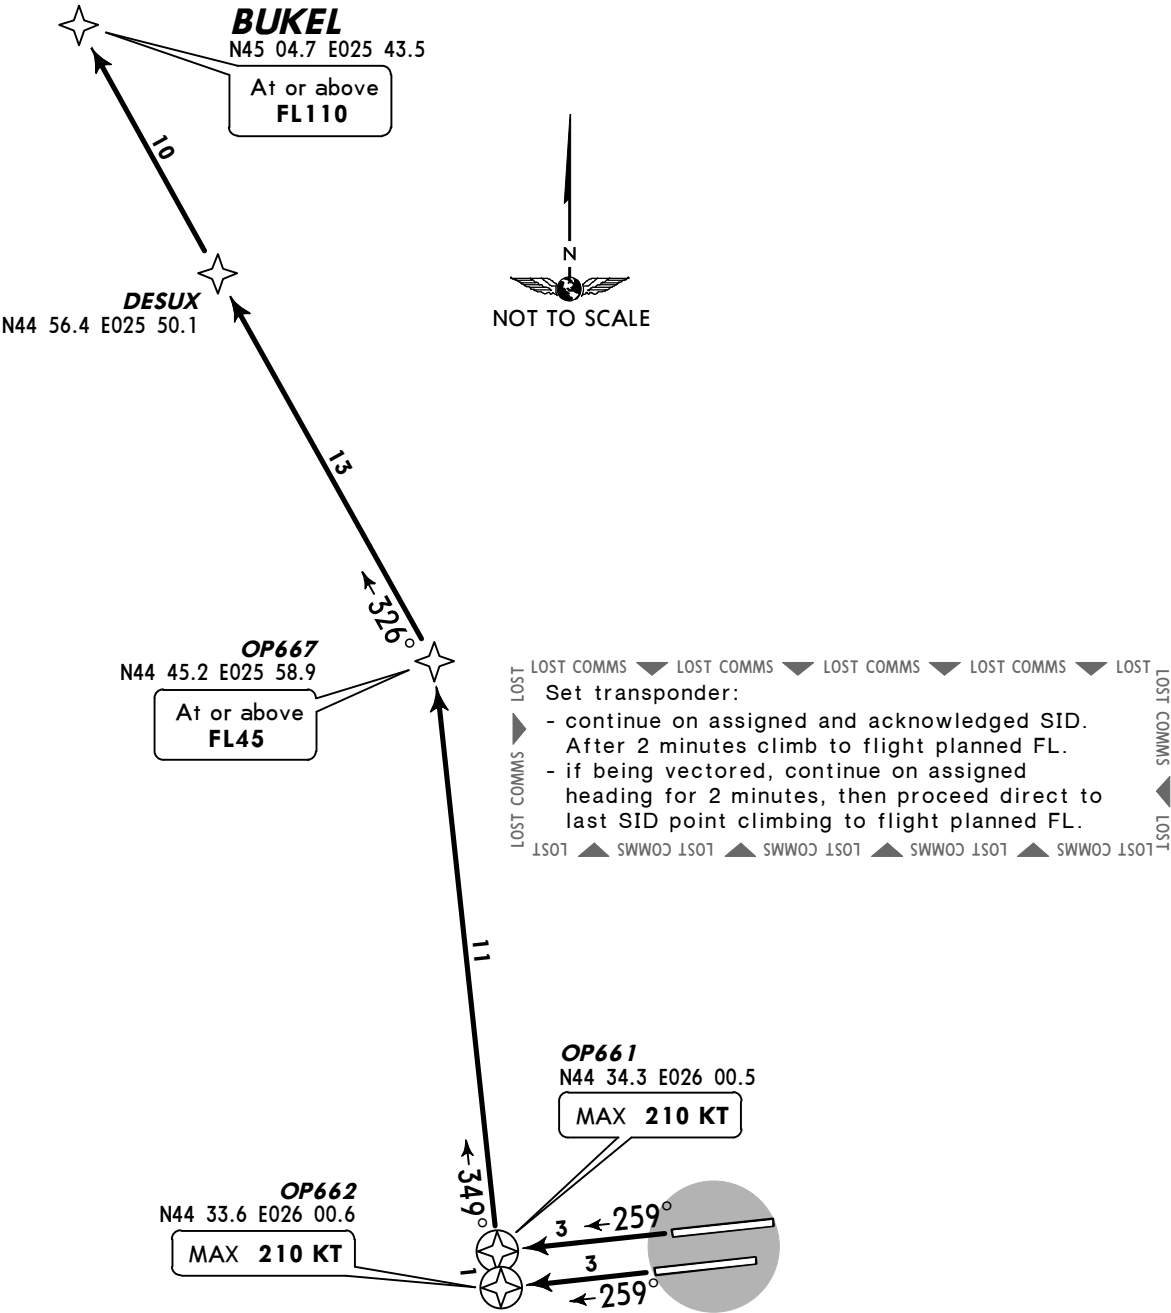

This SID requires a minimum climb gradient of 4.9% until BUKEL due to airspace structure.

Gnd speed-KT	75	100	150	200	250	300
4.9% V/V(fpm)	372	496	744	992	1241	1489

If unable to comply, contact ATC before start-up.

ROUTING

OP662 (26L; K210-)/OP661 (26R; K210-) - OP667 (FL45+) - DESUX - BUKEL (FL110+).

LROP/OTP
HENRI COANDA

JEPPesen
9 MAY 14 20-3B

BUCHAREST, ROMANIA
RNAV SID


Apt Elev
314'

- Trans level: By ATC Trans alt: 4000'
1. 112.2 FLR, 117.1 OPT and 113.2 STJ must all be serviceable for DME/DME operation.
 2. Aircraft unable to achieve SID profile restrictions must request non-standard departure from ATC before start-up.

DENAK 1K [DENAK1K]
RWYS 08L/R RNAV DEPARTURE
RNAV (DME/DME)
RNAV-1 (P-RNAV) APPROVAL REQUIRED



- LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼
- Set transponder:
- continue on assigned and acknowledged SID.
 - After 2 minutes climb to flight planned FL.
 - if being vectored, continue on assigned heading for 2 minutes, then proceed direct to last SID point climbing to flight planned FL.
- LOST COMMS ▲ LOST COMMS ▲ LOST COMMS ▲ LOST COMMS ▲ LOST COMMS ▲

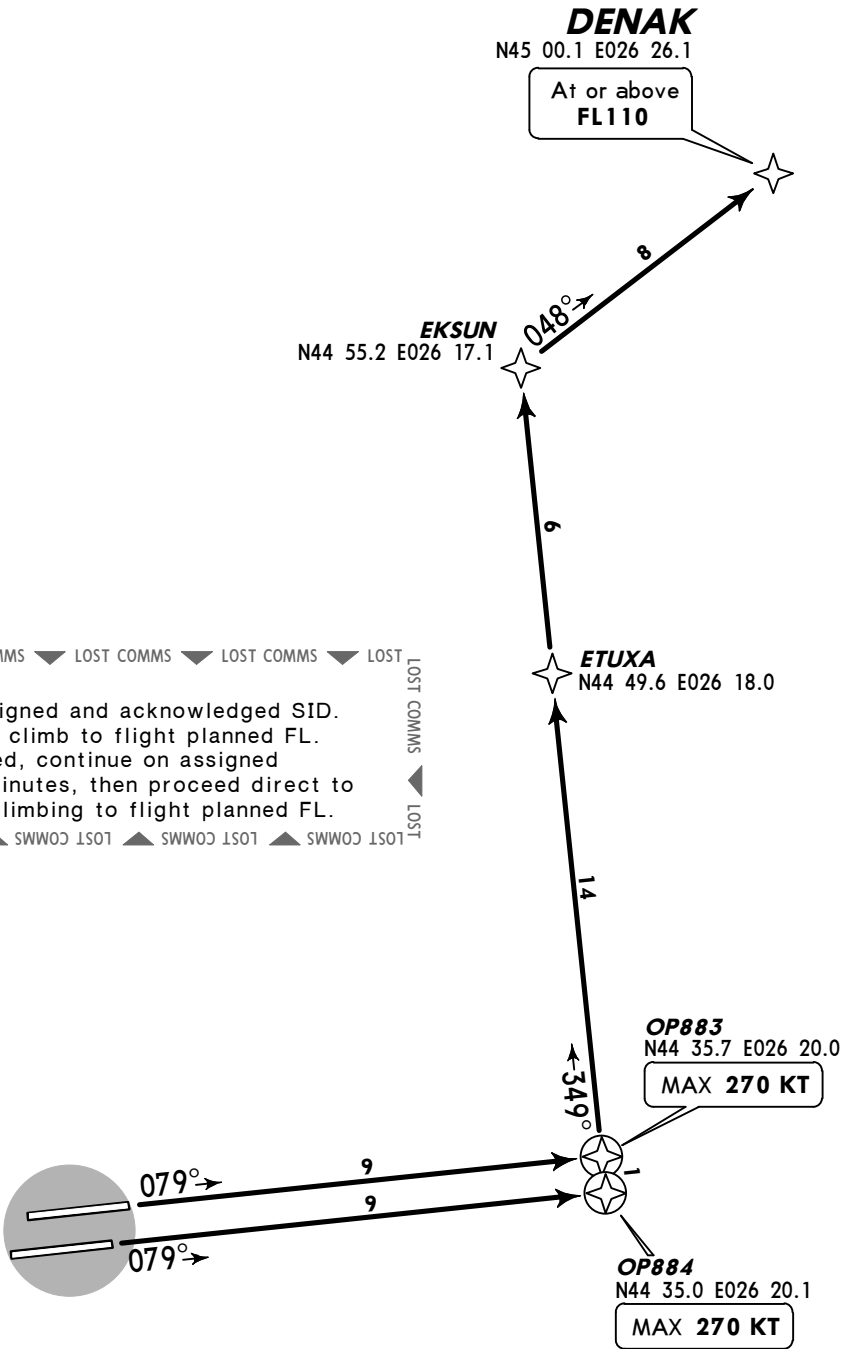

This SID requires a minimum climb gradient of 5.0% until DENAK due to airspace structure.

Gnd speed-KT	75	100	150	200	250	300
5.0% V/V(fpm)	380	506	760	1013	1266	1519

If unable to comply, contact ATC before start-up.

ROUTING

OP883 (08L; K270-)/OP884 (08R; K270-) - ETUXA - EKSUN - DENAK (FL110+).

LROP/OTP
HENRI COANDA


JEPPesen
9 MAY 14 (20-3C)

BUCHAREST, ROMANIA
RNAV SID

Apt Elev
314'

- Trans level: By ATC Trans alt: 4000'
1. 112.2 FLR, 117.1 OPT and 113.2 STJ must all be serviceable for DME/DME operation.
 2. Aircraft unable to achieve SID profile restrictions must request non-standard departure from ATC before start-up.
 3. EXPECT close-in obstacles.

DENAK 1M [DENA1M]
RWYS 26L/R RNAV DEPARTURE
RNAV (DME/DME)
RNAV-1 (P-RNAV) APPROVAL REQUIRED

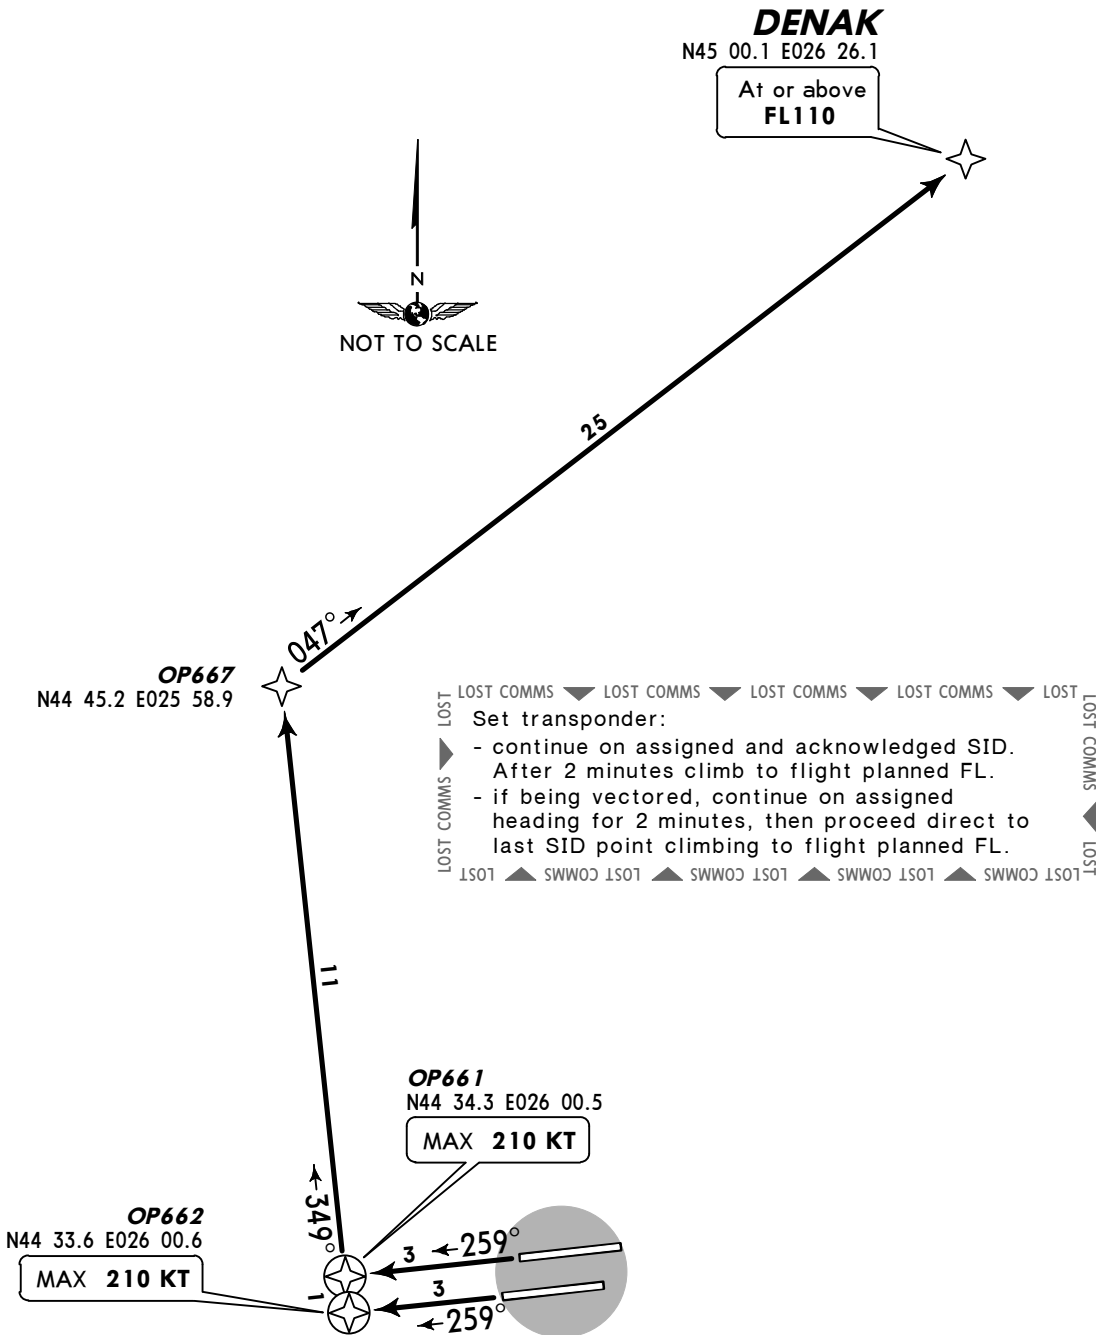

This SID requires a minimum climb gradient of 4.7% until DENAK due to airspace structure.

Gnd speed-KT	75	100	150	200	250	300
4.7% V/V(fpm)	357	476	714	952	1190	1428

If unable to comply, contact ATC before start-up.

ROUTING

OP662 (26L; K210-)/OP661 (26R; K210-) - OP667 - DENAK (FL110+).

LROP/OTP
HENRI COANDA

JEPPESSEN
7 NOV 14 (20-3F)

BUCHAREST, ROMANIA
RNAV SID

Apt Elev
314'


Trans level: By ATC Trans alt: 4000'
1. 112.2 FLR, 117.1 OPT and 113.2 STJ must all be serviceable for P-RNAV DME/DME operation.
2. Aircraft unable to achieve SID profile restrictions must request non-standard departure from ATC before start-up.

POLUN 1K [POLU1K], SOKRU 1K [SOKR1K]

RWYS 08L/R RNAV DEPARTURES

RNAV (DME/DME)

RNAV-1 (P-RNAV) APPROVAL REQUIRED

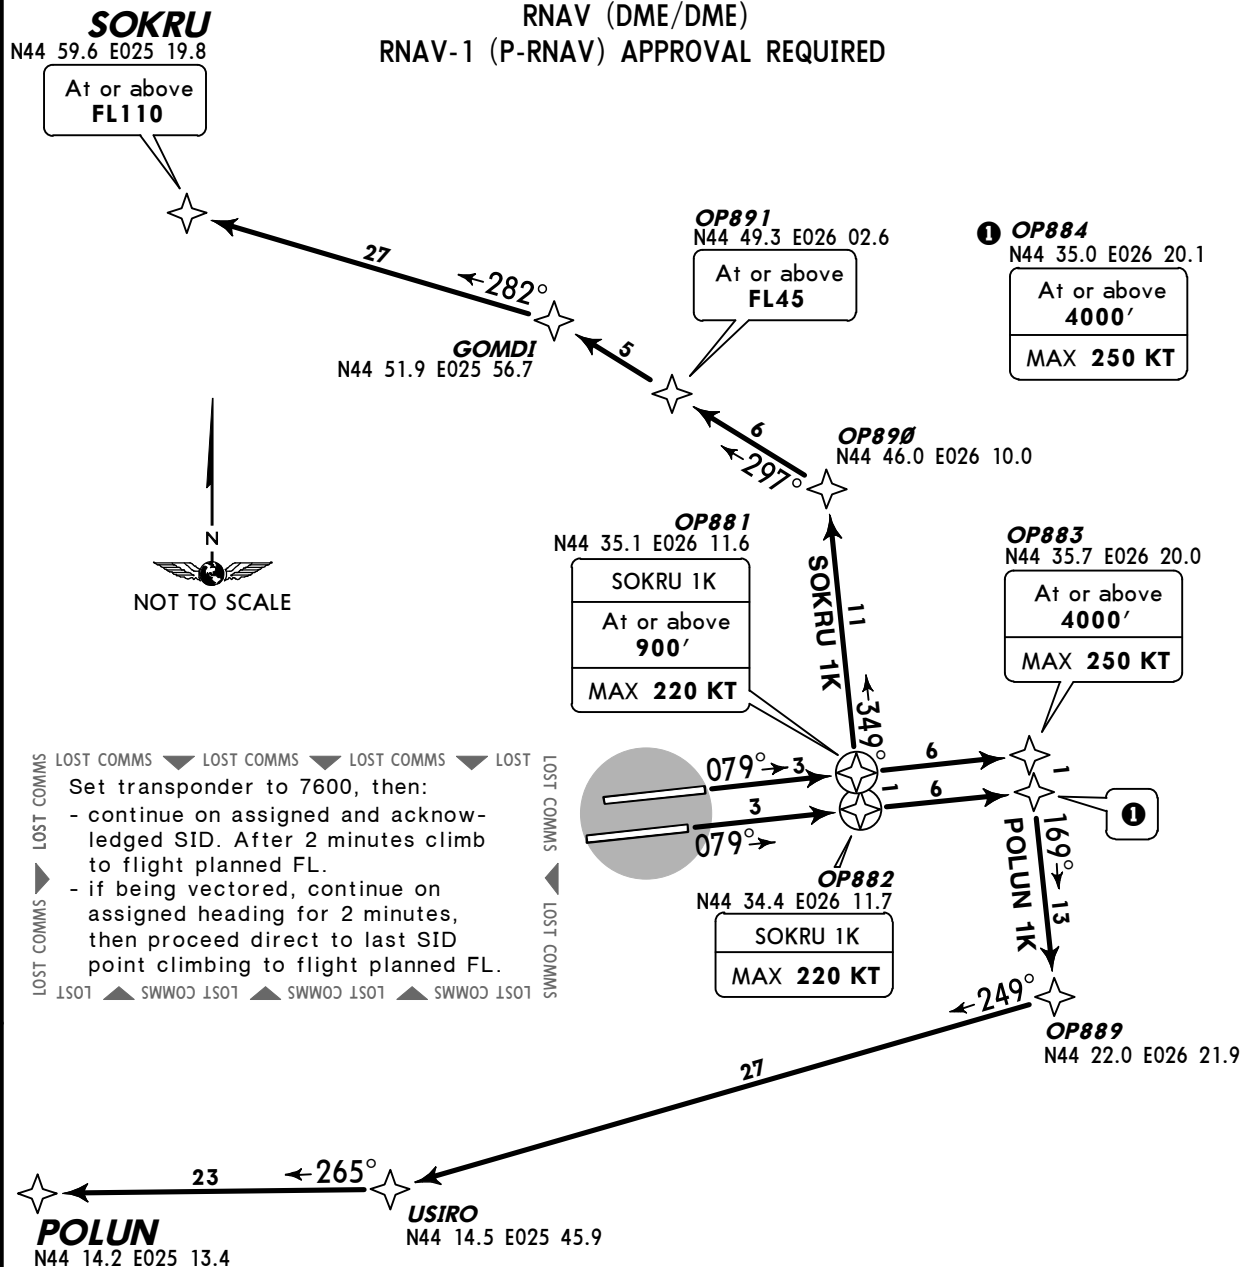

These SIDs require minimum climb gradients of

POLUN 1K: Rwy 08R: 6.7% until OP884 due to airspace structure.
Rwy 08L: 7.0% until OP883 due to airspace structure.

SOKRU 1K: Rwy 08R: 3.5% until SOKRU due to airspace structure.
Rwy 08L: 3.4% until OP881, then 3.5% until SOKRU due to airspace structure.

Gnd speed-KT	75	100	150	200	250	300
7.0% V/V(fpm)	532	709	1063	1418	1772	2127
6.7% V/V(fpm)	509	679	1018	1357	1696	2036
3.5% V/V(fpm)	266	354	532	709	886	1063
3.4% V/V(fpm)	258	344	516	689	861	1033

If unable to comply, contact ATC before start-up.

SID	ROUTING
POLUN 1K ②	OP883 (08L; 4000'+; K250-)/OP884 (08R; 4000'+; K250-) - OP889 - USIRO - POLUN.
SOKRU 1K ③	OP881 (08L; 900'+; K220-)/OP882 (08R; K220-) - OP890 - OP891 (FL45+) - GOMDI - SOKRU (FL110+).

② Not available for traffic to MOPUG.

③ Not available for traffic to DIRER.

LROP/OTP
HENRI COANDA


JEPPESSEN
7 NOV 14 20-3G

BUCHAREST, ROMANIA
RNAV SID

Apt Elev
314'

- Trans level: By ATC Trans alt: 4000'
1. 112.2 FLR, 117.1 OPT and 113.2 STJ must all be serviceable for P-RNAV DME/DME operation.
 2. Aircraft unable to achieve SID profile restrictions must request non-standard departure from ATC before start-up.
 3. EXPECT close-in obstacles.

POLUN 1M [POLU1M], SOKRU 1M [SOKR1M]
RWYS 26L/R RNAV DEPARTURES
RNAV (DME/DME)
RNAV-1 (P-RNAV) APPROVAL REQUIRED

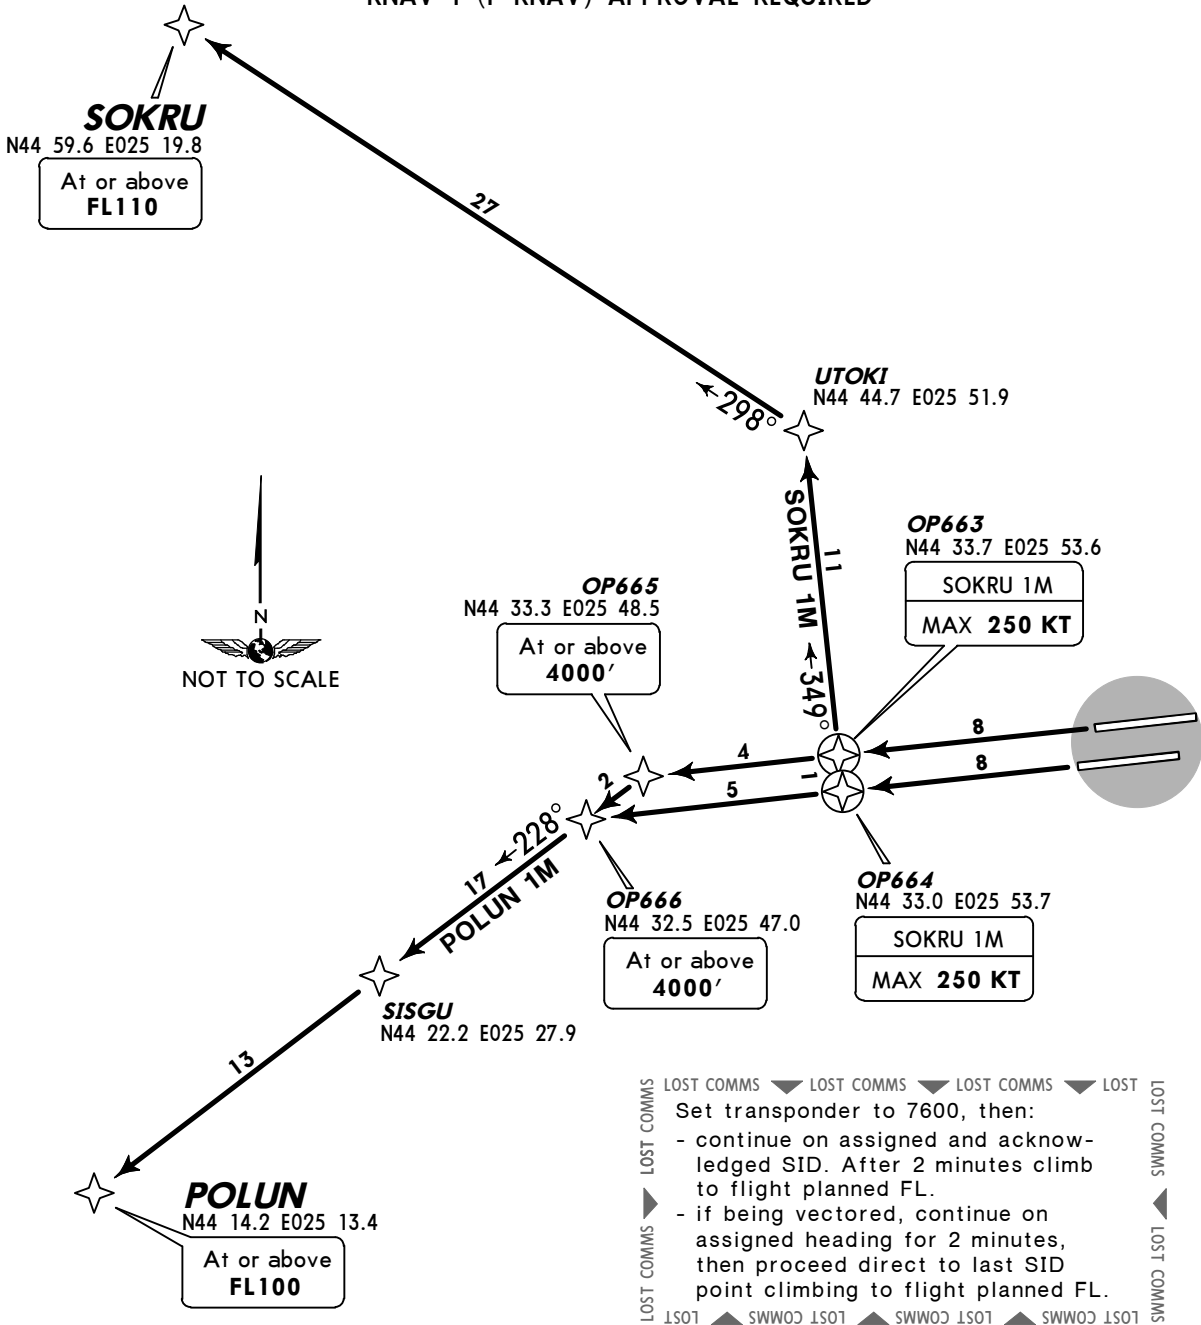

These SIDs require minimum climb gradients of

POLUN 1M: Rwy 26L: 4.9% until OP666 due to airspace structure.
Rwy 26R: 5.2% until OP665 due to airspace structure.

SOKRU 1M: 3.9% until SOKRU due to airspace structure.

Gnd speed-KT	75	100	150	200	250	300
5.2% V/V(fpm)	395	527	790	1053	1317	1580
4.9% V/V(fpm)	372	496	744	992	1241	1489
3.9% V/V(fpm)	296	395	592	790	987	1185

If unable to comply, contact ATC before start-up.

SID	ROUTING
POLUN 1M①	OP666 (26L; 4000'+)/OP665 (26R; 4000'+) - SISGU - POLUN (FL100+).
SOKRU 1M②	OP664 (26L; K250-)/OP663 (26R; K250-) - UTOKI - SOKRU (FL110+).
① Not available for traffic to MOPUG. ② Not available for traffic to DIRER.	

Trans level: By ATC Trans alt: 4000'
SIDs are also noise abatement routings. Strict adherence within the limits of aircraft performance is mandatory.

LROP/OTP
HENRI COANDA

JEPPESSEN
14 JUN 13 20-3M Eff 27 Jun


BUCHAREST, ROMANIA

SID

Apt Elev
314'

Trans level: By ATC Trans alt: 4000'
SIDs are also noise abatement routings. Strict adherence within the limits of aircraft performance is mandatory.

BUKEL 1A [BUKE1A], POLUN 5A [POLU5A]
SOKRU 1A [SOKR1A]
RWYS 08L/R DEPARTURES

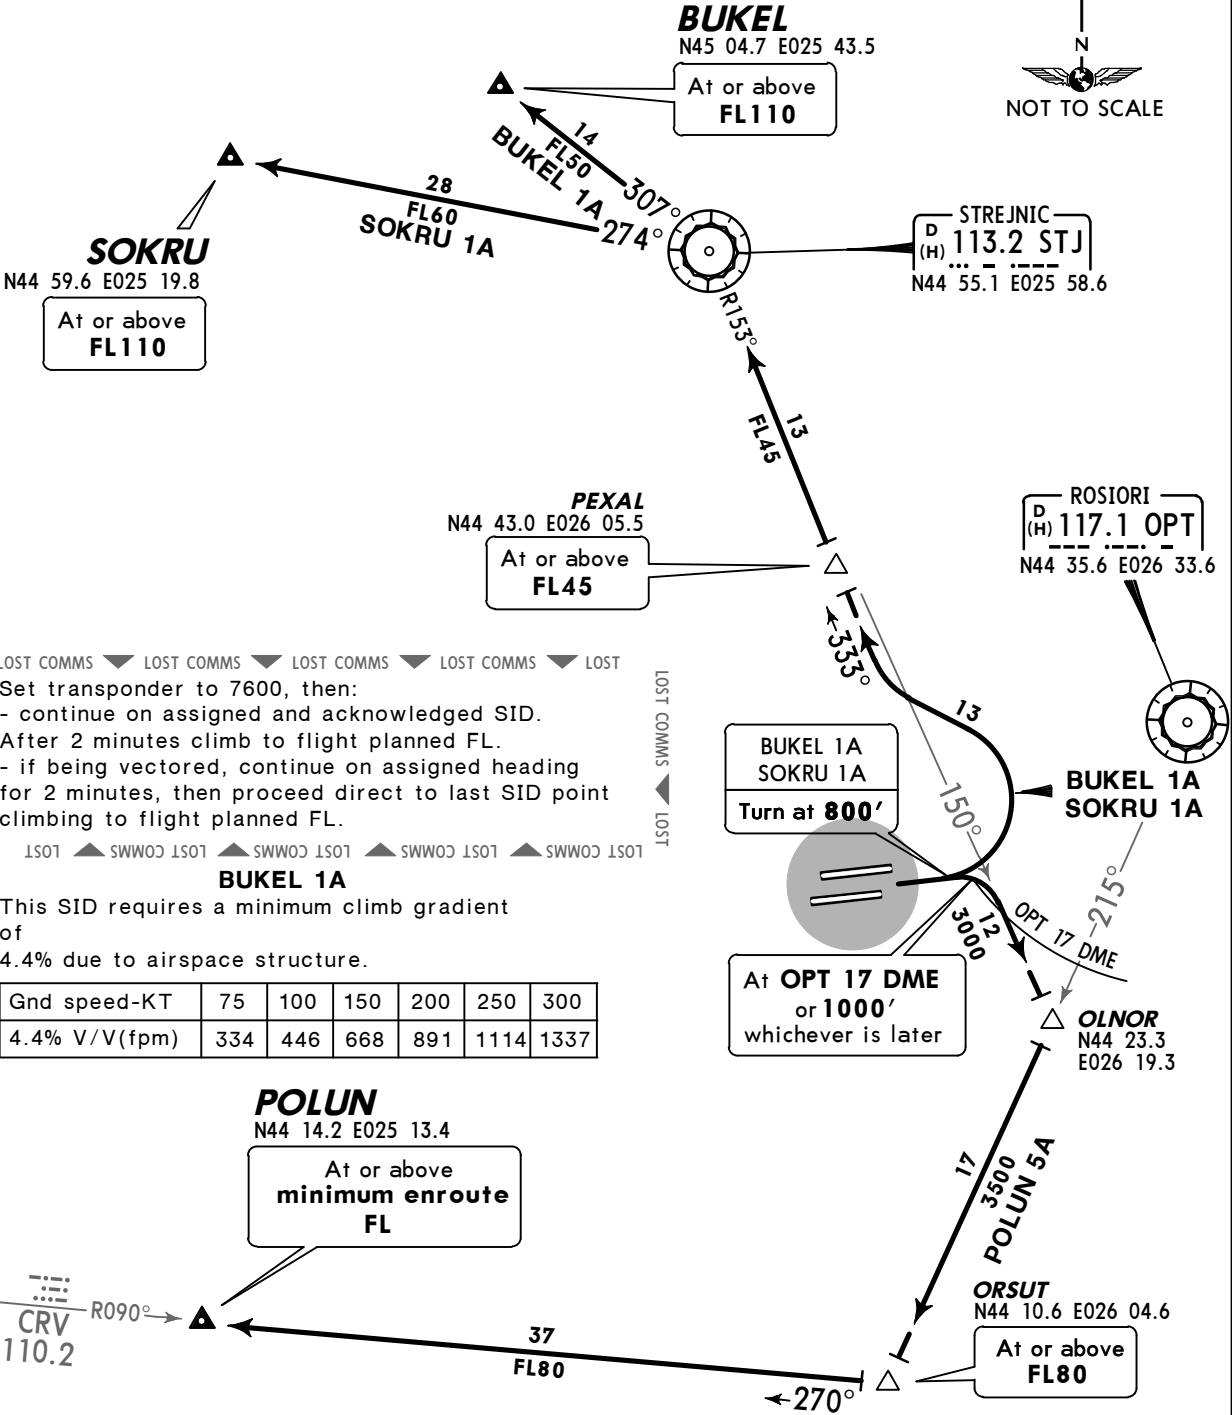

SID	ROUTING
BUKEL 1A ①	Climb on runway track to 800', intercept STJ R-153 inbound to STJ, STJ R-307 to BUKEL.
POLUN 5A ②	Climb on runway track to OPT 17 DME or 1000', whichever is later, turn RIGHT, intercept STJ R-150 to OLNOR, turn RIGHT, intercept OPT R-215 to ORSUT, turn RIGHT, intercept CRV R-090 inbound to POLUN.
SOKRU 1A ③	Climb on runway track to 800', intercept STJ R-153 inbound to STJ, STJ R-274 to SOKRU.

① Not available for traffic to NEPOT. ② Not available for traffic to MOPUG.
③ Not available for traffic to DIRER.

LROP/OTP
HENRI COANDA

JEPPesen
14 JUN 13 (20-3N) Eff 27 Jun

BUCHAREST, ROMANIA


SID

Apt Elev
314'

Trans level: By ATC Trans alt: 4000'
SIDs are also noise abatement routings. Strict adherence within the limits of aircraft performance is mandatory. 2. EXPECT close-in obstacles.

BUKEL 5C [BUKE5C], POLUN 3C [POLU3C]
SOKRU 1C [SOKR1C]
RWYS 26L/R DEPARTURES

LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST
Set transponder to 7600, then:
- continue on assigned and acknowledged SID.
After 2 minutes climb to flight planned FL.
- if being vectored, continue on assigned heading
for 2 minutes, then proceed direct to last SID point
climbing to flight planned FL.
LSOT ▲ SSWOC LSOT ▲ SSWOC LSOT ▲ SSWOC LSOT ▲ SSWOC LSOT

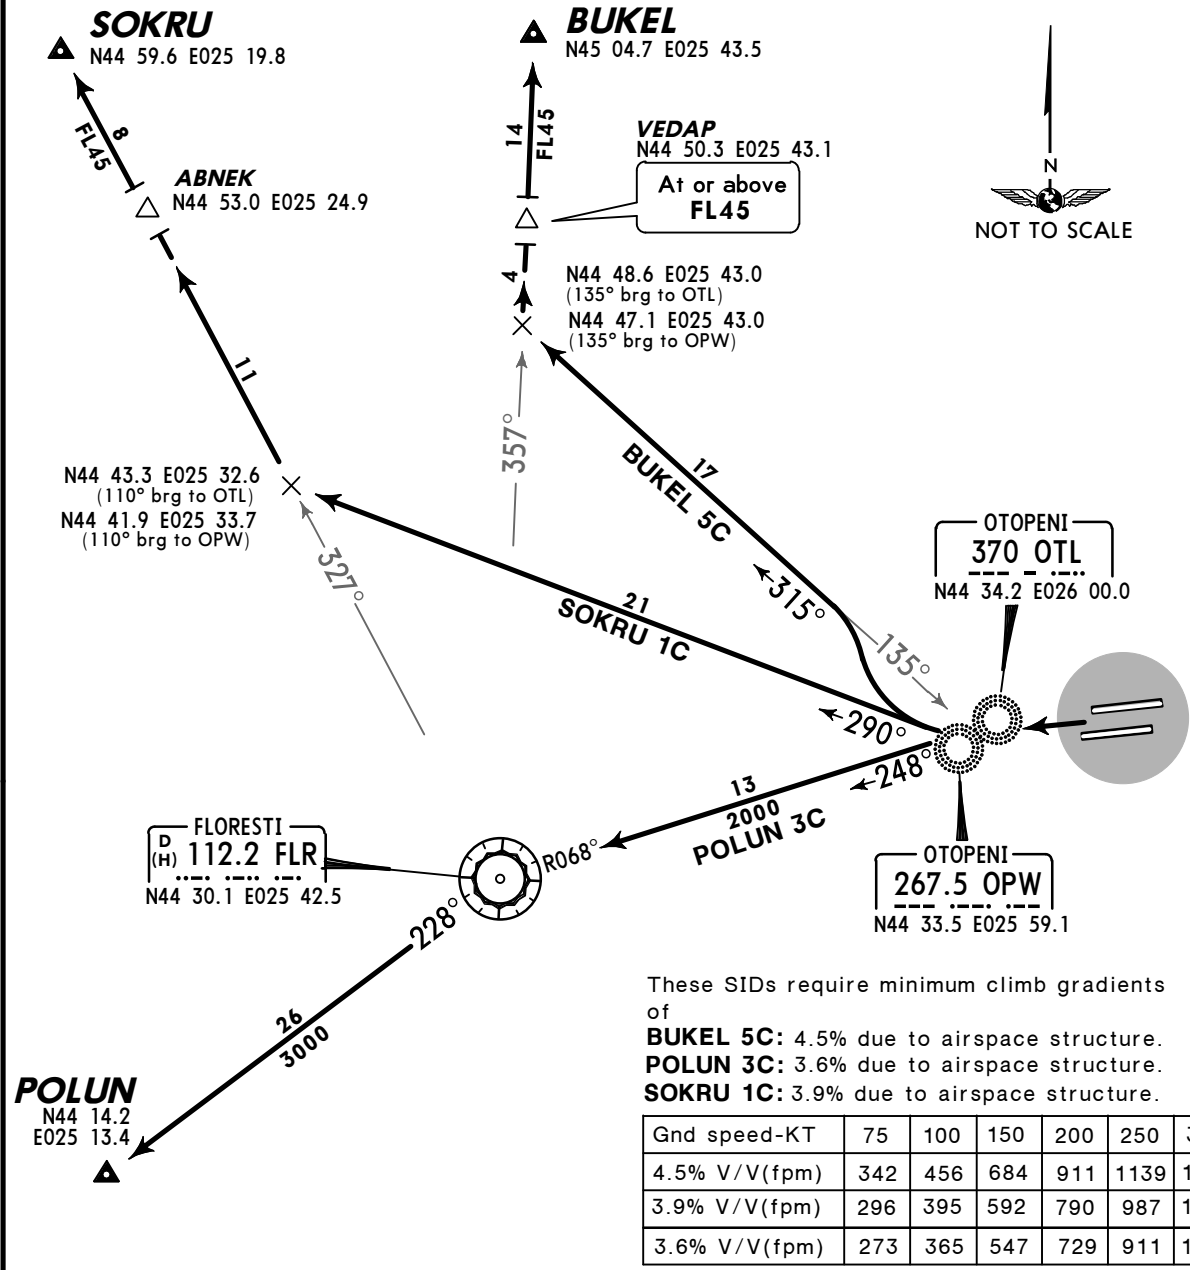

SID	ROUTING
BUKEL 5C ①	To OTL/OPW, turn RIGHT, intercept 315° bearing from OTL/OPW, intercept FLR R-357 to BUKEL.
POLUN 3C ②	To OTL/OPW, turn LEFT, intercept FLR R-068 inbound to FLR, FLR R-228 to POLUN.
SOKRU 1C ③	To OTL/OPW, turn RIGHT, intercept 290° bearing from OTL/OPW, intercept FLR R-327 to SOKRU.
① Not available for traffic to NEPOT. ② Not available for traffic to MOPUG. ③ Not available for traffic to DIRER.	


LROP/OTP

JEPPesen

BUCHAREST, ROMANIA

18 DEC 15 (20-8)

HENRI COANDA

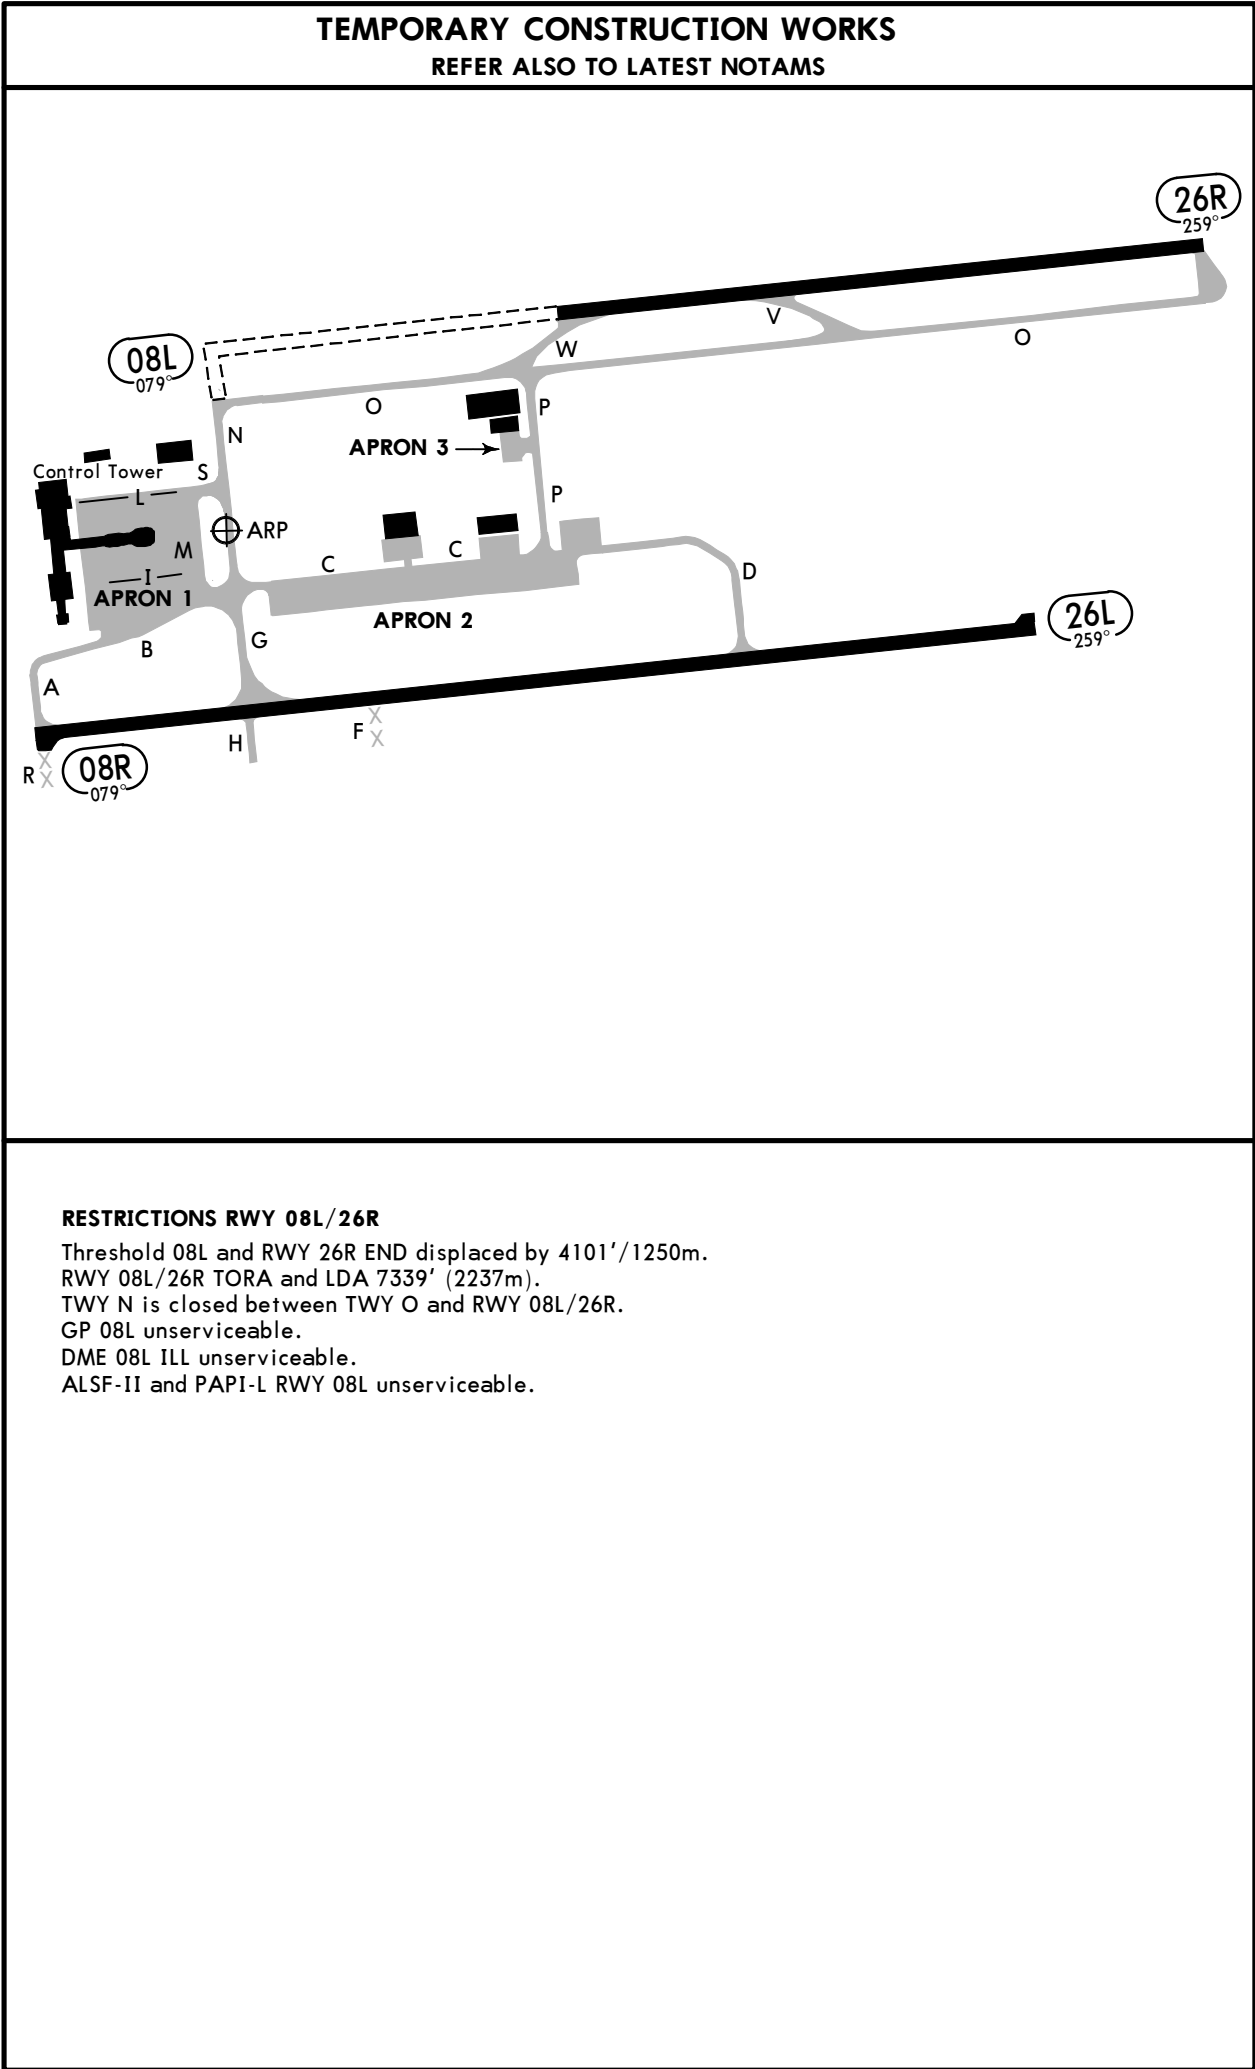


LROP/OTP

Apt Elev 314'

N44 34.3 E026 05.1

JEPPesen
14 NOV 14 20-9

BUCHAREST, ROMANIA
HENRI COANDA

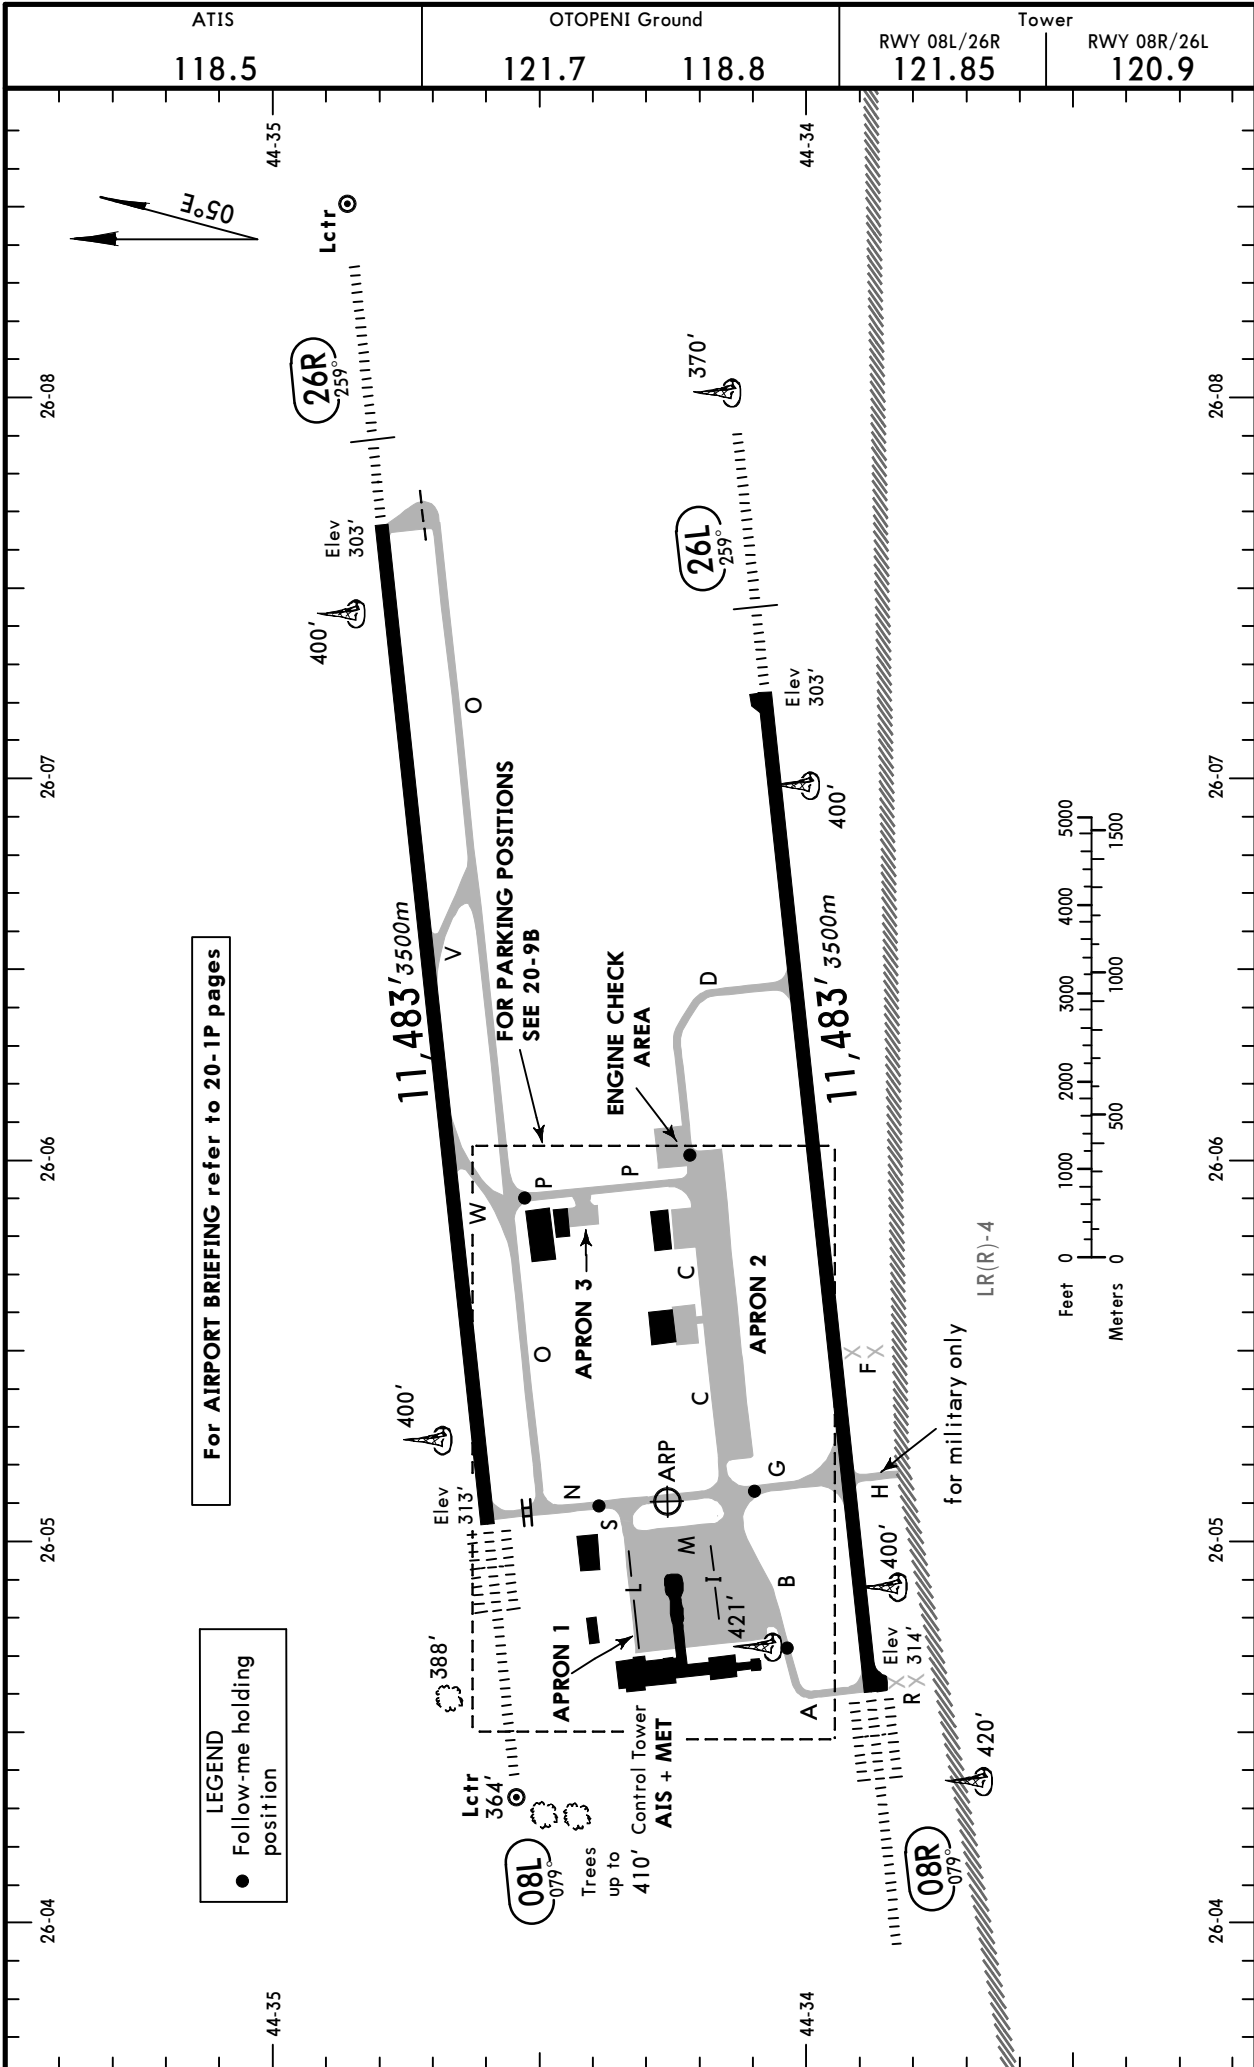

CHANGES: None.

© JEPPesen, 1998, 2013. ALL RIGHTS RESERVED.

LROP/OTP

14 NOV 14 **20-9A**

BUCHAREST, ROMANIA
HENRI COANDA

ADDITIONAL RUNWAY INFORMATION									
RWY						USABLE LENGTHS		TAKE-OFF	WIDTH
						LANDING BEYOND			
	Threshold	Glide Slope							
08L	HIRL (60m) CL (15m) ALSF-II TDZ ❶ HSTIL-V RVR		10,444' 3183m					148' 45m	
26R	HIRL (60m) CL (15m) HIALS PAPI-L (3.0°) ❷ RVR		10,512' 3204m						
❶ PAPI-L (3.0°)									
❷ HSTIL-W									
08R	HIRL (60m) CL (15m) ALSF-II TDZ ❸ RVR		10,328' 3148m		❹			148' 45m	
26L	HIRL (60m) CL (15m) HIALS PAPI-L (2.7°) RVR		10,338' 3151m						
❸ PAPI-L (2.7°)									
❹ TAKE-OFF RUN AVAILABLE									
RWY 08R:									
From rwy head		11,483' (3500m)		RWY 26L:		From rwy head		11,483' (3500m)	
twy G int		9072' (2765m)				twy D int		8169' (2490m)	

INS COORDINATES			
STAND No.	COORDINATES	STAND No.	COORDINATES
APRON 1		APRON 2	
101	N44 34.3 E026 04.7	201 thru 202A	N44 34.2 E026 06.0
102 thru 104	N44 34.3 E026 04.8	202B thru 204A	N44 34.2 E026 05.9
105 thru 107	N44 34.3 E026 04.9	204B	N44 34.2 E026 05.8
107A	N44 34.3 E026 05.0	205	N44 34.1 E026 05.8
108	N44 34.3 E026 04.9	205A	N44 34.2 E026 05.8
109	N44 34.2 E026 04.9	206	N44 34.1 E026 05.8
109A	N44 34.2 E026 05.0	207 thru 209	N44 34.1 E026 05.7
110, 111	N44 34.2 E026 04.9	210 thru 212	N44 34.1 E026 05.6
112 thru 114	N44 34.2 E026 04.8	213 thru 215	N44 34.1 E026 05.5
115	N44 34.2 E026 04.7	216 thru 218	N44 34.1 E026 05.4
116 thru 118	N44 34.1 E026 04.7	219 thru 222	N44 34.1 E026 05.3
119	N44 34.1 E026 04.8	223	N44 34.1 E026 05.2
120	N44 34.1 E026 04.9	APRON 3	
120A	N44 34.1 E026 04.8	N44 34.4 E026 05.9	
121, 122	N44 34.1 E026 04.9	N44 34.4 E026 05.8	
		1 thru 4	
		5, 6	


--	--	--	--	--	--

Standard TAKE-OFF ❶					
❷ LVP must be in Force					
Approved Operators	RL, CL & mult. RVR req	RL & CL	RCLM (DAY only) or RL	RCLM (DAY only) or RL	NIL (DAY only)
A					
B	125m	150m	200m	250m	400m
C					500m
D	150m	200m	250m	300m	
❶ Operators applying U.S. Ops Specs: CL required below 300m; approved HUD required below 150m.					
❷ Rwy 08R: With approved guidance system: ABCD 75m.					

LROP/OTP

JEPPesen
8 NOV 13 (20-9B) Eff 14 Nov

BUCHAREST, ROMANIA
HENRI COANDA

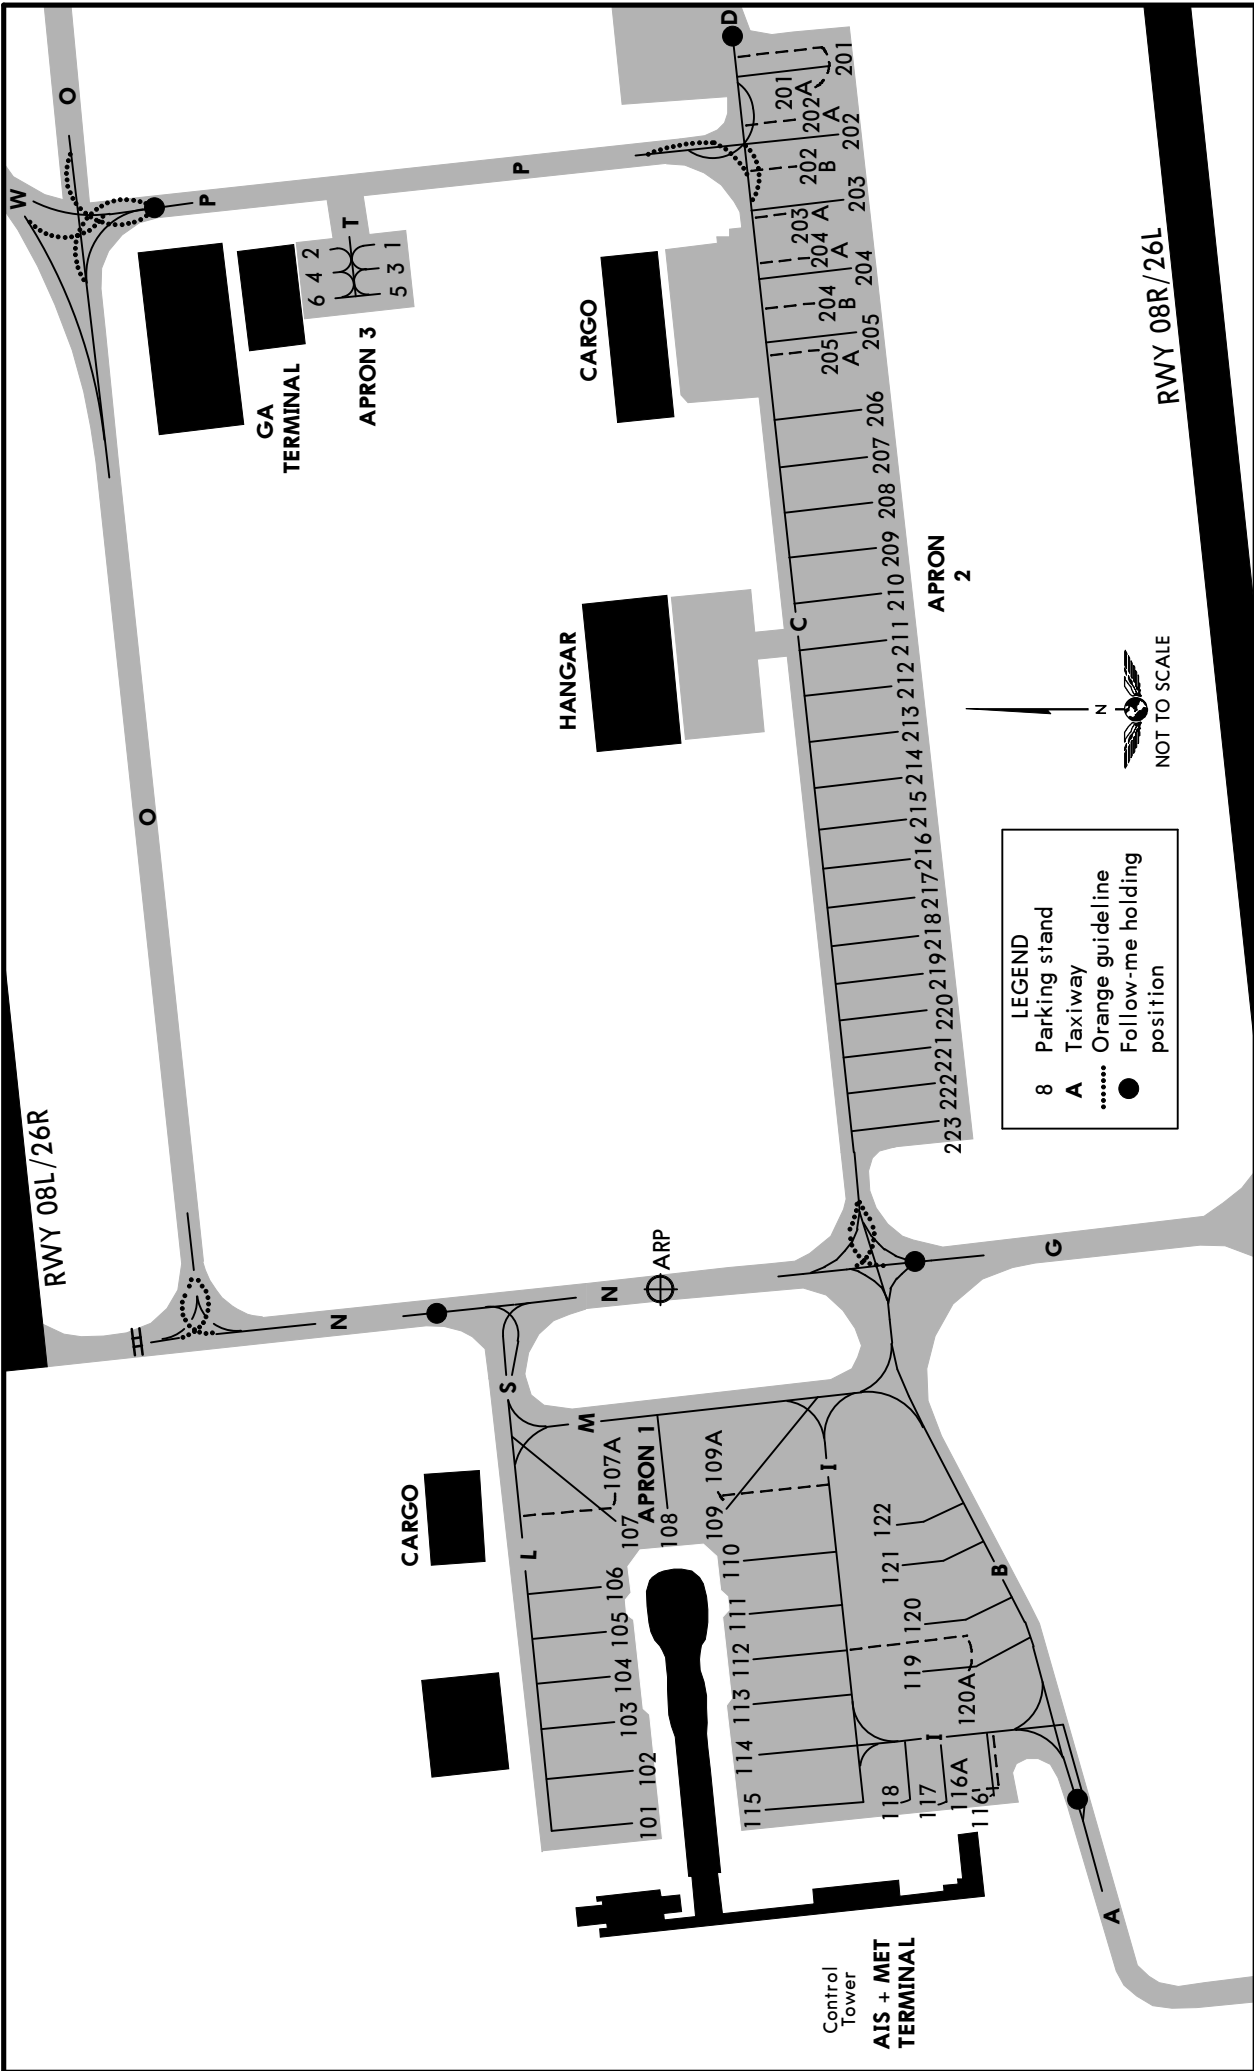

CHANGES: Parking stand designations.

© JEPPESEN, 1998, 2013. ALL RIGHTS RESERVED.

LROP/OTP
JEPPesen
8 NOV 13 (20-9C) Eff 14 Nov

BUCHAREST, ROMANIA
HENRI COANDA

DOCKING GUIDANCE SYSTEM (SAFEDOCK)

A. DESCRIPTION


The docking system consists of a display unit and a laser unit to identify type and position of aircraft.

B. DOCKING PROCEDURE


At apron 1, two models of docking system are installed, type T3-9 and T1.

CAUTION: The safedock docking guidance system has a built-in error detecting program to inform the acft pilots of possible hazards during the docking procedure. During the acft approach to the terminal gate, the docking guidance system automatically confirms the identification of the acft. The acft must be identified at least 39' (12m) before the correct stop position. If this does not occur, the system displays "STOP" and then "WAIT" with two red, rectangular fields being lit in the azimuth guidance area of the display. While the acft is stopped, the system will attempt to identify it. If successful, the docking procedure will continue. If not, "WAIT" will be replaced with "STOP". If the display reverts to the "STOP" indication, the pilot must contact OTOPENI Ground to obtain clearance to complete the docking procedure.

DOCKING SYSTEM T1

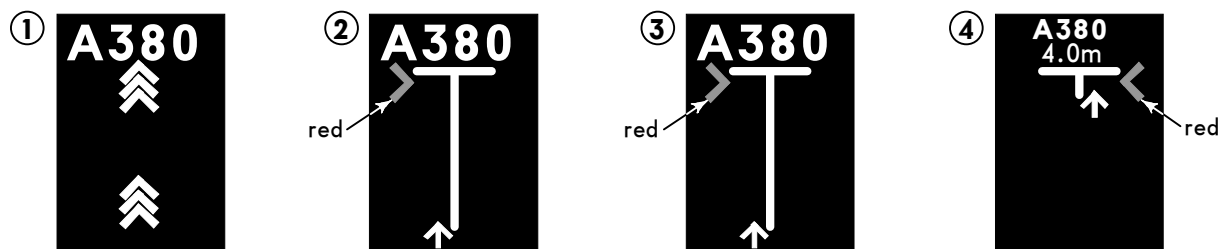

DOCKING SYSTEM T3-9

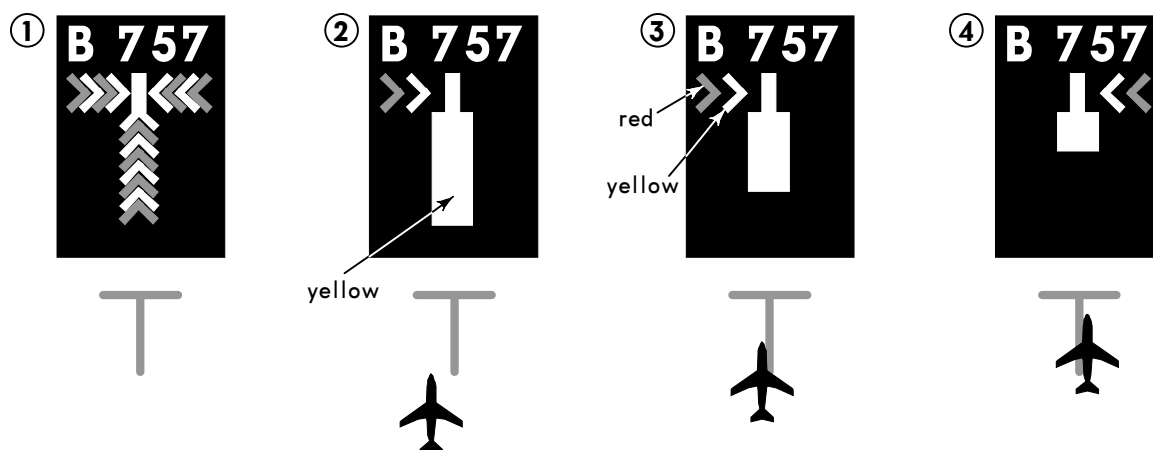

1. Check that the correct acft type is displayed. The scrolling arrows indicate that the system is activated.
2. Follow the lead in line. When the solid yellow closing rate field appears, the acft has been caught by the scanning unit. The scanning unit now checks that the acft is the correct type and the display provides azimuth guidance information.
3. Look for the flashing red arrow and solid yellow arrow which provide azimuth guidance information. The flashing red arrow shows which direction to steer, while solid yellow arrow gives an indication of how far the acft is off of the centerline.
4. When the acft is 39' (12m) from the stop position, closing rate information is given. "Distance to go" is indicated by turning off one row of LED's for each 2' (0.5 m) that the acft advances towards the stop position.

LROP/OTP

JEPPesen
25 MAR 11 (20-9D) Eff 7 Apr

BUCHAREST, ROMANIA


HENRI COANDA

DOCKING GUIDANCE SYSTEM (SAFEDOCK) CONTD

DOCKING SYSTEM T1



DOCKING SYSTEM T3-9

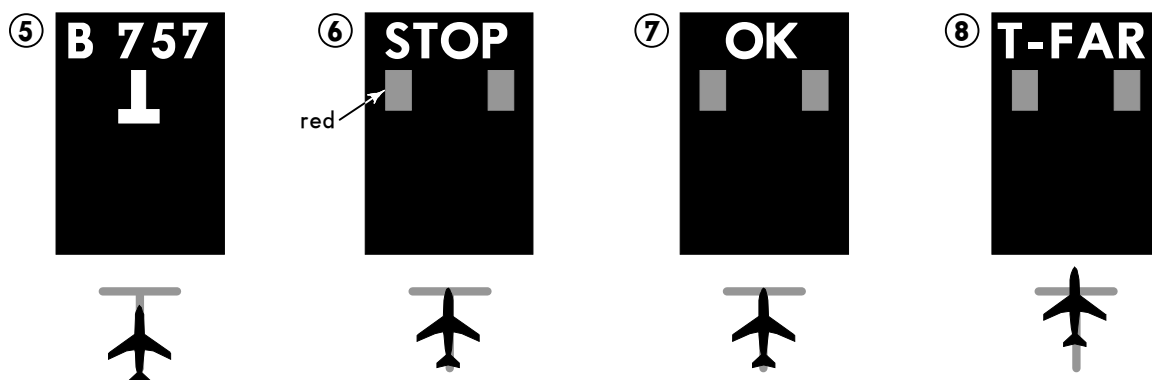



- When the acft is approaching with too high speed, display will indicate "SLOW".
- When the correct stop position is reached all of the LED's for the closing rate field will be off, the word "STOP" will appear in the display and two red rectangular fields will light in the azimuth guidance area of the display.
- If the acft stops in the correct position, "OK" will be displayed after a few seconds.
- If the acft has gone past the correct stop position, the display will show "T-FAR" (too far).

LROP/OTP
HENRI COANDA


JEPPESSEN
27 SEP 13 (21-1)

BUCHAREST, ROMANIA
ILS Rwy 08L

ATIS	BUCHAREST Approach (R)	OTOPENI Tower	Ground	
118.5	118.25	121.85	121.7 118.8	
LOC ILL 110.9	Final Apch Crs 079°	GS D4.0 ILL 1587' (1274')	ILS DA(H) 513' (200')	Apt Elev 314' RWY 313'
MISSED APCH: Climb via OTR NDB to OPT VOR to 3000' and hold, or as directed.				
Alt Set: hPa (MM on req) Rwy Elev: 11 hPa Trans level: By ATC Trans alt: 4000'				
ADF and DME required.				

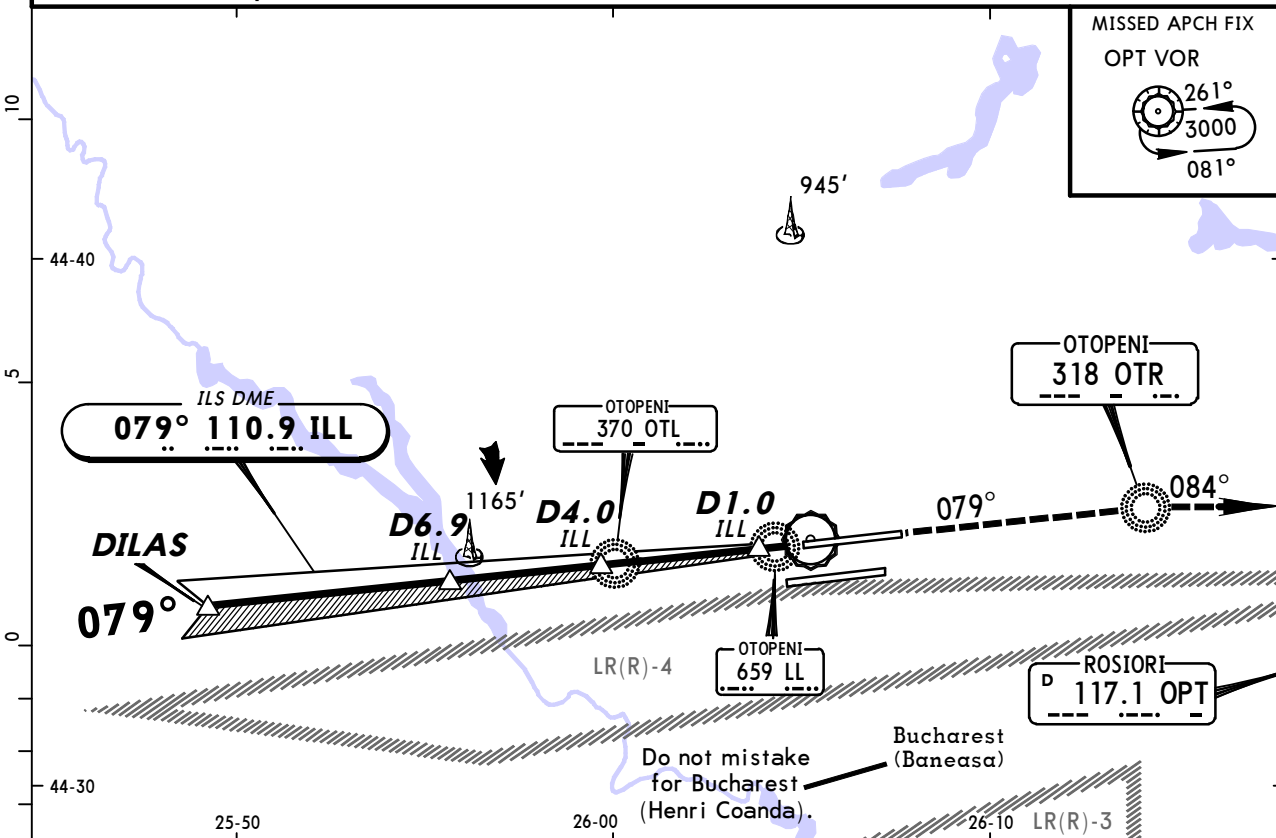

LOC (GS out)	ILL DME ALTITUDE	5.0	4.0	3.0	2.0
		1905'	1587'	1268'	950'

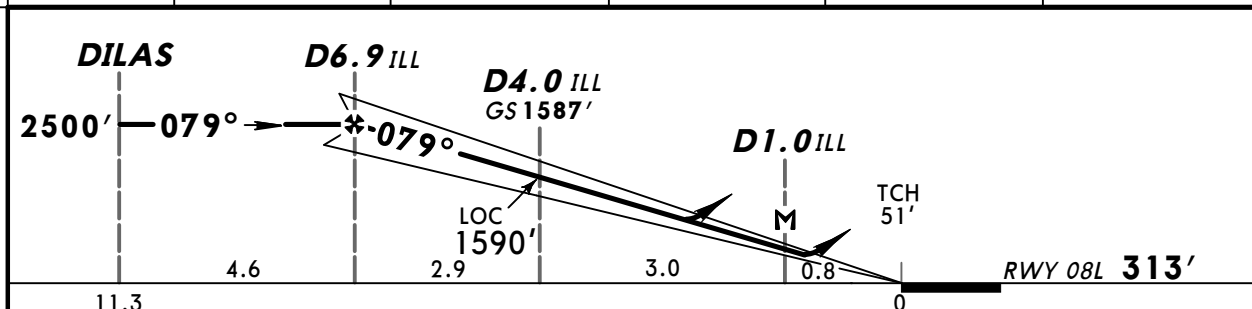

Gnd speed-Kts	70	90	100	120	140	160		ALSF-II	OTR 318
ILS GS or LOC Descent Angle 3.00°	372	478	531	637	743	849		PAPI	
MAP at D1.0 ILL									

STRAIGHT-IN LANDING RWY 08L				CIRCLE-TO-LAND Not authorized South of airport	
ILS			LOC (GS out)		
DA(H) 513' (200')			DA(H) 690' (377')		
FULL	Limited	ALS out	ALS out	Max Kts	MDA(H) VIS
A B C D	RVR 550m	RVR 750m	RVR 1200m	RVR 1500m	100 780' (466') 1500m
					135 820' (506') 1600m
				RVR 1700m	180 1010' (696') 2400m
					205 1020' (706') 3600m

CHANGES: MSA.



© JEPPESSEN, 1998, 2013. ALL RIGHTS RESERVED.

LROP/OTP
HENRI COANDA

JEPPESSEN
15 MAY 15 21-01 Eff 28 May

BUCHAREST, ROMANIA
LOC Rwy 08L

ATIS 118.5		BUCHAREST Approach (R) 118.250		OTOPENI Tower 121.850		Ground 121.7 118.8		 MSA ARP	
LOC ILL 110.9		Final Apch Crs 079°		Minimum Alt D7.8 IRR 2500'(2186')		DA(H) 730'(416')			Apt Elev 314'
MISSED APCH: Climb on track 079° inbound to OTR NDB not below 1600', then turn RIGHT direct to OPT VOR to 3000' and hold, or as directed.									
Alt Set: hPa (MM on req)		Apt Elev: 11 hPa		Trans level: By ATC		Trans alt: 4000'			
DME required.									

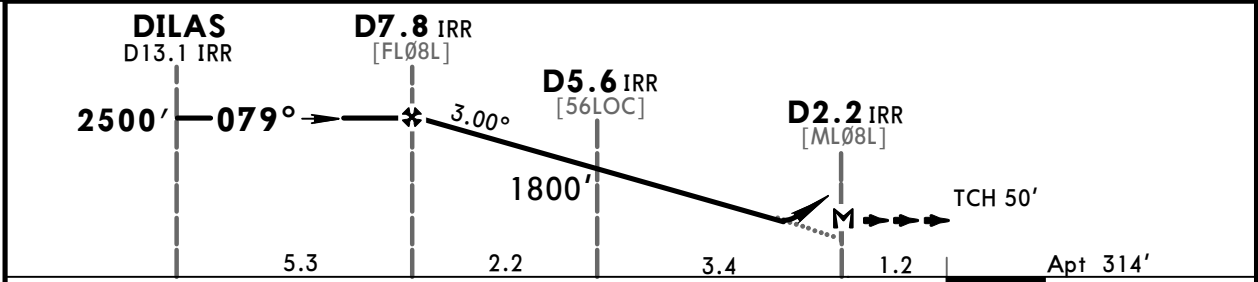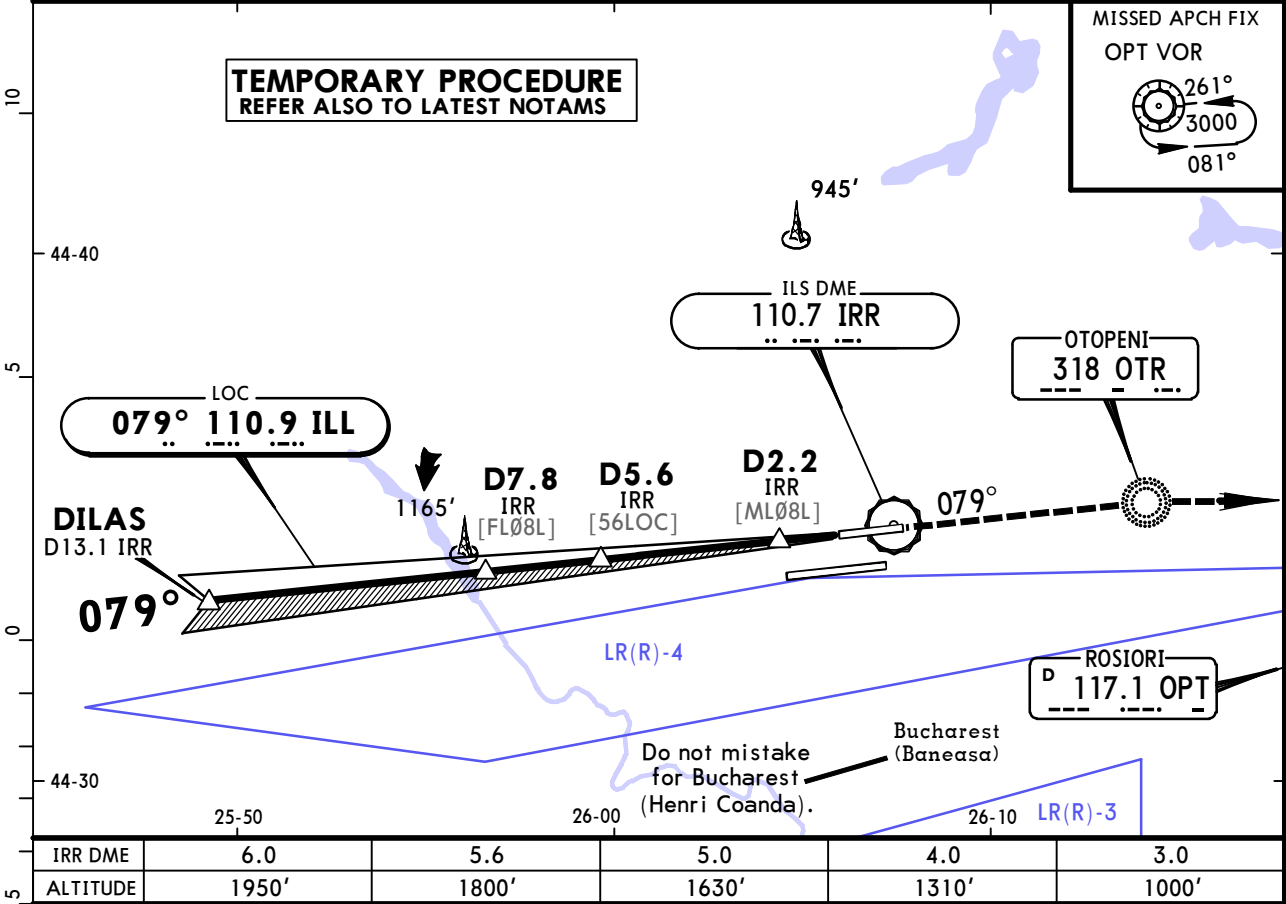

Gnd speed-Kts	70	90	100	120	140	160	MIM 1600' on 079° OTR 318
Descent Angle	3.00°	372	478	531	637	743	
MAP at D2.2 IRR							



Standard STRAIGHT-IN LANDING RWY 08L			CIRCLE-TO-LAND Not authorized South of airport		
DA(H) 730'(416')			Max Kts	MDA(H)	VIS
A	RVR 1500m		100	780'(466')	1500m
B			135	820'(506')	1600m
C	RVR 1900m		180	920'(606')	2400m
D			205	1020'(706')	3600m

LROP/OTP
HENRI COANDA

27 SEP 13 **(21-1A)**

BUCHAREST, ROMANIA
CAT II/III ILS Rwy 08L

ATIS 118.5		BUCHAREST Approach (R) 118.25		OTOPENI Tower 121.85		Ground 121.7 118.8		 MSA Airport
LOC ILL 110.9		Final Apch Crs 079°		GS D4.0 ILL 1587' (1274')		CAT II & IIIA ILS Refer to Minimums Apt Elev 314' RWY 313'		
MISSED APCH: Climb via OTR NDB to OPT VOR to 3000' and hold, or as directed.								
Alt Set: hPa (MM on req) Rwy Elev: 11 hPa Trans level: By ATC Trans alt: 4000'								
1. ADF and DME required. 2. Special Aircrew & Acft Certification required.								

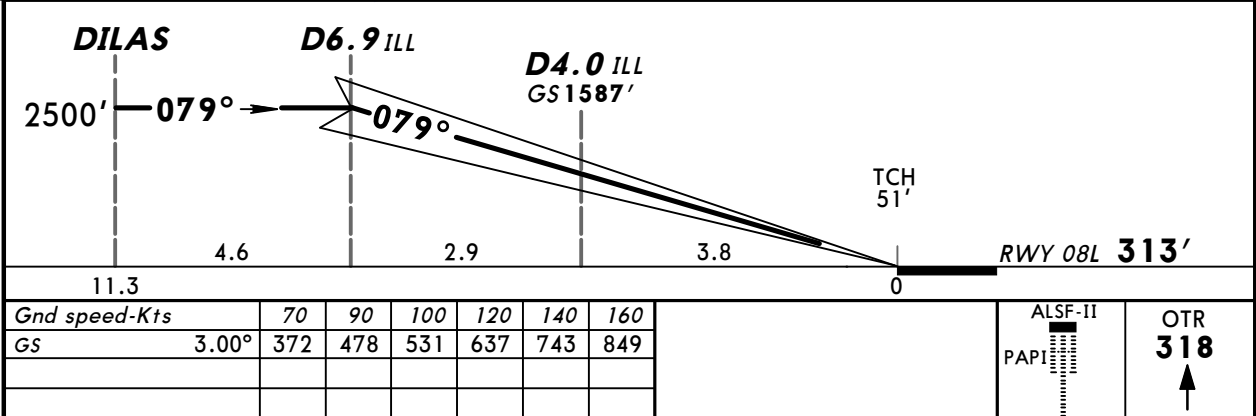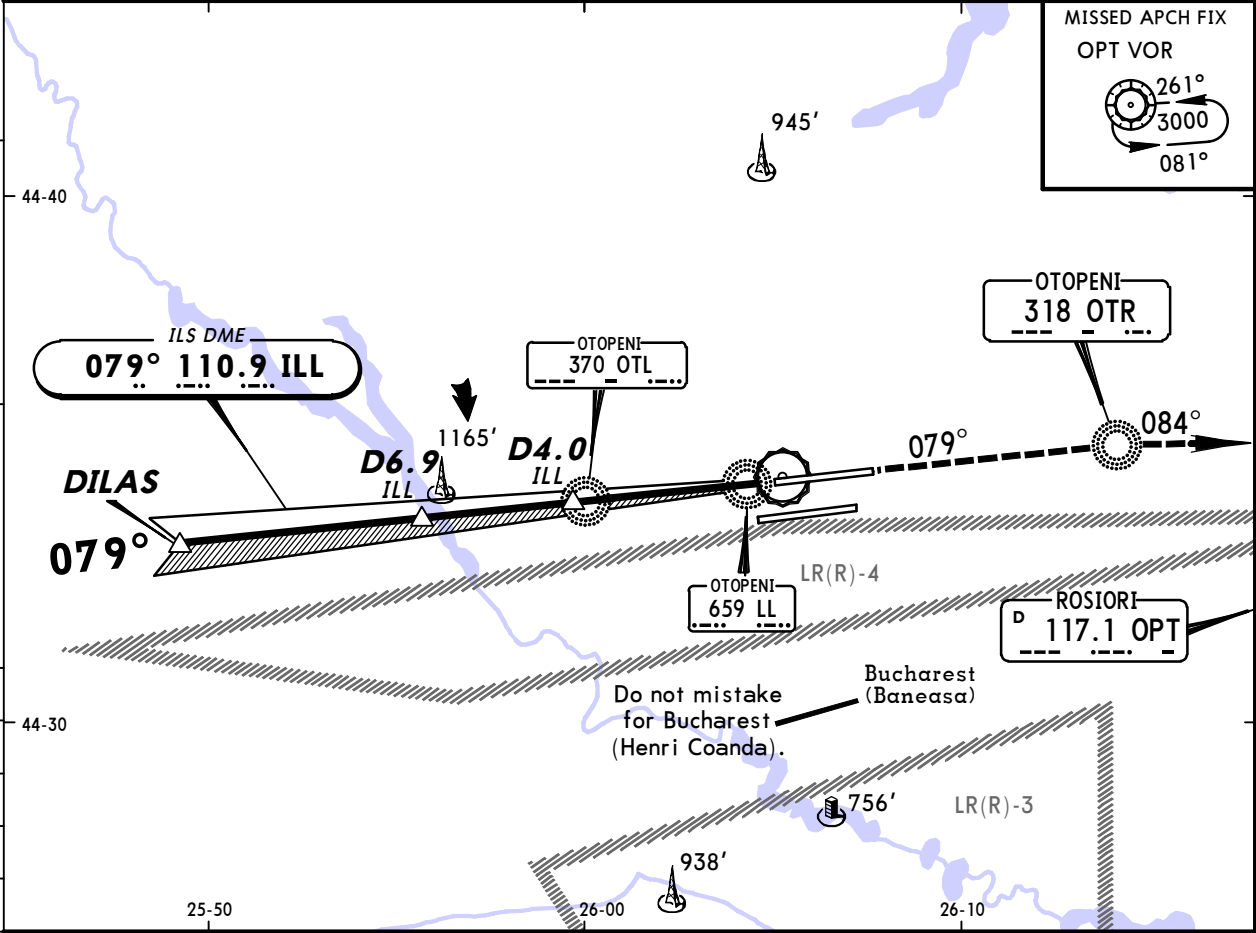

Standard		STRAIGHT-IN LANDING RWY 08L	
CAT IIIA ILS		CAT II ILS	
DH 50'		ABCD RA 99' DA(H) 413' (100')	
RVR 200m		RVR 300m	

LROP/OTP
HENRI COANDA



JEPPESSEN
27 SEP 13 **(21-2)**

BUCHAREST, ROMANIA
ILS Rwy 08R

™

BRIEFING STRIP

ATIS 118.5		BUCHAREST Approach (R) 118.25		OTOPENI Tower 120.9		Ground 121.7 118.8		2500' 090° → ← 270° 2100' MSA Airport
LOC IOP 110.3	Final Apch Crs 079°	GS D4.0 IOP 1460' (1146')		ILS DA(H) 514' (200')		Apt Elev 314'		
MISSED APCH: Climb via OPE NDB to OPT VOR to 3000' and hold, or as directed.								
Alt Set: hPa (MM on req) VOR, DME and NDB required.		Rwy Elev: 11 hPa		Trans level: By ATC		Trans alt: 4000'		

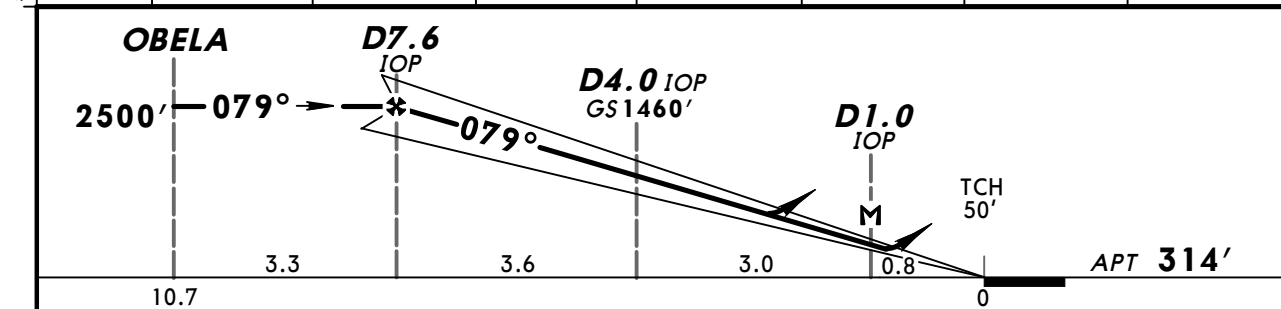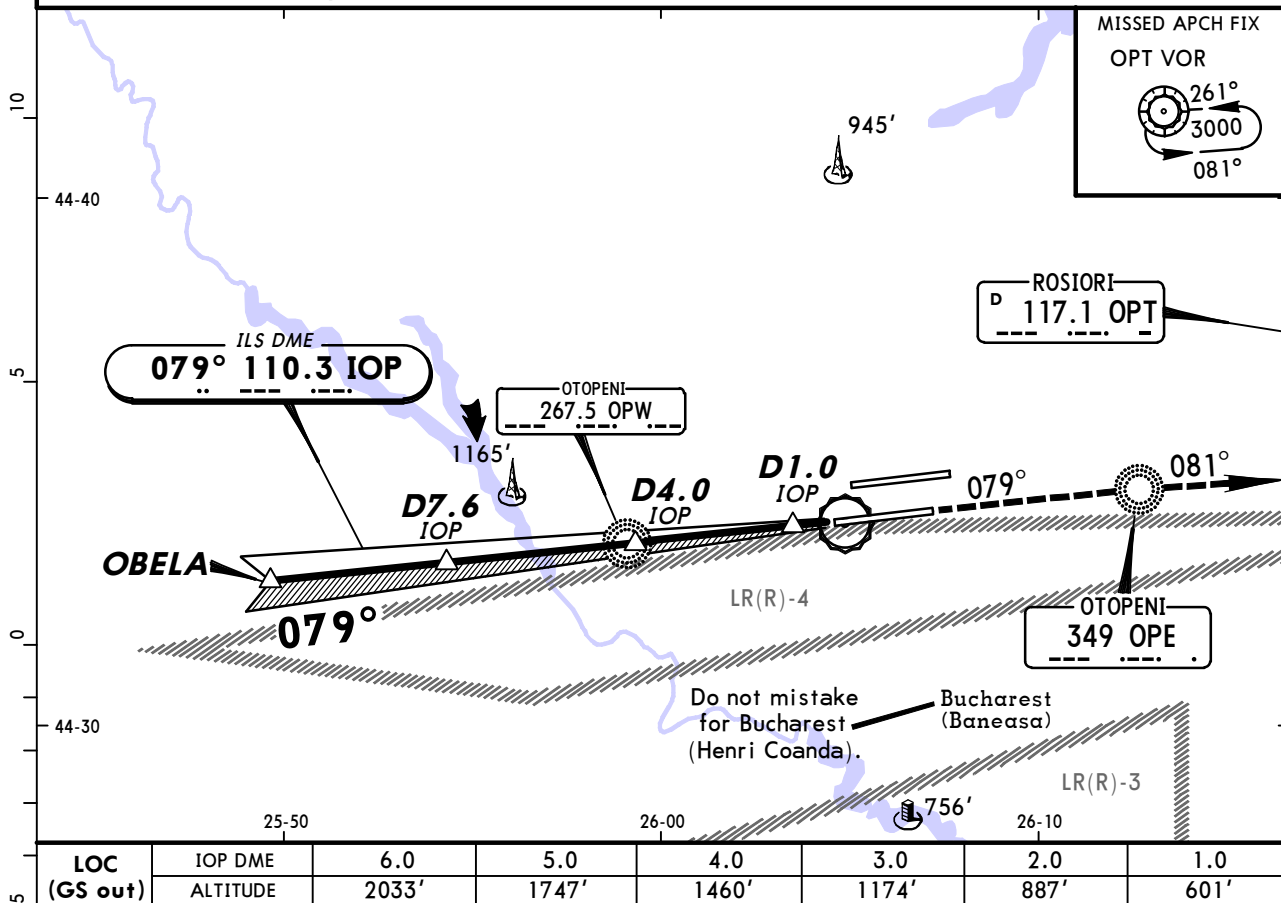

Gnd speed-Kts	70	90	100	120	140	160	 ALSF-II PAPI	OPE 349
ILS GS or LOC Descent Angle 2.70°	334	430	478	573	669	764		
MAP at D1.0 IOP								

Standard		STRAIGHT-IN LANDING RWY 08R					CIRCLE-TO-LAND	
ILS			LOC (GS out)			Not authorized South of airport		
DA(H) 514' (200')			DA(H) 690' (376')					
FULL		Limited	ALS out	ALS out		Max Kts	MDA(H) _____ VIS _____	
A	RVR 550m	RVR 750m	RVR 1200m	RVR 1000m	RVR 1500m	100	780' (466') 1500m	
B					135	820' (506') 1600m		
C					180	1010' (696') 2400m		
D					205	1020' (706') 3600m		


CHANGES: MSA.

© JEPPESSEN, 1998, 2013. ALL RIGHTS RESERVED.



LROP/OTP
HENRI COANDA

27 SEP 13 **21-2A**

BUCHAREST, ROMANIA
CAT II/III ILS Rwy 08R

ATIS 118.5		BUCHAREST Approach (R) 118.25		OTOPENI Tower 120.9		Ground 121.7 118.8				
LOC IOP 110.3		Final Apch Crs 079°		GS D4.0 IOP 1460' (1146')		CAT II & IIIA ILS Refer to Minimums			Apt Elev 314'	
MISSED APCH: Climb via OPE NDB to OPT VOR to 3000' and hold, or as directed.										

Alt Set: hPa (MM on req) Rwy Elev: 11 hPa Trans level: By ATC Trans alt: 4000'
1. VOR, DME and NDB required. 2. Special Aircrew & Acft Certification required.

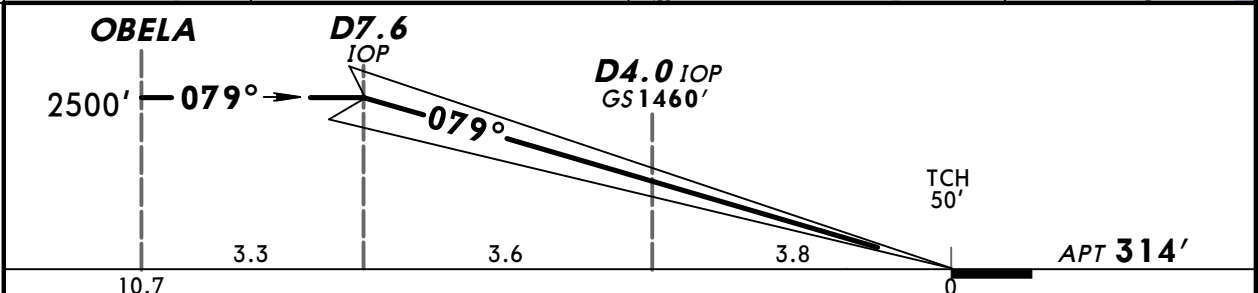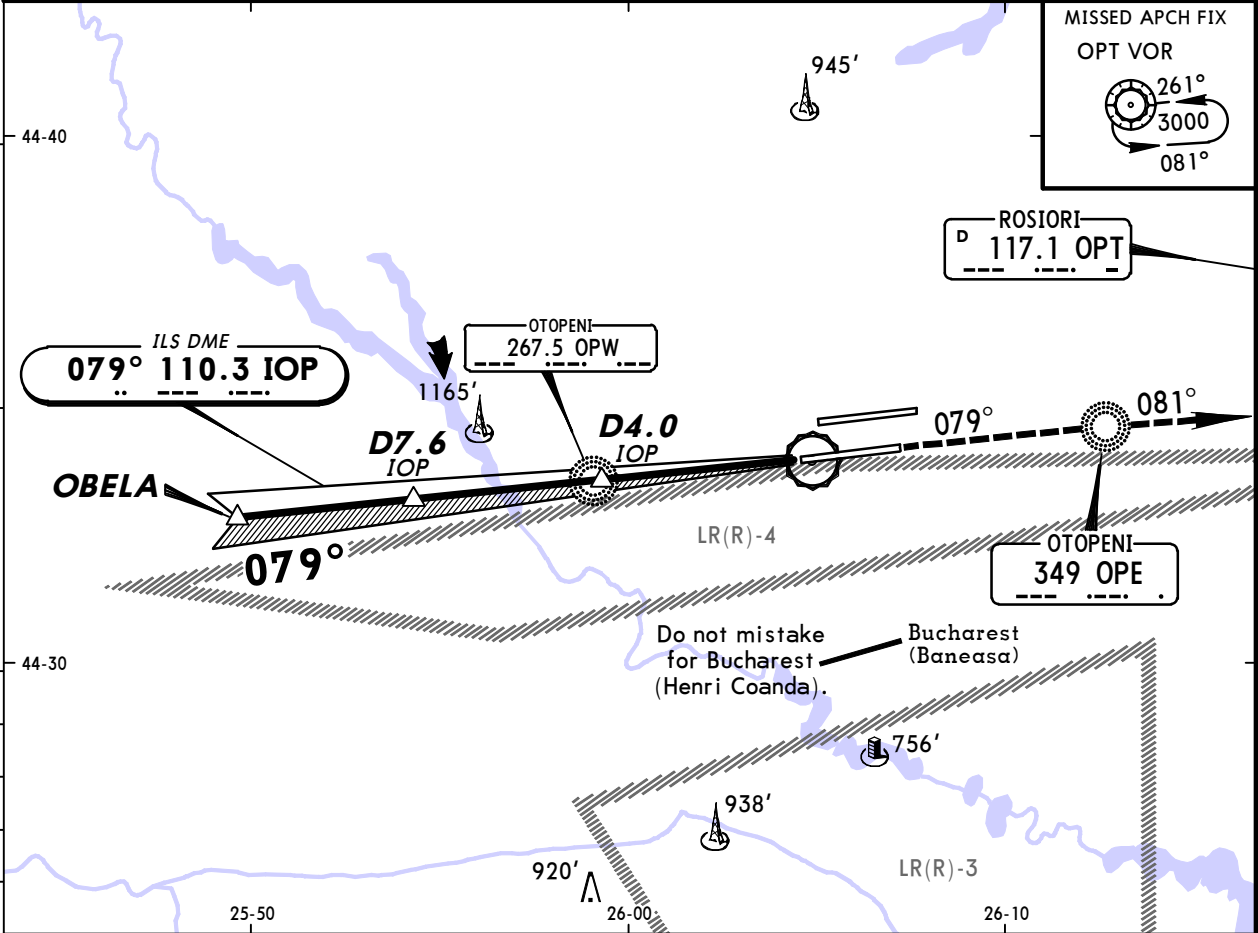

Gnd speed-Kts	70	90	100	120	140	160	ALSF-II PAPI	OPR 349 ↑	
GS	2.70°	334	430	478	573	669			764

Standard		STRAIGHT-IN LANDING RWY 08R	
CAT IIIA ILS		CAT II ILS	
DH 50'		ABCD RA 101' DA(H) 414' (100')	
RVR 200m		RVR 300m 	

 Operators applying U.S. Ops Specs: Autoland or HUD required below RVR 350m.

LROP/OTP HENRI COANDA


27 SEP 13 **(21-3)**

BUCHAREST, ROMANIA ILS or NDB Rwy 26L


BRIEFING STRIP TM	ATIS 118.5		BUCHAREST Approach (R) 118.25		OTOPENI Tower 120.9		Ground 121.7 118.8		2500' 090°→←270° 2100' MSA Airport
	LOC IOE 109.1	Final Apch Crs 259°		GS OPE NDB 1449' (1146')	ILS DA(H) 503' (200')	Apt Elev 314' RWY 303'			
	NDB OPE 349			Minimum Alt D7.7 IOE 2500' (2197')	NDB DA(H) 790' (487')				

MISSED APCH: Climb via OPW NDB to FLR VOR to 3000' and hold, or as directed.

Alt Set: hPa (MM on req) Rwy Elev: 11 hPa Trans level: By ATC Trans alt: 4000'

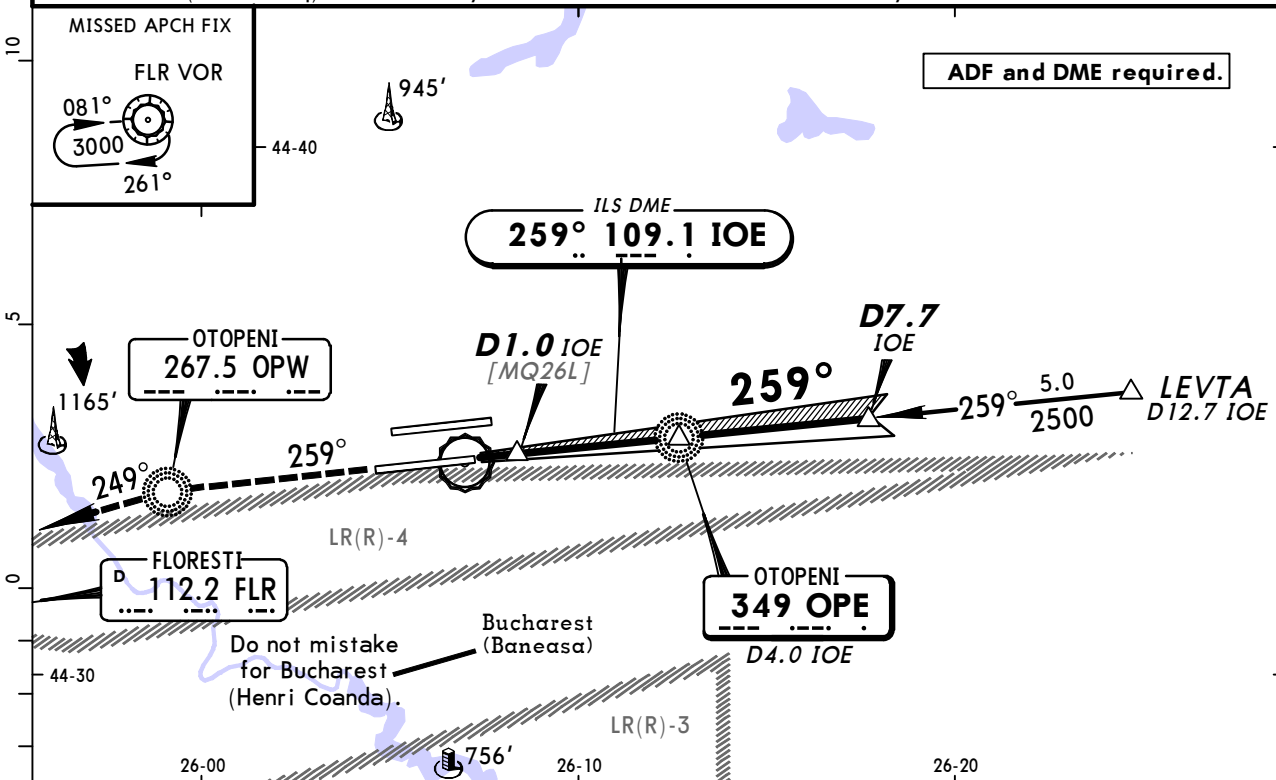

LOC (GS out) or NDB	IOE DME	2.0	3.0	4.0	5.0	6.0	7.0
	ALTITUDE	876'	1163'	1449'	1736'	2022'	2309'

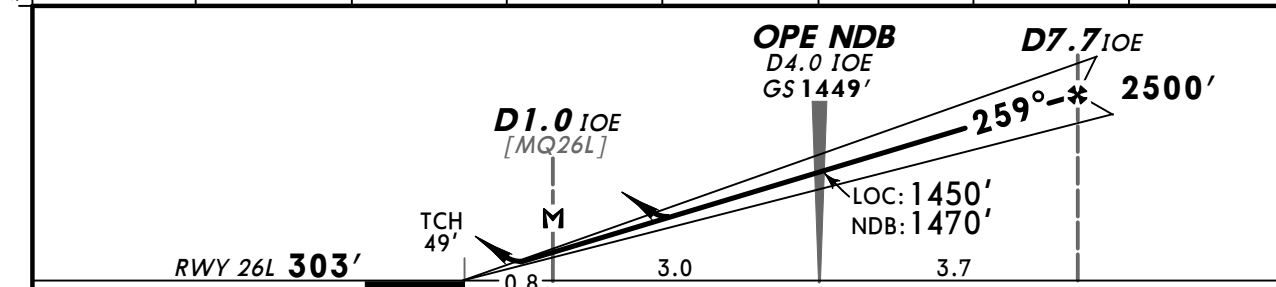

Gnd speed-Kts	70	90	100	120	140	160		
ILS GS or LOC or NDB Descent Angle 2.70°	334	430	478	573	669	764		
MAP at D1.0 IOE								

Standard			STRAIGHT-IN LANDING RWY 26L					CIRCLE-TO-LAND	
ILS			LOC (GS out)		NDB		Not authorized South of airport		
DA(H) 503' (200')			DA(H) 730' (427')		DA(H) 790' (487')		Max Kts	MDA(H) _____ VIS _____	
FULL	Limited	ALS out		ALS out		ALS out			
A	RVR 550m	RVR 750m	RVR 1200m	RVR 1300m	RVR 1500m	RVR 1500m		100	780' (466') 1500m
B							135	820' (506') 1600m	
C					RVR 2000m	RVR 1500m	CMV 2300m	180	1010' (696') 2400m
D								205	1020' (706') 3600m


After NDB apch: MDA(H) 810' (496').

CHANGES: MSA.


© JEPPESEN, 1998, 2013. ALL RIGHTS RESERVED.

LROP/OTP
HENRI COANDA
JEPPESSEN
 27 SEP 13 **(21-4)**
BUCHAREST, ROMANIA
ILS Rwy 26R

ATIS	BUCHAREST Approach (R)	OTOPENI Tower	Ground	
118.5	118.25	121.85	121.7 118.8	
LOC IRR 110.7	Final Apch Crs 259°	GS D4.0 IRR 1577' (1274')	ILS DA(H) Refer to Minimums	Apt Elev 314' RWY 303'
MISSED APCH: Climb via OTL NDB to FLR VOR to 3000' and hold, or as directed.				2500' 090° → ← 270° 2100' MSA Airport

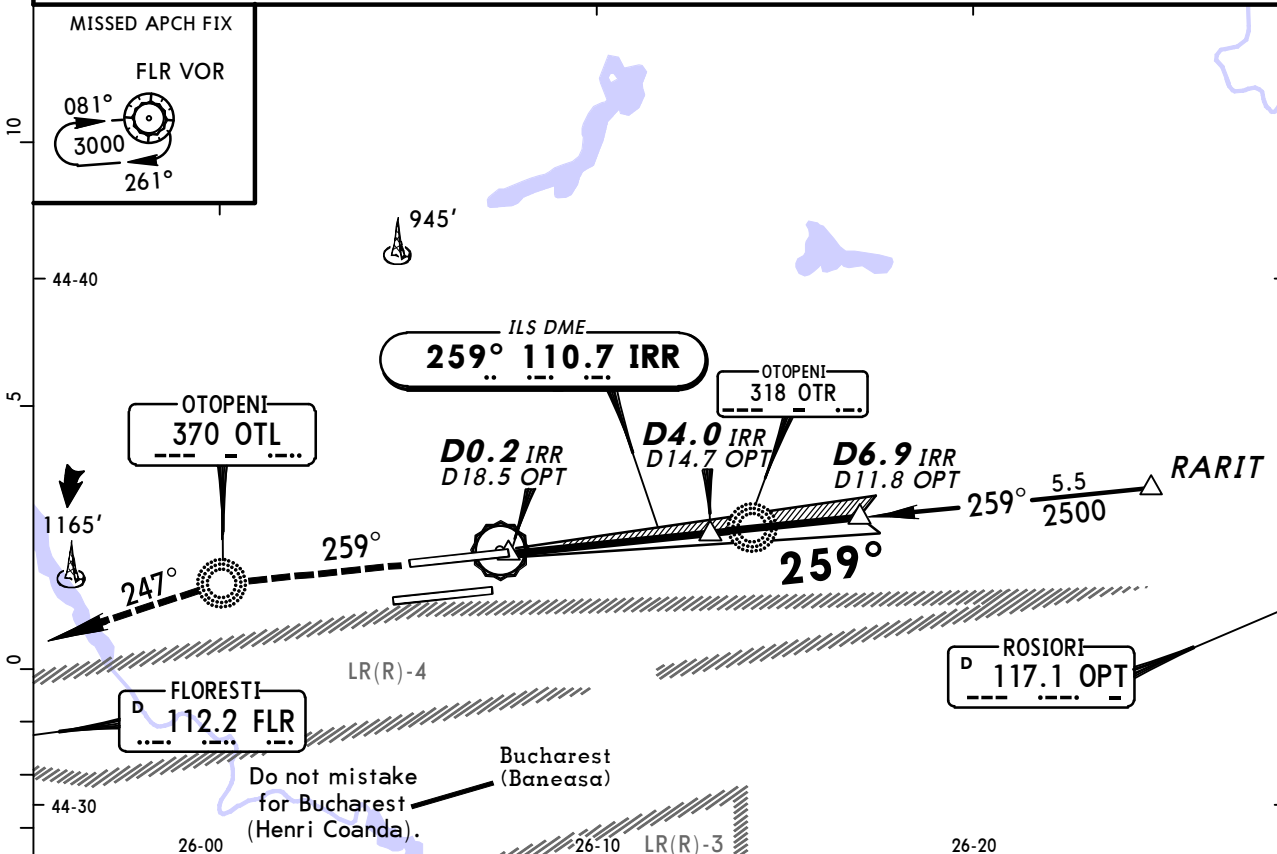 Alt Set: hPa (MM on req) Rwy Elev: 11 hPa Trans level: By ATC Trans alt: 4000'
ADF and DME required.


LOC (GS out)	IRR DME	1.0	2.0	3.0	4.0	5.0	6.0
	ALTITUDE	621'	940'	1258'	1577'	1895'	2214'

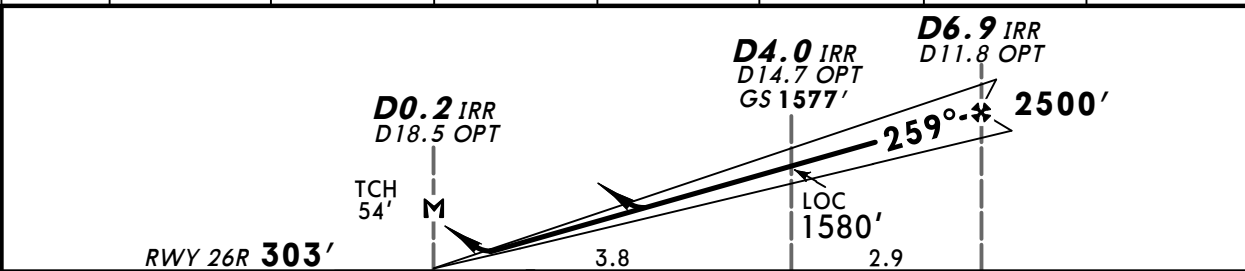

Gnd speed-Kts	70	90	100	120	140	160		
ILS GS or LOC Descent Angle 3.00°	372	478	531	637	743	849		
MAP at D0.2 IRR/D18.5 OPT								

Standard	STRAIGHT-IN LANDING RWY 26R				CIRCLE-TO-LAND Not authorized South of airport	
	ILS DA(H) ABC: 503' (200') D: 509' (206')		LOC (GS out) DA(H) 680' (377')			



	FULL	Limited	ALS out		ALS out	Max Kts	MDA(H)	VIS
A						100	780' (466')	1500m
B	RVR 550m	RVR 750m	RVR 1200m	RVR 1000m	RVR 1500m	135	820' (506')	1600m
C						180	1010' (696')	2400m
D						205	1020' (706')	3600m

LROP/OTP
HENRI COANDA

JEPPESEN
15 MAY 15 **(26-01)** **Eff 28 May**

BUCHAREST, ROMANIA
NDB Rwy 08L

ATIS	BUCHAREST Approach (R)	OTOPENI Tower	Ground	
118.5	118.250	121.850	121.7 118.8	
NDB OTL 370	Final Apch Crs 079°	Procedure Alt D26.5 OPT 2500' (2186')	DA(H) 740' (426')	Apt Elev 314'
MISSED APCH: Climb on track 079° inbound to OTR NDB not below 1600', then turn RIGHT direct to OPT VOR to 3000' and hold, or as directed.				
Alt Set: hPa (MM on req)				Trans alt: 4000'
Apt Elev: 11 hPa				Trans level: By ATC
DME required.				

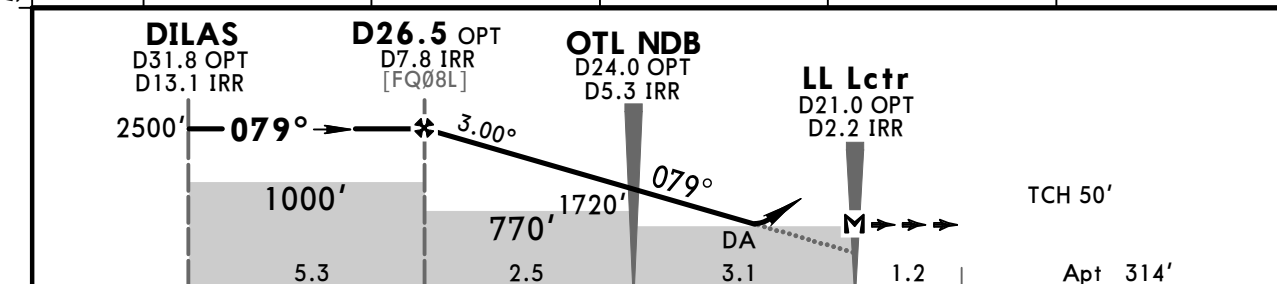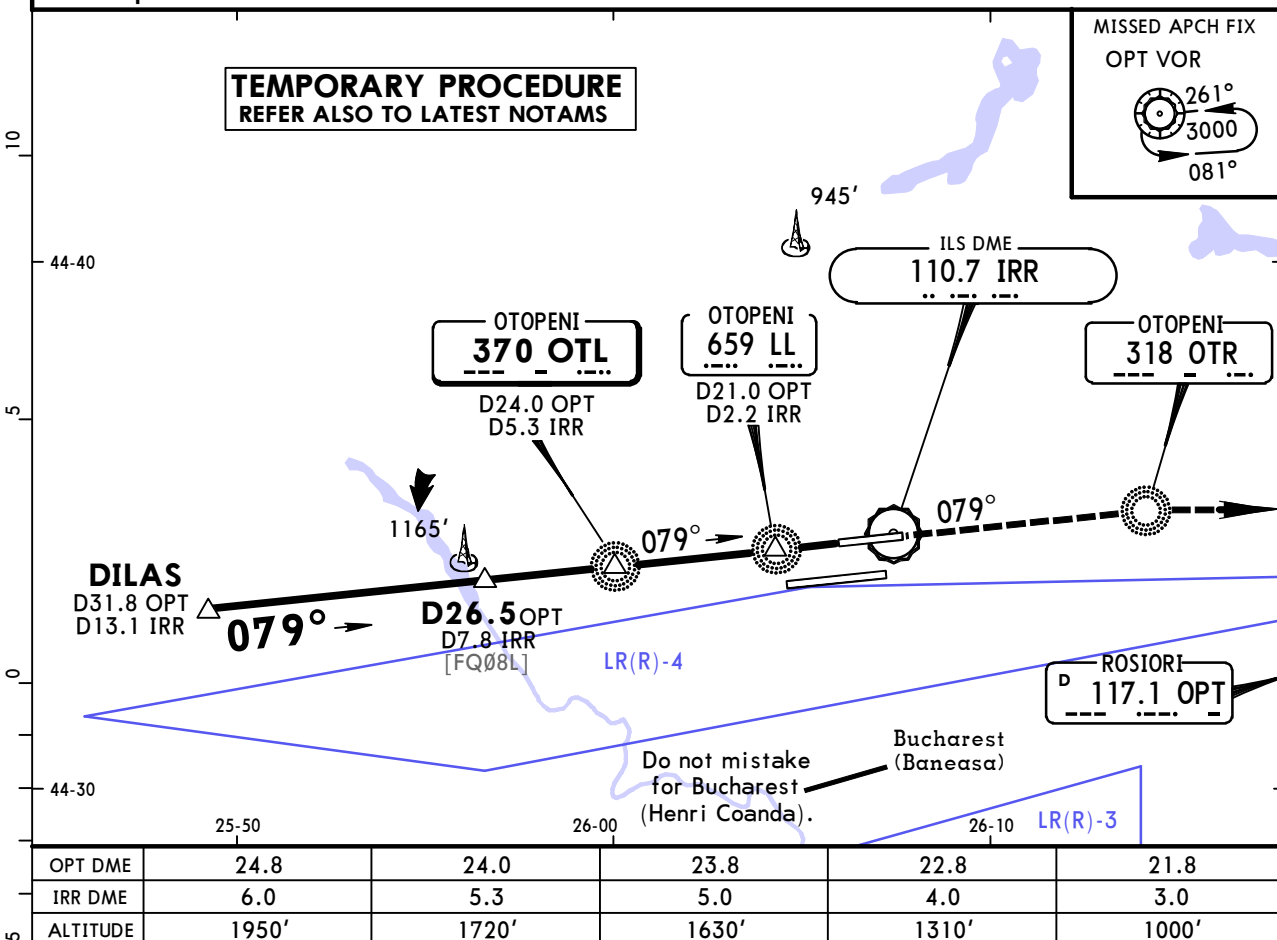

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 3.00°	372	478	531	637	743	849
MAP at LL Lctr/D21.0 OPT/D2.2 IRR						

MIM	1600'	on 079°	OTR	318
-----	-------	---------	-----	-----

Standard STRAIGHT-IN LANDING RWY 08L

CIRCLE-TO-LAND
Not authorized
South of airport

DA(H) 740' (426')		Max Kts	MDA(H)	VIS
A	RVR 1500m	100	780'(466')	1500m
B		135	820'(506')	1600m
C	RVR 2000m	180	920'(606')	2400m
D		205	1020'(706')	3600m


CHANGES: New temporary procedure.

© JEPPESEN, 2015. ALL RIGHTS RESERVED.

LROP/OTP
HENRI COANDA

JEPPESEN
27 SEP 13 **(26-2)**


BUCHAREST, ROMANIA
NDB Rwy 08R

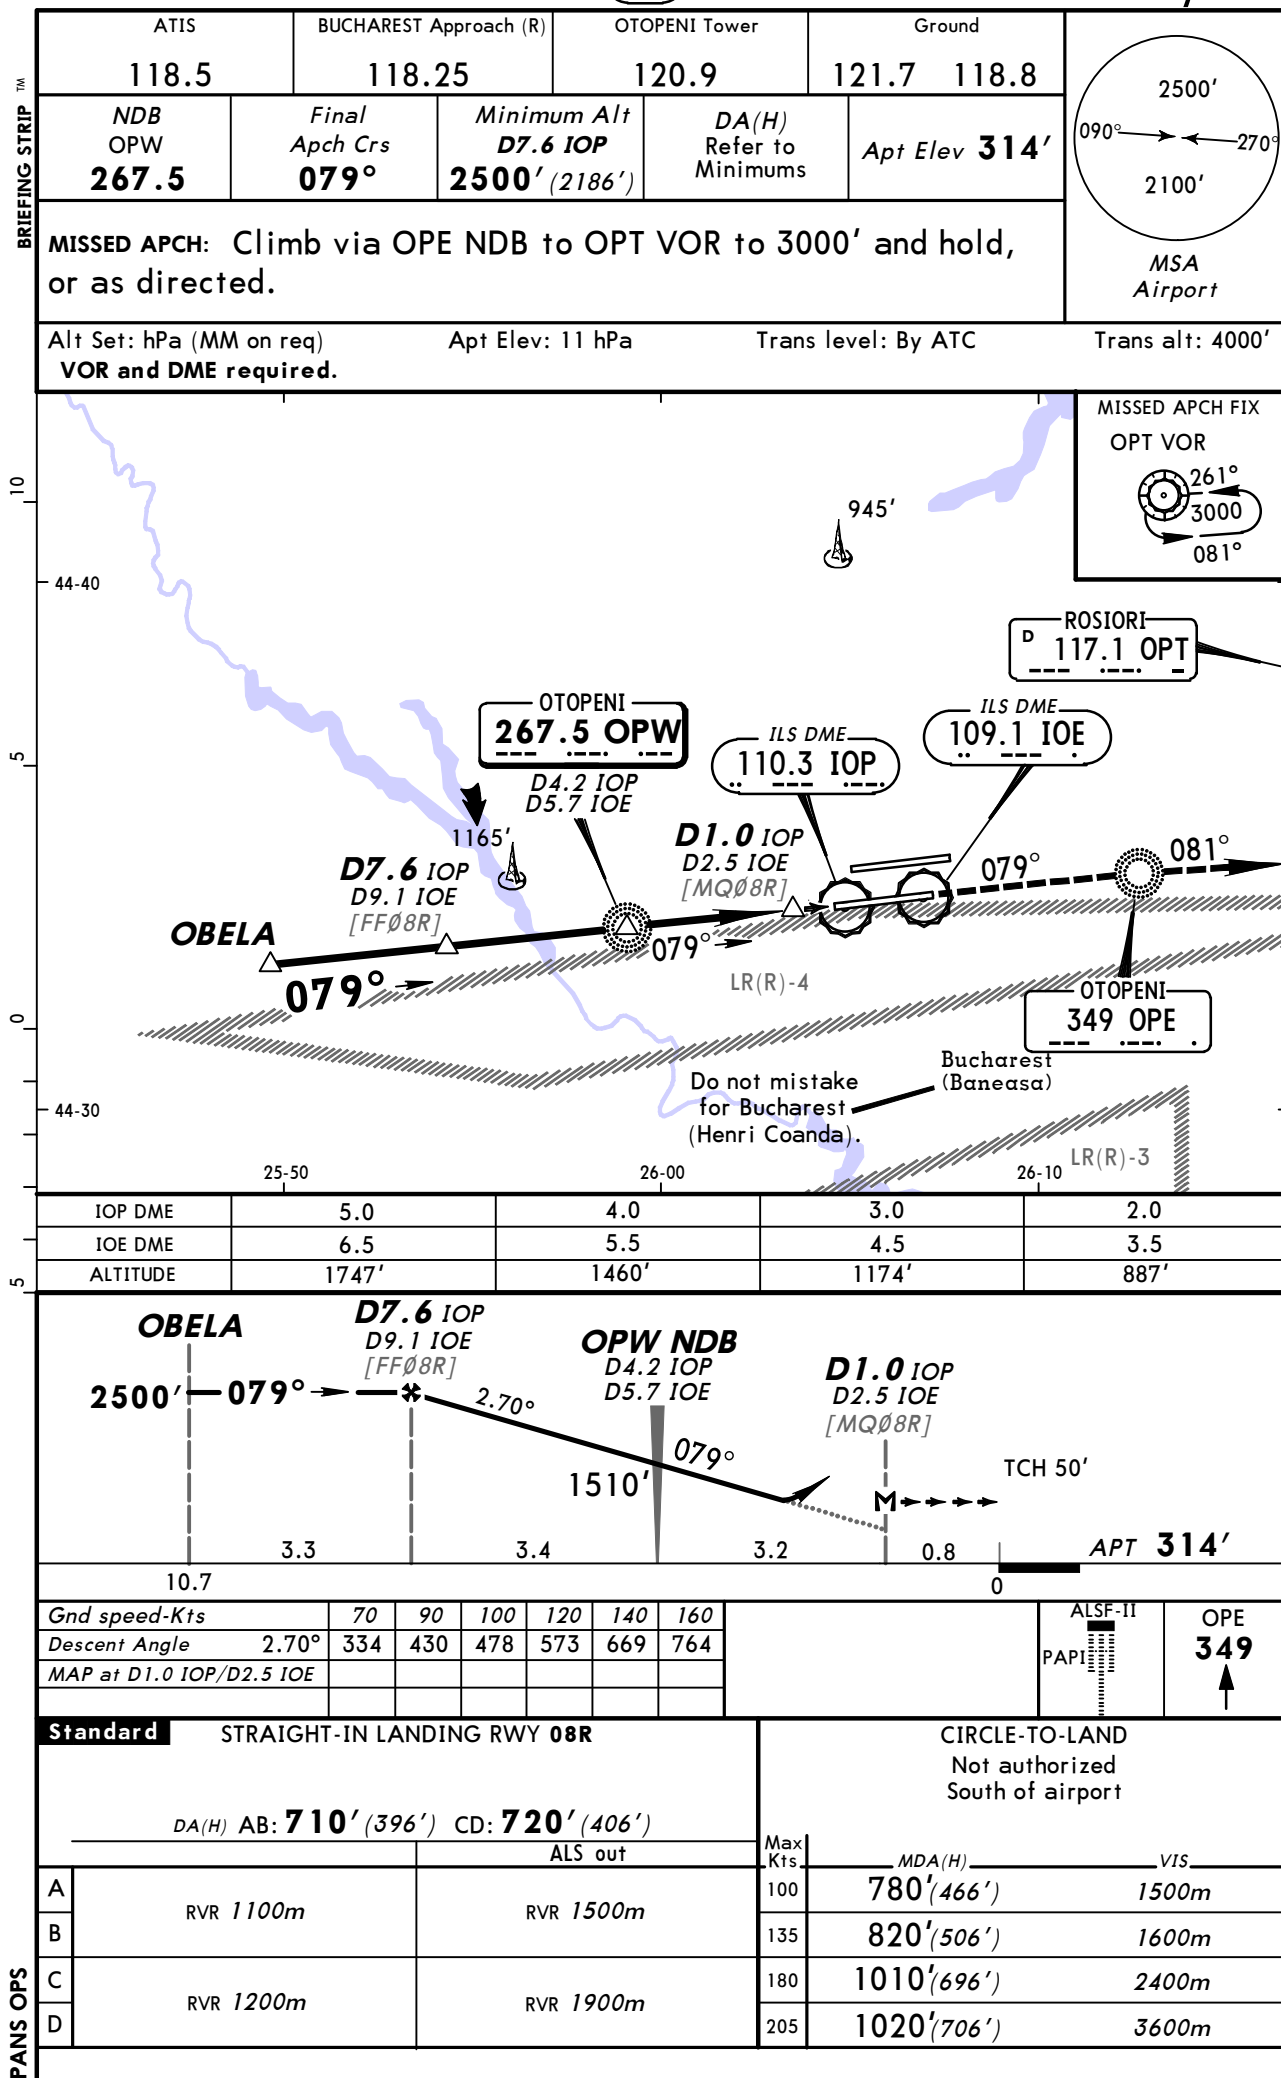

LROP/OTP
HENRI COANDA

JEPPESSEN
27 SEP 13 **(26-3)**

BUCHAREST, ROMANIA
NDB Rwy 26R

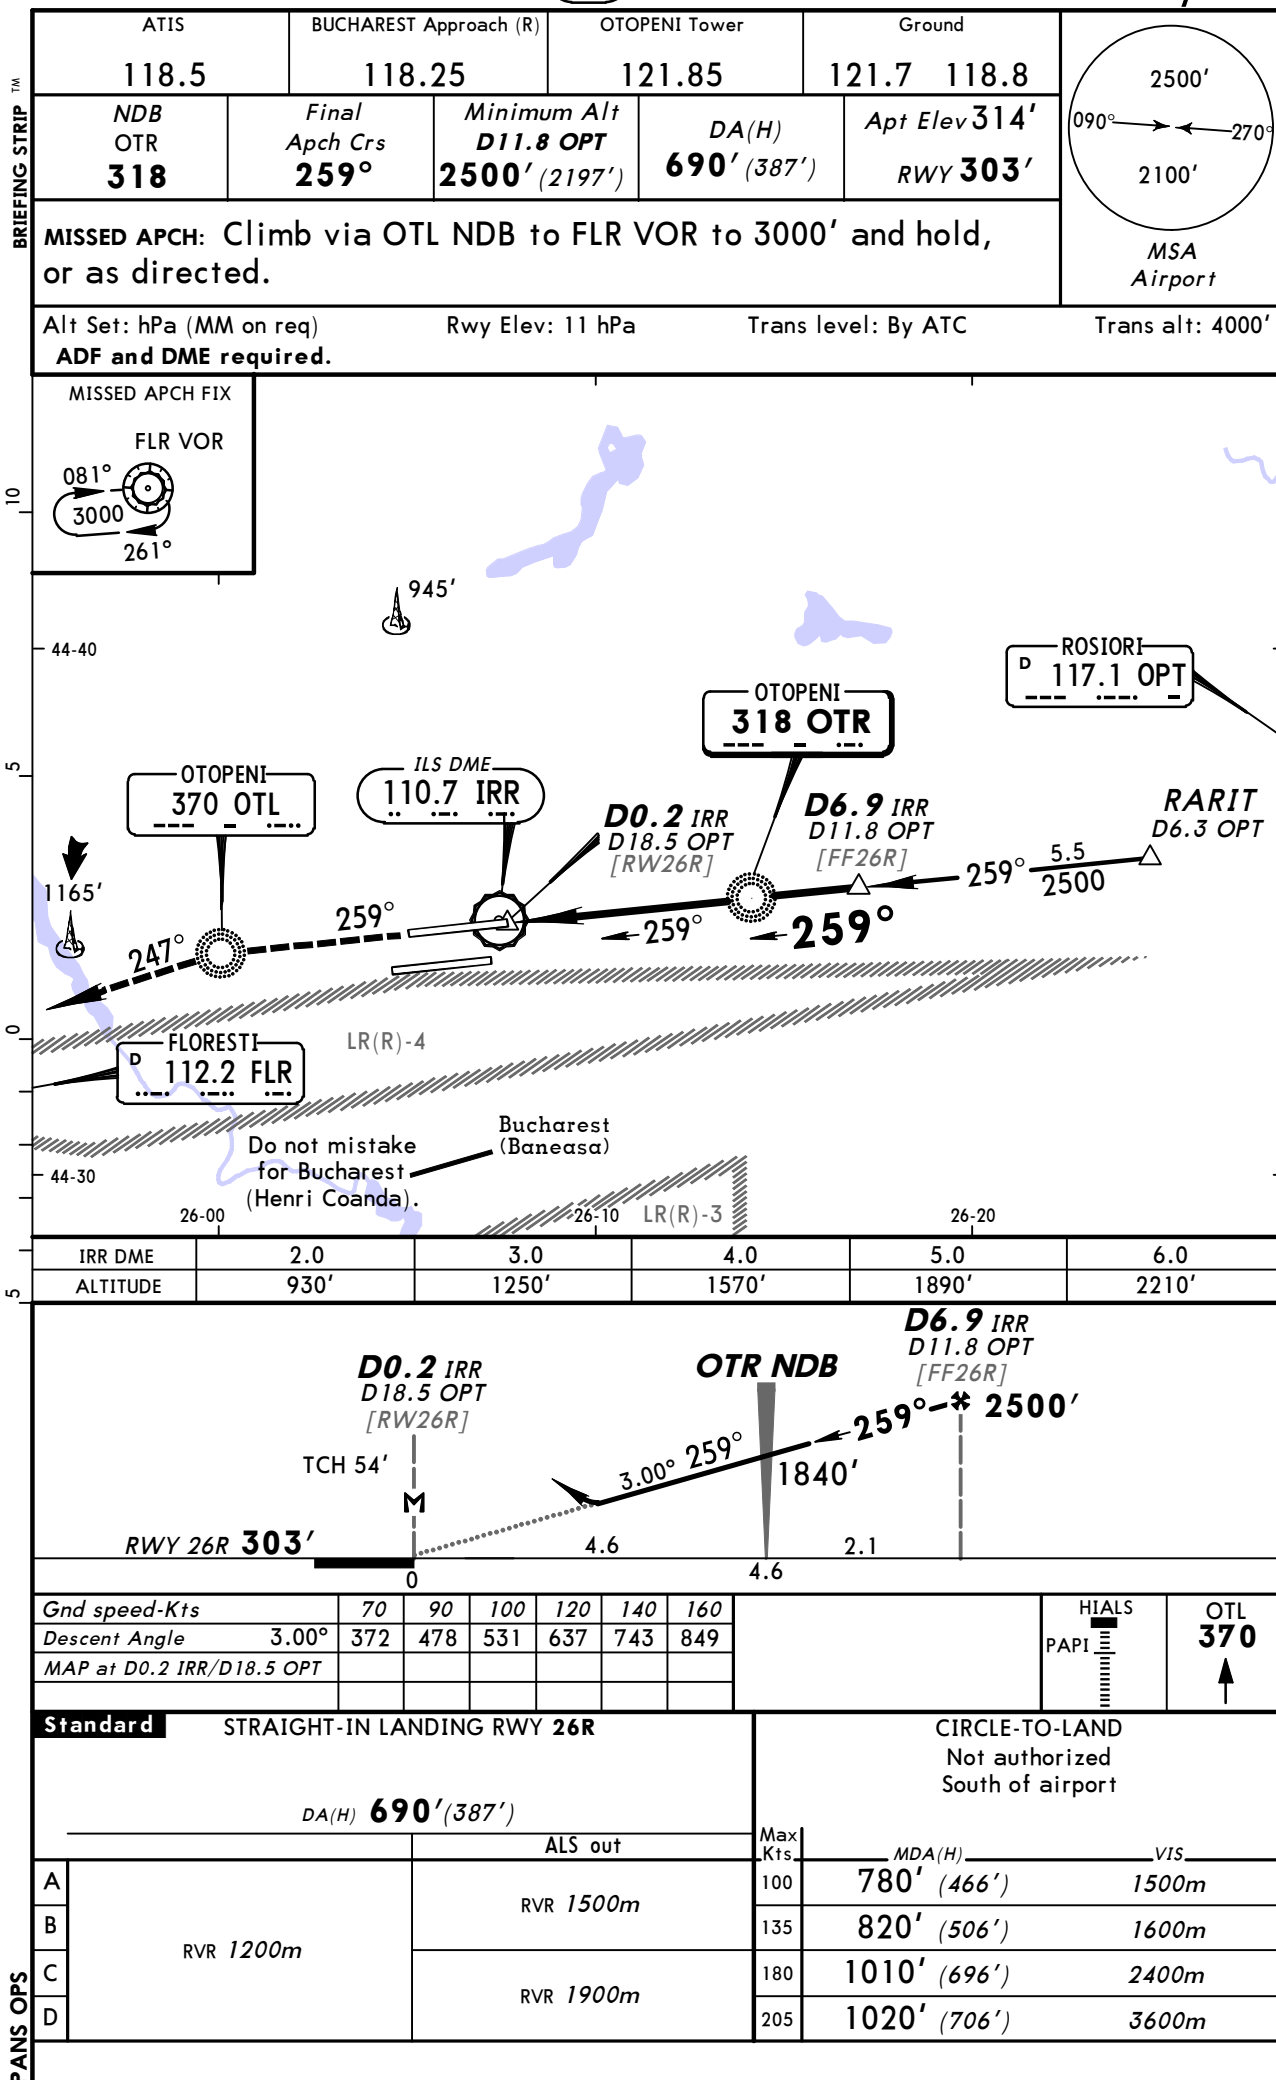

BUCHAREST, (HENRI COANDA - LROP)

TERMINAL CHART CHANGE NOTICES

Chart Change Notices for Airport LROP

Type: Terminal

Effectivity: Temporary

Begin Date: 20150623

End Date: Until Further Notice

(21-1, 21-1A, 26-1) IAPs ILS Rwy 08L, CAT II/III ILS Rwy 08L and NDB Rwy 08L suspended. For temporary IAPs refer to (21-01) LOC Rwy 08L and (26-01) NDB Rwy 08L. Eff date: 23 JUN 15.

Type: Terminal

Effectivity: Temporary

Begin Date: Immediately

End Date: Until Further Notice

(20-1R) For arriving acft MAX 250 KT below FL100.

Type: Terminal

Effectivity: Temporary

Begin Date: 20150623

End Date: Until Further Notice

Construction works on Rwy 08L/26R. Refer to (20-8) and latest NOTAMs. Eff date: 23 JUN 15.