

List of pages in this Trip Kit

Trip Kit Index

Airport Information For LROP

Terminal Charts For LROP

Revision Letter For Cycle 13-2016

Change Notices

Notebook

General Information

Location: BUCHAREST ROU
ICAO/IATA: LROP / OTP
Lat/Long: N44° 34.27', E026° 05.10'
Elevation: 314 ft

Airport Use: Public
Daylight Savings: Observed
UTC Conversion: -2:00 = UTC
Magnetic Variation: 5.0° E

Fuel Types: 100 Octane (LL), Jet A-1
Repair Types: Minor Airframe, Minor Engine
Customs: Yes
Airport Type: IFR
Landing Fee: Yes
Control Tower: Yes
Jet Start Unit: No
LLWS Alert: No
Beacon: No

Sunrise: 0230 Z
Sunset: 1804 Z

Runway Information

Runway: 08L
Length x Width: 7339 ft x 148 ft
Surface Type: asphalt
TDZ-Elev: 309 ft
Lighting: Edge, Centerline

Runway: 08R
Length x Width: 11483 ft x 148 ft
Surface Type: asphalt
TDZ-Elev: 314 ft
Lighting: Edge, ALS, Centerline, TDZ

Runway: 26L
Length x Width: 11483 ft x 148 ft
Surface Type: asphalt
TDZ-Elev: 303 ft
Lighting: Edge, ALS, Centerline

Runway: 26R
Length x Width: 7339 ft x 148 ft
Surface Type: asphalt
TDZ-Elev: 304 ft
Lighting: Edge, ALS, Centerline

Communication Information

ATIS: 118.500
Otopeni Tower: 120.900
Otopeni Tower: 121.850
Otopeni Ground: 118.800 Secondary
Otopeni Ground: 121.700
Bucharest Approach: 118.250
Bucharest Approach: 120.600 Secondary

LROP/OTP
HENRI COANDA

15 MAY 15

JEPPesen
20-1P

Eff 28 May

BUCHAREST, ROMANIA
AIRPORT BRIEFING

1. GENERAL

1.1. ATIS

ATIS 118.5

1.2. NOISE ABATEMENT PROCEDURES

1.2.1. REVERSE THRUST

Avoid reverse thrust after landing, consistent with safe operation of ACFT, especially between 2300-0700LT.

1.2.2. RUN-UP TESTS

ATC will approve idle ground engine runs.

Permission for ground testing in excess of idle must commence in the Engine Test Bay and must be requested through the marshaller, ext. 3426, at all times.

Times of operation are 0600-2300LT.

Engine testing on the open airfield will only be allowed for Chapter 2 ACFT between 0900-1700LT and Chapter 3 ACFT between 0600-2300LT. Propeller-driven ACFT are to be classified as Chapter 3.

1.2.3. USE OF APU

The APU is permitted functioning maximum 15 min after block-on time and may be started over 30 min before standard.

1.3. LOW VISIBILITY PROCEDURES (LVP)

The preparation phase will be implemented when VIS falls below 1500m and is deteriorated to 800m or ceiling is 500' and is deteriorated to 200' and CAT II/III operations are expected.

The operation phase will be commenced when RVR falls below 600m (VIS falls below 800m) or ceiling is below 200'.

LVP will be terminated when RVR is greater than 600m (VIS greater than 800m) and ceiling is greater than 200' and a continuing improvement in these conditions is anticipated.

If LVP operations are not in force, Low Visibility Take-off must be requested a minimum of 30 min in advance to permit the appropriate preparations.

ACFT movements on manoeuvring area to/from RWYs should be made using the Standard Taxi Routes.

Upon receiving taxi clearance, ACFT must only proceed when a green centerline path is illuminated.

ACFT movements on TWYs P and C and on aprons must be carried out with Follow-me car.

Red stop bars at all intersections of RWYs with TWYs except TWYs used only for exit (rapid exit TWY W and V).

Pilots wishing to conduct a guided take-off must inform ATC on start-up in order to ensure that protection of the localizer sensitive area is provided.

Intersection take-offs are not permitted.

LROP/OTP
HENRI COANDA

15 MAY 15

JEPPesen
(20-1P1)

Eff 28 May

BUCHAREST, ROMANIA
AIRPORT BRIEFING

1. GENERAL

1.4 OPERATION OF MODE S TRANSPONDERS WHEN ACFT IS ON THE GROUND

ACFT operators shall ensure that the Mode S transponders are able to operate when ACFT is on the ground, according to ICAO specifications (Annex 10, volume IV, 3.1.2.8.5.3 and 3.1.2.10.3.10).

Aircrews shall select the assigned Mode A code and activate the Mode S by selecting AUTO, ON, XPNDR, or the equivalent according to specific installation and assigned Mode A code under the following conditions:

- From request of push-back or taxi, whichever is earlier;
- After landing, continuously until the ACFT is fully parked on the stand.

The transponder shall be switched off immediately after parking.

Whenever the ACFT is capable of reporting flight identification (i.e. call sign used in flight), the flight identification should also be entered from the request for push-back or taxi, whichever is earlier (through the FMS or the transponder control panel). Aircrews shall use the format as defined in field 7 of the ICAO flight plan for entry of the flight identification.

To ensure that the performance of the systems based on SSR frequencies (including airborne TCAS units and SSR radars) is not compromised, TCAS shall not be activated before receiving the clearance to line up. After landing, it shall be deactivated after vacating the runway.

1.5. TAXI PROCEDURES

On the aprons ACFT are permitted to taxi only at the indispensable minimum engine speed.

Taxiing of ACFT with wingspan greater than 171'/52m is permitted only with engines 1 and 4 on idle power.

Pilots are to delay call "RWY vacated" until ACFT has completely passed the end of green/yellow TWY centerline lights.

Orange guidelines are mandatory for:

A300, A310, B707-320, B757-200, B767-200, B777, DC10-30, IL18, IL62, IL76, IL86, L100-30, L1011-500, TU154, B747-200 and B747-400.

TWY L MAX wingspan 118'/36m.

TWY I MAX wingspan 171'/52m.

TWY M MAX wingspan 213'/65m.

1.6. PARKING INFORMATION

Floodlight poles close to stands 106, 107, 109, 110, 120 and 121.

Apron 1: Stands 101, 102 and 113 thru 115 are equipped with stand entry guidance SAFEDOCK T-3 and stands 103 thru 107 and 109 thru 112 with SAFEDOCK T-1.

Stands 101 thru 118 on apron 1 push-back required.

Stands 119 thru 122 on Apron 1 and stands 202 thru 223 on Apron 2:

Self-parking procedure, stop ACFT when yellow STOP marking is in line with pilots eye view at an angle of 90° to the lead-in line.

2. ARRIVAL

2.1. CAT II/III OPERATIONS

RWYs 08L/R approved for CAT II/III operations, special aircrew and ACFT certification required.

LROP/OTP
HENRI COANDA

JEPPesen
15 MAY 15 (20-1P2) Eff 28 May

BUCHAREST, ROMANIA
AIRPORT BRIEFING

2. ARRIVAL

2.2. TAXI PROCEDURES

2.2.1. STANDARD TAXI ROUTES

2.2.1.1. RWY 08L

Taxi route	Apron	TWY to be followed	Remarks
Arrival 1D	Apron 1	V, O, N	
Arrival 1E		O, N	
Arrival 2C	Apron 2	V, O, P, C	For ACFT with wingspan less than 171'/52m
Arrival 2D		O, P, C	For ACFT with wingspan less than 171'/52m
Arrival 3C	Apron 3	O, P	
Arrival 3D		V, N, C, P	For ACFT with wingspan less than 171'/52m

2.2.1.2. RWY 08R

Taxi route	Apron	TWY to be followed	Remarks
Arrival 1A	Apron 1	D, C	For ACFT with wingspan less than 171'/52m
Arrival 1B		D, P, O, N	
Arrival 1C		G	
Arrival 2A	Apron 2	D, C	For ACFT with wingspan less than 171'/52m
Arrival 2B		G, C	For ACFT with wingspan less than 171'/52m
Arrival 3A	Apron 3	D, P	
Arrival 3B		G, C, P	For ACFT with wingspan less than 171'/52m

2.2.1.3. RWY 26L

Taxi route	Apron	TWY to be followed	Remarks
Arrival 7D	Apron 1	G, N	
Arrival 7E		A, B	
Arrival 8C	Apron 2	G, C	For ACFT with wingspan less than 171'/52m
Arrival 8D		A, B, C	For ACFT with wingspan less than 171'/52m
Arrival 9C	Apron 3	G, C, P	For ACFT with wingspan less than 171'/52m
Arrival 9D		A, B, C, P	For ACFT with wingspan less than 171'/52m

2.2.1.4. RWY 26R

Taxi route	Apron	TWY to be followed	Remarks
Arrival 4A	Apron 1	W, O, N	
Arrival 4B		N	
Arrival 5A	Apron 2	W, P, C	For ACFT with wingspan less than 171'/52m
Arrival 5B		W, O, N, C	For ACFT with wingspan less than 171'/52m
Arrival 6A	Apron 3	W, P	
Arrival 6B			For ACFT with wingspan less than 171'/52m

LROP/OTP
HENRI COANDA

JEPPesen
15 MAY 15 (20-1P3)

BUCHAREST, ROMANIA
Eff 28 May **AIRPORT BRIEFING**

2. ARRIVAL

2.3. PARKING PROCEDURES

When taxiing into ACFT stands, ACFT shall generally not stop in curves between the centerlines of apron TWYs or ACFT stand taxi lanes and the centerlines of ACFT stands so as to avoid the further appliance of break-away power.

If in the course of a manoeuvre as described above, an ACFT inadvertently comes to a stop, prior to increasing engine power again to continue, the pilot shall notify Ground Control and await further instructions.

Parking of ACFT at positions not provided with SEG is only permitted according to the signals of the marshaller.

3. DEPARTURE

3.1. TAXI PROCEDURES

3.1.1. STANDARD TAXI ROUTES

3.1.1.1. RWY 08L

Apron	Taxi route	Holding position	TWY to be followed	Remarks
Apron 1	Departure 1C	N	N	
	Departure 1D	O	C, P,O, taxi on RWY backtrack and line-up THR	For ACFT with wingspan less than 171'/52m
Apron 2	Departure 2C	N	C, N	For ACFT with wingspan less than 171'/52m
	Departure 2D	O	C, P,O, taxi on RWY backtrack and line-up THR	For ACFT with wingspan less than 171'/52m
Apron 3	Departure 3C	N	P, O, N	
	Departure 3D	O	P,O, taxi on RWY back-track and line-up THR	

3.1.1.2. RWY 08R

Apron	Taxi route	Holding position	TWY to be followed	Remarks
Apron 1	Departure 1A	A	A	
	Departure 1B	G	G, turn RIGHT taxi to end of RWY and line-up THR	
Apron 2	Departure 2A	A	C, B, A	For ACFT with wingspan less than 171'/52m
	Departure 2B	G	C, G, turn RIGHT taxi to end of RWY and line-up THR	
Apron 3	Departure 3A	A	P, C, B, A	
	Departure 3B	G	P, C, G, turn RIGHT taxi to end of RWY and line-up THR	

LROP/OTP
HENRI COANDA

JEPPESEN
13 SEP 13 (20-1P4) Eff 19 Sep

BUCHAREST, ROMANIA
AIRPORT BRIEFING

3. DEPARTURE

3.1.1.3. RWY 26L

Apron	Taxi route	Holding position	TWY to be followed	Remarks
Apron 1	Departure 1E	D	C, D, turn LEFT taxi to end of RWY, turn around and line-up THR	For ACFT with wing-span less than 171'/52m
	Departure 1F	G	G, turn LEFT taxi to end of RWY, turn around and line-up THR	For ACFT with wing-span less than 171'/52m
Apron 2	Departure 2E	D	C, D, turn LEFT taxi to end of RWY, turn around and line-up THR	For ACFT with wing-span less than 171'/52m
	Departure 2F	G	C, G, turn LEFT taxi to end of RWY, turn around and line-up THR	
Apron 3	Departure 3E	D	P, D, turn LEFT taxi to end of RWY, turn around and line-up THR	
	Departure 3F	G	P, C, G, turn LEFT taxi to end of RWY, turn around and line-up THR	For ACFT with wing-span less than 171'/52m

3.1.1.4. RWY 26R


Apron	Taxi route	Holding position	TWY to be followed	Remarks
Apron 1	Departure 1G	O	N, O and line-up THR	For ACFT with wing-span more than 171'/52m only with Follow-me.
	Departure 1H	N	N, taxi on RWY, back-track and line-up THR	
Apron 2	Departure 2G	O	C, P, O and line-up THR	For ACFT with wing-span less than 171'/52m
	Departure 2H	N	C, N, taxi on RWY, back-track and line-up THR	For ACFT with wing-span less than 171'/52m
Apron 3	Departure 3G	O	P, O and line-up THR	For ACFT with wing-span more than 171'/52m only with Follow-me.
	Departure 3H	N	P, O, N, turn RIGHT taxi on RWY, back-track and line-up THR	

LROP/OTP
HENRI COANDA

JEPPesen
22 JAN 16 (20-1R)

BUCHAREST, ROMANIA
Eff 4 Feb
RADAR MINIMUM ALTITUDES


BUCHAREST Approach (R) 118.250	Apt Elev 314'	Alt Set: hPa (MM on request) 1. Vertical limits are issued by NOTAM. 2. Chart only to be used for cross-checking of altitudes assigned while under radar control.	Trans level: By ATC Trans alt: 4000'
--------------------------------------	------------------	---	---

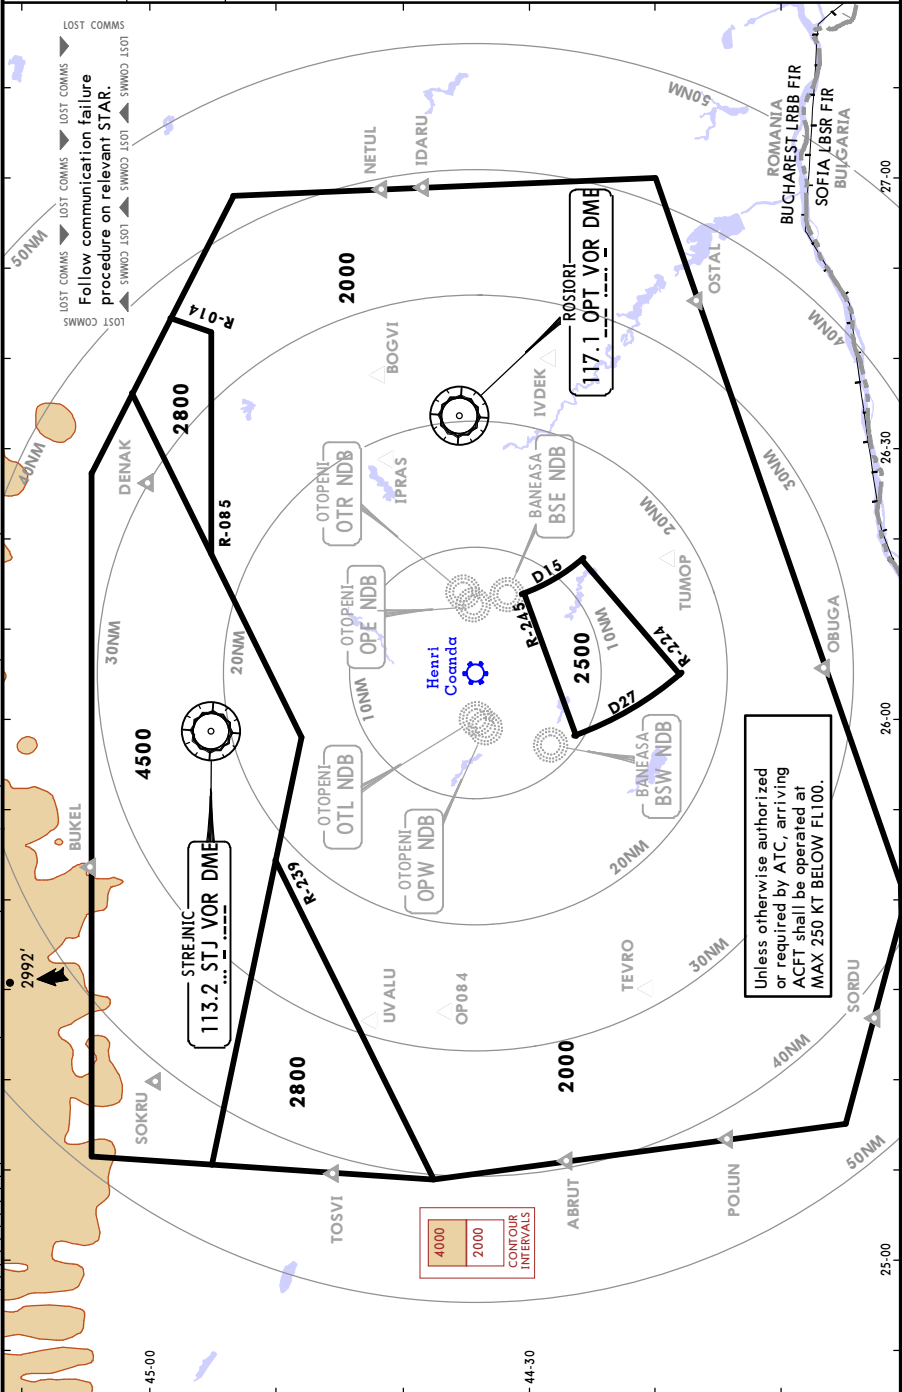

LROP/OTP
HENRI COANDA

JEPPesen BUCHAREST, ROMANIA
22 FEB 13 (20-2) Eff 7 Mar RNAV STAR

ATIS 118.5	Alt Set: hPa (MM on request) Trans level: By ATC Trans alt: 4000' 1. Aircrews should plan for possible descent clearance in accordance with vertical restrictions specified on chart. Actual descent clearance will be as directed by ATC. 2. EXPECT direct routing/shortcuts by ATC whenever possible, including short-cuts on downwind to final approach. 3. 112.2 FLR, 117.1 OPT and 113.2 STJ must all be serviceable for DME/DME operation. 4. OBELA/DILAS is a tactical fix for non-standard shorter approach, used only after request or approval by aircrews.
Apt Elev 314'	

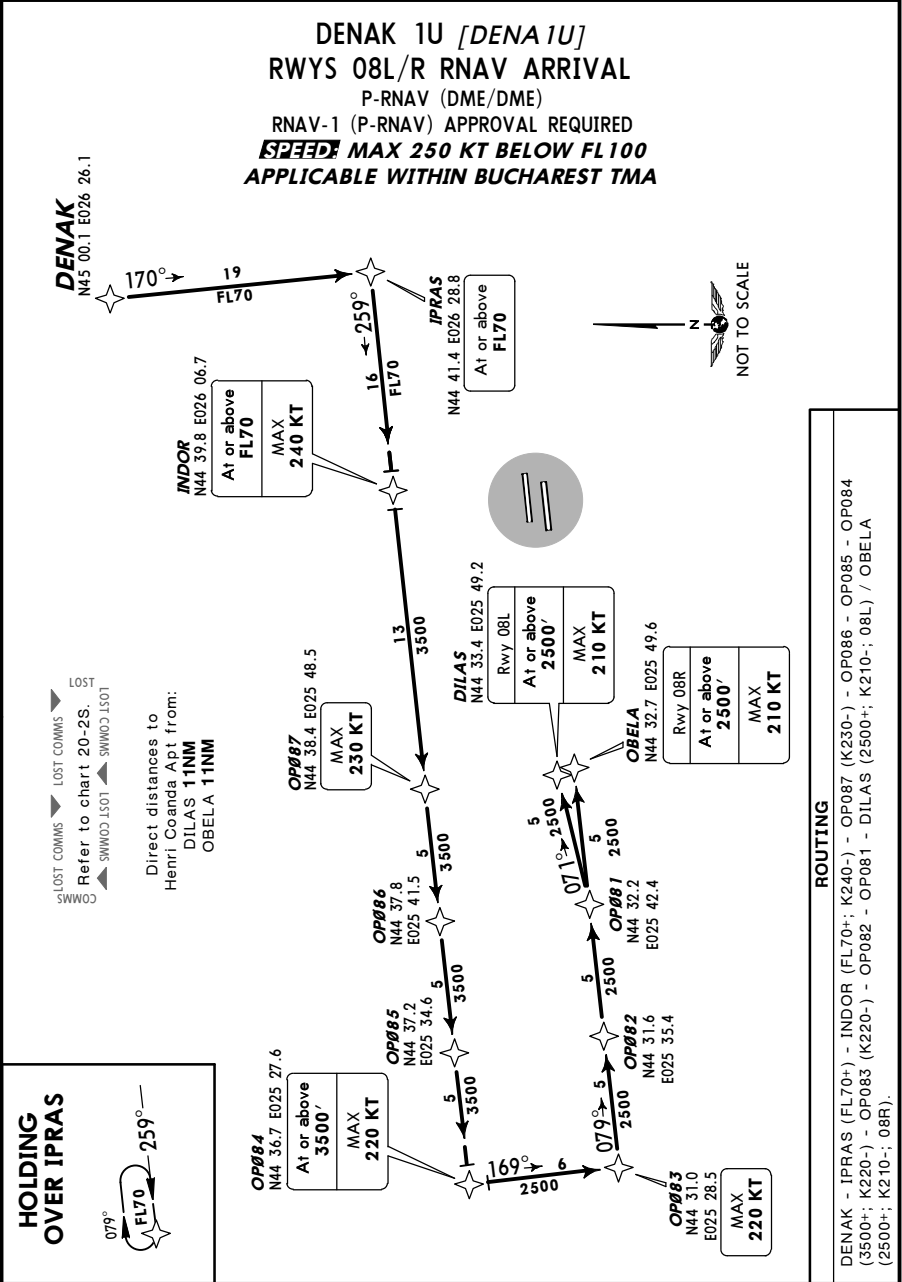

LROP/OTP
HENRI COANDA

JEPPESSEN
22 FEB 13 (20-2A) Eff 7 Mar


BUCHAREST, ROMANIA
RNAV STAR

ATIS
118.5


Apt Elev
314'

- Alt Set: hPa (MM on request) Trans level: By ATC Trans alt: 4000'
1. Aircrews should plan for possible descent clearance in accordance with vertical restrictions specified on chart. Actual descent clearance will be as directed by ATC.
 2. EXPECT direct routing/shortcuts by ATC whenever possible, including short-cuts on downwind to final approach.
 3. 112.2 FLR, 117.1 OPT and 113.2 STJ must all be serviceable for DME/DME operation.
 4. RARIT/LEVTA is a tactical fix for non-standard shorter approach, used only after request or approval by aircrews.

DENAK 2X [DENA2X]
RWYS 26L/R RNAV ARRIVAL
P-RNAV (DME/DME)
RNAV-1 (P-RNAV) APPROVAL REQUIRED
~~SPEED~~ MAX 250 KT BELOW FL100
APPLICABLE WITHIN BUCHAREST TMA

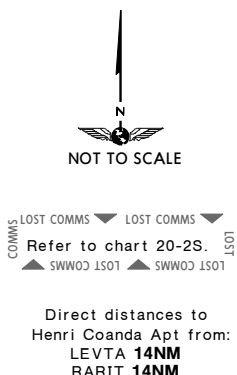

**HOLDING
OVER DENAK**

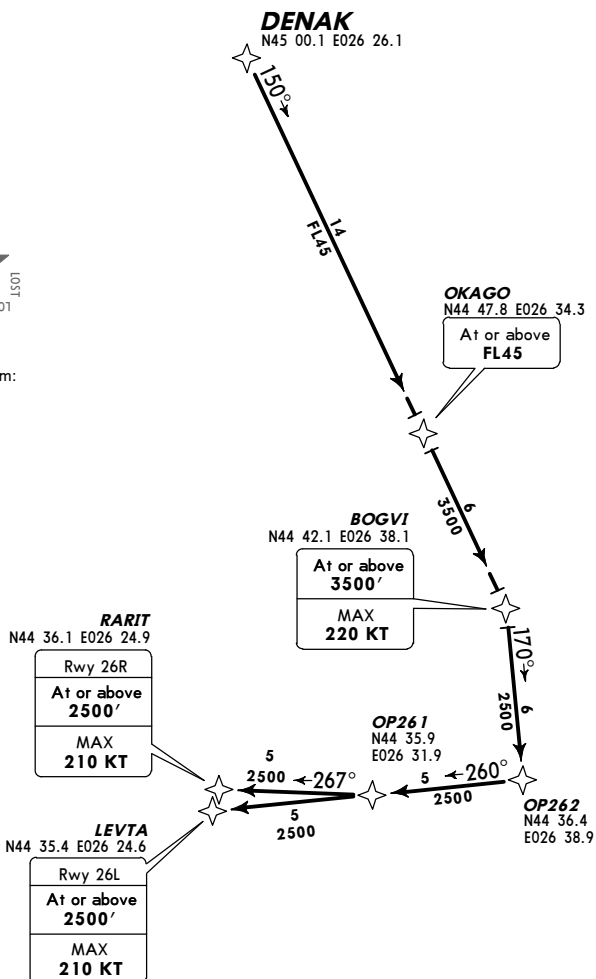

ROUTING


DENAK - OKAGO (FL45+) - BOGVI (3500+; K220-) - OP262 - OP261 - LEVTA (2500+; K210-; 26L) / RARIT (2500+; K210-; 26R).

LROP/OTP
HENRI COANDA

JEPESEN 22 MAR 13 (20-2B) Eff 4 Apr

BUCHAREST, ROMANIA
RNAV STAR

ATIS 118.5	Alt Set: hPa (MM on request) Trans level: By ATC Trans alt: 4000' 1. Aircrews should plan for possible descent clearance in accordance with vertical restrictions specified on chart. Actual descent clearance will be as directed by ATC. 2. EXPECT direct routing/shortcuts by ATC whenever possible, including short-cuts on downwind to final approach. 3. 112.2 FLR, 117.1 OPT and 113.2 STJ must all be serviceable for DME/DME operation. 4. OBELA/DILAS is a tactical fix for non-standard shorter approach, used only after request or approval by aircrews.
Apt Elev 314'	

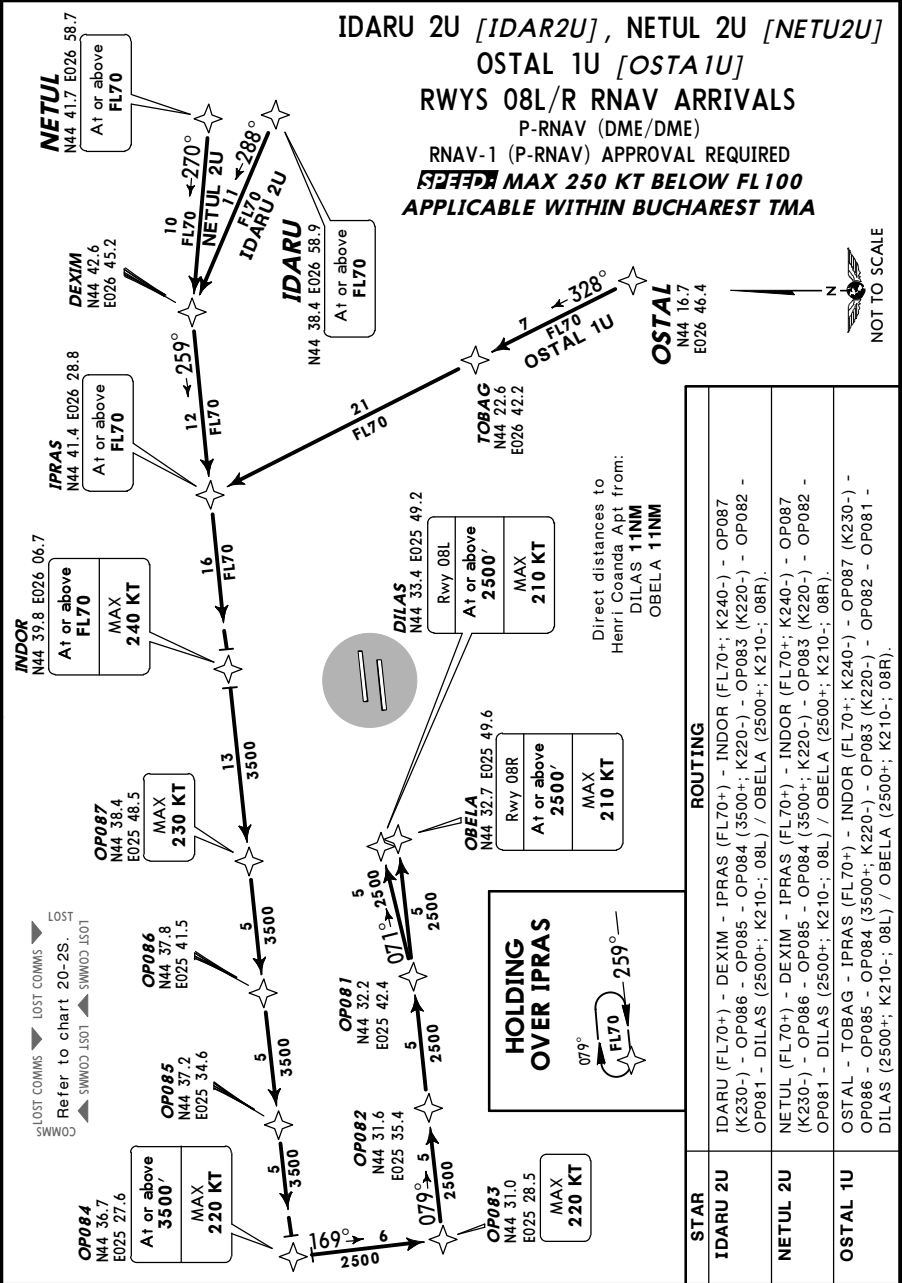

IVDEK (K220-) - OP262 - OP261 - LEVTA (2500+; K210-; 20+; K210-; 26R).

LROP/OTP
HENRI COANDA

JEPPESSEN
1 FEB 13 **(20-2E)** **Eff 7 Feb**

BUCHAREST, ROMANIA
RNAV STAR

ATIS 118.5	Alt Set: hPa (MM on request) Trans level: By ATC Trans alt: 4000' 1. Aircrews should plan for possible descent clearance in accordance with vertical restrictions specified on chart. Actual descent clearance will be as directed by ATC. 2. EXPECT direct routing/shortcuts by ATC whenever possible, including short-cuts on downwind to final approach. 3. 112.2 FLR, 117.1 OPT and 113.2 STJ must all be serviceable for DME/DME operation. 4. RARIT/LEVTA is a tactical fix for non-standard shorter approach, used only after request or approval by aircrews.
Apt Elev 314'	

OBUGA 1X [OBUG1X], SORDU 1X [SORD1X]

RWYS 26L/R RNAV ARRIVALS

P-RNAV (DME/DME)

RNAV-1 (P-RNAV) APPROVAL REQUIRED

~~SPEED~~ MAX 250 KT BELOW FL100

APPLICABLE WITHIN BUCHAREST TMA



RARIT
N44 36.1 E026 24.9

Rwy 26R
At or above
2500'
MAX
210 KT

LEVTA
N44 35.4 E026 24.6

Rwy 26L
At or above
2500'
MAX
210 KT

OP261
N44 35.9
E026 31.9

OP262
N44 36.4
E026 38.9

LOST COMMS ▼ LOST COMMS ▼
Refer to chart 20-2S. LOST
▲ SWWOC 1501 ▲ SWWOC 1501

ESUXU
N44 27.5 E026 26.1

MAX
230 KT

ITVUK
N44 28.0
E026 33.1

IVDEK
N44 28.5
E026 40.0

MAX
220 KT

TUMOP
N44 19.1 E026 17.8

At or above
FL70

DONOX
N44 11.1
E025 54.4

UTIDI
N44 15.2 E026 14.0

SORDU
N44 02.6
E025 26.8

OBUGA
N44 06.5 E026 05.7

**HOLDING
OVER TUMOP**



Direct distances to
Henri Coanda Apt from:
LEVTA 14NM
RARIT 14NM

STAR	ROUTING
OBUGA 1X	OBUGA - UTIDI - TUMOP (FL70+) - ESUXU (K230-) - ITVUK - IVDEK (K220-) - OP262 - OP261 - LEVTA (2500+; K210-; 26L) / RARIT (2500+; K210-; 26R).
SORDU 1X	SORDU - DONOX - UTIDI - TUMOP (FL70+) - ESUXU (K230-) - ITVUK - IVDEK (K220-) - OP262 - OP261 - LEVTA (2500+; K210-; 26L) / RARIT (2500+; K210-; 26R).


CHANGES: None. © JEPPESEN, 2013. ALL RIGHTS RESERVED.

LROP/OTP
HENRI COANDA

5 SEP 14
20-2G

BUCHAREST, ROMANIA
RNAV STAR

ATIS 118.5	Alt Set: hPa (MM on request) Trans level: By ATC Trans alt: 4000' 1. Aircrews should plan for possible descent clearance in accordance with vertical restrictions specified on chart. Actual descent clearance will be as directed by ATC. 2. EXPECT direct routing/shortcuts by ATC whenever possible, including shortcuts on downwind to final approach. 3. 112.2 FLR, 117.1 OPT and 113.2 STJ must all be serviceable for DME/DME operation. 4. RARIT/LEVTA is a tactical fix for non-standard shorter approach, used only after request or approval by aircrews.
Apt Elev 314'	

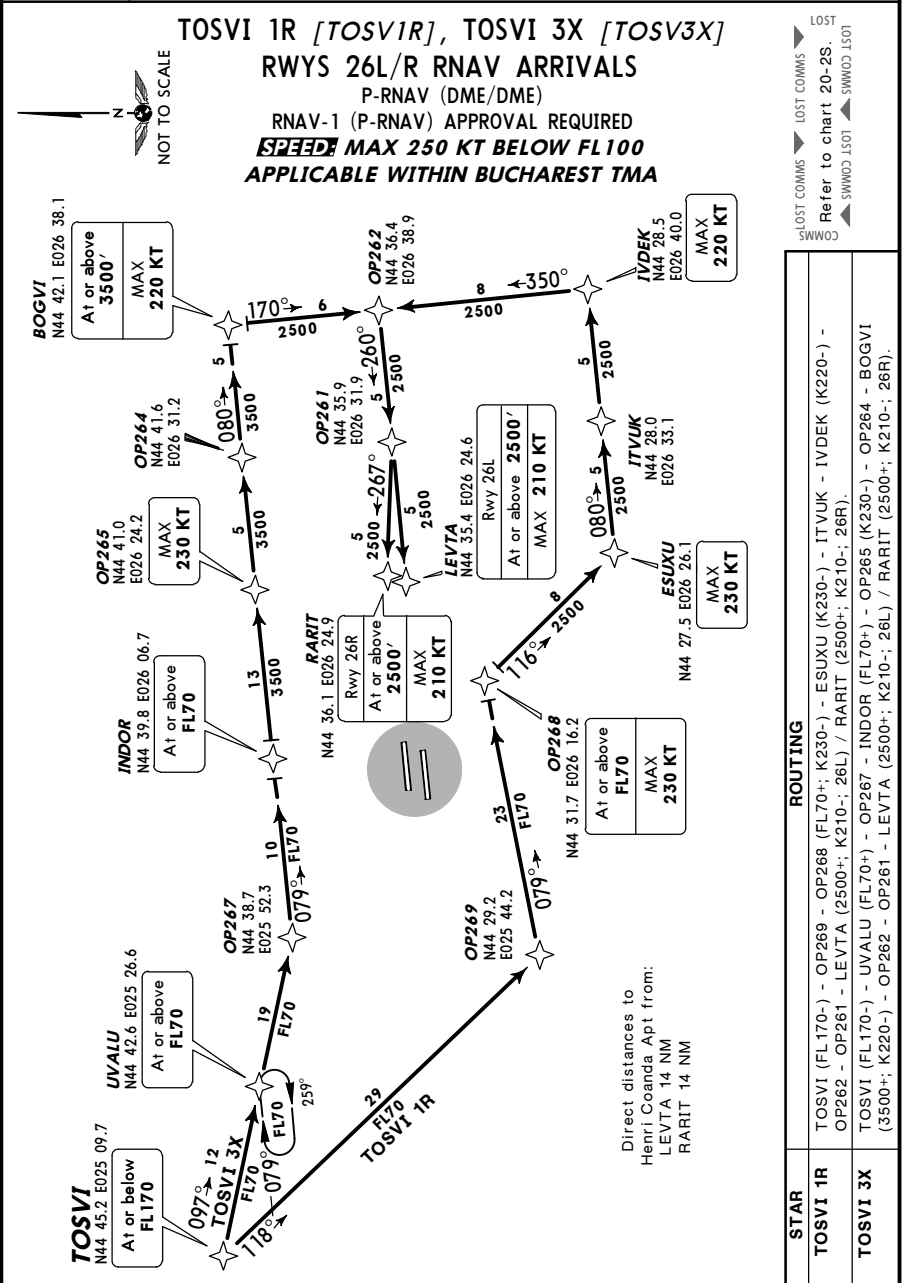

LROP/OTP
HENRI COANDA

JEPPESSEN

1 FEB 13

(20-2H)

Eff 7 Feb

BUCHAREST, ROMANIA

STAR

ATIS
118.5

Apt Elev
314'

Alt Set: hPa (MM on request)
Trans level: By ATC Trans alt: 4000'


DENAK 3E [DENA3E]

RWYS 08L/R ARRIVAL

~~SPEED~~ MAX 250 KT BELOW FL100

APPLICABLE WITHIN BUCHAREST TMA

COMMS LOST COMMS LOST COMMS LOST
Refer to chart 20-2S.
▲ SWW03 1501 ▲ SWW03 1501

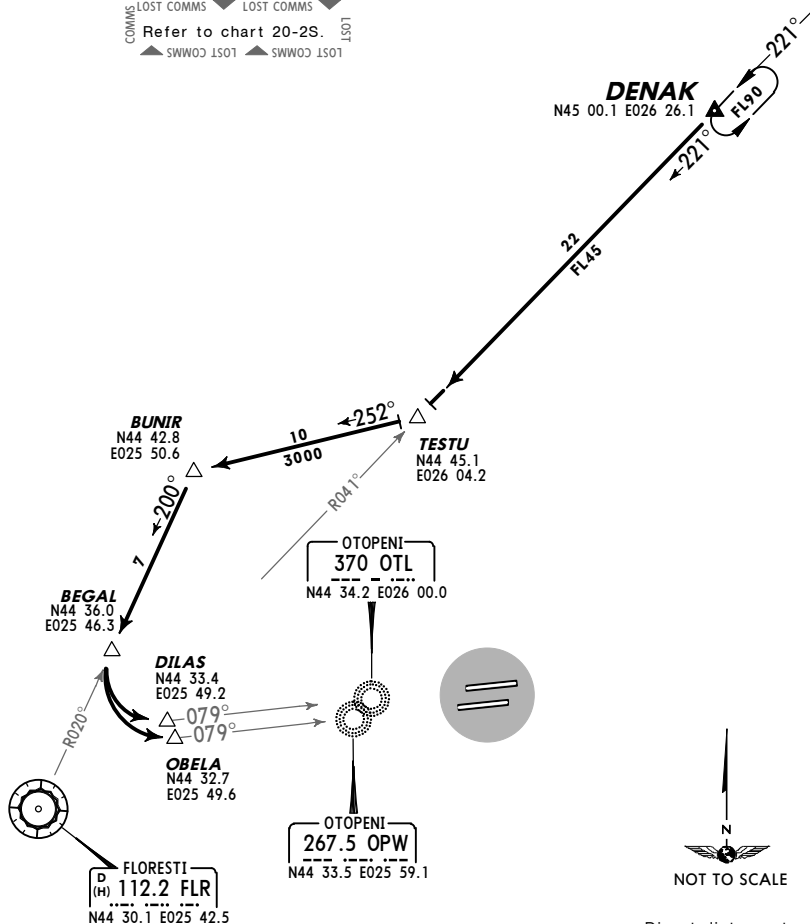

ROUTING

Intercept FLR R-041 inbound to TESTU, 252° track to BUNIR, intercept FLR R-020 inbound to BEGAL, turn LEFT to DILAS (Rwy 08L) or OBELA (Rwy 08R).

LROP/OTP
HENRI COANDA

JEPPESSEN

1 FEB 13

(20-2J)

Eff 7 Feb

BUCHAREST, ROMANIA

STAR

ATIS
118.5

Apt Elev
314'

Alt Set: hPa (MM on request)
Trans level: By ATC Trans alt: 4000'

DENAK 3F [DENA3F]
RWYS 26L/R ARRIVAL
~~SPEED~~ MAX 250 KT BELOW FL100
APPLICABLE WITHIN BUCHAREST TMA



COMMS LOST COMMS LOST COMMS LOST
Refer to chart 20-2S.
▲ SMMWOC 150T ▲ SMMWOC 150T

Direct distance to
Henri Coanda Apt from:
LEVTA 14 NM
RARIT 14 NM



OTOPENI
318 OTR
N44 35.3 E026 14.1

OTOPENI
349 OPE
N44 34.5 E026 12.7

RARIT
N44 36.1
E026 24.9

LEVTA
N44 35.4
E026 24.6

163°
FL90
163°
DENAK
N45 00.1 E026 26.1

22
FLAS

LUROD
N44 38.5
E026 32.7



ROSTORI
D (H) 117.1 OPT
N44 35.6 E026 33.6

ROUTING

Intercept OPT R-343 inbound to LUROD, turn RIGHT, intercept 259° bearing towards OPE to LEVTA (Rwy 26L) or towards OTR to RARIT (Rwy 26R).

LROP/OTP
HENRI COANDA

JEPPesen
1 FEB 13 20-2L

Eff 7 Feb


BUCHAREST, ROMANIA
STAR

ATIS
118.5

Apt Elev
314'

Alt Set: hPa (MM on request)
Trans level: By ATC Trans alt: 4000'

IDARU 6F [IDAR6F]
NETUL 6F [NETU6F]
OSTAL 4F [OSTA4F]
RWYS 26L/R ARRIVALS
~~SPEED~~ MAX 250 KT BELOW FL100
APPLICABLE WITHIN BUCHAREST TMA

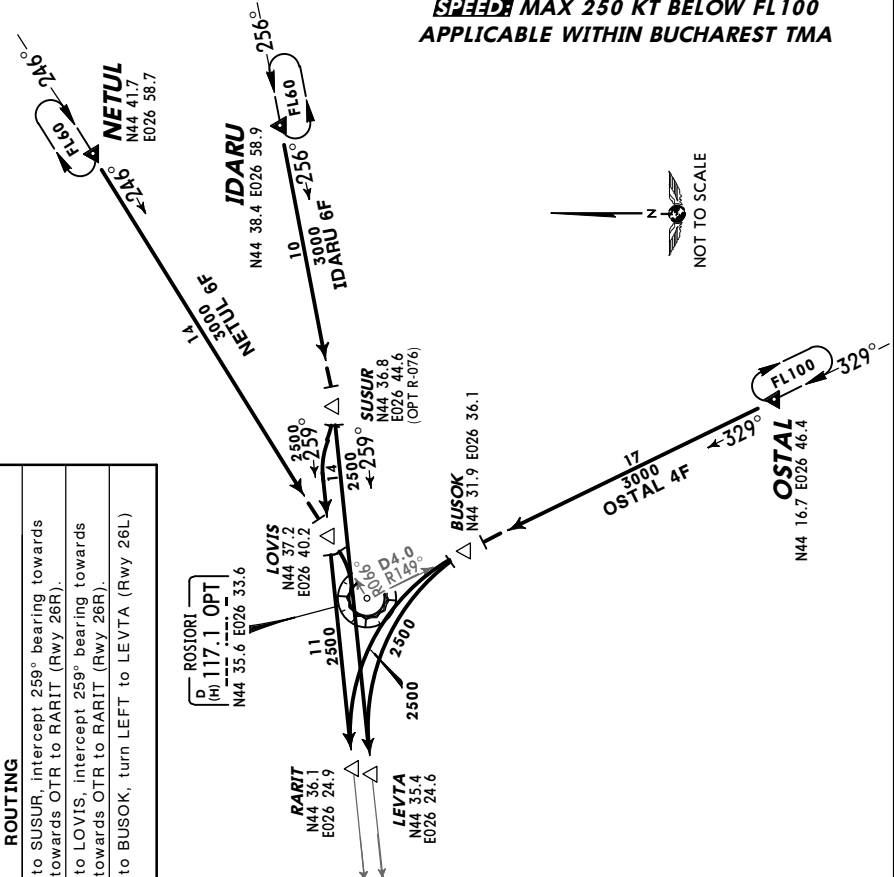

ROUTING

STAR	
IDARU 6F	Intercept OPT R-076 inbound to SUSUR, intercept 259° bearing towards OPE to LEVTA (Rwy 26L) or towards OTR to RARIT (Rwy 26R).
NETUL 6F	Intercept OPT R-066 inbound to LOVIS, intercept 259° bearing towards OPE to LEVTA (Rwy 26L) or towards OTR to RARIT (Rwy 26R).
OSTAL 4F	Intercept OPT R-149 inbound to BUSOK, turn LEFT to LEVTA (Rwy 26L) or RARIT (Rwy 26R).

OTOPENI 318 OTR N44 35.3 E026 14.1
OTOPENI 349 OPE N44 34.5 E026 12.7

Direct distance to
Henri Coanda Apt from:
LEVTA 14 NM
RARIT 14 NM

LOST COMMS
Refer to chart 20-2S.
LOST COMMS

LROP/OTP
HENRI COANDA

JEPPESEN
1 FEB 13 (20-2M)

BUCHAREST, ROMANIA
STAR

ATIS
118.5

Apt Elev
314'

Alt Set: hPa (MM on request)
Trans level: By ATC Trans alt: 4000'

OBUGA 5E [OBUG5E]
SORDU 3E [SORD3E]
RWYS 08L/R ARRIVALS
~~SPEED~~ MAX 250 KT BELOW FL100
APPLICABLE WITHIN BUCHAREST TMA



FLORESTI
(H) 112.2 FLR
N44 30.1 E025 42.5

DILAS
N44 33.4
E025 49.2

OTOPENI
370 OTL
N44 34.2 E026 00.0

OBELA
N44 32.7
E025 49.6

OTOPENI
267.5 OPW
N44 33.5 E025 59.1

Direct distance to
Henri Coanda Apt from:
DILAS 11 NM
OBELA 11 NM

COMMS LOST COMMS LOST COMMS LOST COMMS
Refer to chart 20-2S.
▲ SWW00 1501 ▲ SWW00 1501

SORDU
N44 02.6
E025 26.8

OBUGA
N44 06.5 E026 05.7

STAR	ROUTING
OBUGA 5E	Intercept FLR R-140 inbound to FLR, FLR R-051 to DILAS (Rwy 08L) or FLR R-058 to OBELA (Rwy 08R).
SORDU 3E	Intercept FLR R-198 inbound to FLR, FLR R-051 to DILAS (Rwy 08L) or FLR R-058 to OBELA (Rwy 08R).

LROP/OTP
HENRI COANDA

JEPPESSEN
1 FEB 13 (20-2N) Eff 7 Feb

BUCHAREST, ROMANIA
STAR

ATIS
118.5


Apt Elev
314'

Alt Set: hPa (MM on request)
Trans level: By ATC Trans alt: 4000'

OBUGA 5F [OBUG5F]
SORDU 3F [SORD3F]
RWYS 26L/R ARRIVALS
SPEED MAX 250 KT BELOW FL100
APPLICABLE WITHIN BUCHAREST TMA

COMMS LOST COMMS LOST COMMS
Refer to chart 20-2S.
SWW03 1501 SWW03 1501

Direct distance to
Henri Coanda Apt from:
LEVTA 14 NM
RARIT 14 NM

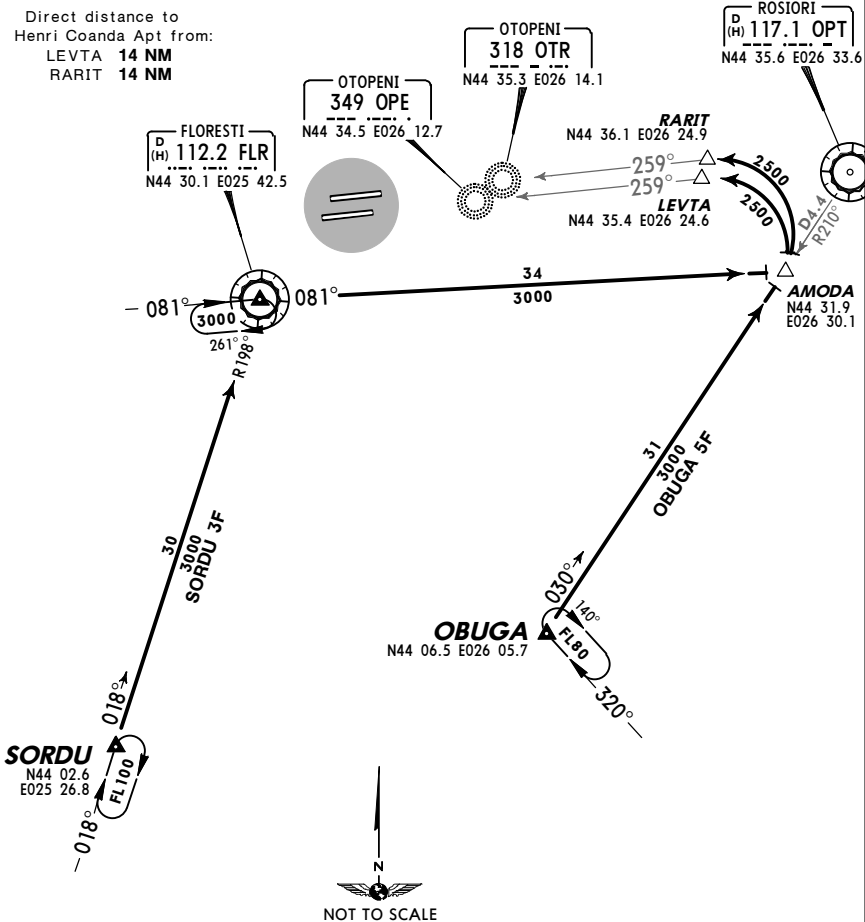

NOT TO SCALE

STAR	ROUTING
OBUGA 5F	Intercept OPT R-210 inbound to AMODA, turn LEFT to LEVTA (Rwy 26L) or RARIT (Rwy 26R).
SORDU 3F	Intercept FLR R-198 inbound to FLR, turn RIGHT, FLR R-081 to AMODA, turn LEFT to LEVTA (Rwy 26L) or RARIT (Rwy 26R).

LROP/OTP
HENRI COANDA

JEPPESSEN
1 FEB 13 (20-2P) Eff 7 Feb


BUCHAREST, ROMANIA
STAR

ATIS 118.5	Apt Elev 314'	Alt Set: hPa (MM on request) Trans level: By ATC Trans alt: 4000'
---------------	------------------	--

TOSVI 1E [TOSVIE]
RWYS 08L/R ARRIVAL
~~SPEED~~ MAX 250 KT BELOW FL100
APPLICABLE WITHIN BUCHAREST TMA

Direct distance to
Henri Coanda Apt from:
DILAS 11 NM
OBELA 11 NM

LOST COMMS
LOST COMMS
LOST COMMS
Refer to chart 20-2S.
SWMOJ 1501 SWMOJ 1501

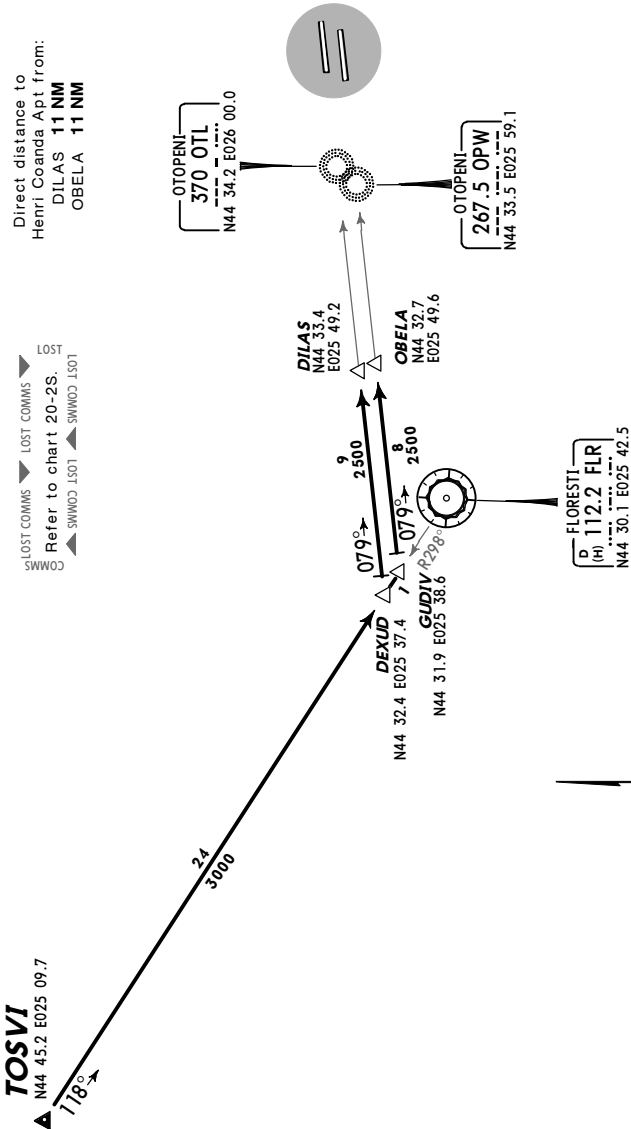

ROUTING

Intercept FLR R-298 inbound to DEXUD (Rwy 08L) or GUDIV (Rwy 08R), intercept 079° bearing towards OTL to DILAS (Rwy 08L) or towards OPW to OBELA (Rwy 08R).


LROP/OTP
HENRI COANDA

JEPPESSEN
1 FEB 13 20-2Q Eff 7 Feb

BUCHAREST, ROMANIA
STAR

ATIS 118.5	Apt Elev 314'	Alt Set: hPa (MM on request) Trans level: By ATC Trans alt: 4000'
---------------	------------------	--

TOSVI 1F [TOSV1F]
RWYS 26L/R ARRIVAL
~~SPEED~~ MAX 250 KT BELOW FL100
APPLICABLE WITHIN BUCHAREST TMA

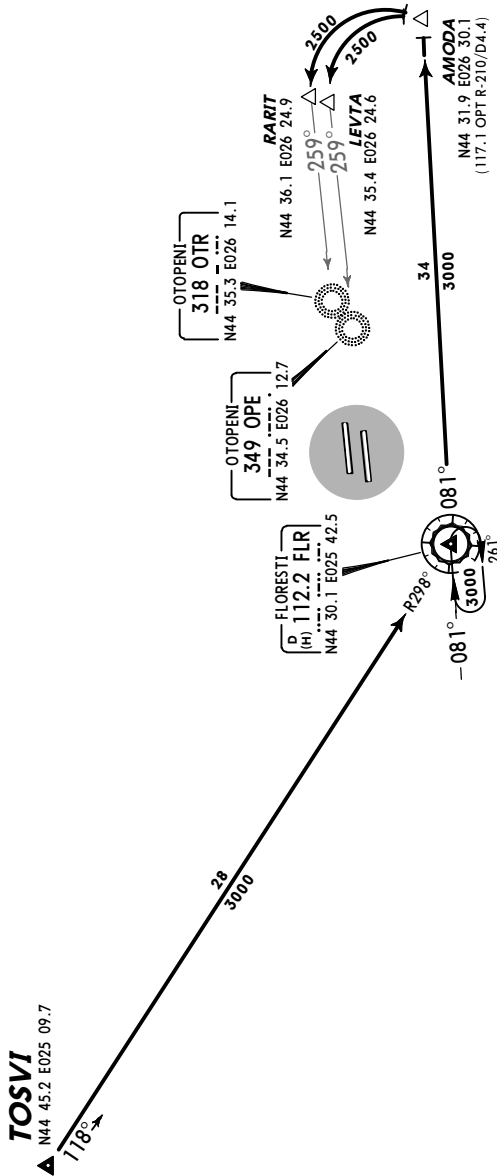

Direct distance to
Henri Coanda Apt from:
LEVTA 14 NM
RARIT 14 NM

LOST COMMS
LOST COMMS
COMMS
Refer to chart 20-2S.
SWW03 JS01

ROUTING
Intercept FLR R-298 inbound to FLR, FLR R-081 to AMODA,
turn LEFT to LEVTA (Rwy 26L) or RARIT (Rwy 26R).

LROP/OTP
HENRI COANDA

JEPPESSEN
9 MAY 14 (20-3)

BUCHAREST, ROMANIA
RNAV SID


Apt Elev
314'

Trans level: By ATC Trans alt: 4000'
1. 112.2 FLR, 117.1 OPT and 113.2 STJ must all be serviceable for DME/DME operation.
2. Aircraft unable to achieve SID profile restrictions must request non-standard departure from ATC before start-up.

BUKEL 1K [BUKE1K]
RWYS 08L/R RNAV DEPARTURE
RNAV (DME/DME)
RNAV-1 (P-RNAV) APPROVAL REQUIRED
NOT AVAILABLE FOR TRAFFIC TO NEPOT

BUKEL
N45 04.7 E025 43.5
At or above
FL110

LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST
Set transponder:
- continue on assigned and acknowledged SID.
After 2 minutes climb to flight planned FL.
- if being vectored, continue on assigned heading for 2 minutes, then proceed direct to last SID point climbing to flight planned FL.
LOST COMMS ▲ LOST COMMS ▲ LOST COMMS ▲ LOST COMMS ▲ LOST

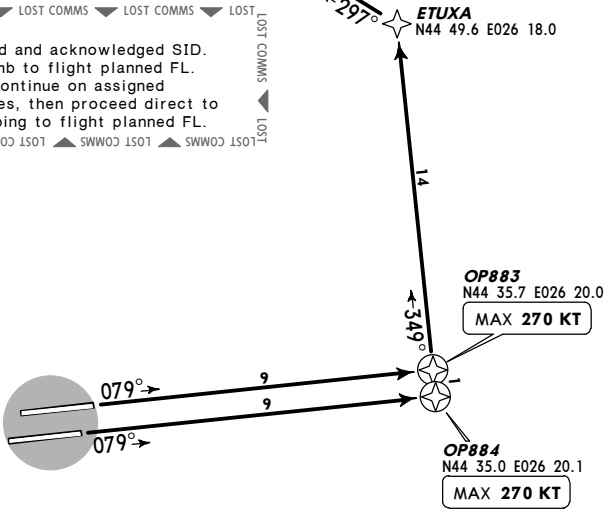

This SID requires a minimum climb gradient of 3.5% until BUKEL due to airspace structure.

Gnd speed-KT	75	100	150	200	250	300
3.5% V/V(fpm)	266	354	532	709	886	1063

If unable to comply, contact ATC before start-up.

ROUTING

OP883 (08L; K270-)/OP884 (08R; K270-) - ETUXA - BUKEL (FL110+).

© JEPPESEN, 2013, 2014. ALL RIGHTS RESERVED.

LROP/OTP
HENRI COANDA


 **JEPPESSEN**
9 MAY 14 (20-3B)

BUCHAREST, ROMANIA
RNAV SID

Apt Elev
314'

Trans level: By ATC Trans alt: 4000'
1. 112.2 FLR, 117.1 OPT and 113.2 STJ must all be serviceable for DME/DME operation.
2. Aircraft unable to achieve SID profile restrictions must request non-standard departure from ATC before start-up.

DENAK 1K [DENA1K]
RWYS 08L/R RNAV DEPARTURE
RNAV (DME/DME)
RNAV-1 (P-RNAV) APPROVAL REQUIRED

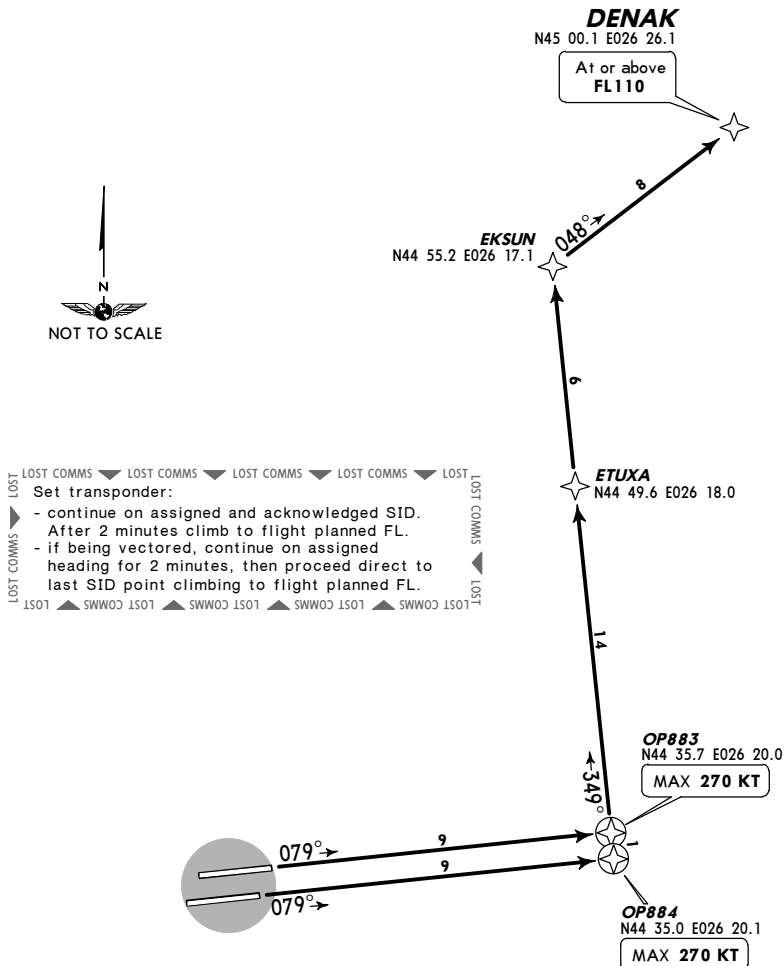

This SID requires a minimum climb gradient of
5.0% until DENAK due to airspace structure.

Gnd speed-KT	75	100	150	200	250	300
5.0% V/V(fpm)	380	506	760	1013	1266	1519

If unable to comply, contact ATC before start-up.

ROUTING

OP883 (08L; K270-)/OP884 (08R; K270-) - ETUXA - EKSUN - DENAK (FL110+).

LROP/OTP
HENRI COANDA

JEPPESSEN
1 FEB 13 (20-3D) Eff 7 Feb


BUCHAREST, ROMANIA
RNAV SID

Apt Elev
314'

Trans level: By ATC Trans alt: 4000'
1. 112.2 FLR, 117.1 OPT and 113.2 STJ must all be serviceable for DME/DME operation.
2. Aircraft unable to achieve SID profile restrictions must request non-standard departure from ATC before start-up.

IDARU 1K [IDAR1K], NETUL 1K [NETU1K]
RWYS 08L/R RNAV DEPARTURES
RNAV (DME/DME)
RNAV-1 (P-RNAV) APPROVAL REQUIRED

LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST
Set transponder:
- continue on assigned and acknowledged SID.
After 2 minutes climb to flight planned FL.
- if being vectored, continue on assigned
heading for 2 minutes, then proceed direct to
last SID point climbing to flight planned FL.
LOST COMMS ▲ LOST COMMS ▲ LOST COMMS ▲ LOST COMMS ▲ LOST

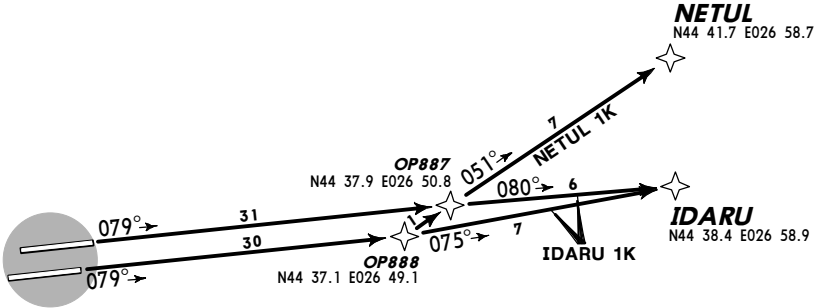

SID	ROUTING
IDARU 1K	OP887 (08L)/OP888 (08R) - IDARU.
NETUL 1K	OP887 (08L)/OP888 (08R) - NETUL.

© JEPPESEN, 2014. ALL RIGHTS RESERVED.

LROP/OTP
HENRI COANDA


JEPPESSEN
7 NOV 14 (20-3G)

BUCHAREST, ROMANIA
RNAV SID

Apt Elev
314'

Trans level: By ATC Trans alt: 4000'
1. 112.2 FLR, 117.1 OPT and 113.2 STJ must all be serviceable for P-RNAV DME/DME operation.
2. Aircraft unable to achieve SID profile restrictions must request non-standard departure from ATC before start-up.
3. EXPECT close-in obstacles.

POLUN 1M [POLU1M], SOKRU 1M [SOKR1M]
RWYS 26L/R RNAV DEPARTURES
RNAV (DME/DME)
RNAV-1 (P-RNAV) APPROVAL REQUIRED

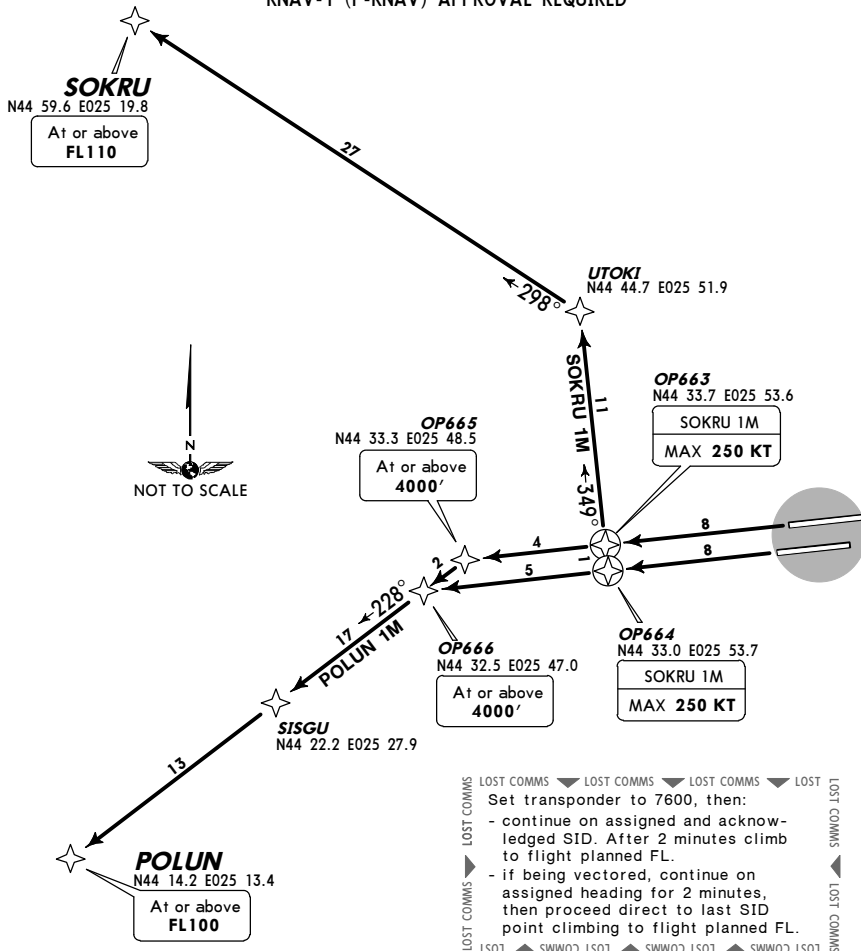

These SIDs require minimum climb gradients of

POLUN 1M: Rwy 26L: 4.9% until OP666 due to airspace structure.
Rwy 26R: 5.2% until OP665 due to airspace structure.

SOKRU 1M: 3.9% until SOKRU due to airspace structure.

Gnd speed-KT	75	100	150	200	250	300
5.2% V/V(fpm)	395	527	790	1053	1317	1580
4.9% V/V(fpm)	372	496	744	992	1241	1489
3.9% V/V(fpm)	296	395	592	790	987	1185

If unable to comply, contact ATC before start-up.

SID	ROUTING
POLUN 1M①	OP666 (26L; 4000'+)/OP665 (26R; 4000'+) - SISGU - POLUN (FL100+).
SOKRU 1M②	OP664 (26L; K250-)/OP663 (26R; K250-) - UTOKI - SOKRU (FL110+).
① Not available for traffic to MOPUG. ② Not available for traffic to DIRER.	

CHANGES: None.

© JEPPESSEN, 2013. ALL RIGHTS RESERVED.

© JEPPESEN, 2013, 2014. ALL RIGHTS RESERVED.

LROP/OTP
HENRI COANDA

JEPPESSEN
9 MAY 14 (20-3J)

BUCHAREST, ROMANIA
SID

Apt Elev 314' Trans level: By ATC Trans alt: 4000'
SIDs are also noise abatement routings. Strict adherence within the limits of aircraft performance is mandatory. 2. EXPECT close-in obstacles.

DENAK 5C [DENA5C]
RWYS 26L/R DEPARTURE



LOST COMMS ▼ LOST

LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST
Set transponder:
- continue on assigned and acknowledged SID.
- After 2 minutes climb to flight planned FL.
- if being vectored, continue on assigned heading for 2 minutes, then proceed direct to last SID point climbing to flight planned FL.

ROUTING
To OTL/OPW, turn RIGHT, intercept FLR R-041 to DENAK.

This SID requires a minimum climb gradient of 4.2% due to airspace structure.

Gnd speed-KT	75	100	150	200	250	300
4.2% V/V(fpm)	319	425	638	851	1063	1276

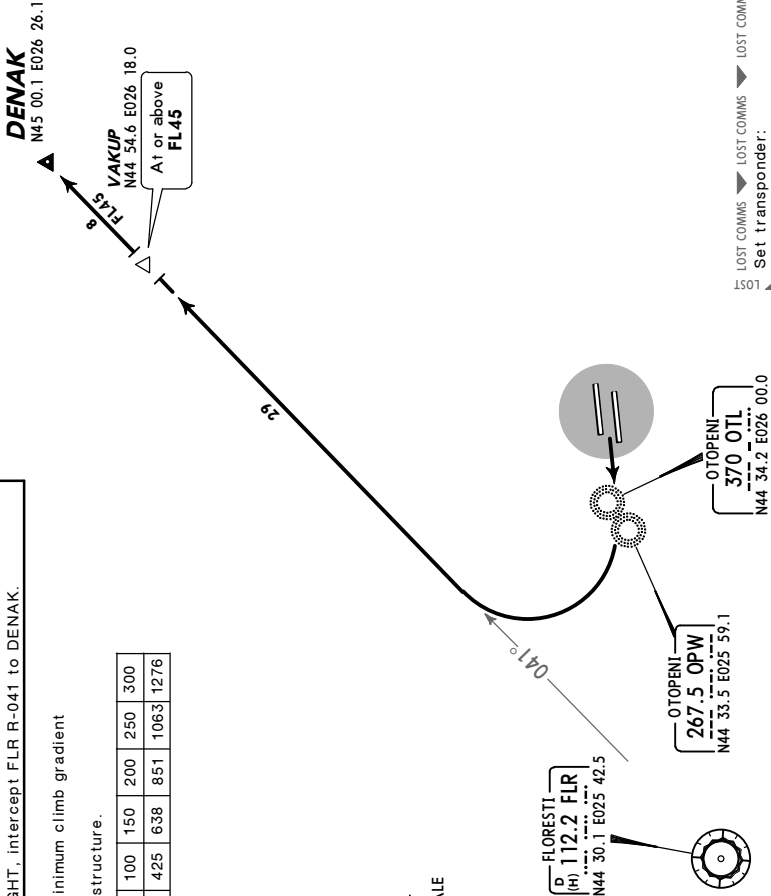

© JEPPESEN, 2013. ALL RIGHTS RESERVED.

© JEPPESEN, 2013. ALL RIGHTS RESERVED.

LROP/OTP
HENRI COANDA


JEPPESSEN
14 JUN 13 (20-3M) Eff 27 Jun

BUCHAREST, ROMANIA
SID

Apt Elev
314'

Trans level: By ATC Trans alt: 4000'
SIDs are also noise abatement routings. Strict adherence within the limits of aircraft performance is mandatory.

BUKEL 1A [BUKE1A], POLUN 5A [POLU5A]
SOKRU 1A [SOKR1A]
RWYS 08L/R DEPARTURES

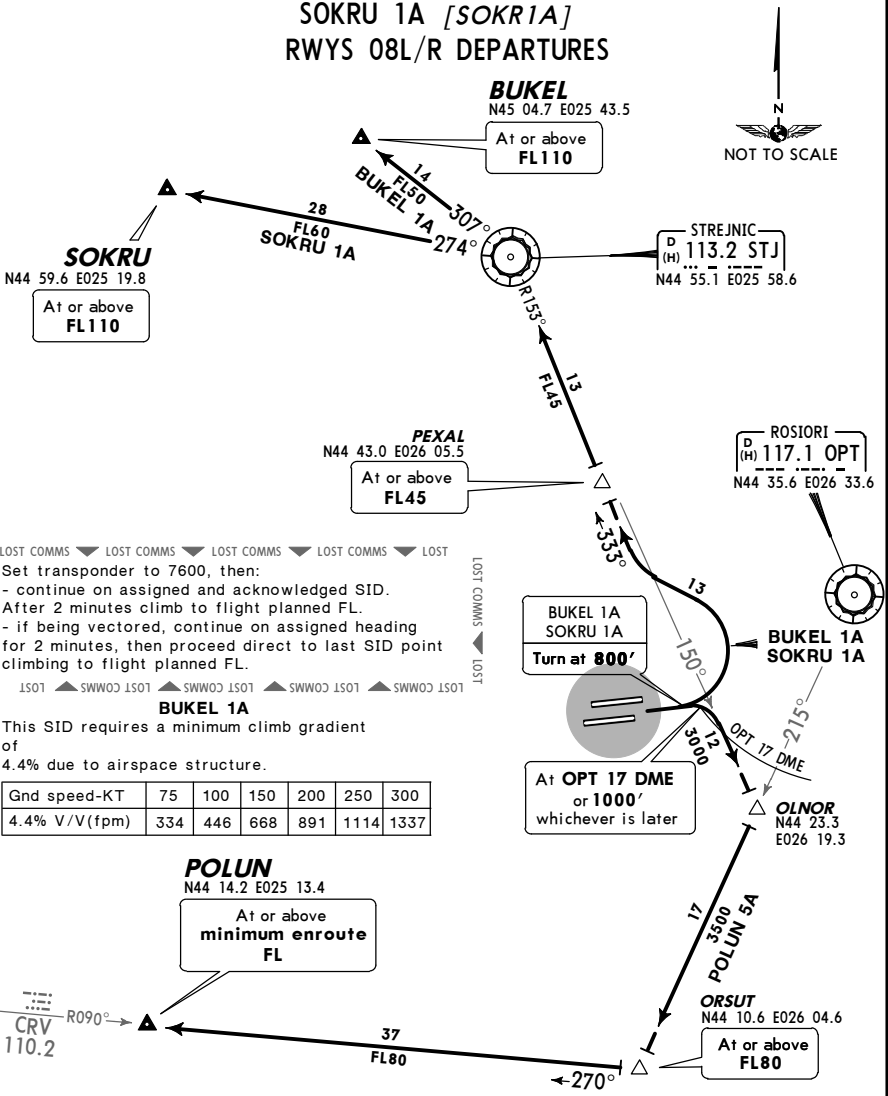

SID	ROUTING
BUKEL 1A ①	Climb on runway track to 800', intercept STJ R-153 inbound to STJ, STJ R-307 to BUKEL.
POLUN 5A ②	Climb on runway track to OPT 17 DME or 1000', whichever is later, turn RIGHT, intercept STJ R-150 to OLNOR, turn RIGHT, intercept OPT R-215 to ORSUT, turn RIGHT, intercept CRV R-090 inbound to POLUN.
SOKRU 1A ③	Climb on runway track to 800', intercept STJ R-153 inbound to STJ, STJ R-274 to SOKRU.
① Not available for traffic to NEPOT. ② Not available for traffic to MOPUG. ③ Not available for traffic to DIRER.	

LROP/OTP
HENRI COANDA

JEPPESSEN
14 JUN 13 (20-3N) Eff 27 Jun


BUCHAREST, ROMANIA
SID

Apt Elev
314'

Trans level: By ATC Trans alt: 4000'
SIDs are also noise abatement routings. Strict adherence within the limits of aircraft performance is mandatory. 2. EXPECT close-in obstacles.

BUKEL 5C [BUKE5C], POLUN 3C [POLU3C]
SOKRU 1C [SOKR1C]
RWYS 26L/R DEPARTURES

LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST
Set transponder to 7600, then:
- continue on assigned and acknowledged SID.
After 2 minutes climb to flight planned FL.
- if being vectored, continue on assigned heading for 2 minutes, then proceed direct to last SID point climbing to flight planned FL.
LS01 ▲ SMMWC LS01 ▲ SMMWC LS01 ▲ SMMWC LS01 ▲ SMMWC LS01

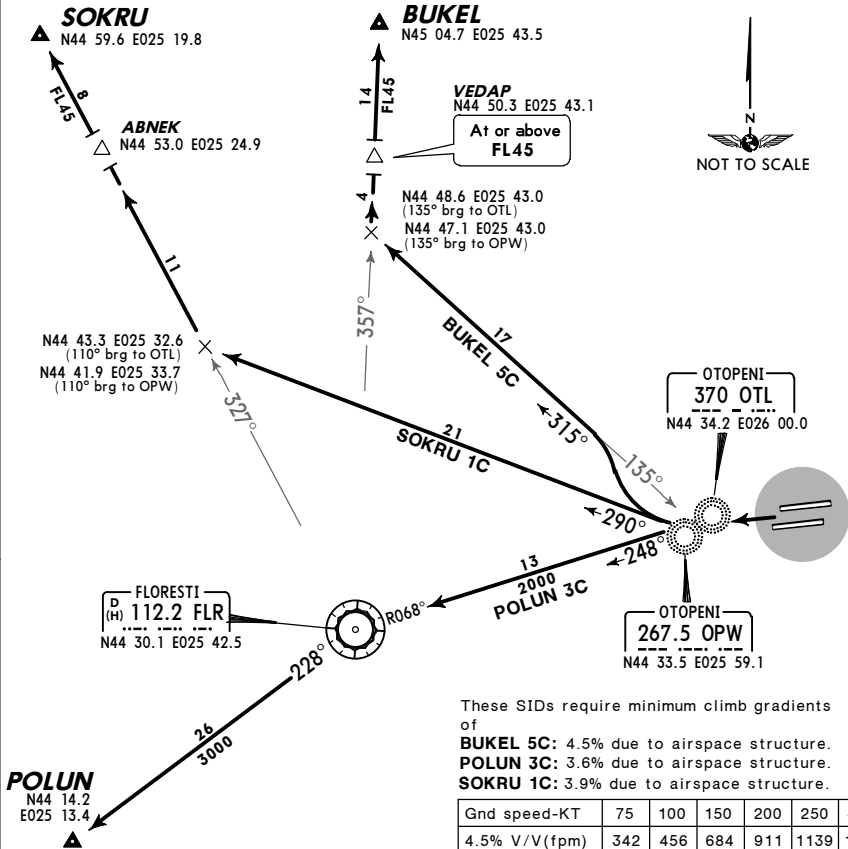

These SIDs require minimum climb gradients of
BUKEL 5C: 4.5% due to airspace structure.
POLUN 3C: 3.6% due to airspace structure.
SOKRU 1C: 3.9% due to airspace structure.

Gnd speed-KT	75	100	150	200	250	300
4.5% V/V (fpm)	342	456	684	911	1139	1367
3.9% V/V (fpm)	296	395	592	790	987	1185
3.6% V/V (fpm)	273	365	547	729	911	1094

SID	ROUTING
BUKEL 5C ①	To OTL/OPW, turn RIGHT, intercept 315° bearing from OTL/OPW, intercept FLR R-357 to BUKEL.
POLUN 3C ②	To OTL/OPW, turn LEFT, intercept FLR R-068 inbound to FLR, FLR R-228 to POLUN.
SOKRU 1C ③	To OTL/OPW, turn RIGHT, intercept 290° bearing from OTL/OPW, intercept FLR R-327 to SOKRU.
① Not available for traffic to NEPOT. ② Not available for traffic to MOPUG. ③ Not available for traffic to DIRER.	

LROP/OTP

JEPPesen


18 DEC 15 (20-8)

BUCHAREST, ROMANIA

HENRI COANDA

TEMPORARY CONSTRUCTION WORKS

REFER ALSO TO LATEST NOTAMS

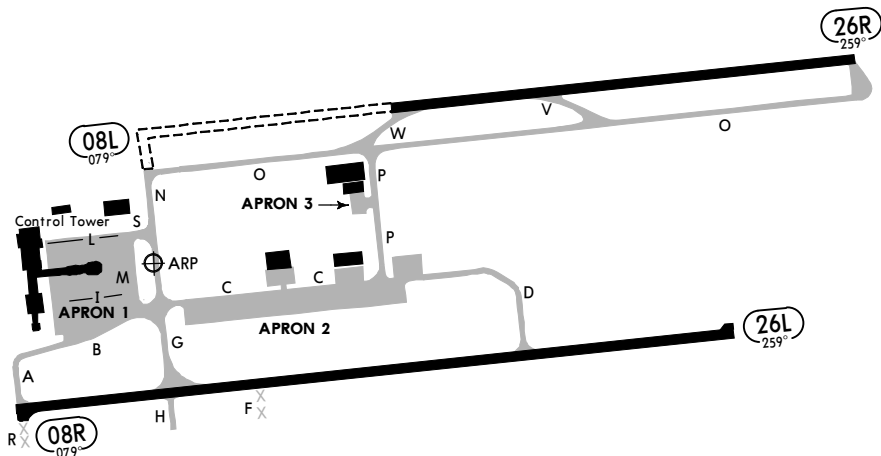

RESTRICTIONS RWY 08L/26R

Threshold 08L and RWY 26R END displaced by 4101'/1250m.

RWY 08L/26R TORA and LDA 7339' (2237m).

TWY N is closed between TWY O and RWY 08L/26R.

GP 08L unserviceable.


DME 08L ILL unserviceable.

ALSF-II and PAPI-L RWY 08L unserviceable.

LROP/OTP
Apt Elev 314'
N44 34.3 E026 05.1

JEPPesen
14 NOV 14 (20-9)


BUCHAREST, ROMANIA
HENRI COANDA

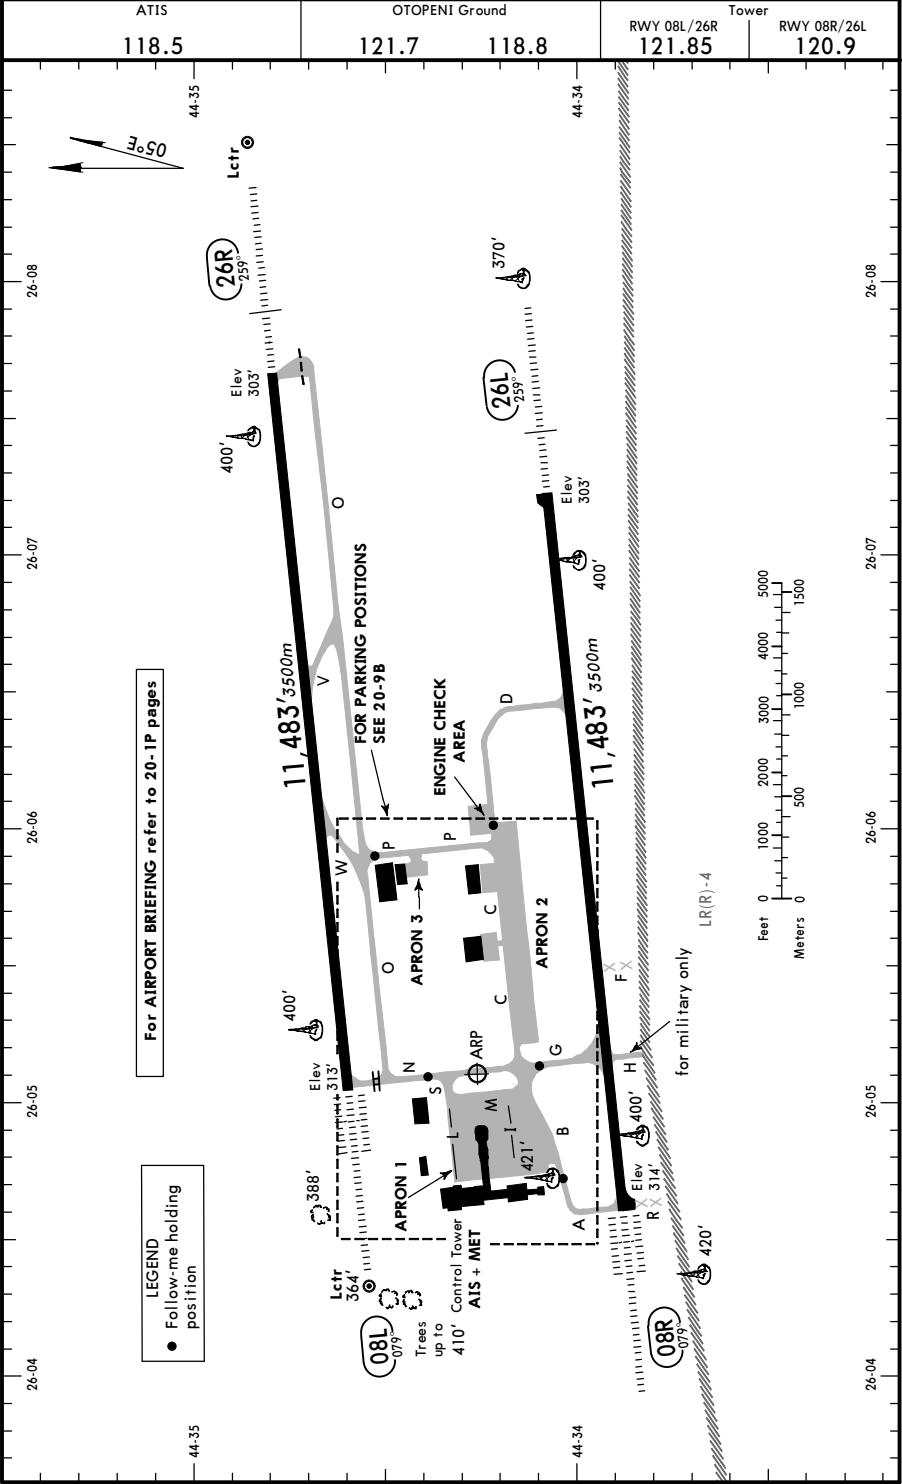

LROP/OTP

JEPPESSEN
8 NOV 13 (20-9B) Eff 14 Nov

BUCHAREST, ROMANIA
HENRI COANDA

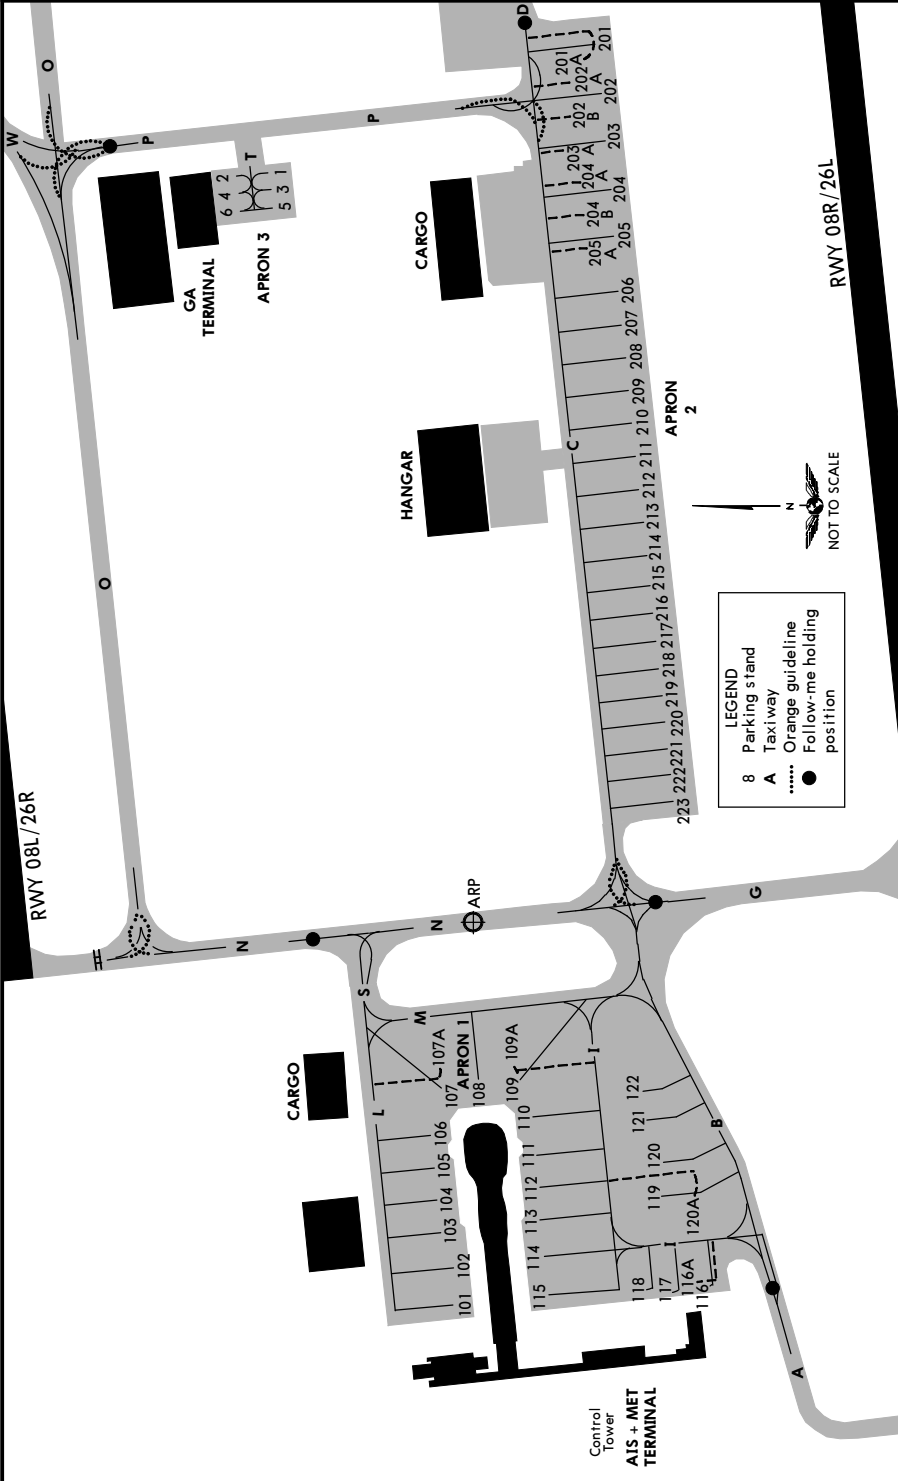

CHANGES: Parking stand designations.

© JEPPESSEN, 1998, 2013. ALL RIGHTS RESERVED.

LROP/OTP

JEPPesen

8 NOV 13

(20-9C)

Eff 14 Nov

BUCHAREST, ROMANIA

HENRI COANDA

DOCKING GUIDANCE SYSTEM (SAFEDOCK)

A. DESCRIPTION


The docking system consists of a display unit and a laser unit to identify type and position of aircraft.

B. DOCKING PROCEDURE


At apron 1, two models of docking system are installed, type T3-9 and T1.

CAUTION: The safedock docking guidance system has a built-in error detecting program to inform the acft pilots of possible hazards during the docking procedure. During the acft approach to the terminal gate, the docking guidance system automatically confirms the identification of the acft. The acft must be identified at least 39' (12m) before the correct stop position. If this does not occur, the system displays "STOP" and then "WAIT" with two red, rectangular fields being lit in the azimuth guidance area of the display. While the acft is stopped, the system will attempt to identify it. If successful, the docking procedure will continue. If not, "WAIT" will be replaced with "STOP". If the display reverts to the "STOP" indication, the pilot must contact OTOPENI Ground to obtain clearance to complete the docking procedure.

DOCKING SYSTEM T1

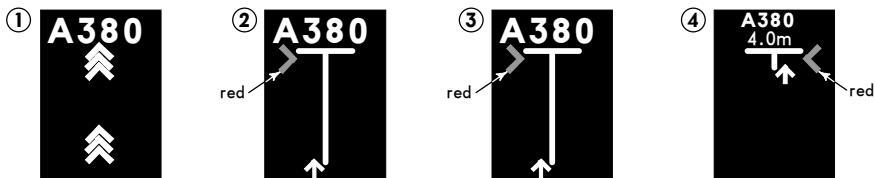

DOCKING SYSTEM T3-9

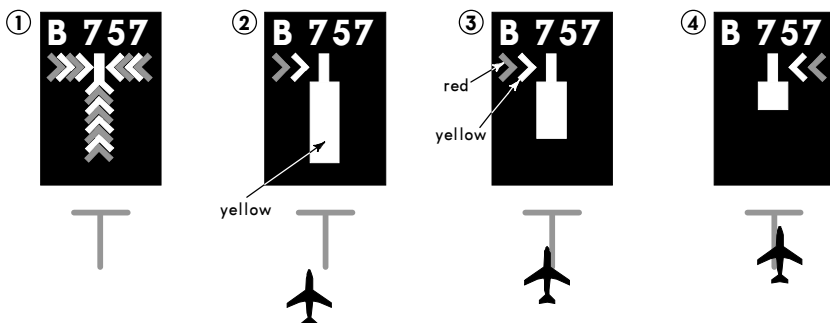

1. Check that the correct acft type is displayed. The scrolling arrows indicate that the system is activated.
2. Follow the lead in line. When the solid yellow closing rate field appears, the acft has been caught by the scanning unit. The scanning unit now checks that the acft is the correct type and the display provides azimuth guidance information.
3. Look for the flashing red arrow and solid yellow arrow which provide azimuth guidance information. The flashing red arrow shows which direction to steer, while solid yellow arrow gives an indication of how far the acft is off of the centerline.
4. When the acft is 39' (12m) from the stop position, closing rate information is given. "Distance to go" is indicated by turning off one row of LED's for each 2' (0.5 m) that the acft advances towards the stop position.

LROP/OTP

25 MAR 11

(20-9D)


Eff 7 Apr

BUCHAREST, ROMANIA


HENRI COANDA

DOCKING GUIDANCE SYSTEM (SAFEDOCK) CONTD

DOCKING SYSTEM T1

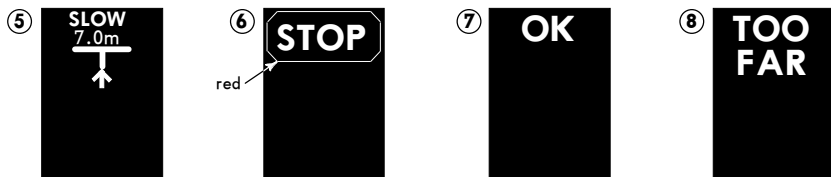

DOCKING SYSTEM T3-9

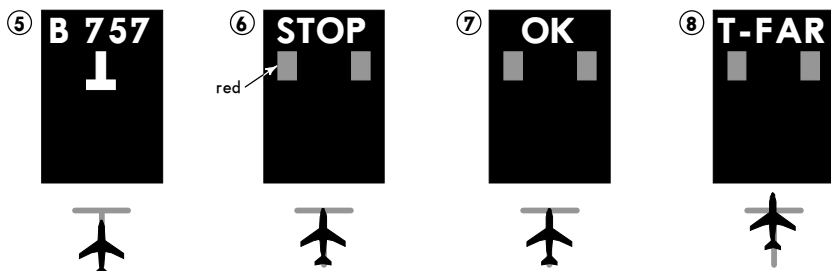


- When the acft is approaching with to high speed, display will indicate "SLOW".
- When the correct stop position is reached all of the LED's for the closing rate field will be off, the word "STOP" will appear in the display and two red rectangular fields will light in the azimuth guidance area of the display.
- If the acft stops in the correct position, "OK" will be displayed after a few seconds.
- If the acft has gone past the correct stop position, the display will show "T-FAR" (too far).

LROP/OTP
HENRI COANDA

27 SEP 13 (21-1)

BUCHAREST, ROMANIA
ILS Rwy 08L

ATIS	BUCHAREST Approach (R)	OTOPENI Tower	Ground	
118.5	118.25	121.85	121.7 118.8	
LOC ILL 110.9	Final Apch Crs 079°	GS D4.0 ILL 1587' (1274')	ILS DA(H) 513' (200')	
Apt Elev 314' RWY 313'				MSA Airport
MISSED APCH: Climb via OTR NDB to OPT VOR to 3000' and hold, or as directed.				
Alt Set: hPa (MM on req) ADF and DME required.		Rwy Elev: 11 hPa	Trans level: By ATC	Trans alt: 4000'

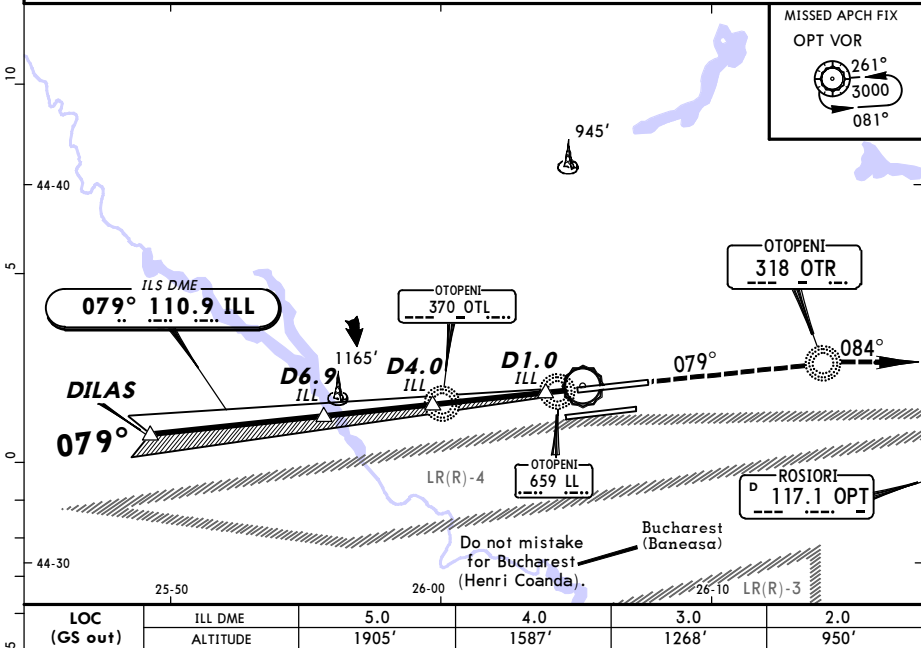

11.3	4.6	2.9	3.0	0.8	0	RWY 08L 313'
Gnd speed-Kts	70	90	100	120	140	160
ILS GS or LOC Descent Angle 3.00°	372	478	531	637	743	849
MAP at D1.0 ILL						
ALSF-II	OTR					
PAPI	318					

STRAIGHT-IN LANDING RWY 08L						CIRCLE-TO-LAND Not authorized South of airport	
ILS				LOC (GS out)		Max Kts	MDA(H) VIs
DA(H) 513' (200')				DA(H) 690' (377')			
FULL		Limited	ALS out	ALS out		100	780' (466') 1500m
A B C D	RVR 550m	RVR 750m	RVR 1200m	RVR 1000m	RVR 1500m	135	820' (506') 1600m
					RVR 1700m	180	1010' (696') 2400m
						205	1020' (706') 3600m

TRANS OPS

CHANGES: MSA.

© JEPPESEN, 1998, 2013. ALL RIGHTS RESERVED.

LROP/OTP
HENRI COANDA

15 MAY 15

(21-01)

Eff 28 May

BUCHAREST, ROMANIA
LOC Rwy 08L

BRIEFING STRIP™


ATIS 118.5		BUCHAREST Approach (R) 118.250		OTOPENI Tower 121.850		Ground 121.7 118.8		
LOC ILL 110.9		Final Apch Crs 079°		Minimum Alt D7.8 IRR 2500'(2186')		DA(H) 730'(416')		
						Apt Elev 314'		
MISSED APCH: Climb on track 079° inbound to OTR NDB not below 1600', then turn RIGHT direct to OPT VOR to 3000' and hold, or as directed.								
Alt Set: hPa (MM on req)			Apt Elev: 11 hPa		Trans level: By ATC		Trans alt: 4000'	
DME required.								

2500'

090° ← → 270°

2100'

MSA ARP

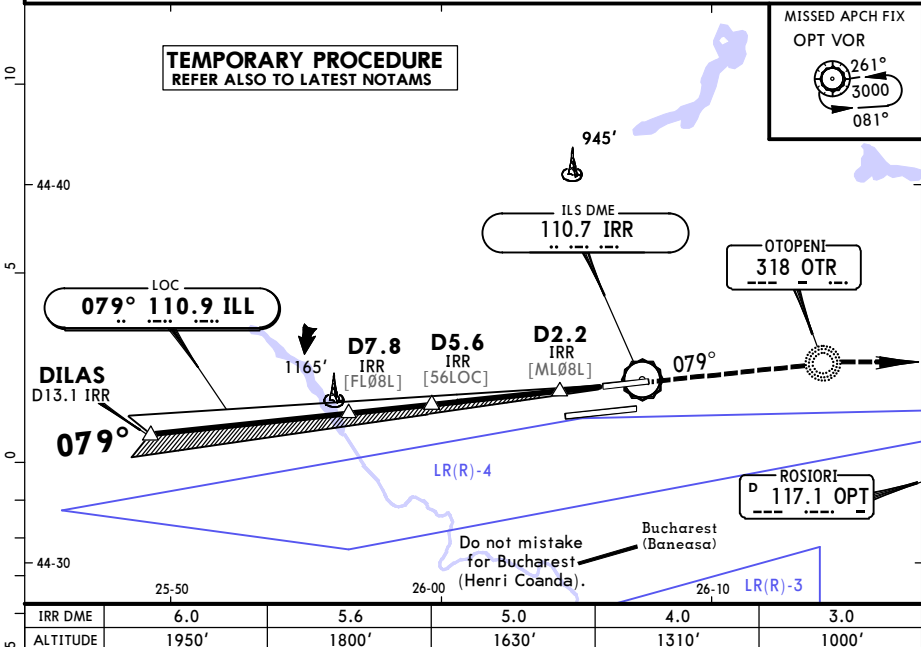

DILAS D13.1 IRR		D7.8 IRR [FL08L]		D5.6 IRR [56LOC]		D2.2 IRR [ML08L]		TCH 50'	
2500'		1800'		1630'		1310'		1000'	
5.3		2.2		3.4		1.2		Apt 314'	
Gnd speed-Kts		70	90	100	120	140	160		
Descent Angle		3.00°	372	478	531	637	743	849	
MAP at D2.2 IRR									
Standard		STRAIGHT-IN LANDING RWY 08L						CIRCLE-TO-LAND Not authorized South of airport	
		DA(H) 730'(416')						MIM 1600' on 079° OTR 318	
		Max Kts						MDA(H)	
		100						780'(466')	
		135						820'(506')	
		180						920'(606')	
		205						1020'(706')	
		RVR 1500m						1500m	
		RVR 1900m						2400m	
								3600m	

CHANGES: New temporary procedure.


© JEPPESEN, 2015. ALL RIGHTS RESERVED.

LROP/OTP
HENRI COANDA

27 SEP 13 **21-1A**



BUCHAREST, ROMANIA
CAT II/III ILS Rwy 08L

ATIS 118.5	BUCHAREST Approach (R) 118.25	OTOPENI Tower 121.85	Ground 121.7 118.8
LOC ILL 110.9	Final Apch Crs 079°	GS D4.0 ILL 1587' (1274')	CAT II & IIIA ILS Refer to Minimums Apt Elev 314' RWY 313'



MISSED APCH: Climb via OTR NDB to OPT VOR to 3000' and hold,
or as directed.

Alt Set: hPa (MM on req) Rwy Elev: 11 hPa Trans level: By ATC Trans alt: 4000'
1. **ADF and DME required.** 2. Special Aircrew & Acft Certification required.

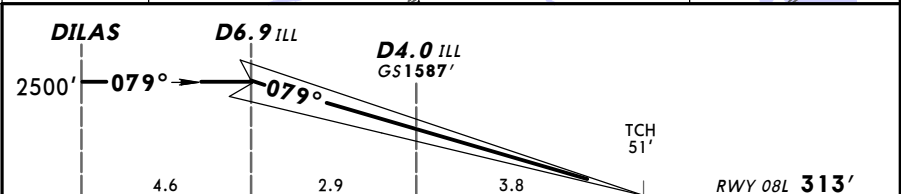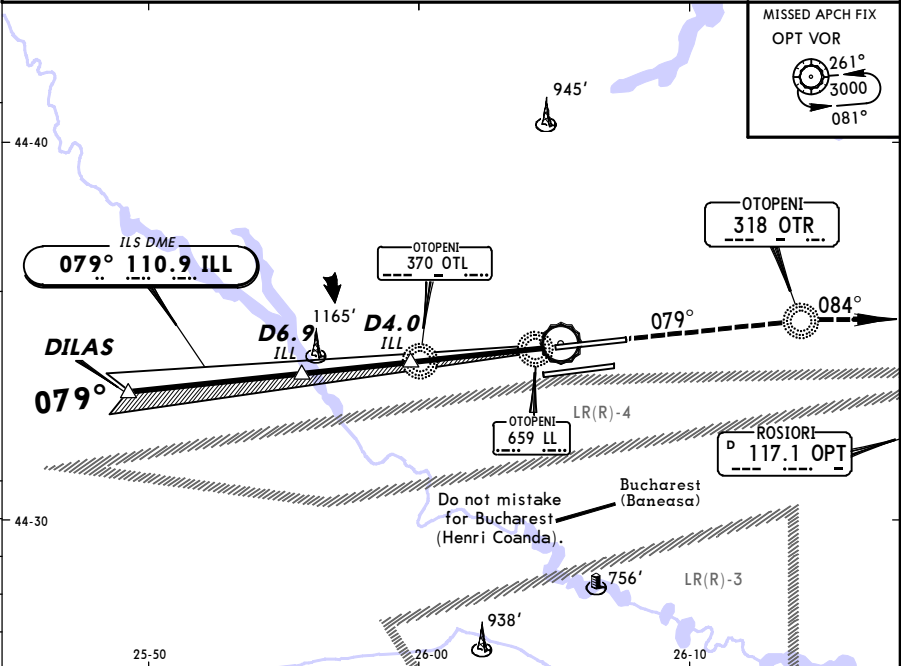

11.3							0		
Gnd speed-Kts	70	90	100	120	140	160	ALSF-II PAPI	OTR 318 ↑	
GS	3.00°	372	478	531	637	743			849

Standard		STRAIGHT-IN LANDING RWY 08L	
CAT IIIA ILS		CAT II ILS	
DH 50'		ABCD RA 99' DA(H) 413' (100')	
RVR 200m		RVR 300m I	

I Operators applying U.S. Ops Specs: Autoland or HUD required below RVR 350m.

LROP/OTP
HENRI COANDA

JEPPESSEN
27 SEP 13 (21-2)

BUCHAREST, ROMANIA
ILS Rwy 08R

BREFFING STRIP™

ATIS 118.5	BUCHAREST Approach (R) 118.25	OTOPENI Tower 120.9	Ground 121.7 118.8
LOC IOP 110.3	Final Apch Crs 079°	GS D4.0 IOP 1460' (1146')	ILS DA(H) 514' (200') Apt Elev 314'

MISSED APCH: Climb via OPE NDB to OPT VOR to 3000' and hold, or as directed.



Alt Set: hPa (MM on req)
VOR, DME and NDB required.

Rwy Elev: 11 hPa

Trans level: By ATC

Trans alt: 4000'

2500'
090°→270°
2100'
MSA
Airport

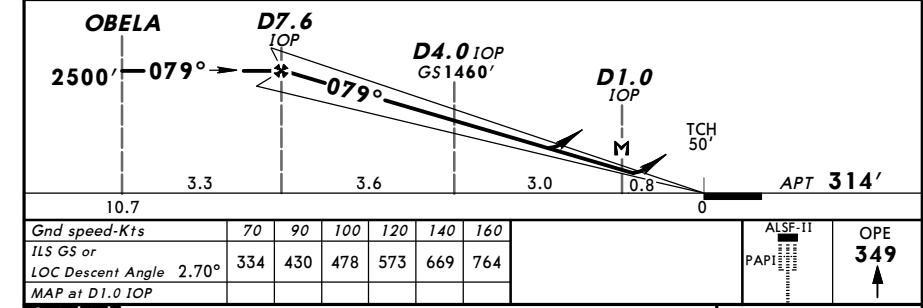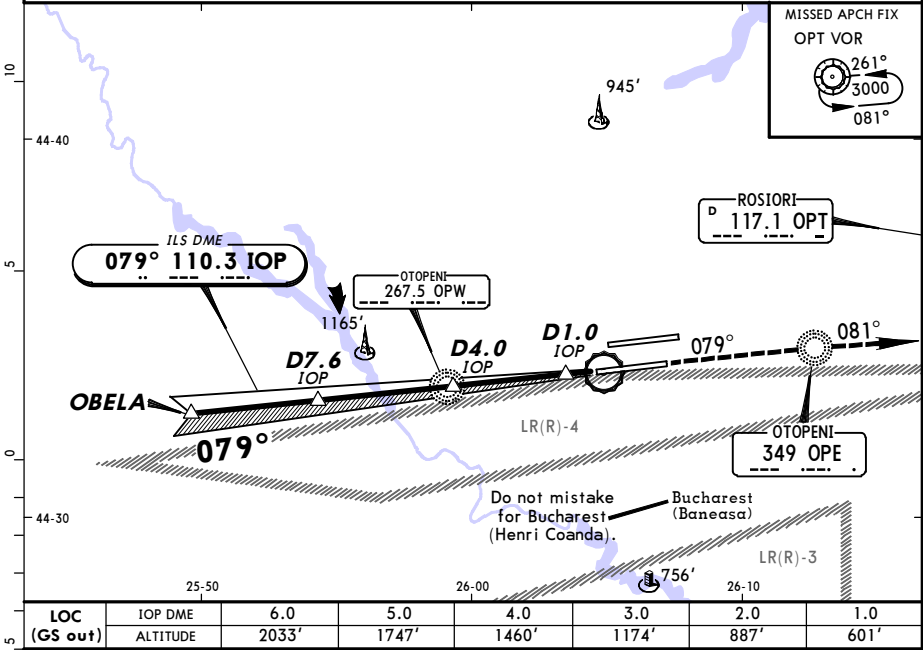

Standard		STRAIGHT-IN LANDING RWY 08R				CIRCLE-TO-LAND Not authorized South of airport	
ILS				LOC (GS out)			
DA(H) 514' (200')				DA(H) 690' (376')			
FULL		Limited	ALS out	ALS out		Max Kts.	MDA(H) VTS
A					RVR 1500m	100	780' (466') 1500m
B						135	820' (506') 1600m
C	RVR 550m	RVR 750m	RVR 1200m	RVR 1000m		180	1010' (696') 2400m
D					RVR 1700m	205	1020' (706') 3600m

PANS OPS


CHANGES: MSA.

© JEPPESSEN, 1998, 2013. ALL RIGHTS RESERVED.

LROP/OTP
HENRI COANDA


JEPPesen
27 SEP 13 (21-3)

BUCHAREST, ROMANIA
ILS or NDB Rwy 26L


BRIEFING STRIP TM	ATIS 118.5		BUCHAREST Approach (R) 118.25		OTOPENI Tower 120.9		Ground 121.7 118.8			
	LOC IOE 109.1		Final Apch Crs 259°	GS OPE NDB 1449' (1146')		ILS DA(H) 503' (200')		Apt Elev 314'		
	NDB OPE 349			Minimum Alt D7.7 IOE 2500' (2197')		NDB DA(H) 790' (487')		RWY 303'		

MISSED APCH: Climb via OPW NDB to FLR VOR to 3000' and hold, or as directed.

Alt Set: hPa (MM on req) Rwy Elev: 11 hPa Trans level: By ATC Trans alt: 4000'

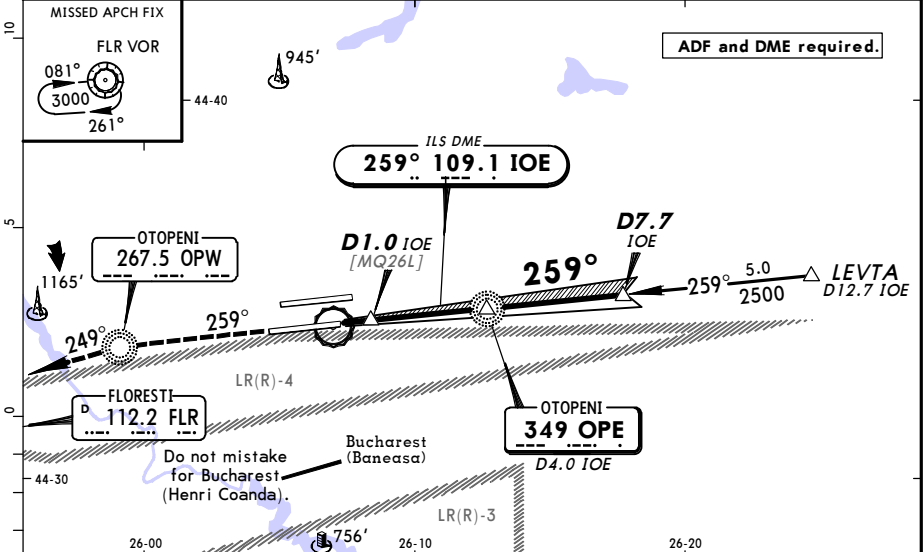

LOC (GS out) or NDB	IOE DME	2.0	3.0	4.0	5.0	6.0	7.0
	ALTITUDE	876'	1163'	1449'	1736'	2022'	2309'

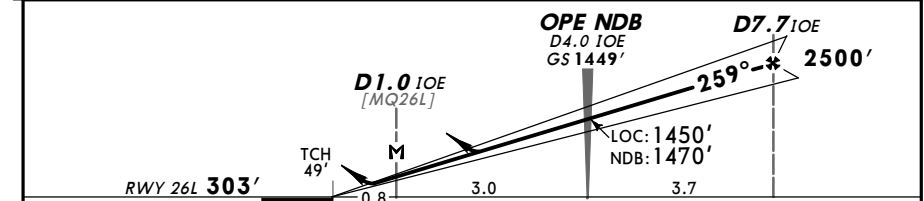

Gnd speed-Kts	70	90	100	120	140	160		OPW 267.5
ILS GS or LOC or NDB Descent Angle 2.70°	334	430	478	573	669	764		
MAP at D1.0 IOE								

Standard				STRAIGHT-IN LANDING RWY 26L				CIRCLE-TO-LAND Not authorized South of airport			
ILS				LOC (GS out)				NDB			
DA(H) 503' (200')				DA(H) 730' (427')				DA(H) 790' (487')			
FULL		Limited	ALS out	ALS out		ALS out		ALS out		Max Kts	MDA(H) VIS
A										100	780' (466') 1500m
B				RVR 1500m		RVR 1500m				135	820' (506') 1600m
C		RVR 550m	RVR 750m	RVR 1200m	RVR 1300m					180	1010' (696') 2400m
D					RVR 2000m	RVR 1500m	CMV 2300m			205	1020' (706') 3600m

After NDB apch: MDA(H) 810' (496').

CHANGES: MSA.

© JEPPesen, 1998, 2013. ALL RIGHTS RESERVED.

LROP/OTP
HENRI COANDA

JEPPesen
27 SEP 13 (21-4)

BUCHAREST, ROMANIA
ILS Rwy 26R

™

BREIFING STRIP

ATIS 118.5		BUCHAREST Approach (R) 118.25		OTOPENI Tower 121.85		Ground 121.7 118.8	
LOC IRR 110.7		Final Apch Crs 259°		GS D4.0 IRR 1577' (1274')		ILS DA(H) Refer to Minimums	
						Apt Elev 314' RWY 303'	
MISSED APCH: Climb via OTL NDB to FLR VOR to 3000' and hold, or as directed.							
Alt Set: hPa (MM on req) Rwy Elev: 11 hPa Trans level: By ATC Trans alt: 4000'							
ADF and DME required.							


2500'

090°


270°

2100'

MSA
Airport

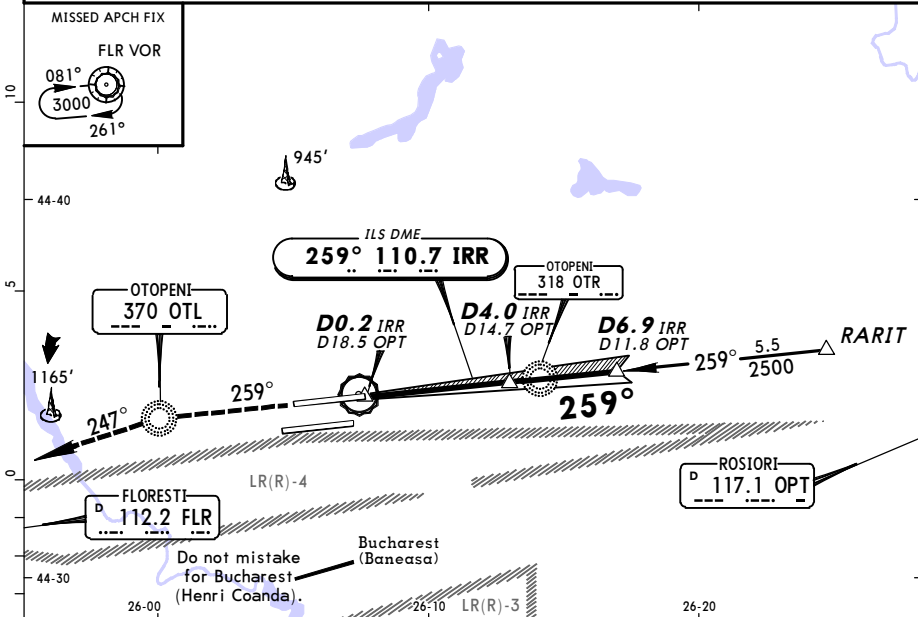

LOC (GS out)	IRR DME	1.0	2.0	3.0	4.0	5.0	6.0
	ALTITUDE	621'	940'	1258'	1577'	1895'	2214'

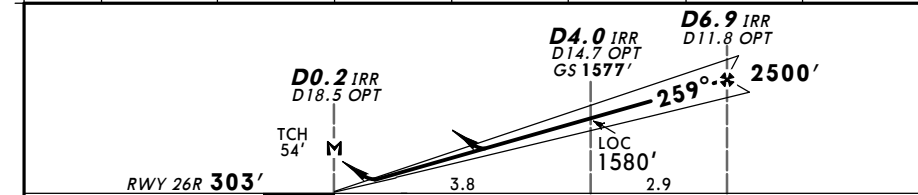

Gnd speed-Kts	70	90	100	120	140	160		OTL 370
ILS GS or LOC Descent Angle 3.00°	372	478	531	637	743	849		
MAP at D0.2 IRR/D18.5 OPT								




STRAIGHT-IN LANDING RWY 26R				CIRCLE-TO-LAND Not authorized South of airport	
ILS DA(H) ABC: 503' (200') D: 509' (206')				LOC (GS out) DA(H) 680' (377')	
FULL		Limited	ALS out	ALS out	Max Kts, MDA(H), VIS
A					100 780' (466') 1500m
B				RVR 1500m	135 820' (506') 1600m
C		RVR 550m	RVR 750m	RVR 1200m	180 1010' (696') 2400m
D				RVR 1000m	205 1020' (706') 3600m

LROP/OTP
HENRI COANDA

JEPPesen
27 SEP 13 (26-1)

BUCHAREST, ROMANIA
NDB Rwy 08L

ATIS	BUCHAREST Approach (R)	OTOPENI Tower	Ground	
118.5	118.25	121.85	121.7	118.8
NDB OTL 370	Final Apch Crs 079°	Minimum Alt D27.1 2500' (2186')	DA(H) Refer to Minimums	Apt Elev 314'
MISSED APCH: Climb via OTR NDB to OPT VOR to 3000' and hold, or as directed.				
Alt Set: hPa (MM on req) Apt Elev: 11 hPa Trans level: By ATC Trans alt: 4000'				
OPT VOR and DME required.				

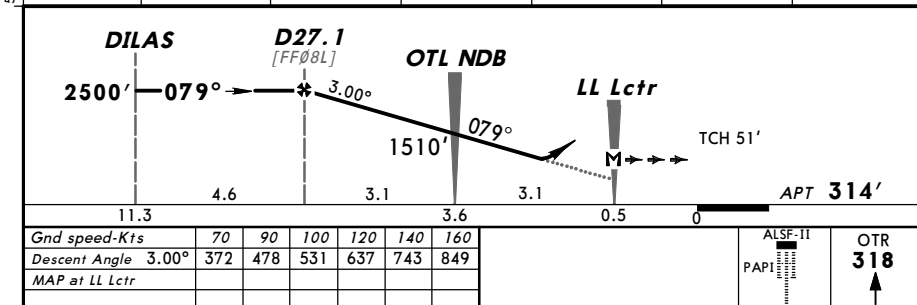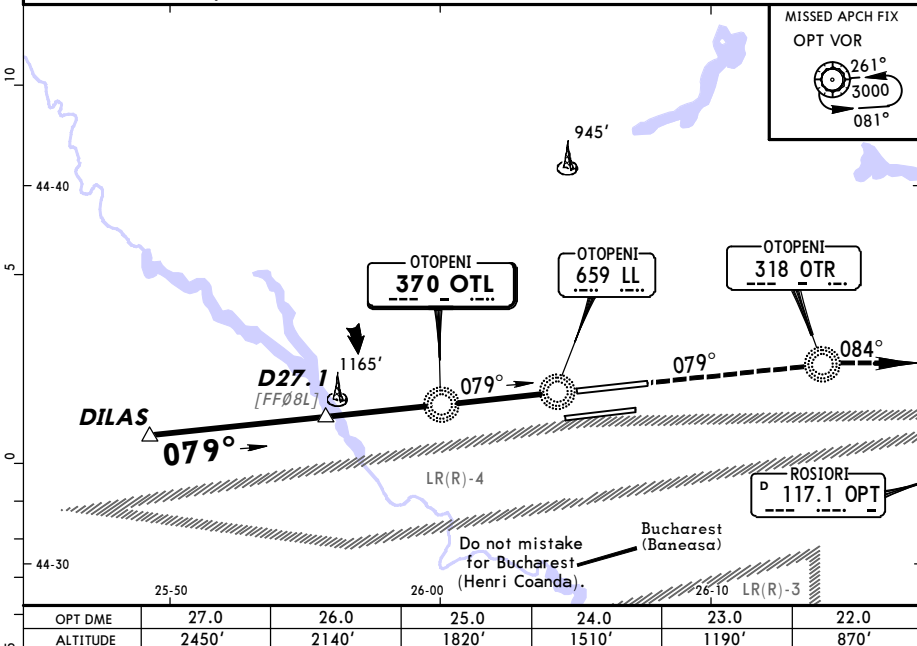

Standard STRAIGHT-IN LANDING RWY 08L			CIRCLE-TO-LAND Not authorized South of airport		
DA(H) AB: 710' (396') CD: 720' (406')			ALS out		
A			Max Kts		
B			MDA(H)		
C			VIS		
D			RVR		
RVR 1100m			100	780' (466')	1500m
RVR 1200m			135	820' (506')	1600m
RVR 1900m			180	1010' (696')	2400m
RVR 1900m			205	1020' (706')	3600m

CHANGES: MSA.




© JEPPESEN, 2012, 2013. ALL RIGHTS RESERVED.

LROP/OTP
HENRI COANDA

JEPPesen
15 MAY 15 (26-01) Eff 28 May

BUCHAREST, ROMANIA
NDB Rwy 08L

BREEZING STRIP™	ATIS	BUCHAREST Approach (R)	OTOPENI Tower	Ground	
	118.5	118.250	121.850	121.7	118.8
	NDB OTL 370	Final ApcH Crs 079°	Procedure Alt D26.5 OPT 2500' (2186')	DA(H) 740' (426')	Apt Elev 314'
MISSED APCH: Climb on track 079° inbound to OTR NDB not below 1600', then turn RIGHT direct to OPT VOR to 3000' and hold, or as directed.					
Alt Set: hPa (MM on req) Apt Elev: 11 hPa Trans level: By ATC Trans alt: 4000'					
DME required.					

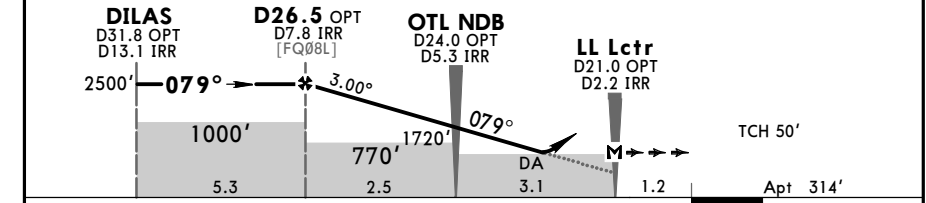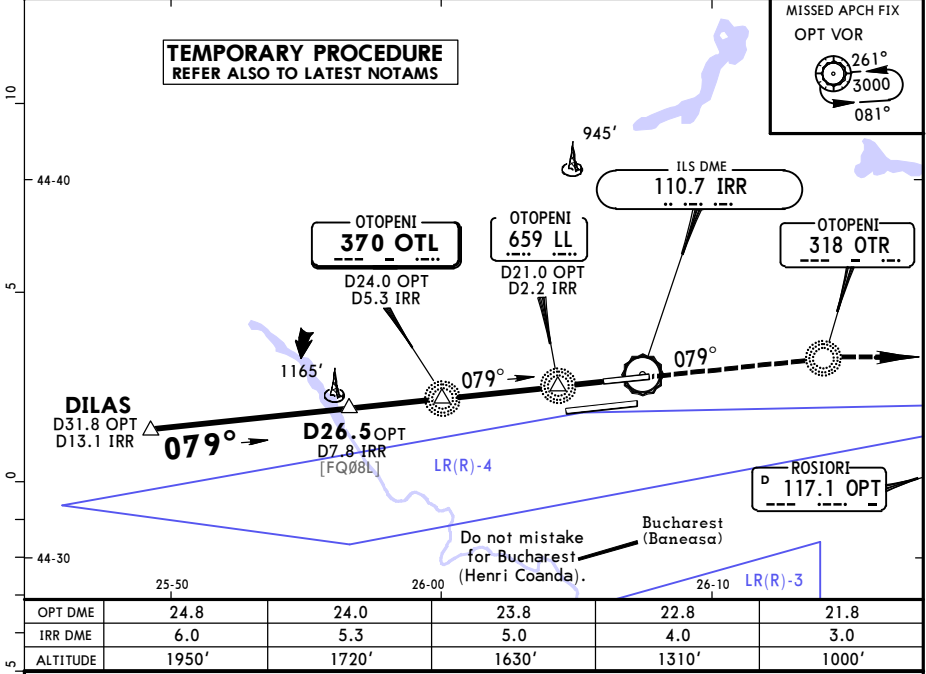


Gnd speed-Kts		70	90	100	120	140	160	MIM 1600' on 079° OTR 318		
Descent Angle		3.00°	372	478	531	637	743			849
MAP at LL Lctr/D21.0 OPT/D2.2 IRR										
Standard STRAIGHT-IN LANDING RWY 08L								CIRCLE-TO-LAND Not authorized South of airport		
DA(H) 740'(426')										
A	RVR 1500m							Max Kts	MDA(H)	VIS
B								100	780'(466')	1500m
C								135	820'(506')	1600m
D								180	920'(606')	2400m
RVR 2000m								205	1020'(706')	3600m



LROP/OTP
HENRI COANDA

JEPPesen
27 SEP 13 (26-2)

BUCHAREST, ROMANIA
NDB Rwy 08R

BRIEFING STRIP™

ATIS 118.5		BUCHAREST Approach (R) 118.25		OTOPENI Tower 120.9		Ground 121.7 118.8	
NDB OPW 267.5		Final Apch Crs 079°		Minimum Alt D7.6 IOP 2500' (2186')		DA(H) Refer to Minimums	
						Apt Elev 314'	
MISSED APCH: Climb via OPE NDB to OPT VOR to 3000' and hold, or as directed.							
Alt Set: hPa (MM on req) VOR and DME required.		Apt Elev: 11 hPa		Trans level: By ATC		Trans alt: 4000'	

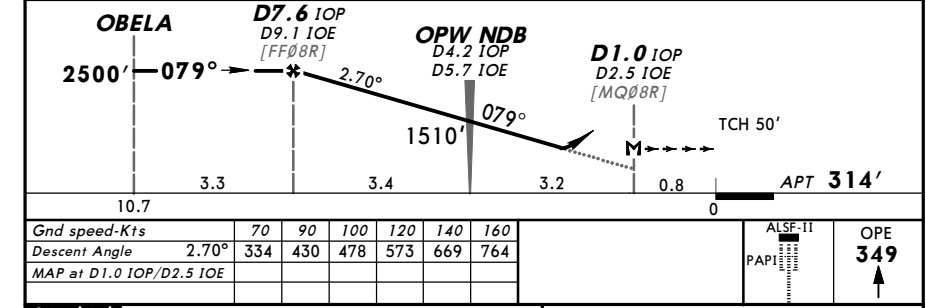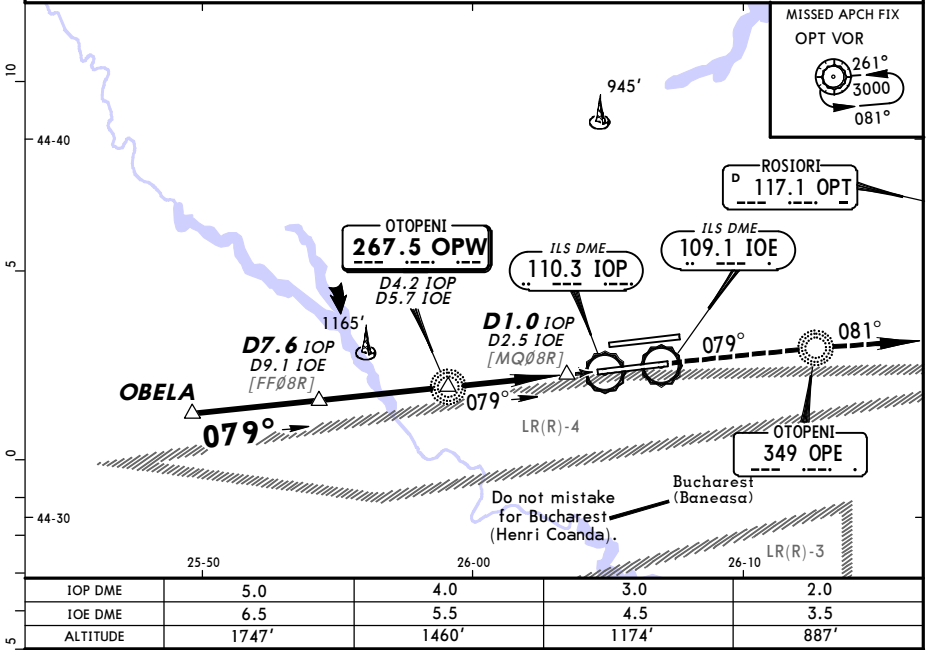

Standard STRAIGHT-IN LANDING RWY 08R			CIRCLE-TO-LAND Not authorized South of airport		
DA(H) AB: 710' (396') CD: 720' (406')					
ALS out			Max Kts	MDA(H)	VIS
			100	780' (466')	1500m
			135	820' (506')	1600m
			180	1010' (696')	2400m
			205	1020' (706')	3600m
A	RVR 1100m				
B	RVR 1500m				
C	RVR 1200m				
D	RVR 1900m				


LROP/OTP
HENRI COANDA

27 SEP 13 **26-3**


BUCHAREST, ROMANIA
NDB Rwy 26R

BREFFING STRIP™


ATIS 118.5		BUCHAREST Approach (R) 118.25		OTOPENI Tower 121.85		Ground 121.7 118.8	
NDB OTR 318		Final Apch Crs 259°		Minimum Alt D11.8 OPT 2500' (2197')		DA(H) 690' (387')	
						Apt Elev 314' RWY 303'	
MISSED APCH: Climb via OTL NDB to FLR VOR to 3000' and hold, or as directed.							
Alt Set: hPa (MM on req) ADF and DME required.		Rwy Elev: 11 hPa		Trans level: By ATC		Trans alt: 4000'	



2500'
090° → ← 270°
2100'
MSA
Airport

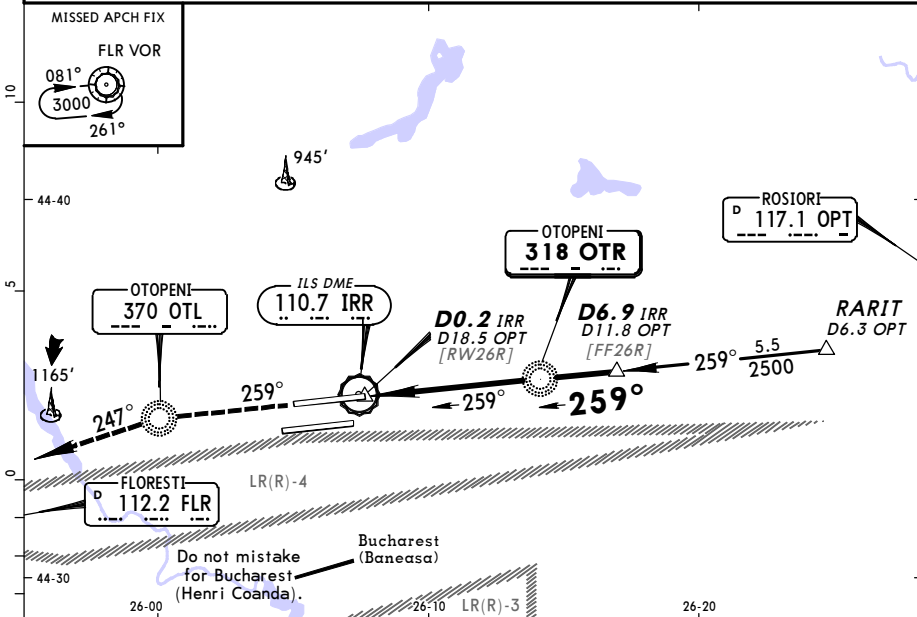

IRR DME	2.0	3.0	4.0	5.0	6.0
ALTITUDE	930'	1250'	1570'	1890'	2210'

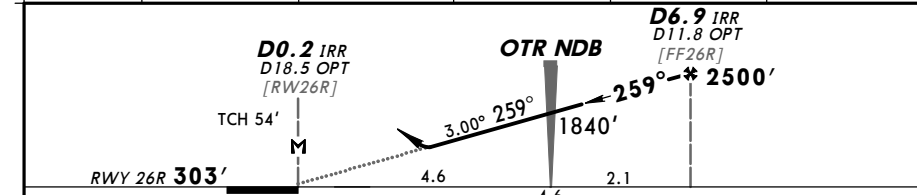

Gnd speed-Kts	70	90	100	120	140	160		OTL 370
Descent Angle	3.00°	372	478	531	637	743		
MAP at D0.2 IRR/D18.5 OPT								

Standard STRAIGHT-IN LANDING RWY 26R				CIRCLE-TO-LAND Not authorized South of airport			
DA(H) 690' (387')							
ALS out				Max Kts	MDA(H)	VIS	
RVR 1500m				100	780' (466')	1500m	
				135	820' (506')	1600m	
RVR 1200m				180	1010' (696')	2400m	
				205	1020' (706')	3600m	



Chart changes since cycle 12-2016

ADD = added chart, REV = revised chart, DEL = deleted chart.

ACT PROCEDURE IDENT

INDEX

REV DATE

EFF DATE

BUCHAREST, (HENRI COANDA - LROP)

TERMINAL CHART CHANGE NOTICES

Chart Change Notices for Airport LROP

Type: Terminal

Effectivity: Temporary

Begin Date: 20150623

End Date: Until Further Notice

Construction works on Rwy 08L/26R. Refer to (20-8) and latest NOTAMs. Eff date: 23 JUN 15.

Type: Terminal

Effectivity: Temporary

Begin Date: 20150623

End Date: Until Further Notice

(21-1, 21-1A, 26-1) IAPs ILS Rwy 08L, CAT II/III ILS Rwy 08L and NDB Rwy 08L suspended. For temporary IAPs refer to (21-01) LOC Rwy 08L and (26-01) NDB Rwy 08L. Eff date: 23 JUN 15.