

List of pages in this Trip Kit

Trip Kit Index

Airport Information For LTBA

Terminal Charts For LTBA

Revision Letter For Cycle 13-2016

Change Notices

Notebook

General Information

Location: ISTANBUL TUR
ICAO/IATA: LTBA / IST
Lat/Long: N40° 58.57', E028° 48.85'
Elevation: 163 ft

Airport Use: Public
Daylight Savings: Observed
UTC Conversion: -2:00 = UTC
Magnetic Variation: 4.0° E

Fuel Types: 100-130 Octane, Jet A-1
Repair Types: Minor Airframe, Minor Engine
Customs: Yes
Airport Type: IFR
Landing Fee: Yes
Control Tower: Yes
Jet Start Unit: No
LLWS Alert: No
Beacon: Yes

Sunrise: 0232 Z
Sunset: 1740 Z

Runway Information

Runway: 05
Length x Width: 8465 ft x 197 ft
Surface Type: asphalt
TDZ-Elev: 93 ft
Lighting: Edge, ALS, Centerline, REIL, TDZ
Displaced Threshold: 427 ft

Runway: 17L
Length x Width: 9843 ft x 148 ft
Surface Type: concrete
TDZ-Elev: 157 ft
Lighting: Edge, ALS, Centerline, REIL, TDZ

Runway: 17R
Length x Width: 9843 ft x 148 ft
Surface Type: concrete
TDZ-Elev: 163 ft
Lighting: Edge, ALS, Centerline, REIL, TDZ

Runway: 23
Length x Width: 8465 ft x 197 ft
Surface Type: asphalt
TDZ-Elev: 90 ft
Lighting: Edge, ALS, Centerline, REIL, TDZ

Runway: 35L
Length x Width: 9843 ft x 148 ft
Surface Type: concrete
TDZ-Elev: 118 ft
Lighting: Edge, ALS, Centerline, REIL, TDZ

Runway: 35R
Length x Width: 9843 ft x 148 ft
Surface Type: concrete
TDZ-Elev: 124 ft
Lighting: Edge, ALS, Centerline, REIL, TDZ

Communication Information

ATIS: 130.250 Arrival Service
ATIS: 128.200 Departure Service
Yesilkoy Tower: 25.780 Military
Yesilkoy Tower: 118.100 Arrival Service
Yesilkoy Tower: 118.375 Departure Service
Yesilkoy Tower: 119.800
Yesilkoy Delivery Tower: 121.700
Yesilkoy Tower: 123.525
Yesilkoy Tower: 125.900
Yesilkoy North/South Ground: 126.800
Yesilkoy Center Ground: 125.300
Yesilkoy South Ground: 121.800
Yesilkoy North Ground: 121.600
Yesilkoy Center Ground: 121.550
Yesilkoy Center Ground: 118.175
Yesilkoy Approach/Radar Approach: 36.230 Military
Yesilkoy Approach/Radar Approach: 124.450
Yesilkoy Approach/Radar Approach: 119.475
Yesilkoy Approach/Radar Approach: 118.950
Yesilkoy Approach/Radar Approach: 127.825
Yesilkoy Approach/Radar Approach: 127.100
Yesilkoy Approach/Radar Approach: 119.350
Yesilkoy Approach/Radar Approach: 120.700
Yesilkoy Approach/Radar Approach: 126.425
Yesilkoy Approach/Radar Approach: 119.425
Yesilkoy Approach/Radar Approach: 122.675
Yesilkoy Approach/Radar Approach: 120.450
Yesilkoy Approach/Radar Approach: 120.125
Yesilkoy Approach/Radar Approach: 122.575
Yesilkoy Approach/Radar Approach: 121.250
Yesilkoy Approach/Radar Approach: 120.500
Yesilkoy Approach/Radar Approach: 121.100

LTBA/IST
ATATURK

29 APR 16

JEPPesen

10-1P

ISTANBUL, TURKEY
AIRPORT BRIEFING

1. GENERAL

1.1. ATIS

ATIS Arrival 130.250

ATIS Departure 128.2

1.2. ATATURK AIRPORT PREFERENTIAL RUNWAY SYSTEM OPERATIONS

Ataturk Airport applies a "Preferential RWY System" (PRS) indicating the RWY or RWYs that are considered by ATC to be the most suitable for take-off or landing, taking ACFT performance, surface wind speed and other components into consideration.

During PRS operations the following RWY configuration will be used in preference to the other configurations:

- RWY 05 for landing, and
- RWY 35L/R for take-off and/or landing.

PRS Operations shall be used in compliance with the following conditions:

- The existing meteorological conditions are convenient for landing and/or take-off operations.
- There are no low visibility operations in progress.

When the preferred RWY/RWYs

- is/are dry and tail wind component does not exceed 10 Kt, or
- is/are wet and tail wind component does not exceed 5 Kt.

When braking action for the preferred RWY/RWYs is less than "Good, Good, Good", RWY/RWYs to be used shall be selected so as to make landing and take-off into the wind.

It is the pilot's decision and responsibility to accept or refuse the use of preferred RWY/RWYs determined by ATC. If another RWY than the preferred one is requested by the pilot, this request will be met by ATC when it is available. In such cases, ACFT may be subject to delay. ATC shall notify pilots of delays expected to exceed 30 minutes.

1.2.1. ANNOUNCEMENT BY ATIS DURING PRS OPERATIONS IN PROGRESS**1.2.1.1. ATIS ANNOUNCEMENT FOR TAKE-OFF TRAFFIC**

PRS Operations are in progress. Pilots unable to comply with PRS Operations for RWY 35L/R shall notify the relevant ATC unit at the time of requesting start-up clearance. This traffic may normally be subject to delay.

1.2.1.2. ATIS ANNOUNCEMENT FOR LANDING TRAFFIC

PRS Operations are in progress. Pilots unable to comply with PRS Operations for RWY 05 shall notify the relevant ATC unit at the first contact or 20 minutes in advance of the ETA (which is earlier). This traffic may normally be subject to delay. Air crew must comply with the requirements announced by ATIS.

1.2.2. MINIMUM RWY OCCUPANCY TIME**1.2.2.1. APPROACH**

During descent and approach briefings, pilot-in-command should plan the TWY to be used to vacate the RWY in order to reduce RWY Occupancy Time. However, pilot should take into consideration that if unable to exit via first TWY planned, it will take more time to re-open thrust to vacate the RWY via next TWY since the ACFT has already decelerated. In that case it may take shorter time to vacate the RWY directly via next TWY. In all cases Rapid Exit TWYs should be preferred to vacate the RWY.

LTBA/IST
ATATURK

29 APR 16

JEPPesen

10-1P1

ISTANBUL, TURKEY

AIRPORT BRIEFING

1. GENERAL

1.2.2.2. TAKE-OFF

Pilots, granted line-up clearance, must be ready to depart immediately after they receive take-off clearance. Pilot-in-command who is unable to comply with this requirement shall notify the relevant ATC unit, just after receiving the line-up clearance.

1.3. MANDATORY IMPLEMENTATION OF RNAV (GNSS) SIDS AND STARS

RNAV (GNSS) SIDS AND STARS procedures are mandatory for P-RNAV approved ACFT. Therefore, the P-RNAV approved ACFT arriving/departing to/from LTBA are required to flight plan or submit a change message (CHG) concerning the route section of their RPLs as described below.

1. GNSS based RNAV STARS for LTBA starts from the waypoints/fixes TETSA, PAZAR, ERKAL, DEKEK, TURKO, GELBU and ENESU. These waypoints/fixes shall be the last element of the flight planned routes for the P-RNAV approved ACFT as illustrated below:

- A flight planned route for the arrivals to LTBA via BIGA;
EXAMPLE: UG80 BIG Y146 TURKO

2. GNSS based RNAV SIDs for LTBA ends at the waypoints/fixes MARMA, GOLDO, VADEN, IBLAL, MAKOL, MOPIN, PIMAV and EDASA. These waypoints/fixes shall be the first element of the flight planned routes for the P-RNAV approved ACFT as illustrated below:

- A flight planned route for the departures from LTBA via VADEN;
EXAMPLE: VADEN UL610

1.4. SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM**1.4.1. A-SMGCS UTILISING MODE S**

ACFT operators should ensure that Mode S transponders are able to operate when ACFT is on the ground.

Flight crew should select XPNDR or equivalent according to specific installation, AUTO if available, not OFF or STDBY, and the assigned Mode A code, just after receiving the ATC clearance, after landing, continuously until ACFT is fully parked on stand. After parking, the Mode A code 2000 must be set before selecting OFF or STDBY.

Flight crew of ACFT equipped with Mode S having an ACFT identification feature should also set the ACFT ident.

This setting is the ACFT ident specified in item 7 of the flight plan.

ACFT ident should be entered just after the ATC clearance through FMS or transponder control panel.

Traffic whose transponder is not on and active shall not be instructed for push-back.

1.5. LOW VISIBILITY PROCEDURES (LVP)

During CAT II and III operations, special ATC Low Visibility Procedures will be applied. Pilots will be informed when these procedures are in operation via ATIS and RTF.

Under Low Visibility conditions, only yellow TWY centerlines shall be used. Blue and orange TWY centerlines shall be used only under night conditions which do not have Low Visibility conditions.

LTBA/IST
ATATURK

29 APR 16

JEPPesen

10-1P2

ISTANBUL, TURKEY

AIRPORT BRIEFING

1. GENERAL

1.6. TAXI PROCEDURES**1.6.1. GENERAL**

Caution: Due to dense ground movement flight crew shall strictly obey ATC instructions and follow signs/markings on aprons and TWYs. Never cross RWYs unless clear permission is granted or instruction is given by ATC. Comply with the readback and hearback procedures.

Flight crews have to observe carefully on the movement area and consider wingtip separation is under their responsibility.

ACFT ready for departure must start taxiing as soon as taxi-clearance is received.

The traffic having clearance to "line up to proceed to RWY 17L and RWY 35R" are required to proceed to the line up position 2 point where available psn-2 sign 200m inside from THR RWY 17L and THR RWY 35R unless otherwise authorized by ATC.

Heavy traffic departing from RWY 35R can cause jet wash impact for traffic to land RWY 05.

ACFT taxiing from West to East on TWY G shall stop on hotspot located at backward side of T4 parking area, and resume taxiing by ATC instruction.

Entering/Departing parking areas on Apron V and entering of stands 101 and 102 under low thrust level only.

Unless otherwise specified by TWR, taxiing speed is 20 kt in TWYs and 10 kt in TWYs D, D1, G and V apron.

Whenever RWY 17R Take-off / RWY 17L Landing or RWY 35R Landing / RWY 35L Take-off configurations are utilized, due to the insufficient distance between the subject RWYs 17/35, no ACFT can wait along TWYs A1, A2, A3, A5 and A6.

Due to the situation of ACFT parking positions, ACFT must use push-back to leave the parking areas.

Unless otherwise specified by ATC, ACFT max CAT C must use push-back from the parking areas to blue and orange centerlines.

Unless otherwise specified by ATC, the following standard taxi-routes shall be used.

1.6.2. STANDARD TAXI ROUTES FOR ARRIVAL**1.6.2.1 RWY 05**

1G: Vacate RWY from E5, E6, E7 and E8 and use TWY G.

1F: Vacate RWY from E5, E6, E7 and E8 and use TWYs F and D and hold before G for ATC instructions.

1.6.2.2. RWY 17L

3D: Vacate RWY from B8, B9, A5B and B11 and use TWYs C, F and D and hold before B9 for ATC instructions.

3F: Vacate RWY from B8, B9, A5B and B11 and use TWYs C, F, E5 and G.

1.6.2.3. RWY 23

2D: Vacate RWY from E1, E2, E3 and E4 and use TWYs F and D and hold before B9 for ATC instructions.

2F: Vacate RWY from E1, E2, E3 and E4 and use TWYs F, E5 and G.

1.6.2.4. RWY 35L

2A: After ARR TWR instructions for cross RWY 35R. Vacate RWY 35R from B1, B2, B3, A2B, B4, A3B and B5 and use TWY C and hold before B8 for ATC instructions.

LTBA/IST
ATATURK

JEPPESEN
29 APR 16 10-1P3

ISTANBUL, TURKEY
AIRPORT BRIEFING

1. GENERAL

1.6.3. STANDARD TAXI ROUTES FOR DEPARTURE

1.6.3.1. RWY 05

- 2C: Use TWYs D, B5, C, F and E1 and hold on RWY 05 holding position.
- 2F: Use TWYs G, E5 and F and hold before TWY C for ATC instructions.

1.6.3.2. RWY 17R

- 2A: Use TWYs G, C and B1 and hold on RWY 17L holding position.
- 3A: Use TWYs D, B8, C and B1 and hold on RWY 17L holding position.

1.6.3.3. RWY 35L/R

- 1A: Use TWYs B8, C and B12 and hold on RWY 35R holding position.
- 1B: Use TWYs G, C and B12 and hold on RWY 35R holding position.
- 1C: Use TWYs D, B5, C and B12 and hold on RWY 35R holding position.
- 1D: Use TWYs D, B5, C and B11 and hold on RWY 35R holding position.
- 1G: Use TWYs G, C and B11 and hold on RWY 35R holding position.
- 1H: Use G, C, F and A7 and hold on RWY 35L holding position.
- 1J: Use D, B5, C, F and A7 and hold on RWY 35L holding position.

1.7. PARKING INFORMATION

- Aprons L, M, N, and R not visible from Tower.
- Stands 101 thru 105 on Terminal B Apron not visible from Tower.
- Automatic guidance system available on stands 101 thru 112 and 201 thru 226.
- All ACFT should obtain tow-bar, except general aviation ACFT.

1.8. OTHER INFORMATION

1.8.1. GENERAL

- Birds.

1.8.2. BALKED LANDING MISSED APPROACH PROCEDURE

- For the execution of the procedure at least one of the pilots in team shall have completed simulator training on this specific procedure and the flying pilot shall always be the pilot having had this training.

1.8.3. ENGINE TESTING

- Before an engine test contact YESILKOY Ground on 121.8 or 121.6.
- Engine testing shall be performed on Motor Test Apron.
- In case the testing could not be performed on Motor Test Apron for any reason, engine testing in coordination with the relevant ATC unit, will be carried out on TWY C between TWY B1 and TWY B4.

LTBA/IST
ATATURK

JEPPESEN
20 MAY 16 (10-1P4)

Eff 26 May

ISTANBUL, TURKEY
AIRPORT BRIEFING

2. ARRIVAL

2.1. COMMUNICATION FAILURE PROCEDURE

2.1.1. RF FOR IFR FLIGHTS OUTSIDE TMA

Select transponder code 7600. Follow the flight plan route using last assigned and acknowledged FL. For 3 minutes execute relevant STAR. Then, descending 6000' proceed to IST VOR. Leave IST VOR at 6000'. Proceed to relevant IAF, execute Instrument Approach Procedure (IAP) and land.

2.1.2. RF FOR IFR FLIGHTS INSIDE TMA

If available call telephone number 0090 212 465 0121.

ACFT at or above 6000'

Select transponder code 7600. For 3 minutes execute last assigned and acknowledged ATC instructions. Then, descending 6000' proceed to IST VOR. Leave IST VOR at 6000'. Proceed to relevant IAF, execute Instrument Approach Procedure and land.

Note: Traffic via 112.2 KFK is not allowed to descend below 10000' before passing DEKEK Int or beyond IST 40 DME.

ACFT below 6000', at or above 3000'

Select transponder code 7600. Proceed to relevant IAF, descend or maintain last assigned and acknowledged altitude. Execute Instrument Approach Procedure and land. The Instrument Approach Procedures for RWYs 17 and 23 are to be executed via IAFs VURAL and KOFUN.

Note: ACFT on downwind legs shall execute this procedure regardless of altitude or FL.

ACFT below 3000'

Select transponder code 7600. Proceed to relevant Final Approach Fix and land.

2.2. GNSS BASED RNAV STARS

The altitudes/FLs depicted on the arrival procedures are for operational purposes. They do not represent permission to descend to those altitudes/FLs unless otherwise authorized by ATC.

When an arriving ACFT on a STAR is cleared to descend to an altitude/FL lower than the altitudes/FLs specified in a STAR, the ACFT shall follow the published vertical profile of a STAR, unless such restrictions are explicitly cancelled by ATC.

The cancellation of the level restrictions depicted on the STARS will be subject to the ATC clearance by the phrase: "OPEN DESCEND TO ... (ALT./FL.)".

2.3. CAT II/III OPERATIONS

RWY 05 approved for CAT II/III operations and RWY 35R approved for CAT II operations, special aircrew and ACFT certification required.

LTBA/IST
ATATURK

20 MAY 16

JEPPesen

10-1P5

Eff 26 May

ISTANBUL, TURKEY

AIRPORT BRIEFING

2. ARRIVAL**2.4. LANDINGS**

Due to conditions of the relevant RWY, Pilots should adjust their landings in a way to make them use of the high speed taxi-route turn-offs as stated in the table below so as not to occupy the RWY more than required.

RWY	ACFT	Turn off intersection	Dist from THR ft(m)
05	heavy	E7	7382' (2250m)
	medium	E6	6512' (1985m)
	light	E5	5315' (1620m)
17L	heavy/medium/light	B9	7644' (2330m)
17R	heavy/medium/light	A5	7710' (2350m)
23	heavy	E3	7005' (2135m)
	medium/light	E4	6102' (1860m)
35L	heavy	A2	7710' (1350m)
	medium/light	A3	6234' (1900m)
35R	heavy/medium	B4	7513' (2290m)
	light	B5	6299' (1920m)

To provide the least optimum duration of RWY occupation in landing operations, pilots, during the Approach phase, are strongly advised to make computations in a way to make them use of the preferred high speed taxi-route turn-offs.

When precision approach procedures are applied for landing operations, because of the speed restrictions, non-precision approach procedures regarding training purposes cannot be applied.

When RWY 35L is preferred for landing, the landing ACFT shall not cross RWY35R without taking ATC instruction/permission.

All traffic landing to RWY 05/23 or 17L immediately after vacating the RWY (crossing RWY holding points) shall contact with YESILKOY Ground South without waiting any instruction from TWR.

All traffic landing to RWY 35R immediately after vacating the RWY (crossing RWY holding points) shall contact with YESILKOY Ground North without waiting any instruction from TWR. After landing to RWY 17R/35L traffic shall be instructed by ATC for frequency change.

The requests regarding usage of the opposite RWYs shall not be accepted. Even the Optional RWY operations are concerned, those traffic persistently willing to use opposite RWYs for landing should take into consideration the very likelihood of being exposed to long duration of delay on holding position due to the intensity of air traffic operations within the vicinity.

Delays on holding position if happen to exceed 20 minutes, EXPECTED APPROACH TIME shall be informed accordingly.

In case of low fuel level condition, the situation shall be promptly declared to the ATC through using only the following statements whichever suit best to the described condition: "Minimum Diversion Fuel", "Low on Fuel", "Minimum Fuel".

2.5. OTHER INFORMATION

Caution: On approach to RWYs 05/23 and 17L/35R expect momentary distortions or interruptions of GS signal and/or RWY 05/23 localizer.

GS fluctuations depending on taxiing of departing ACFT possible. ATC will clear landing ACFT for ILS approach without GS.

The phraseology will be "Cleared for Localizer Approach".

The innermost TDZ lights of RWY 05/23 are located 30'/9m away from RWY centerline, but the innermost TDZ markings of RWY 05/23 are located 37'/11.25m away from RWY centerline to not occur slipperiness on the RWY, so that innermost TDZ lights of RWY 05/23 are not located in same alignment with the innermost TDZ markings. Pay attention please.

LTBA/IST
ATATURK

JEPPESEN
20 MAY 16 10-1P6

ISTANBUL, TURKEY
AIRPORT BRIEFING

3. DEPARTURE

3.1. CLEARANCE DELIVERY

Pilots shall contact with Clearance Delivery as follows:
Call Sign / Stand Position / Code confirming ATIS message received.

3.2. DE-ICING

3.2.1 GENERAL

De-icing can be handled at the park area; however, in case anti-icing has been started at the designated areas, de-icing in the parking area shall not be permitted.

3.2.2 ANTI-ICING AREA

For all Airline Companies:

As a line-up area for CAT-I anti-icing application, TWY F (between E8 and E4 TWYs) shall be used. In case of CAT-II and CAT-III conditions, TWY C (between B8 and G1) shall be used as a line-up area.

TWY C (between B5 and B4 TWYs) is the line-up area and the intersection of TWYs C, B1, B2 and B3 is the application area.

For all Airline Companies other than Turkish Airlines:

In CAT-I conditions, the intersection of TWY F and TWY E3 is the anti-icing application area. In CAT-II and CAT III-conditions, F1, F2, F3 and F4 TWYs are the anti-icing application areas.

3.3. START-UP & PUSH-BACK PROCEDURE

Departing traffic willing to use RWY 35R (normally designated for landing operations) instead of RWY 35L (normally designated for take-off operations) have to notify their request via Clearance Delivery frequency to ATC 35 minutes in advance of the estimated engine start-up time at the latest. The requests regarding usage of the opposite RWYs shall not be accepted. Nevertheless, while conducting optional RWY operations, those traffic persistently requesting to use opposite RWYs for take-off operations should be aware of the fact that they would most likely be exposed to long duration of delay due to the intensity of both ground and air traffic.

Pilots are required to be prepared for take-off from either RWY 35L or 35R (or similarly 17L or 17R) in order not to increase the RWY Occupancy Time and not to lead any delay by prolonging the departure.

Request to start engines shall be made approximately 10 min prior to planned time of departure.

ACFT leaving stands 101, 102, 103, 104, 105, 106, R1, R2, R3 and R4 shall do push-back first, and subsequently start-up their engines when reached at start-up positions PSN-1, PSN-2 or PSN-3 for MAX Code D ACFT and PSN-1 or PSN-2 for Code E ACFT.

Unless otherwise instructed by ATC, ACFT to leave stands V1, V2, V3, V4, V5 shall do push-back first, subsequently start up their engines when reached at start-up position PSN-6 (N40 59.8 E028 48.1).

The requests of any traffic to make Cross Bleed Start-up shall not be accepted in as much as such an operation can affect Apron traffic safety adversely and cause extra noise pollution. Only those ACFT having APU failure are allowed to make Cross Bleed Start-Up provided that required measures were taken in advance.

LTBA/IST
ATATURK

JEPPESEN
20 MAY 16 10-1P7

ISTANBUL, TURKEY
AIRPORT BRIEFING

3. DEPARTURE

ACFT at parking positions of ACFT maintenance apron 1 shall continue their push-back until TWY D and then start up their engines.

CAT E ACFT entering the ACFT maintenance apron 1 shall use TWY J1.

TWYs K and K1 are classified as CAT C. CAT C ACFT can start up their engines and do taxiing on these TWYs.

CAT D ACFT shall pass TWYs K and K1 by push-back without starting up their engines. But CAT E and F ACFT shall not pass.

Traffic granted with push-back and engine start-up permissions must start push-back within 1 minute at the latest, otherwise estimated start-up time shall be instructed by ATC.

Pilots must have accomplished all required cockpit checks for take-off before entering the RWY, and hence restrained their final checks only to minimum for take-off when entered the RWY. Pilots are deemed to react to the take-off clearances within 10 seconds at the latest. Otherwise ATC, in order to prevent the redundant RWY occupation, has the authority to withdraw the ACFT from the take-off course and re-direct it to the end of departure sequence.

3.4. NOISE ABATEMENT PROCEDURES

For departures, any ACFT having compliance with the noise category ICAO Annex 16 Chapter 3 and 4 shall apply NADP-2 whereas all other ACFT whose noise category are in compliance with ICAO Annex 16 Chapter 2 shall only apply NADP-1.

Pilots shall apply Noise Abatement Departure Procedure 1 or 2 (NADP-1 or NADP-2) which has been explained in ICAO Doc 8168 Vol 1 until passing 3000'.

Engine test operations must be conducted between 0700-2100LT.

In parking area, APU must be switched-off within 5 minutes after parking. APU is allowed to be switched on 15 minutes before the estimated start-up.

3.5. GNSS BASED RNAV SIDS

When a departing ACFT on a SID is cleared to climb to an altitude/FL higher than the initially cleared altitude/FL or the altitudes/FLs specified in a SID, the ACFT shall follow the published vertical profile of a SID, unless such restrictions are explicitly cancelled by ATC.

The cancellation of the level restrictions depicted on the SIDs will be subject to the ATC clearance by the phrase: "OPEN CLIMB TO ... (ALT./FL.)".

3.6. OTHER INFORMATION

3.6.1. CALCULATED TAKE-OFF TIME (CTOT)

Pilots, while requesting for engine start-up clearance, should be ready for departure at the CTOT, taking into consideration the estimated TWY crossover durations which are approximately 26 minutes for RWY 17L/R, 20 minutes for RWY 35L/R and RWY 05/23.

Pilots not able to comply with the instructed CTOT, shall get in contact with their company representatives or authorized agencies to apply for and have a new CTOT.


As a precautionary measure for RWY usage capacity augmentation, TWR can change the departure sequence at any time so as to ensure all ACFT ready for take-off do not miss their CTOT.

LTBA/IST
ATATURK

JEPPesen
20 MAR 15 (10-1R)

ISTANBUL, TURKEY

Eff 2 Apr. RADAR MINIMUM ALTITUDES

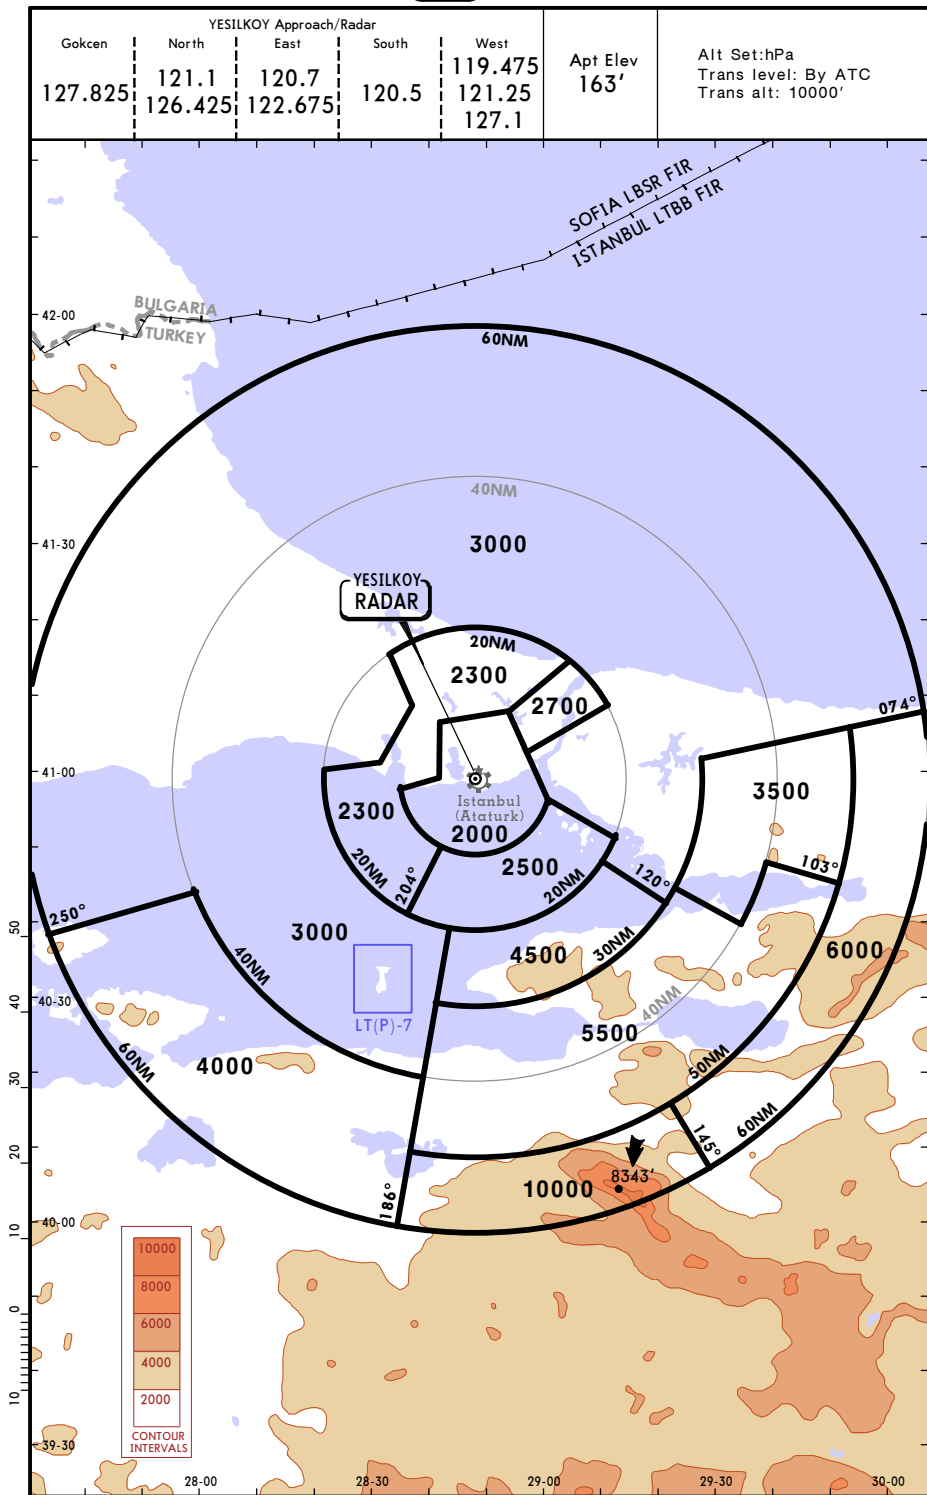



LTBA/IST
ATATURK

JEPPESSEN
6 NOV 15 10-2 Eff 12 Nov

ISTANBUL, TURKEY
RNAV STAR

ATIS 130.250	Alt Set: hPa Trans level: By ATC Trans alt: 10000'
Apt Elev 163'	1. RADAR required. 2. P-RNAV approval required otherwise advise ATC. 3. On downwind expect vectors to final. 4. At first contact with IST RADAR report if unable to comply RNAV STAR. At first contact with YESILKOY RADAR report only callsign. 5. Descend as cleared.

DEKEK 1A [DEKE1A], ERKAL 1A [ERKA1A]
PAZAR 1A [PAZA1A], PIMAV 1A [PIMA1A]
RWY 05 RNAV ARRIVALS
RNAV (GNSS)

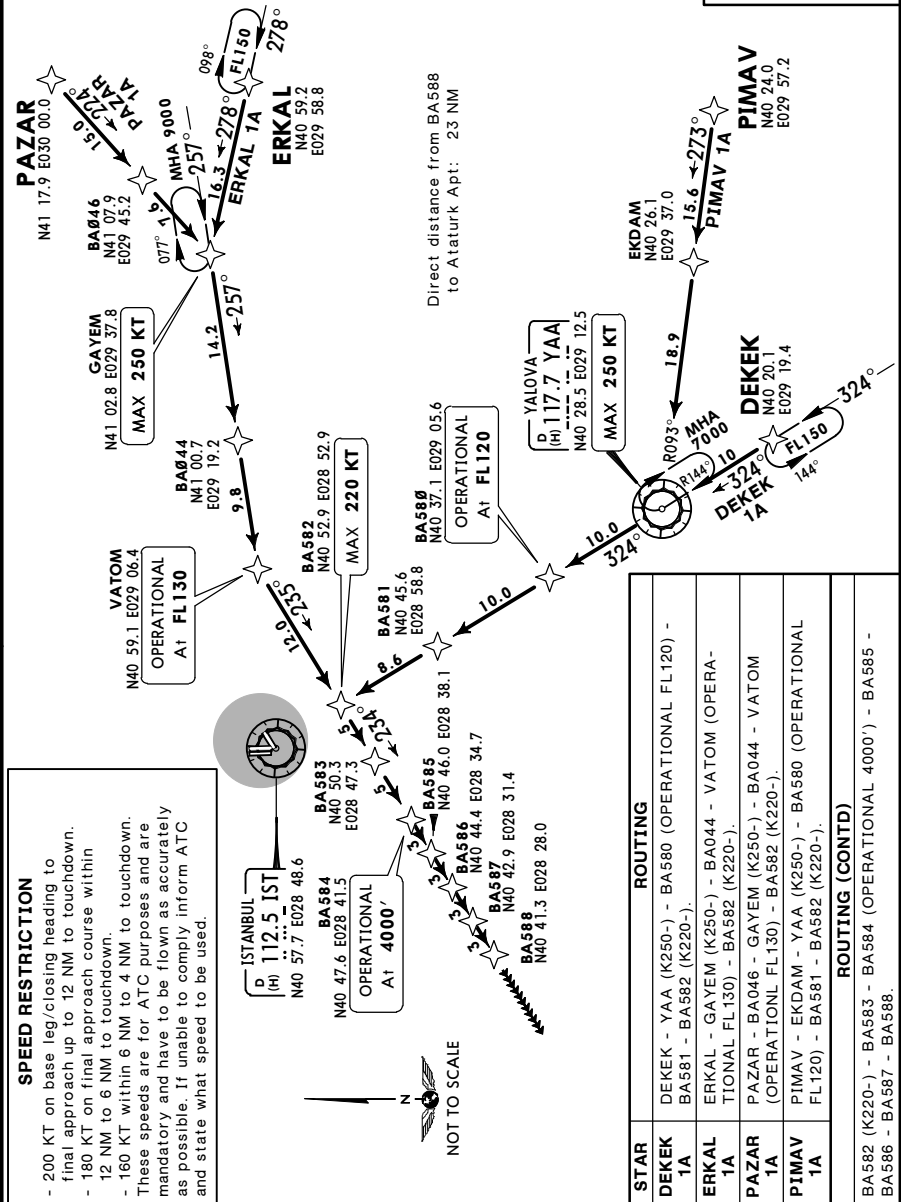

LTBA/IST
ATATURK



JEPPESSEN
6 NOV 15 (10-2A) Eff 12 Nov

ISTANBUL, TURKEY
RNAV STAR

ATIS
130.250
Apt Elev
163'

Alt Set: hPa Trans level: By ATC Trans alt: 10000'
1. RADAR required. 2. P-RNAV approval required otherwise advise ATC.
3. On downwind expect vectors to final. 4. At first contact with IST RADAR report if unable to comply RNAV STAR. At first contact with YESILKOY RADAR report only callsign. 5. Descend as cleared.

DEKEK 1B [DEKE1B]
ERKAL 1B [ERKA1B]
PAZAR 1B [PAZA1B]
PIMAV 1B [PIMA1B]
RWYS 17L/R
RNAV ARRIVALS
RNAV (GNSS)

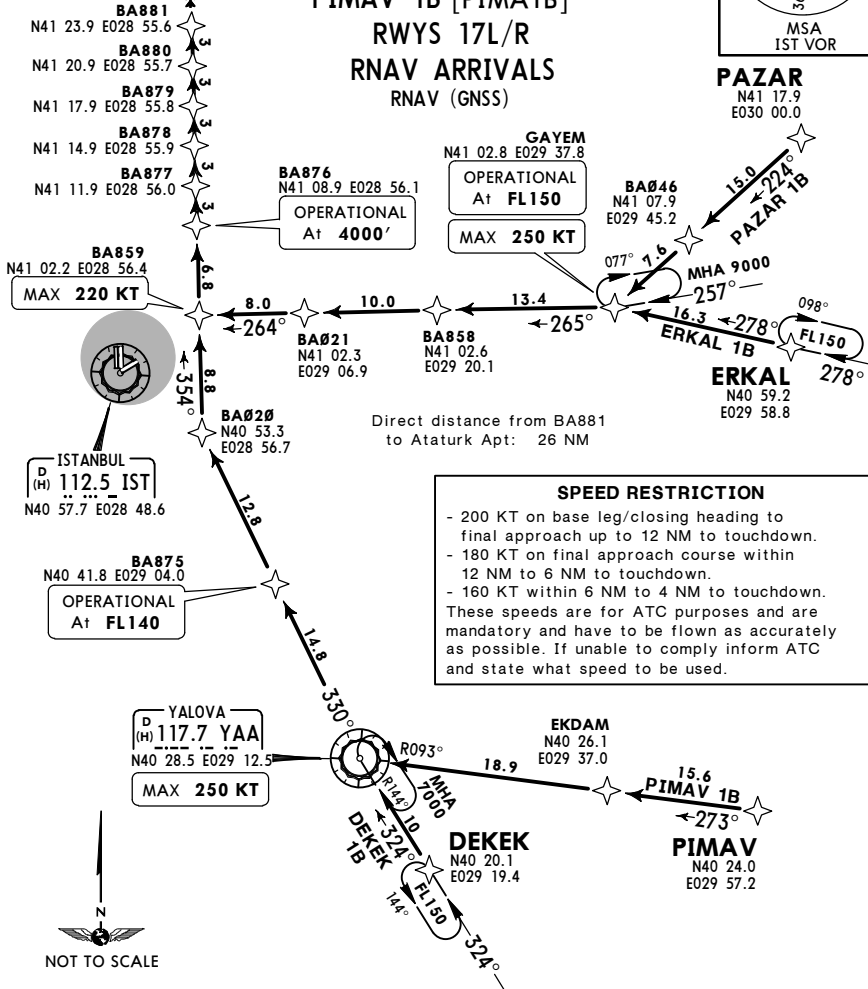

STAR	ROUTING
DEKEK 1B	DEKEK - YAA (K250-) - BA875 (OPERATIONAL FL140) - BA020 - BA859 (K220-).
ERKAL 1B	ERKAL - GAYEM (OPERATIONAL FL150; K250-) - BA858 - BA021 - BA859 (K220-).
PAZAR 1B	PAZAR - BA046 - GAYEM (OPERATIONAL FL150; K250-) - BA858 - BA021 - BA859 (K220-).
PIMAV 1B	PIMAV - EKDAM - YAA (K250-) - BA875 (OPERATIONAL FL140) - BA020 - BA859 (K220-).
ROUTING (CONTD)	
BA859 (K220-) - BA876 (OPERATIONAL 4000') - BA877 - BA878 - BA879 - BA880 - BA881.	

LTBA/IST
ATATURK


JEPPESSEN
6 NOV 15 **10-2B** Eff 12 Nov

ISTANBUL, TURKEY
RNAV STAR


ATIS
130.250
Apt Elev
163'

Alt Set: hPa Trans level: By ATC Trans alt: 10000'
1. RADAR required. 2. P-RNAV approval required otherwise advise ATC.
3. On downwind expect vectors to final. 4. At first contact with IST RADAR report if unable to comply RNAV STAR. At first contact with YESILKOY RADAR report only callsign. 5. Descend as cleared.

**DEKEK 1C [DEKE1C], ERKAL 1C [ERKA1C]
PAZAR 1C [PAZA1C], PIMAV 1C [PIMA1C]
RWY 23 RNAV ARRIVALS
RNAV (GNSS)**



SPEED RESTRICTION
- 200 KT on base leg/closing heading to final approach up to 12 NM to touchdown.
- 180 KT on final approach course within 12 NM to 6 NM to touchdown.
- 160 KT within 6 NM to 4 NM to touchdown.
These speeds are for ATC purposes and are mandatory and have to be flown as accurately as possible. If unable to comply inform ATC and state what speed to be used.

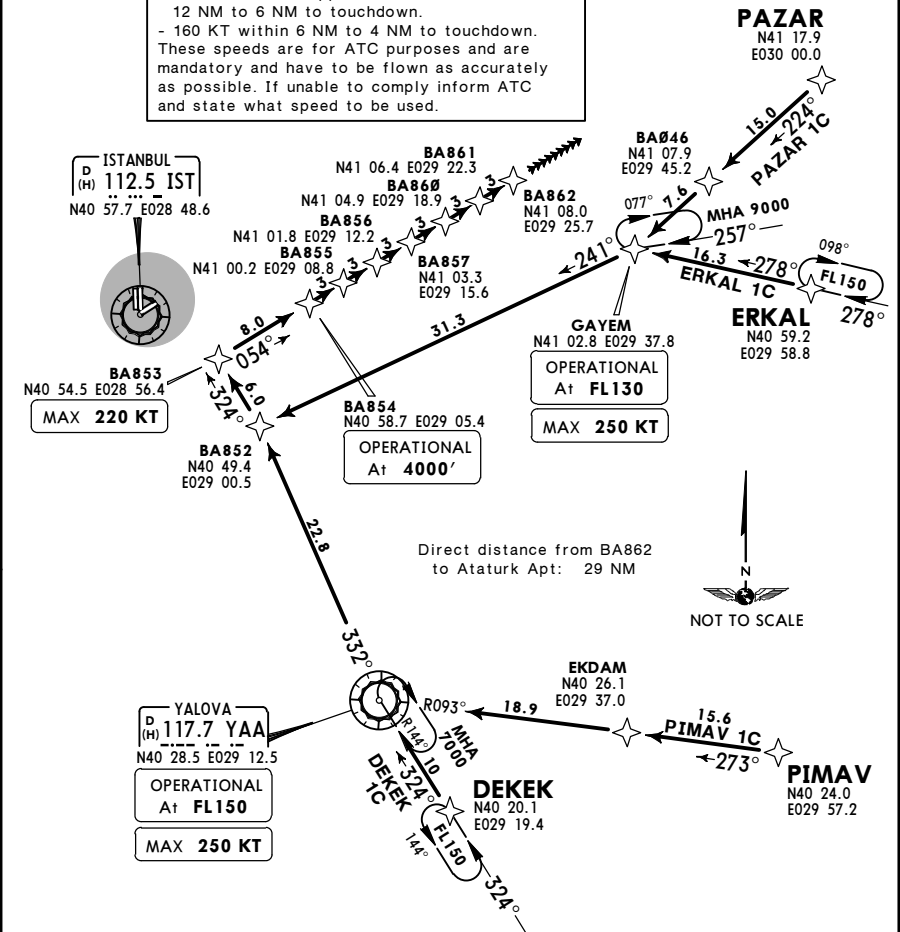

STAR	ROUTING
DEKEK 1C	DEKEK - YAA (OPERATIONAL FL150; K250-) - BA852.
ERKAL 1C	ERKAL - GAYEM (OPERATIONAL FL130; K250-) - BA852.
PAZAR 1C	PAZAR - BA046 - GAYEM (OPERATIONAL FL130; K250-) - BA852.
PIMAV 1C	PIMAV - EKDAM - YAA (OPERATIONAL FL150; K250-) - BA852.
ROUTING (CONTD)	
BA852 - BA853 (K220-) - BA854 (OPERATIONAL 4000') - BA855 - BA856 - BA857 - BA860 - BA861 - BA862.	

LTBA/IST
ATATURK

JEPPESSEN
6 NOV 15 (10-2C) Eff 12 Nov

ISTANBUL, TURKEY
RNAV STAR



ATIS
130.250
Apt Elev
163'

Alt Set: hPa Trans level: By ATC Trans alt: 10000'
1. RADAR required. 2. P-RNAV approval required otherwise advise ATC.
3. On downwind expect vectors to final. 4. At first contact with IST RADAR report if unable to comply RNAV STAR. At first contact with YESILKOY RADAR report only callsign. 5. Descend as cleared.

DEKEK 1D [DEKE1D], ERKAL 1D [ERKA1D]
PAZAR 1D [PAZA1D], PIMAV 1D [PIMA1D]
RWYS 35L/R RNAV ARRIVALS
RNAV (GNSS)

SPEED RESTRICTION

- 200 KT on base leg/closing heading to final approach up to 12 NM to touchdown.
 - 180 KT on final approach course within 12 NM to 6 NM to touchdown.
 - 160 KT within 6 NM to 4 NM to touchdown.
- These speeds are for ATC purposes and are mandatory and have to be flown as accurately as possible. If unable to comply inform ATC and state what speed to be used.

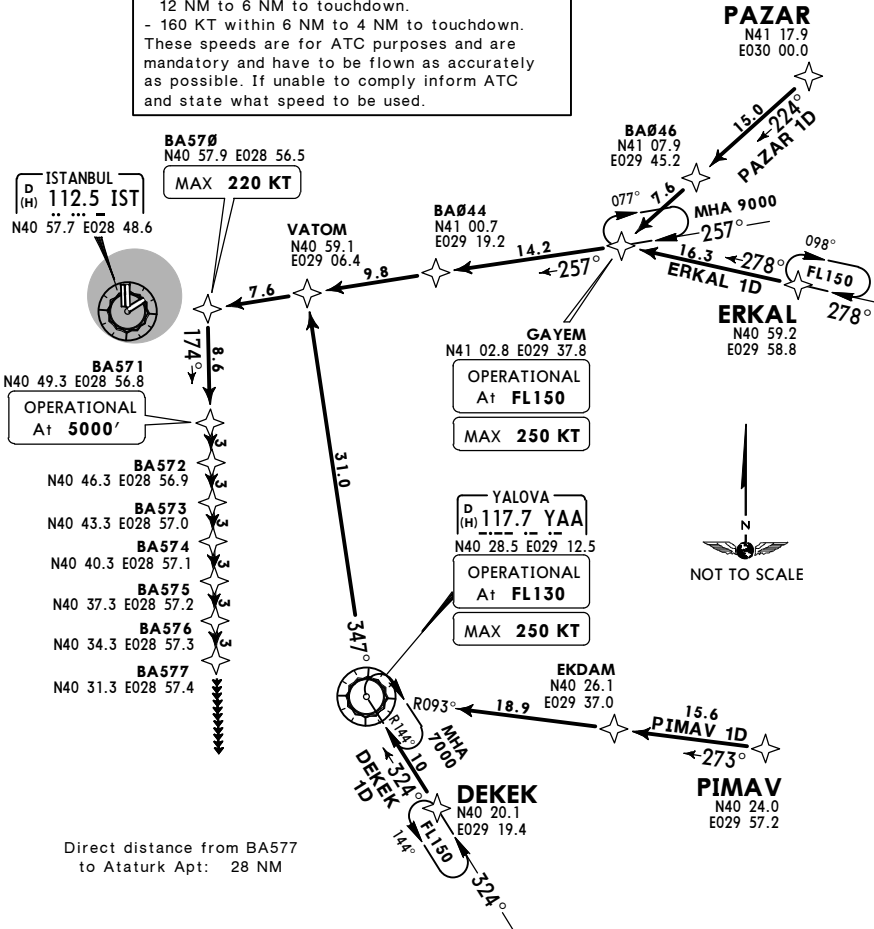

Direct distance from BA577
to Ataturk Apt: 28 NM

STAR	ROUTING
DEKEK 1D	DEKEK - YAA (OPERATIONAL FL130; K250-) - VATOM.
ERKAL 1D	ERKAL - GAYEM (OPERATIONAL FL150; K250-) - BA044 - VATOM.
PAZAR 1D	PAZAR - BA046 - GAYEM (OPERATIONAL FL150; K250-) - BA044 - VATOM.
PIMAV 1D	PIMAV - EKDAM - YAA (OPERATIONAL FL130; K250-) - VATOM.


ROUTING (CONTD)

VATOM - BA570 (K220-) - BA571 (OPERATIONAL 5000') - BA572 - BA573 - BA574 - BA575 - BA576 - BA577.

ISTANBUL, TURKEY
RNAV STAR

ATIS 130.250	Alt Set: hPa Trans level: By ATC Trans alt: 10000' 1. RADAR required. 2. P-RNAV approval required otherwise advise ATC. 3. On downwind expect vectors to final. 4. At first contact with IST RADAR report if unable to comply RNAV STAR. At first contact with YESILKOY RADAR report only callsign. 5. Descend as cleared.
Apt Elev 163'	

ENESU 1B [ENES1B], GELBU 1B [GELB1B]
TETSA 1B [TETS1B], TURKO 1B [TURK1B]
RWYS 17L/R RNAV ARRIVALS
RNAV (GNSS)

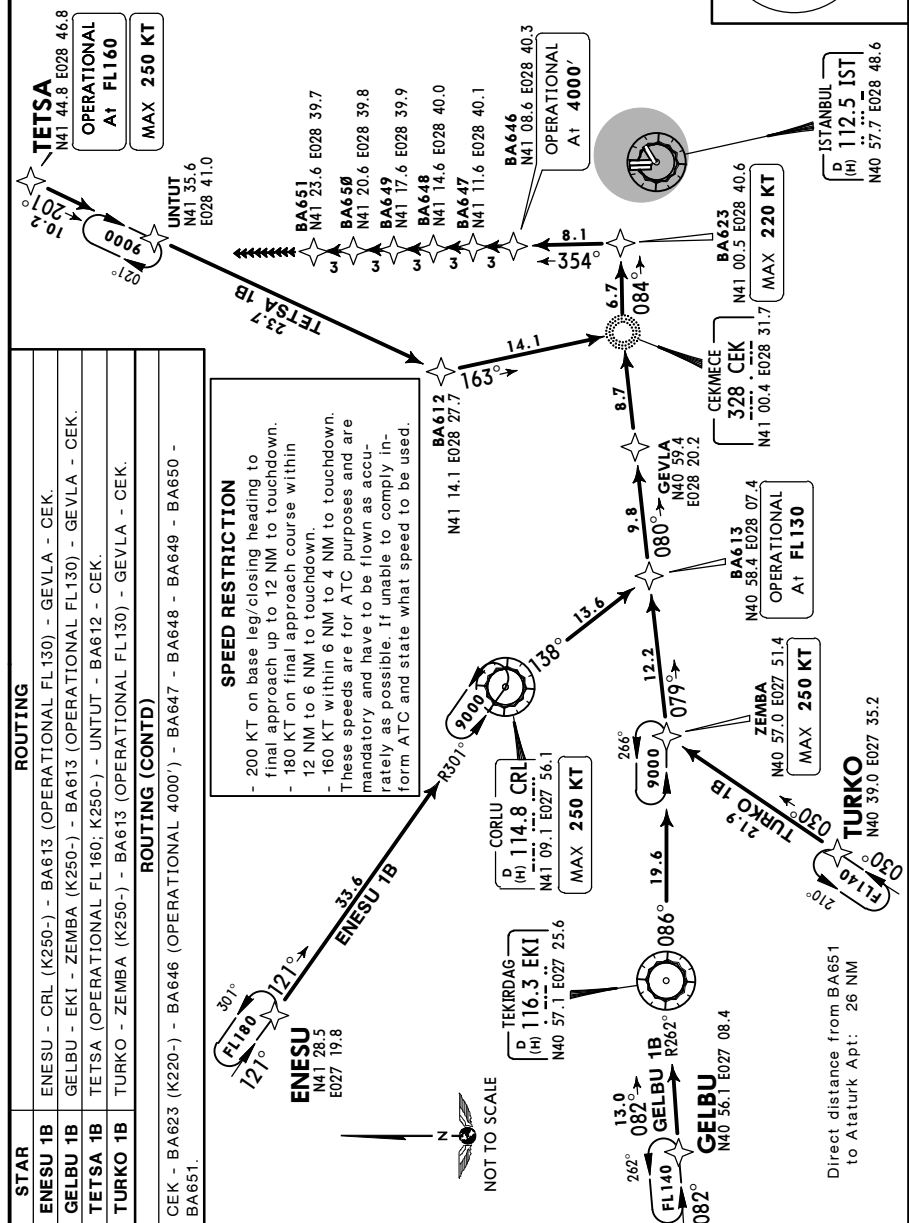


LTBA/IST
ATATURK

JEPPESSEN
6 NOV 15 10-2G Eff 12 Nov

ISTANBUL, TURKEY
RNAV STAR

ATIS 130.250	Alt Set: hPa Trans level: By ATC Trans alt: 10000'
Apt Elev 163'	1. RADAR required. 2. P-RNAV approval required otherwise advise ATC. 3. On downwind expect vectors to final. 4. At first contact with IST RADAR report if unable to comply RNAV STAR. At first contact with YESILKOY RADAR report only callsign. 5. Descend as cleared.


ENESU 1D [ENES1D], GELBU 1D [GELB1D]
TETSA 1D [TETS1D], TURKO 1D [TURK1D]
RWYS 35L/R RNAV ARRIVALS
RNAV (GNSS)



SPEED RESTRICTION

- 200 KT on base leg/closing heading to final approach up to 12 NM to touchdown.
- 180 KT on final approach course within 12 NM to 6 NM to touchdown.
- 160 KT within 6 NM to 4 NM to touchdown.

These speeds are for ATC purposes and are mandatory and have to be flown as accurately as possible. If unable to comply inform ATC and state what speed to be used.

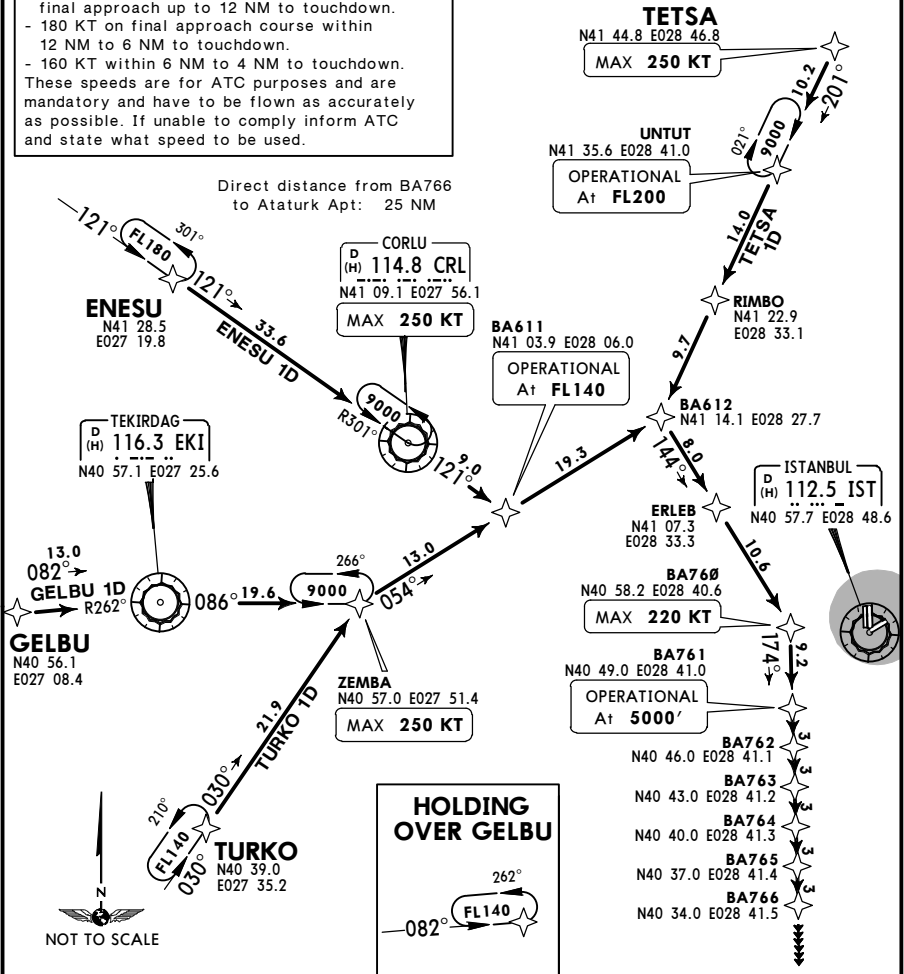

STAR	ROUTING
ENESU 1D	ENESU - CRL (K250-) - BA611 (OPERATIONAL FL140) - BA612.
GELBU 1D	GELBU - EKI - ZEMBA (K250-) - BA611 (OPERATIONAL FL140) - BA612.
TETSA 1D	TETSA (K250-) - UNTUT (OPERATIONAL FL200) - RIMBO - BA612.
TURKO 1D	TURKO - ZEMBA (K250-) - BA611 (OPERATIONAL FL140) - BA612.

ROUTING (CONTD)
BA612 - ERLEB - BA760 (K220-) - BA761 (OPERATIONAL 5000') - BA762 - BA763 - BA764 - BA765 - BA766.

LTBA/IST
ATATURK

JEPPesen


6 NOV 15


(10-2H)

Eff 12 Nov

ISTANBUL, TURKEY

STAR

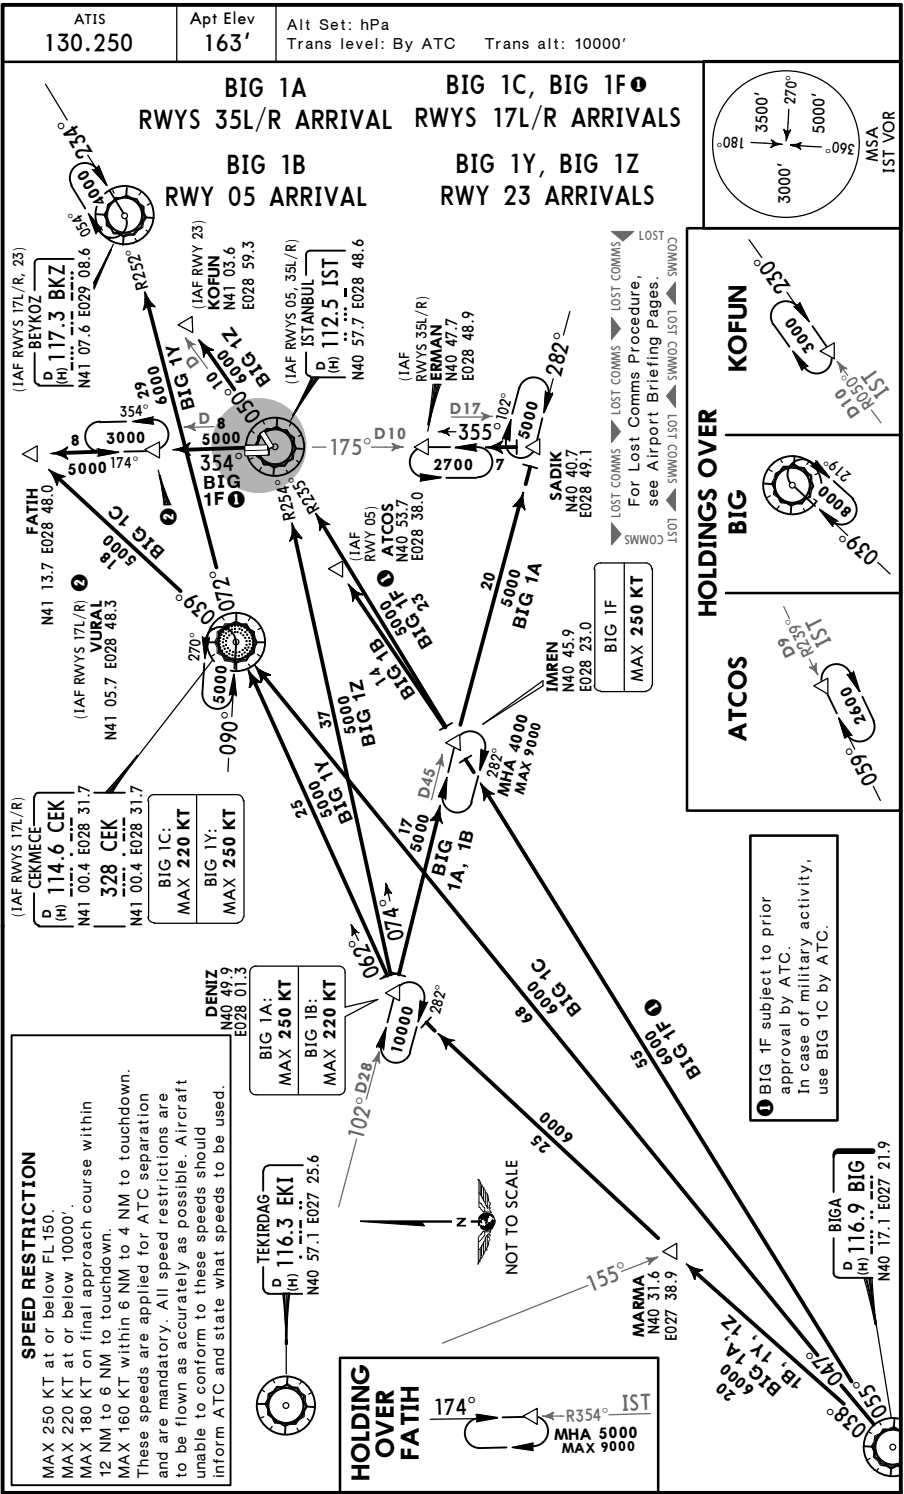

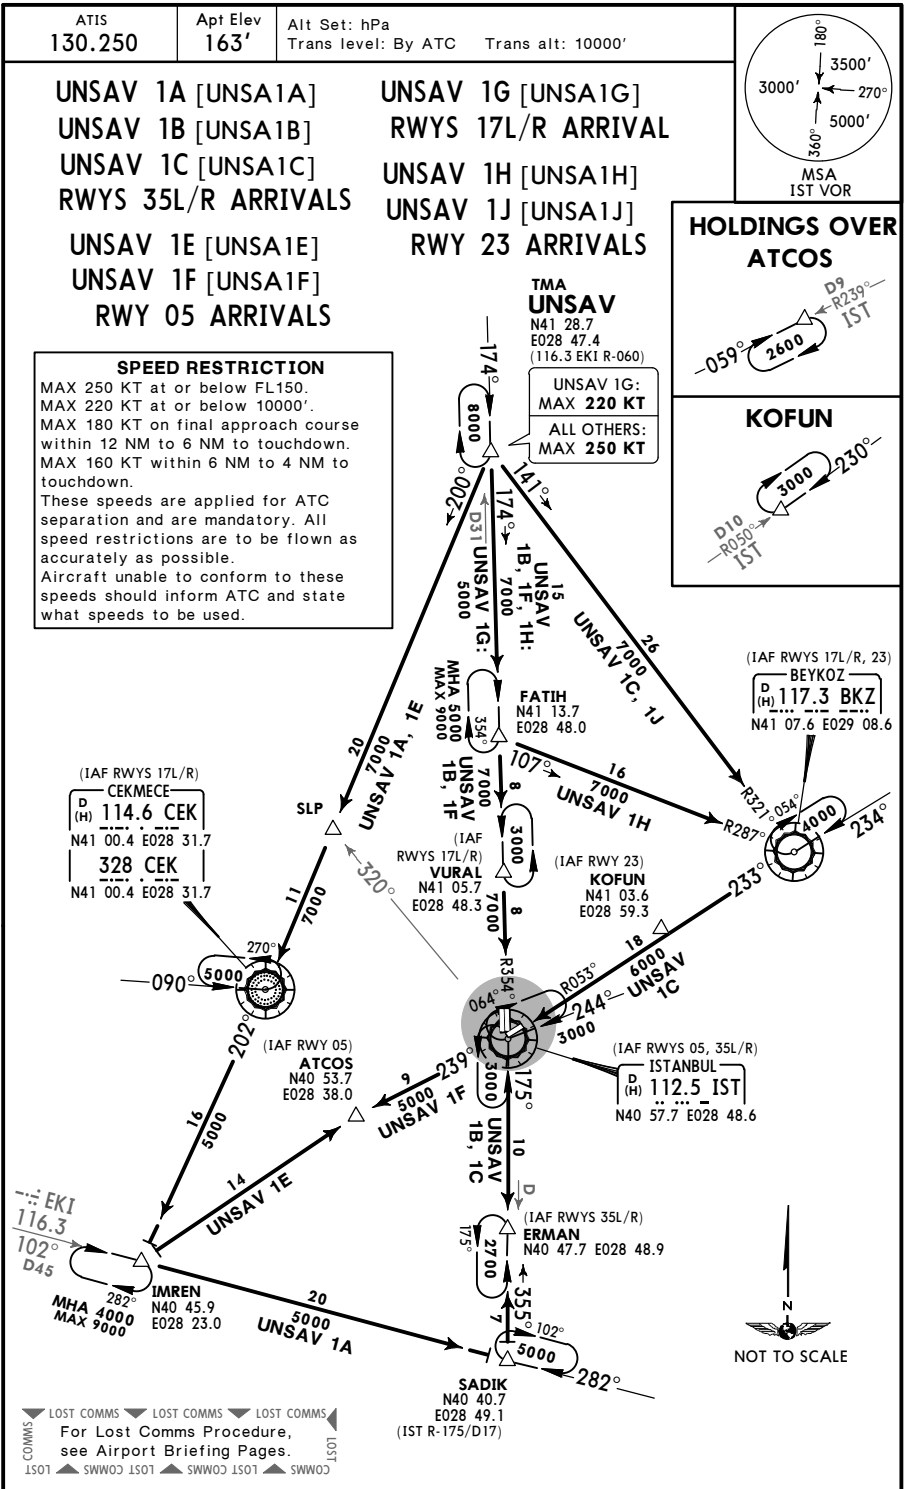

ATIS 130.250	Apt Elev 163'	Alt Set: hPa Trans level: By ATC	Trans alt: 10000'
-----------------	------------------	-------------------------------------	-------------------

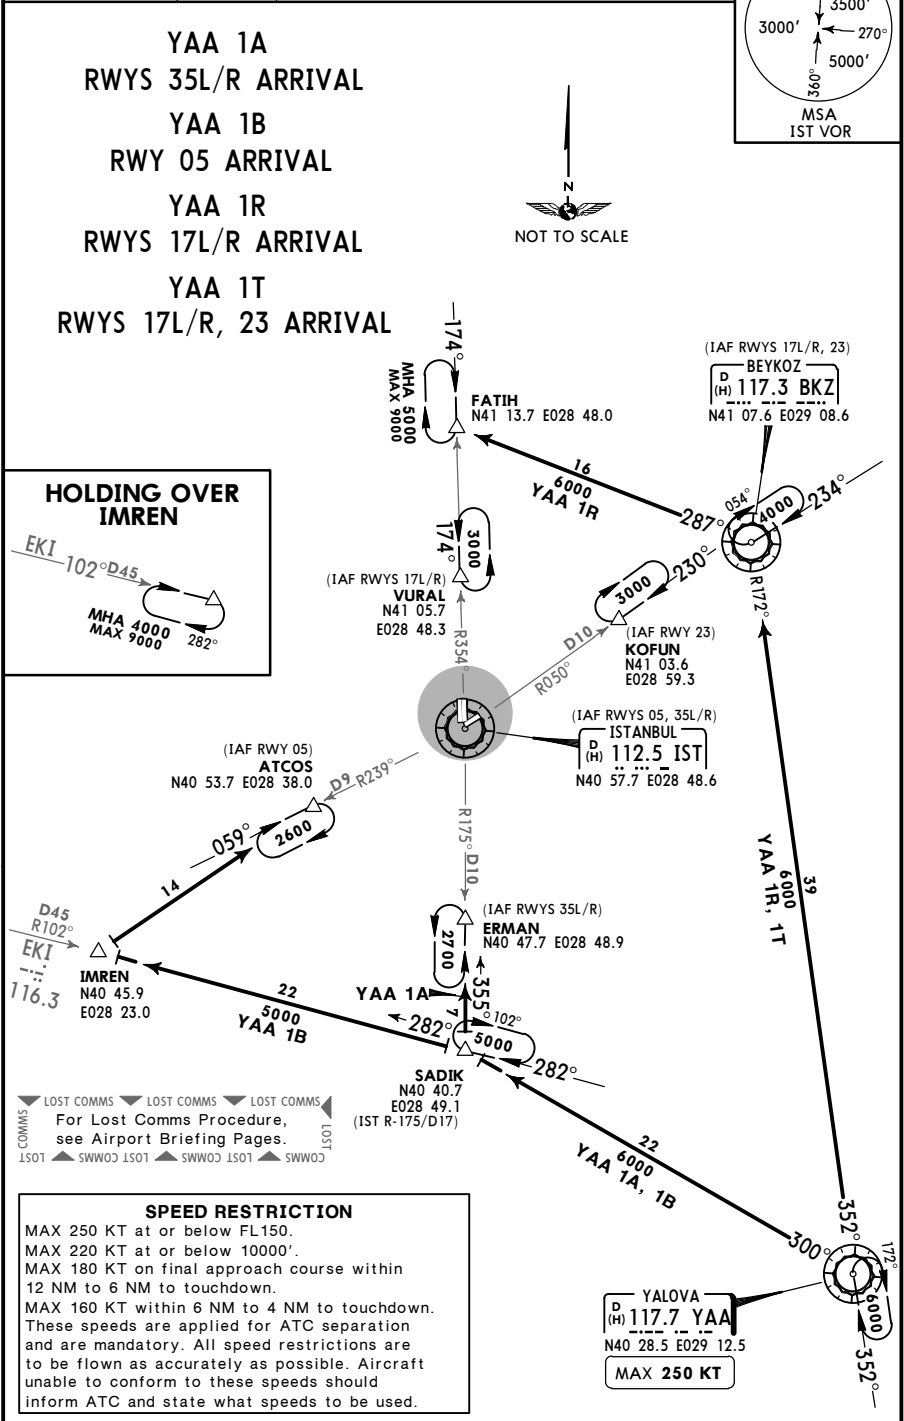


Diagram illustrating a circular sector with radii 3500', 3000', and 5000' and angles 180°, 270°, and 360°.

MAX 250 KT at or below FL150.
MAX 220 KT at or below 10000'.
MAX 180 KT on final approach
12 NM to 6 NM to touchdown.
MAX 160 KT within 6 NM to 4 NM.
These speeds are applied for ATIS
and are mandatory. All speed re-
sults can be flown as accurately as possible to conform to these speed
limits. Inform ATC and state what speed
you are flying.



© JEPPESEN, 2013, 2015. ALL RIGHTS RESERVED.

LTBA/IST
ATATURK

JEPPESSEN
 15 MAY 15 **(10-3)** **Eff 28 May**
ISTANBUL, TURKEY
RNAV SID

RNAV SID DESIGNATION	REFER TO CHART
MAKOL 1E, MOPIN 1E	10-3B
ERSEN 1P, MAKOL 1P, MOPIN 1P	10-3C
ERSEN 1R, MAKOL 1R, MOPIN 1R	10-3D
ERSEN 1S, MAKOL 1S, MOPIN 1S	10-3E
ERSEN 1T, MAKOL 1T, MOPIN 1T	10-3F
ERSEN 1U, MAKOL 1U, MOPIN 1U	10-3G
ERSEN 1V, MAKOL 1V, MOPIN 1V	10-3H
MAKOL 1X, MOPIN 1X	10-3J
ERSEN 1Y, MAKOL 1Y, MOPIN 1Y	10-3K
ERSEN 1Z, MAKOL 1Z, MOPIN 1Z	10-3L
EDASA 1E, PIMAV 1E	10-3M
EDASA 1N, PIMAV 1N	10-3N
EDASA 1P, PIMAV 1P	10-3P
EDASA 1Q, PIMAV 1Q	10-3Q
EDASA 1R, 1T, PIMAV 1R, 1T	10-3Q1
EDASA 1S, 1U, PIMAV 1S, 1U	10-3Q2
EDASA 1V, PIMAV 1V	10-3Q3
EDASA 1X, PIMAV 1X	10-3Q4
EDASA 1Y, PIMAV 1Y	10-3S
EDASA 1Z, PIMAV 1Z	10-3T
GOLDO 1E, MARMA 1E	10-3T1
GOLDO 1P, MARMA 1P	10-3T2
GOLDO 1R, 1T, MARMA 1R, 1T	10-3T3
GOLDO 1S, 1U, MARMA 1S, 1U	10-3T4
GOLDO 1V, MARMA 1V	10-3T5
GOLDO 1X, MARMA 1X	10-3T6
GOLDO 1Y, MARMA 1Y	10-3T7
GOLDO 1Z, MARMA 1Z	10-3T8
IBLAL 1E, TUDBU 1E, VADEN 1E	10-3U
IBLAL 1P, TUDBU 1P, VADEN 1P	10-3V
IBLAL 1R, 1T, TUDBU 1R, 1T, VADEN 1R, 1T	10-3V1
IBLAL 1S, 1U, TUDBU 1S, 1U, VADEN 1S, 1U	10-3V2
IBLAL 1V, TUDBU 1V, VADEN 1V	10-3V3
IBLAL 1X, TUDBU 1X, VADEN 1X	10-3V4
IBLAL 1Y, TUDBU 1Y, VADEN 1Y	10-3V5
IBLAL 1Z, TUDBU 1Z, VADEN 1Z	10-3V6
FOR SID DESIGNATION REFER TO PAGE 10-3A	

LTBA/IST
ATATURK



JEPPesen

7 AUG 15

(10-3B)

Eff 20 Aug

ISTANBUL, TURKEY

RNAV SID

YESILKOY Radar
126.425

Apt Elev
163'



Trans level: By ATC Trans alt: 10000'

1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency.

2. RADAR required.

3. P-RNAV approval required otherwise advise ATC.

MAKOL 1E [MAKO1E]
MOPIN 1E [MOP1E]
RWY 35R RNAV DEPARTURES
RNAV (GNSS)
EXECUTED WITH RNAV STARS RWY 23

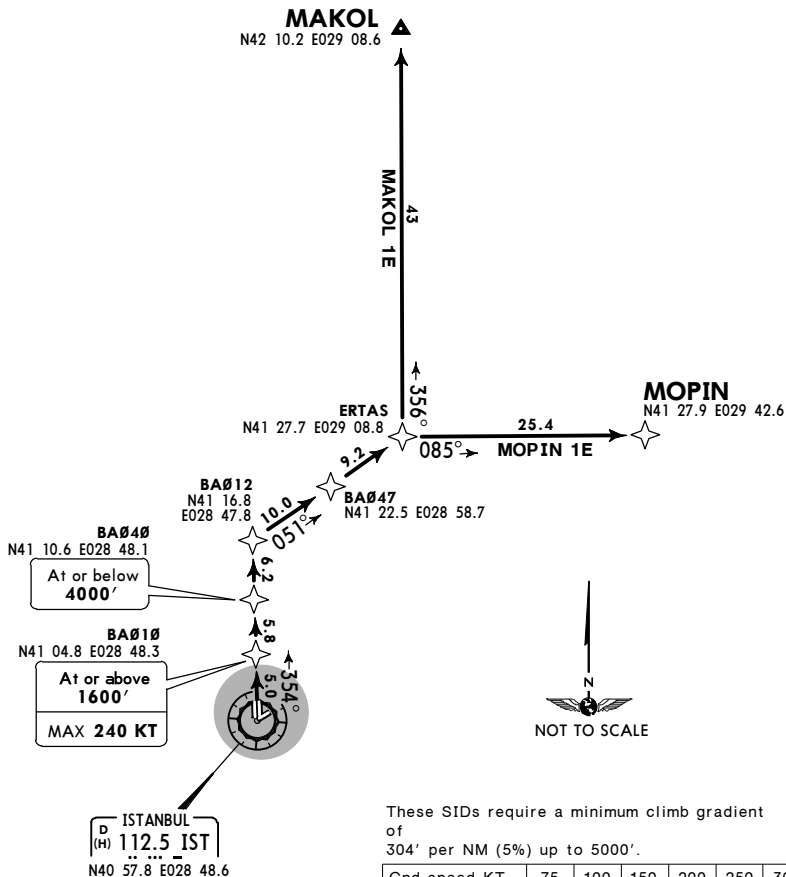

These SIDs require a minimum climb gradient of 304' per NM (5%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

Initial climb clearance 5000'

SID	ROUTING
MAKOL 1E	BA010 (1600'+; K240-) - BA040 (4000'-) - BA012 - BA047 - ERTAS - MAKOL.
MOPIN 1E	BA010 (1600'+; K240-) - BA040 (4000'-) - BA012 - BA047 - ERTAS - MOPIN.

CHANGES: BA010 altitude & speed restriction.

© JEPPESEN, 2012, 2014. ALL RIGHTS RESERVED.

LTBA/IST
ATATURK



JEPPESSEN

7 AUG 15

(10-3C)

Eff 20 Aug

ISTANBUL, TURKEY

RNAV SID

YESILKOY Radar
126.425

Apt Elev
163'



Trans level: By ATC Trans alt: 10000'

1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency.

2. RADAR required.

3. P-RNAV approval required otherwise advise ATC.

ERSEN 1P [ERSE1P]
MAKOL 1P [MAKO1P]
MOPIN 1P [MOP11P]
RWY 05 RNAV DEPARTURES
RNAV (GNSS)

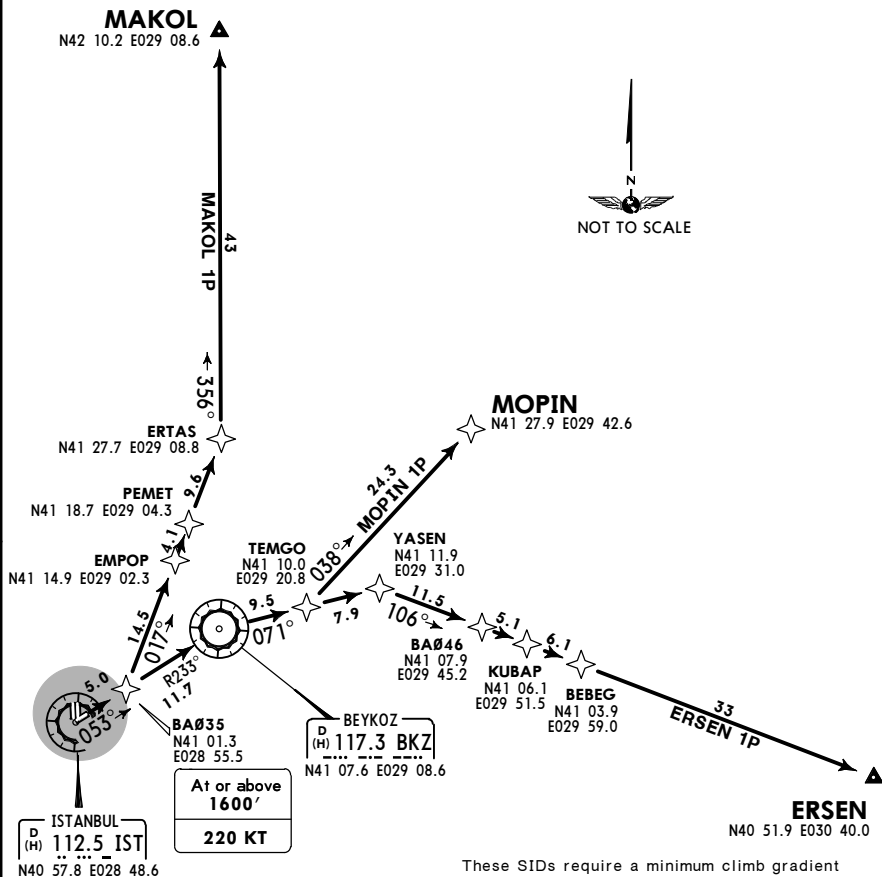

These SIDs require a minimum climb gradient of 304' per NM (5%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

Initial climb clearance **5000'**

SID	ROUTING
ERSEN 1P	BA035 (1600'+; K220) - BKZ - YASEN - BA046 - KUBAP - BEBEG - ERSEN.
MAKOL 1P	BA035 (1600'+; K220) - EMPOP - PEMET - ERTAS - MAKOL.
MOPIN 1P	BA035 (1600'+; K220) - BKZ - TEMGO - MOPIN.

CHANGES: None.

© JEPPESSEN, 2012. ALL RIGHTS RESERVED.

LTBA/IST
ATATURK

JEPPESSEN
25 MAY 12 (10-3D) Eff 31 May



ISTANBUL, TURKEY
RNAV SID

YESILKOY Radar
126.42

Apt Elev
163'

Trans level: By ATC Trans alt: 10000'
1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency.
2. RADAR required.
3. P-RNAV approval required otherwise advise ATC.

ERSEN 1R [ERSE1R]
MAKOL 1R [MAKO1R]
MOPIN 1R [MOPI1R]
RWY 17L RNAV DEPARTURES
RNAV (GNSS)
EXECUTED WITH RNAV STARS RWYS 17L/R

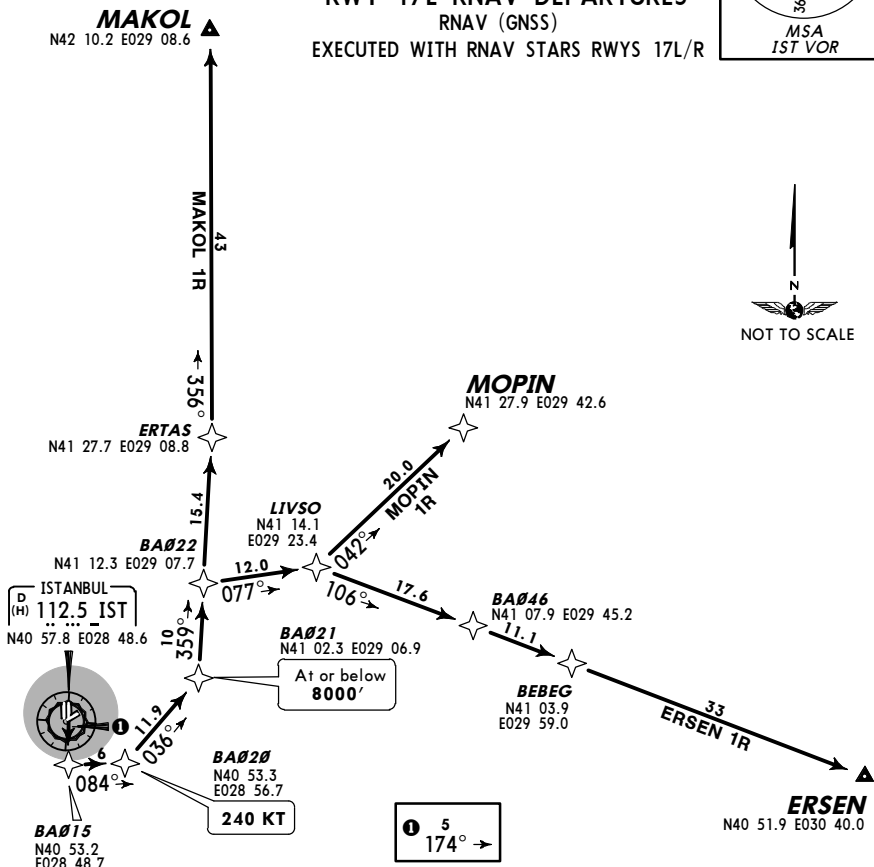

These SIDs require a minimum climb gradient of 261' per NM (4.3%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
261' per NM	327	435	653	871	1089	1306

Initial climb clearance 5000'

SID	ROUTING
ERSEN 1R	BA015 (1400'+; K220) - BA020 (K240) - BA021 (8000'-) - BA022 - LIVSO - BA046 - BELEG - ERSEN.
MAKOL 1R	BA015 (1400'+; K220) - BA020 (K240) - BA021 (8000'-) - BA022 - ERTAS - MAKOL.
MOPIN 1R	BA015 (1400'+; K220) - BA020 (K240) - BA021 (8000'-) - BA022 - LIVSO - MOPIN.

LTBA/IST
ATATURK

JEPPesen
25 MAY 12 (10-3E) Eff 31 May



ISTANBUL, TURKEY
RNAV SID

YESILKOY Radar
126.42

Apt Elev
163'

Trans level: By ATC Trans alt: 10000'
1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency.
2. RADAR required.
3. P-RNAV approval required otherwise advise ATC.

ERSEN 1S [ERSE1S]
MAKOL 1S [MAKO1S]
MOPIN 1S [MOP11S]
RWY 17R RNAV DEPARTURES
RNAV (GNSS)
EXECUTED WITH RNAV STARS RWYS 17L/R

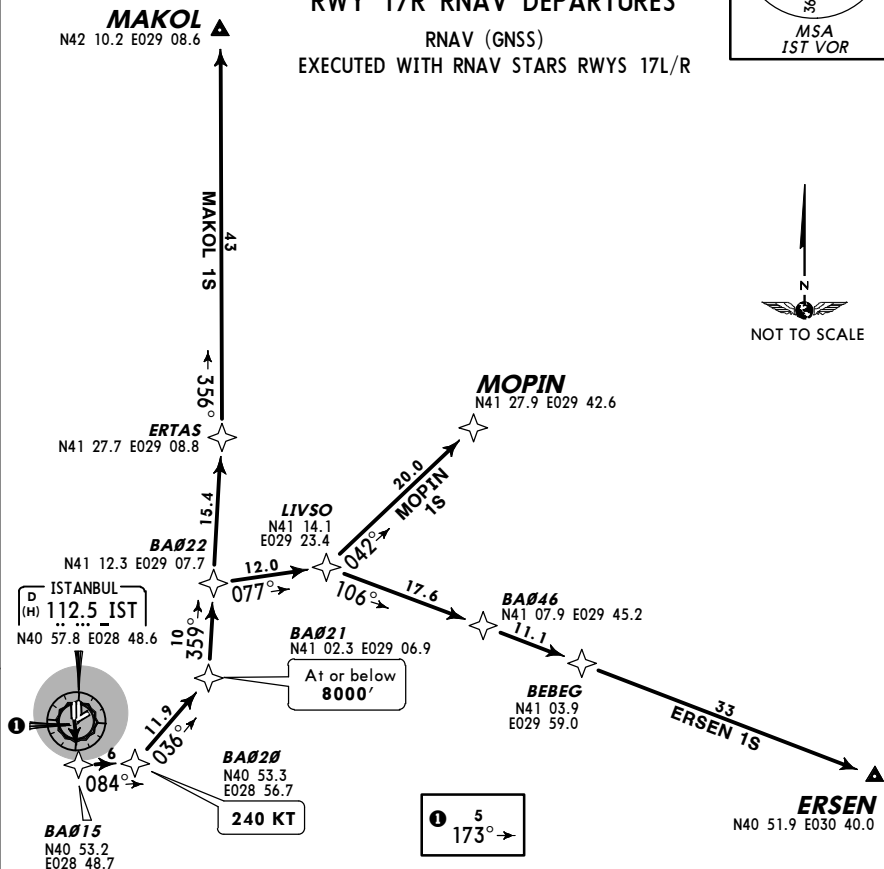

These SIDs require a minimum climb gradient of 261' per NM (4.3%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
261' per NM	327	435	653	871	1089	1306

Initial climb clearance 5000'

SID	ROUTING
ERSEN 1S	BA015 (1400'+; K220) - BA020 (K240) - BA021 (8000'-) - BA022 - LIVSO - BA046 - BEBEG - ERSEN.
MAKOL 1S	BA015 (1400'+; K220) - BA020 (K240) - BA021 (8000'-) - BA022 - ERTAS - MAKOL.
MOPIN 1S	BA015 (1400'+; K220) - BA020 (K240) - BA021 (8000'-) - BA022 - LIVSO - MOPIN.

LTBA/IST
ATATURK


JEPPESSEN
25 MAY 12 (10-3F) Eff 31 May

ISTANBUL, TURKEY
RNAV SID

YESILKOY Radar
126.42


Apt Elev
163'

Trans level: By ATC Trans alt: 10000'
1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency.
2. RADAR required.
3. P-RNAV approval required otherwise advise ATC.



MAKOL
N42 10.2 E029 08.6

ERSEN 1T [ERSE1T]
MAKOL 1T [MAKO1T]
MOPIN 1T [MOPI1T]
RWY 17L RNAV DEPARTURES
RNAV (GNSS)
EXECUTED WITH RNAV STARS RWY 23

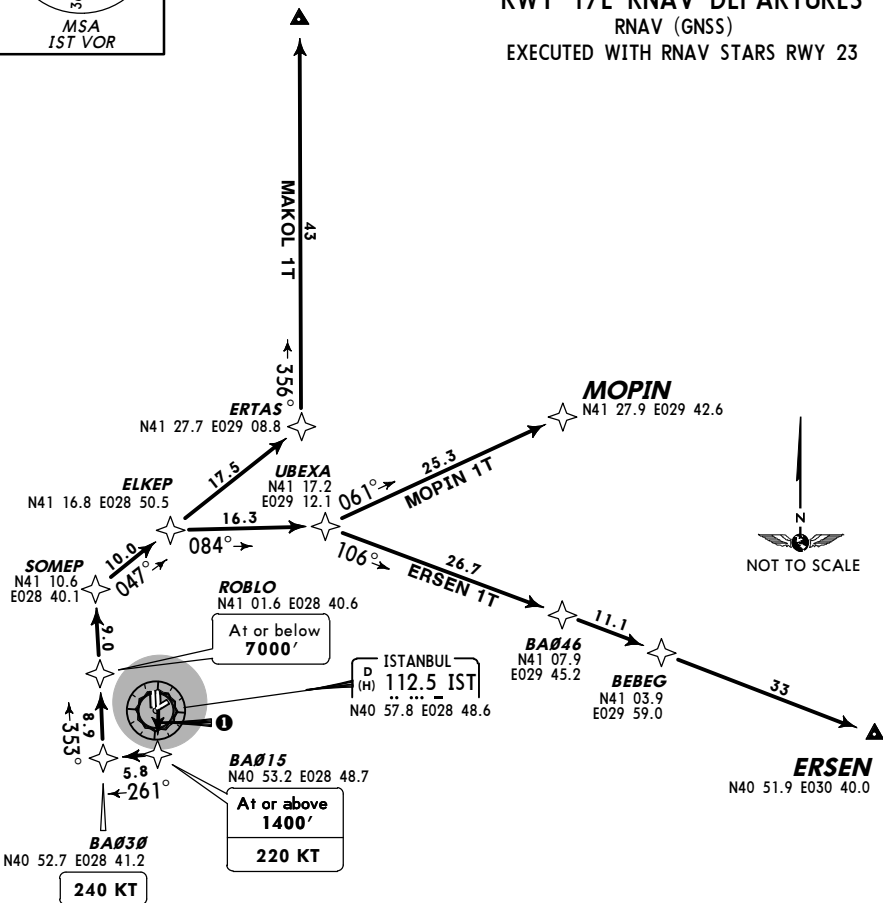

These SIDs require a minimum climb gradient of 261' per NM (4.3%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
261' per NM	327	435	653	871	1089	1306

Initial climb clearance **5000'**

SID	ROUTING
ERSEN 1T	BA015 (1400'+; K220) - BA030 (K240) - ROBLO (7000'-) - SOMEPELKEP - UBEXA - BA046 - BEBEG - ERSEN.
MAKOL 1T	BA015 (1400'+; K220) - BA030 (K240) - ROBLO (7000'-) - SOMEPELKEP - ERTAS - MAKOL.
MOPIN 1T	BA015 (1400'+; K220) - BA030 (K240) - ROBLO (7000'-) - SOMEPELKEP - UBEXA - MOPIN.

LTBA/IST
ATATURK


JEPPesen
25 MAY 12 (10-3G) Eff 31 May

ISTANBUL, TURKEY
RNAV SID

YESILKOY Radar
126.42


Apt Elev
163'

Trans level: By ATC Trans alt: 10000'
1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency.
2. RADAR required.
3. P-RNAV approval required otherwise advise ATC.



MAKOL
N42 10.2 E029 08.6

ERSEN 1U [ERSE1U]
MAKOL 1U [MAKO1U]
MOPIN 1U [MOP11U]
RWY 17R RNAV DEPARTURES
RNAV (GNSS)
EXECUTED WITH RNAV STARS RWY 23

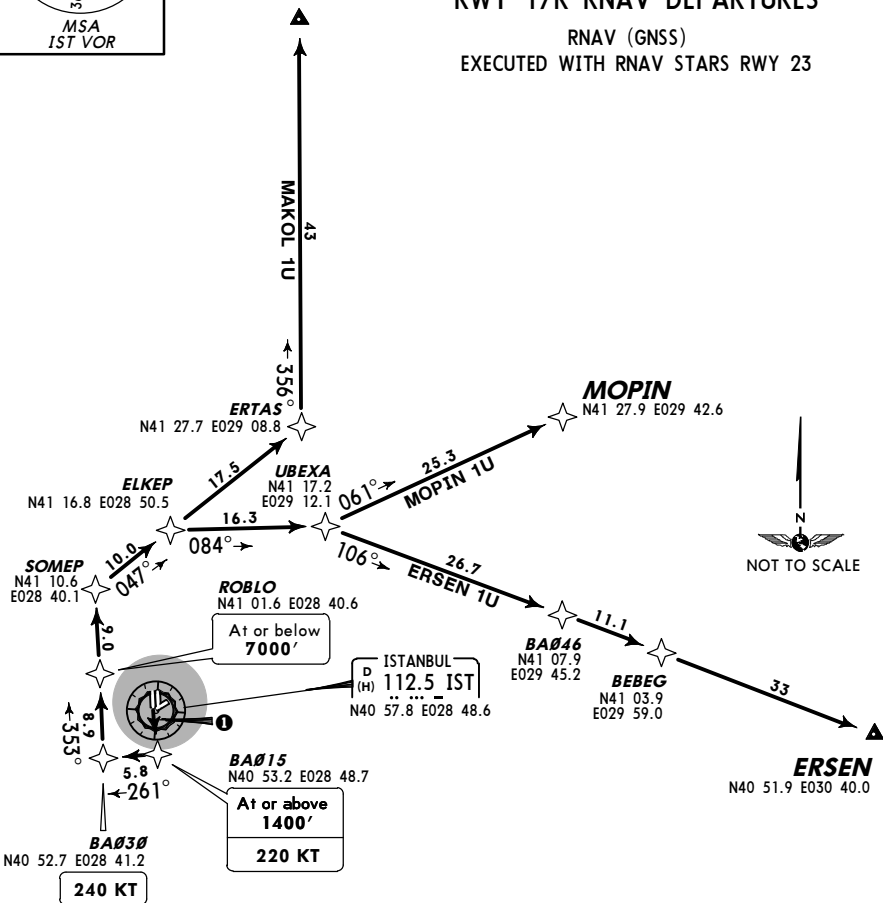

These SIDs require a minimum climb gradient of 261' per NM (4.3%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
261' per NM	327	435	653	871	1089	1306

Initial climb clearance **5000'**

SID	ROUTING
ERSEN 1U	BA015 (1400'+; K220) - BA030 (K240) - ROBLO (7000'-) - SOMEPE - ELKEP - UBEXA - BA046 - BEBEG - ERSEN.
MAKOL 1U	BA015 (1400'+; K220) - BA030 (K240) - ROBLO (7000'-) - SOMEPE - ELKEP - ERTAS - MAKOL.
MOPIN 1U	BA015 (1400'+; K220) - BA030 (K240) - ROBLO (7000'-) - SOMEPE - ELKEP - UBEXA - MOPIN.

LTBA/IST
ATATURK



JEPPesen

7 AUG 15

(10-3H)

Eff 20 Aug

ISTANBUL, TURKEY

RNAV SID

YESILKOY Radar
126.425

Apt Elev
163'


Trans level: By ATC Trans alt: 10000'

1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency.

2. RADAR required.


3. P-RNAV approval required otherwise advise ATC.

4. No turns prior to DER.



ERSEN 1V [ERSE1V]
MAKOL 1V [MAKO1V]
MOPIN 1V [MOPI1V]
RWY 23 RNAV DEPARTURES
RNAV (GNSS)

MAKOL
N42 10.2 E029 08.6

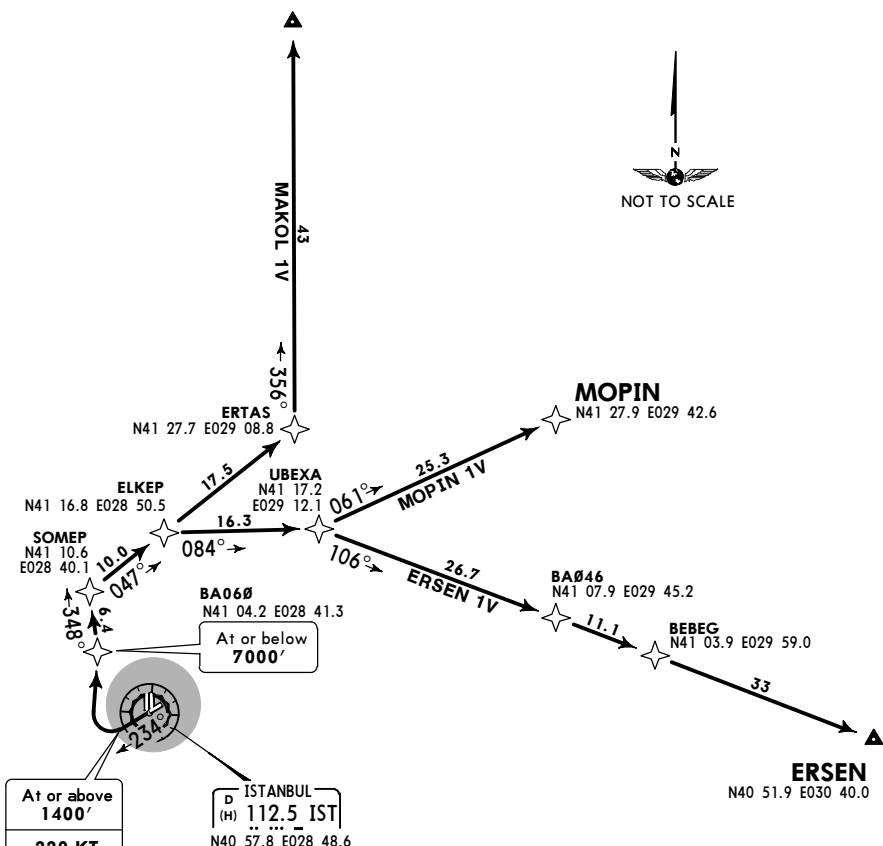

These SIDs require a minimum climb gradient of 261' per NM (4.3%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
261' per NM	327	435	653	871	1089	1306

Initial climb clearance 5000'

SID

ROUTING

ERSEN 1V

(1400'+; K220) - BA060 (7000'-) - SOMEPEL - ELKEP - UBEXA - BA046 - BEBEG - ERSEN.

MAKOL 1V

(1400'+; K220) - BA060 (7000'-) - SOMEPEL - ELKEP - ERTAS - MAKOL.

MOPIN 1V

(1400'+; K220) - BA060 (7000'-) - SOMEPEL - ELKEP - UBEXA - MOPIN.

LTBA/IST
ATATURK



JEPPesen

7 AUG 15

(10-3J)

Eff 20 Aug

ISTANBUL, TURKEY

RNAV SID

YESILKOY Radar
126.425

Apt Elev
163'



Trans level: By ATC Trans alt: 10000'

1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency.

2. RADAR required.

3. P-RNAV approval required otherwise advise ATC.

MAKOL 1X [MAKO1X]
MOPIN 1X [MOPI1X]
RWY 35L RNAV DEPARTURES
RNAV (GNSS)
EXECUTED WITH RNAV STARS RWY 23

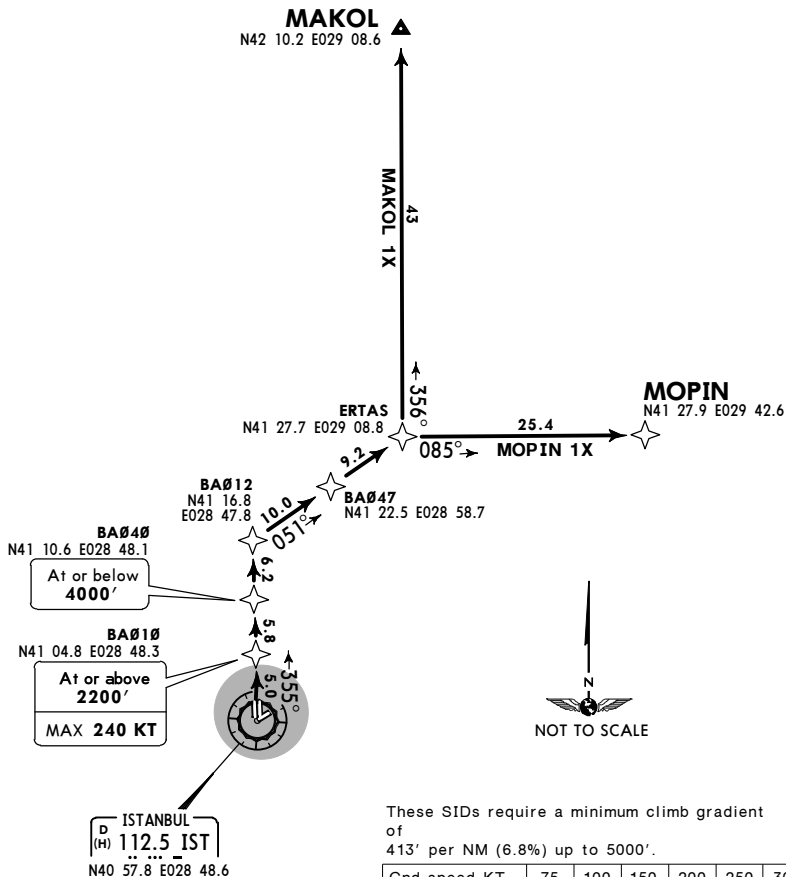

These SIDs require a minimum climb gradient of 413' per NM (6.8%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
413' per NM	516	689	1033	1377	1722	2066

Initial climb clearance **5000'**

SID	ROUTING
MAKOL 1X	BA010 (2200'+; K240-) - BA040 (4000'-) - BA012 - BA047 - ERTAS - MAKOL.
MOPIN 1X	BA010 (2200'+; K240-) - BA040 (4000'-) - BA012 - BA047 - ERTAS - MOPIN.

CHANGES: BA010 speed restriction.

© JEPPESEN, 2012, 2015. ALL RIGHTS RESERVED.



LTBA/IST
ATATURK

JEPPesen
7 AUG 15 10-3K Eff 20 Aug

ISTANBUL, TURKEY
RNAV SID

YESILKOY Radar 126.425	Apt Elev 163'	Trans level: By ATC Trans alt: 10000' 1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency. 2. RADAR required. 3. P-RNAV approval required otherwise advise ATC.
---------------------------	------------------	--

ERSEN 1Y [ERSE1Y]
MAKOL 1Y [MAKO1Y]
MOPIN 1Y [MOPI1Y]
RWY 35L RNAV DEPARTURES
RNAV (GNSS)

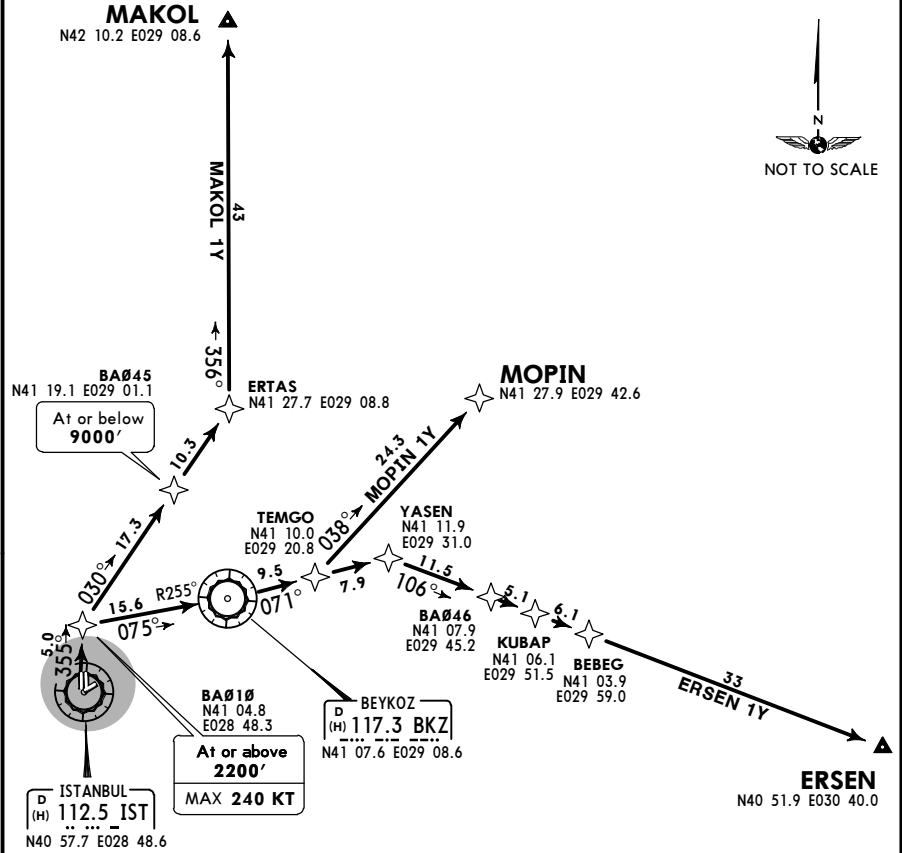

These SIDs require a minimum climb gradient of 413' per NM (6.8%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
413' per NM	516	689	1033	1377	1722	2066

Initial climb clearance 5000'	
SID	ROUTING
ERSEN 1Y	BA010 (2200'+; K240-) - BKZ - YASEN - BA046 - KUBAP - BEBEG - ERSEN.
MAKOL 1Y	BA010 (2200'+; K240-) - BA045 (9000'-) - ERTAS - MAKOL.
MOPIN 1Y	BA010 (2200'+; K240-) - BKZ - TEMGO - MOPIN.

LTBA/IST
ATATURK

JEPPesen
7 AUG 15 **10-3L** **Eff 20 Aug**



ISTANBUL, TURKEY
RNAV SID

YESILKOY Radar
126.425

Apt Elev
163'

Trans level: By ATC Trans alt: 10000'
1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency.
2. RADAR required.
3. P-RNAV approval required otherwise advise ATC.

ERSEN 1Z [ERSE1Z]
MAKOL 1Z [MAKO1Z]
MOPIN 1Z [MOP11Z]
RWY 35R RNAV DEPARTURES
RNAV (GNSS)

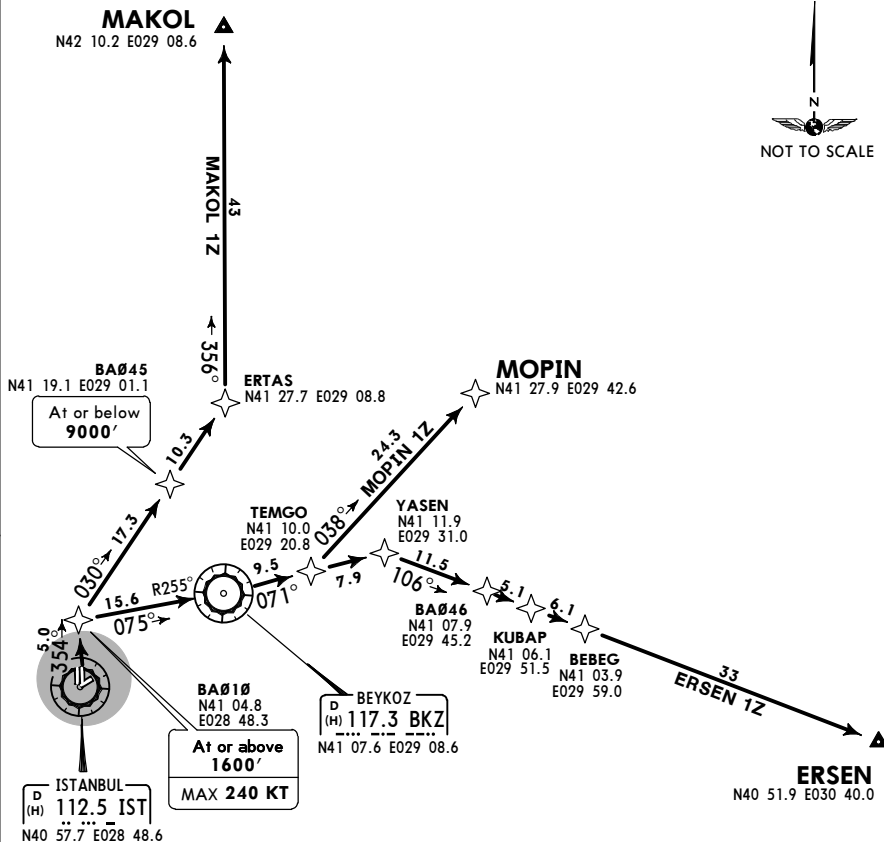

These SIDs require a minimum climb gradient of 304' per NM (5%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

Initial climb clearance **5000'**

SID	ROUTING
ERSEN 1Z	BA010 (1600'+; K240-) - BKZ - YASEN - BA046 - KUBAP - BEBEG - ERSEN.
MAKOL 1Z	BA010 (1600'+; K240-) - BA045 (9000'-) - ERTAS - MAKOL.
MOPIN 1Z	BA010 (1600'+; K240-) - BKZ - TEMGO - MOPIN.



LTBA/IST
ATATURK

 **JEPPESSEN**
7 AUG 15 **(10-3M)** **Eff 20 Aug**

ISTANBUL, TURKEY
RNAV SID

YESILKOY Radar 126.425	Apt Elev 163'	Trans level: By ATC Trans alt: 10000' 1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency. 2. RADAR required. 3. P-RNAV approval required otherwise advise ATC.
---------------------------	------------------	--

**EDASA 1E [EDAS1E]
PIMAV 1E [PIMA1E]
RWY 35R RNAV DEPARTURES**
RNAV (GNSS)
EXECUTED WITH RNAV STARS RWY 23

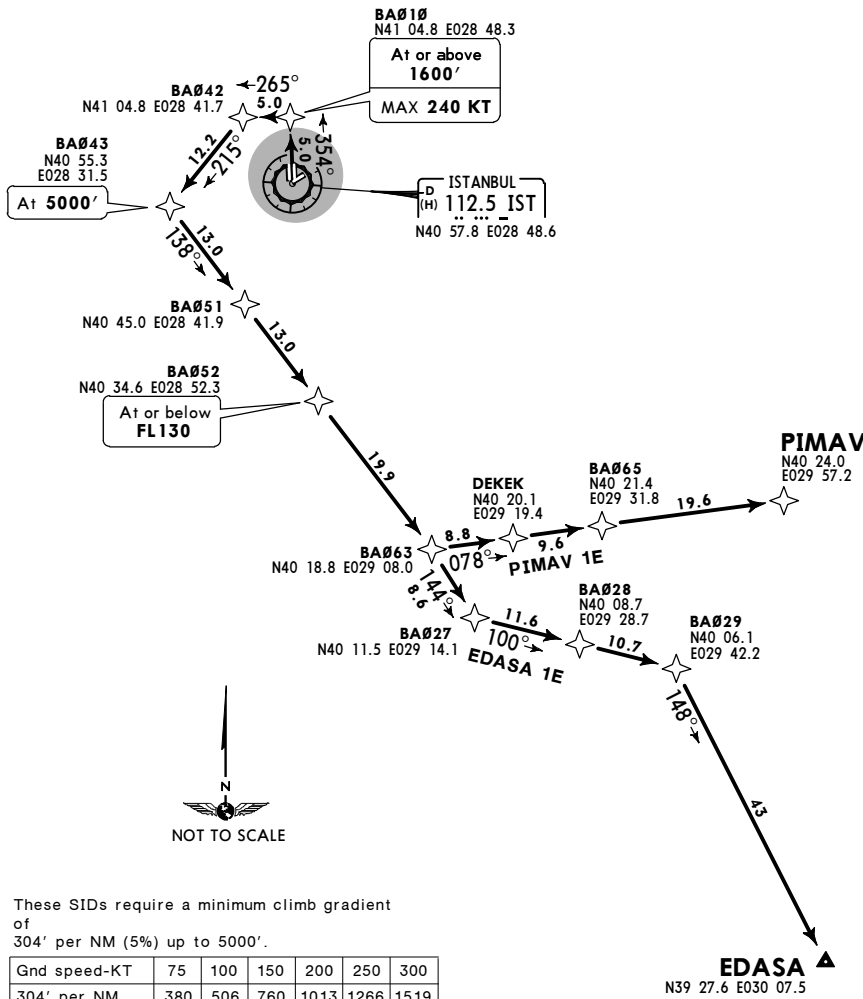

These SIDs require a minimum climb gradient of 304' per NM (5%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

Initial climb clearance **5000'**

SID	ROUTING
EDASA 1E	BA010 (1600'+; K240-) - BA042 - BA043 (5000') - BA051 - BA052 (FL130-) - BA063 - BA027 - BA028 - BA029 - EDASA.
PIMAV 1E	BA010 (1600'+; K240-) - BA042 - BA043 (5000') - BA051 - BA052 (FL130-) - BA063 - DEKEK - BA065 - PIMAV.

LTBA/IST
ATATURK



JEPPesen

7 AUG 15

(10-3P)

Eff 20 Aug

ISTANBUL, TURKEY


RNAV SID

YESILKOY Radar
126.425

Apt Elev
163'

Trans level: By ATC Trans alt: 10000'
1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency.
2. RADAR required.
3. P-RNAV approval required otherwise advise ATC.

EDASA 1P [EDAS1P]
PIMAV 1P [PIMA1P]
RWY 05 RNAV DEPARTURES
RNAV (GNSS)



BA035
N41 01.3 E028 55.5

At or above
1600'
220 KT

BEYKOZ
D (H) 117.3 BKZ
N41 07.6 E029 08.6

BA044
N41 00.7 E029 19.2

At or below
FL120

ISTANBUL
D (H) 112.5 IST
N40 57.8 E028 48.6

BAVUL
N40 51.8 E029 32.8

ULPER
N40 41.8 E029 39.1

EKDAM
N40 26.1 E029 37.0

PIMAV
N40 24.0 E029 57.2

YENISEHIR
D (H) 115.3 BRY
N40 15.8 E029 35.7



These SIDs require a minimum climb gradient
of
304' per NM (5%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

Initial climb clearance 5000'

SID	ROUTING
EDASA 1P	BA035 (1600'+; K220) - BKZ - BA044 (FL120-) - BAVUL - ULPER - EKDAM - BRY - EDASA.
PIMAV 1P	BA035 (1600'+; K220) - BKZ - BA044 (FL120-) - BAVUL - ULPER - PIMAV.

LTBA/IST
ATATURK

JEPPesen
7 AUG 15 (10-3Q) Eff 20 Aug



ISTANBUL, TURKEY
RNAV SID

YESILKOY Radar
126.425

Apt Elev
163'

Trans level: By ATC Trans alt: 10000'
1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency.
2. RADAR required.
3. P-RNAV approval required otherwise advise ATC.

EDASA 1Q [EDAS1Q]
PIMAV 1Q [PIMA1Q]
RWY 35L RNAV DEPARTURES
RNAV (GNSS)
EXECUTED WITH RNAV STARS RWY 23

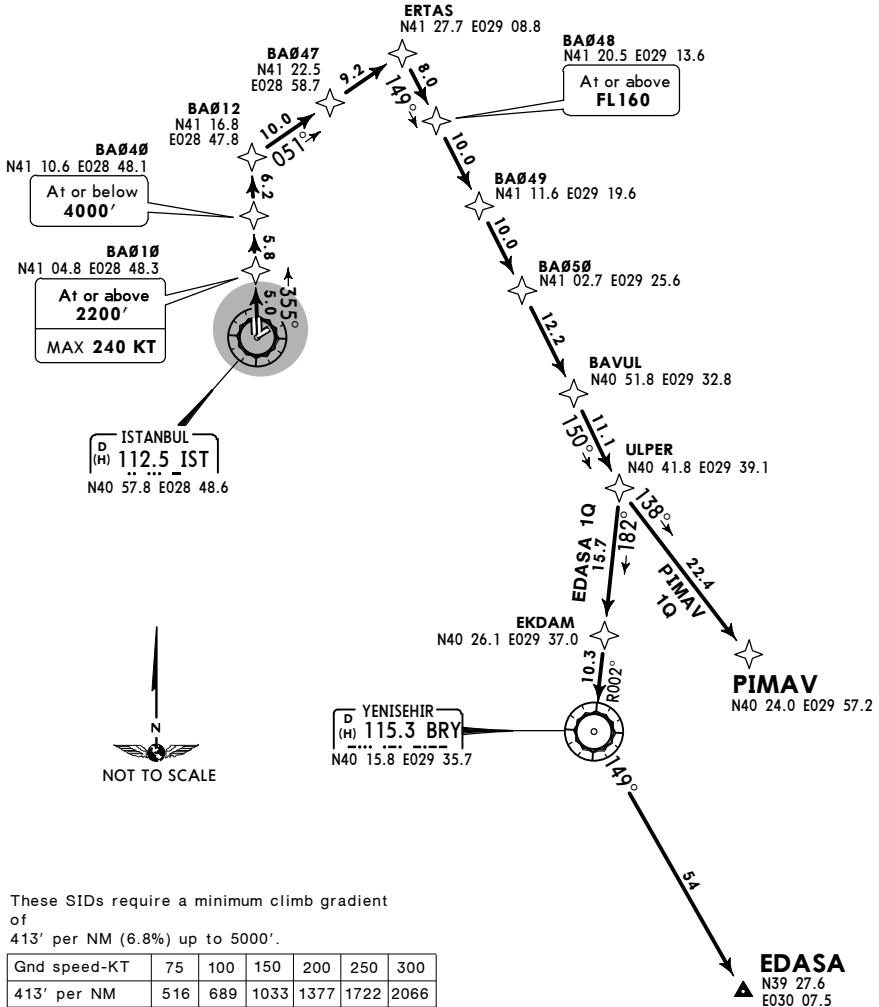

These SIDs require a minimum climb gradient of 413' per NM (6.8%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
413' per NM	516	689	1033	1377	1722	2066

Initial climb clearance 5000'

SID	ROUTING
EDASA 1Q	BA010 (2200'+; K240-) - BA040 (4000'-) - BA012 - BA047 - ERTAS - BA048 (FL160+) - BA049 - BA050 - BAVUL - ULPER - EKDAM - BRY - EDASA.
PIMAV 1Q	BA010 (2200'+; K240-) - BA040 (4000'-) - BA012 - BA047 - ERTAS - BA048 (FL160+) - BA049 - BA050 - BAVUL - ULPER - PIMAV.

LTBA/IST
ATATURK


JEPPESSEN
25 MAY 12 (10-3Q1) Eff 31 May

ISTANBUL, TURKEY
RNAV SID

YESILKOY Radar
126.42

Apt Elev
163'


Trans level: By ATC Trans alt: 10000'
1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency.
2. RADAR required.
3. P-RNAV approval required otherwise advise ATC.



EDASA 1R [EDAS1R]
PIMAV 1R [PIMA1R]
EXECUTED WITH RNAV STARS RWYS 17L/R

EDASA 1T [EDAS1T]
PIMAV 1T [PIMA1T]
EXECUTED WITH RNAV STARS RWY 23

RWY 17L RNAV DEPARTURES
RNAV (GNSS)

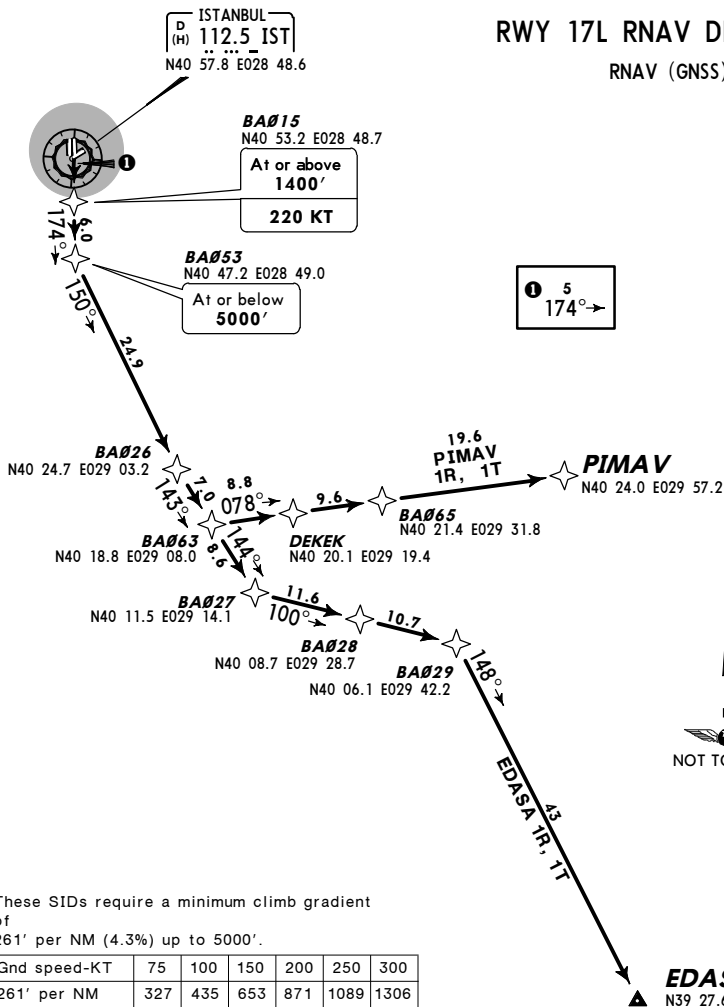

These SIDs require a minimum climb gradient
of
261' per NM (4.3%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
261' per NM	327	435	653	871	1089	1306

Initial climb clearance 5000'

SID	ROUTING
EDASA 1R, 1T	BA015 (1400'+; K220) - BA053 (5000'-) - BA026 - BA027 - BA028 - BA029 - EDASA.
PIMAV 1R, 1T	BA015 (1400'+; K220) - BA053 (5000'-) - BA026 - BA063 - DEKEK - BA065 - PIMAV.

LTBA/IST
ATATURK


JEPPesen
25 MAY 12 (10-3Q2) Eff 31 May

ISTANBUL, TURKEY
RNAV SID

YESILKOY Radar
126.42

Apt Elev
163'


Trans level: By ATC Trans alt: 10000'
1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency.
2. RADAR required.
3. P-RNAV approval required otherwise advise ATC.




EDASA 1S [EDAS1S]
PIMAV 1S [PIMA1S]
RWY 17R RNAV DEPARTURES
EXECUTED WITH RNAV STARS RWYS 17L/R

EDASA 1U [EDAS1U]
PIMAV 1U [PIMA1U]
EXECUTED WITH RNAV STARS RWY 23

RWY 17R RNAV DEPARTURES
RNAV (GNSS)

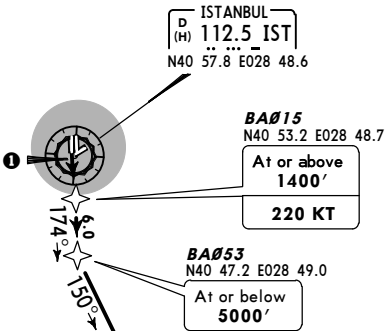

5
173°

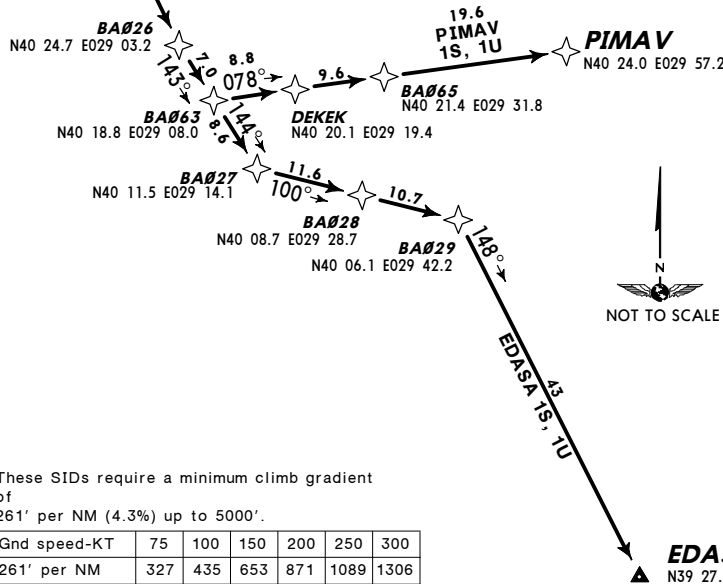

These SIDs require a minimum climb gradient
of
261' per NM (4.3%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
261' per NM	327	435	653	871	1089	1306

Initial climb clearance 5000'

SID	ROUTING
EDASA 1S, 1U	BA015 (1400'+; K220) - BA053 (5000'-) - BA026 - BA027 - BA028 - BA029 - EDASA.
PIMAV 1S, 1U	BA015 (1400'+; K220) - BA053 (5000'-) - BA026 - BA063 - DEKEK - BA065 - PIMAV.

LTBA/IST
ATATURK



JEPPESSEN

7 AUG 15

(10-3Q3)

Eff 20 Aug

ISTANBUL, TURKEY

RNAV SID

YESILKOY Radar
126.425

Apt Elev
163'

Trans level: By ATC Trans alt: 10000'



1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency.

2. RADAR required.

3. P-RNAV approval required otherwise advise ATC.

4. No turns prior to DER.

EDASA 1V [EDAS1V]
PIMAV 1V [PIMA1V]
RWY 23 RNAV DEPARTURES
RNAV (GNSS)

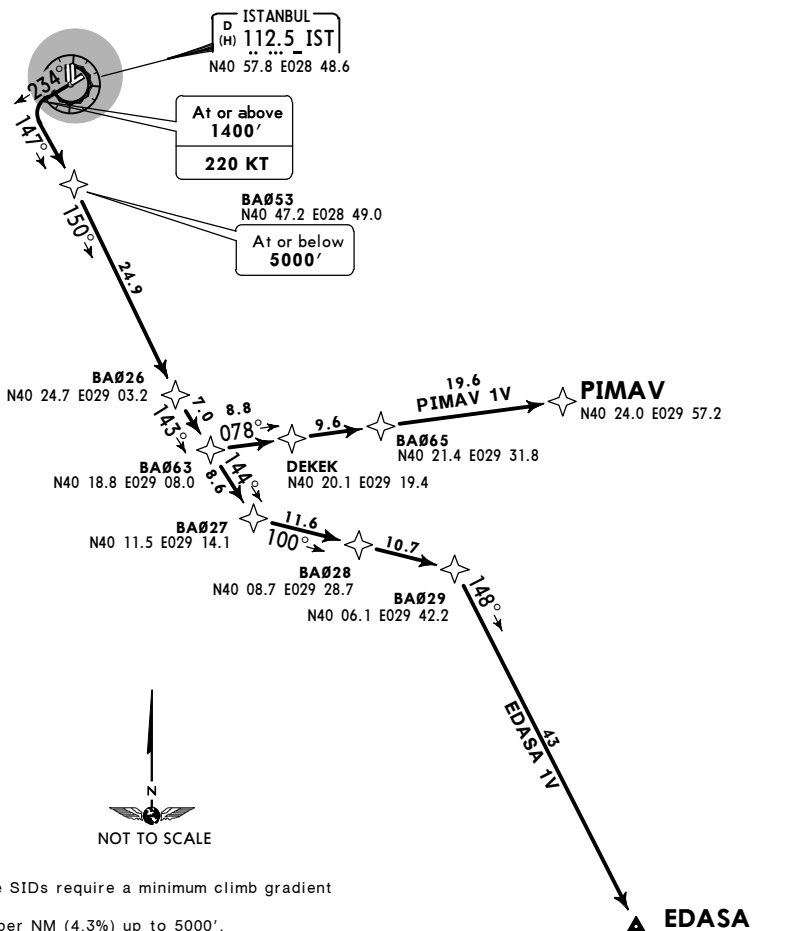

These SIDs require a minimum climb gradient of 261' per NM (4.3%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
261' per NM	327	435	653	871	1089	1306

Initial climb clearance 5000'

SID	ROUTING
EDASA 1V	(1400'+; K220) - BA053 (5000'-) - BA026 - BA027 - BA028 - BA029 - EDASA.
PIMAV 1V	(1400'+; K220) - BA053 (5000'-) - BA026 - BA063 - DEKEK - BA065 - PIMAV.



LTBA/IST
ATATURK

JEPPesen
7 AUG 15 (10-3Q4) Eff 20 Aug

ISTANBUL, TURKEY
RNAV SID

YESILKOY Radar 126.425	Apt Elev 163'	Trans level: By ATC Trans alt: 10000' 1.Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency. 2.RADAR required. 3.P-RNAV approval required otherwise advise ATC.
---------------------------	------------------	---

EDASA 1X [EDAS1X]
PIMAV 1X [PIMA1X]
RWY 35L RNAV DEPARTURES
RNAV (GNSS)
EXECUTED WITH RNAV STARS RWY 23

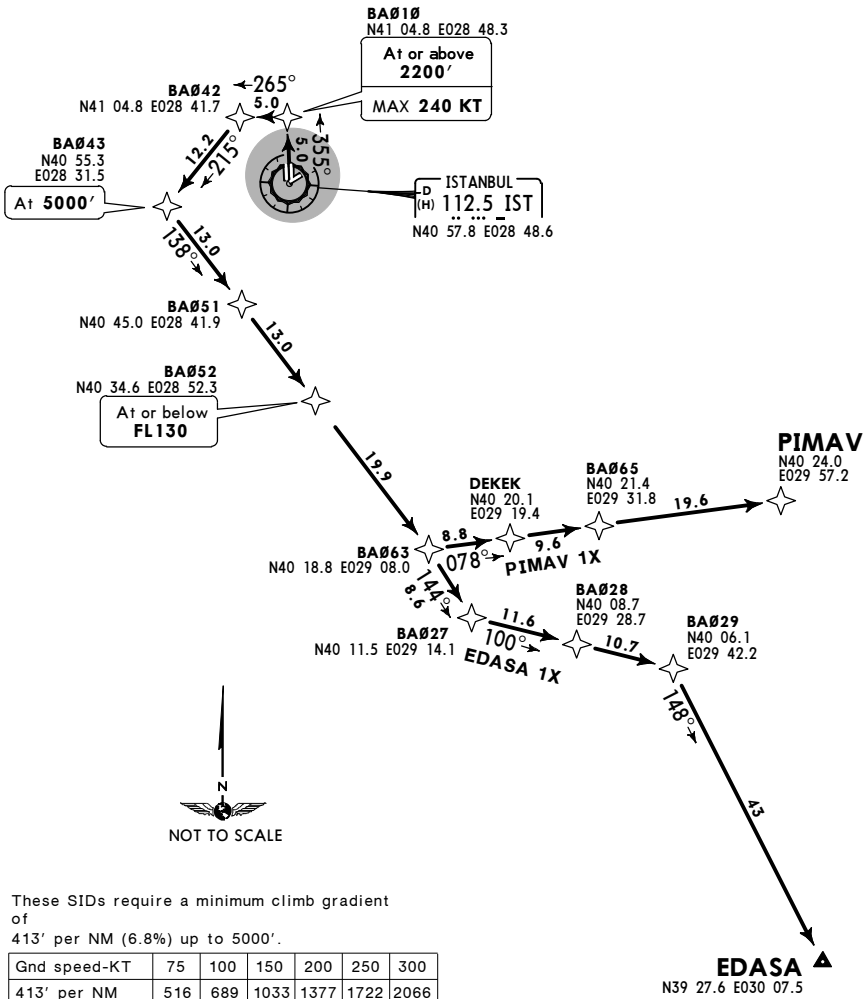

These SIDs require a minimum climb gradient of 413' per NM (6.8%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
413' per NM	516	689	1033	1377	1722	2066

Initial climb clearance 5000'	
SID	ROUTING
EDASA 1X	BA010 (2200'+; K240-) - BA042 - BA043 (5000') - BA051 - BA052 (FL130-) - BA063 - BA027 - BA028 - BA029 - EDASA.
PIMAV 1X	BA010 (2200'+; K240-) - BA042 - BA043 (5000') - BA051 - BA052 (FL130-) - BA063 - DEKEK - BA065 - PIMAV.

CHANGES: BA010 speed restriction.

© JEPPESEN, 2012, 2015. ALL RIGHTS RESERVED.

LTBA/IST
ATATURK

JEPPesen
7 AUG 15 **(10-3S)** **Eff 20 Aug**


ISTANBUL, TURKEY
RNAV SID

YESILKOY Radar
126.425

Apt Elev
163'

Trans level: By ATC Trans alt: 10000'
1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency.
2. RADAR required.
3. P-RNAV approval required otherwise advise ATC.

**EDASA 1Y [EDAS1Y]
PIMAV 1Y [PIMA1Y]
RWY 35L RNAV DEPARTURES**
RNAV (GNSS)



BA010
N41 04.8 E028 48.3

At or above
2200'
MAX **240 KT**

BEYKOZ
D (H) **117.3 BKZ**
N41 07.6 E029 08.6

BA044
N41 00.7 E029 19.2
At or below
FL120



ISTANBUL
D (H) **112.5 IST**
N40 57.7 E028 48.6

BAVUL
N40 51.8 E029 32.8

ULPER
N40 41.8 E029 39.1

EDASA 1Y
N40 26.1 E029 37.0

EKDAM
N40 26.1 E029 37.0

YENISEHIR
D (H) **115.3 BRY**
N40 15.8 E029 35.6

PIMAV
N40 24.0 E029 57.2

EDASA
N39 27.6 E030 07.5

These SIDs require a minimum climb gradient
of
413' per NM (6.8%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
413' per NM	516	689	1033	1377	1722	2066

Initial climb clearance **5000'**

SID	ROUTING
EDASA 1Y	BA010 (2200'+; K240-) - BKZ - BA044 (FL120-) - BAVUL - ULPER - EKDAM - BRY - EDASA.
PIMAV 1Y	BA010 (2200'+; K240-) - BKZ - BA044 (FL120-) - BAVUL - ULPER - PIMAV.

LTBA/IST
ATATURK

JEPPesen
7 AUG 15 **10-3T** **Eff 20 Aug**


ISTANBUL, TURKEY
RNAV SID

YESILKOY Radar
126.425

Apt Elev
163'

Trans level: By ATC Trans alt: 10000'
1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency.
2. RADAR required.
3. P-RNAV approval required otherwise advise ATC.

**EDASA 1Z [EDAS1Z]
PIMAV 1Z [PIMA1Z]
RWY 35R RNAV DEPARTURES**
RNAV (GNSS)



BA010
N41 04.8 E028 48.3

At or above
1600'
MAX 240 KT

BEYKOZ
(D) 117.3 BKZ
(H)
N41 07.6 E029 08.6

BA044
N41 00.7 E029 19.2

At or below
FL120

(D) ISTANBUL
(H) 112.5 IST
N40 57.7 E028 48.6



BAVUL
N40 51.8 E029 32.8

ULPER
N40 41.8 E029 39.1

EDASA 1Z
15.7
182°

EKDAM
N40 26.1 E029 37.0

YENISEHIR
(D) 115.3 BRY
(H)
N40 15.8 E029 35.6

PIMAV
N40 24.0 E029 57.2

These SIDs require a minimum climb gradient
of
304' per NM (5%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

Initial climb clearance **5000'**


SID	ROUTING
EDASA 1Z	BA010 (1600'+; K240-) - BKZ - BA044 (FL120-) - BAVUL - ULPER - EKDAM - BRY - EDASA.
PIMAV 1Z	BA010 (1600'+; K240-) - BKZ - BA044 (FL120-) - BAVUL - ULPER - PIMAV.

LTBA/IST
ATATURK



JEPPesen
7 AUG 15 (10-3T1) Eff 20 Aug

ISTANBUL, TURKEY
RNAV SID

YESILKOY Radar 126.425	Apt Elev 163'	Trans level: By ATC Trans alt: 10000' 1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency. 2. RADAR required. 3. P-RNAV approval required otherwise advise ATC.
---------------------------	------------------	--



GOLDO 1E [GOLD1E]
MARMA 1E [MARM1E]
RWY 35R RNAV DEPARTURES
RNAV (GNSS)
EXECUTED WITH RNAV STARS RWY 23

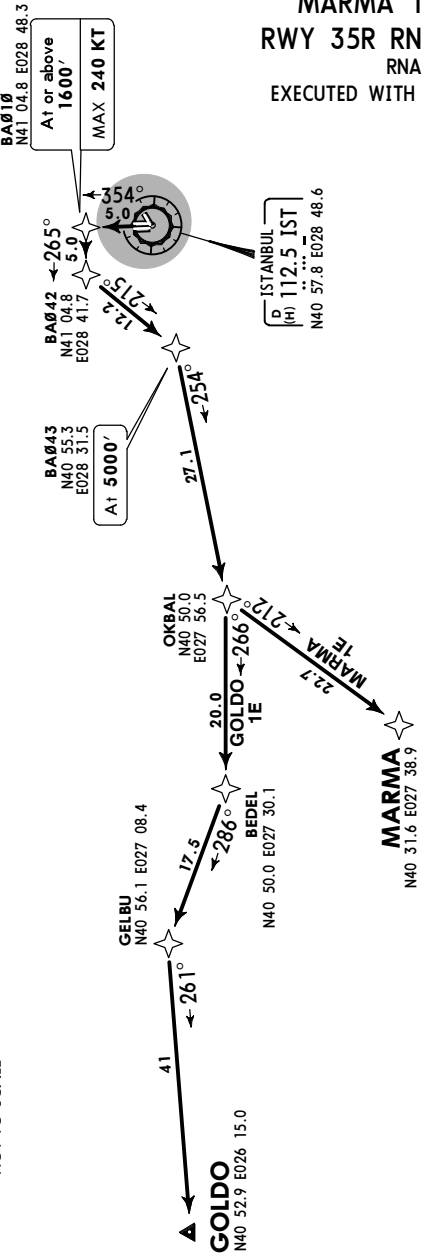


These SIDs require a minimum climb gradient of 304' per NM (5%) up to 5000'.

Grd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519


Initial climb clearance 5000'	
ROUTING	
SID	
GOLDO 1E	BA010 (1600'+; K240-) - BA042 - BA043 (5000') - OKBAL - BEDEL - GELBU - GOLDO.
MARMA 1E	BA010 (1600'+; K240-) - BA042 - BA043 (5000') - OKBAL - MARMA.

Trans level: By ATC Trans alt: 10000'

1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency.
2. RADAR required.
3. P-RNAV approval required otherwise advise ATC.



GOLDO 1P [GOLD1P]
MARMA 1P [MARM1P]
RWY 05 RNAV DEPARTURES
RNAV (GNSS)

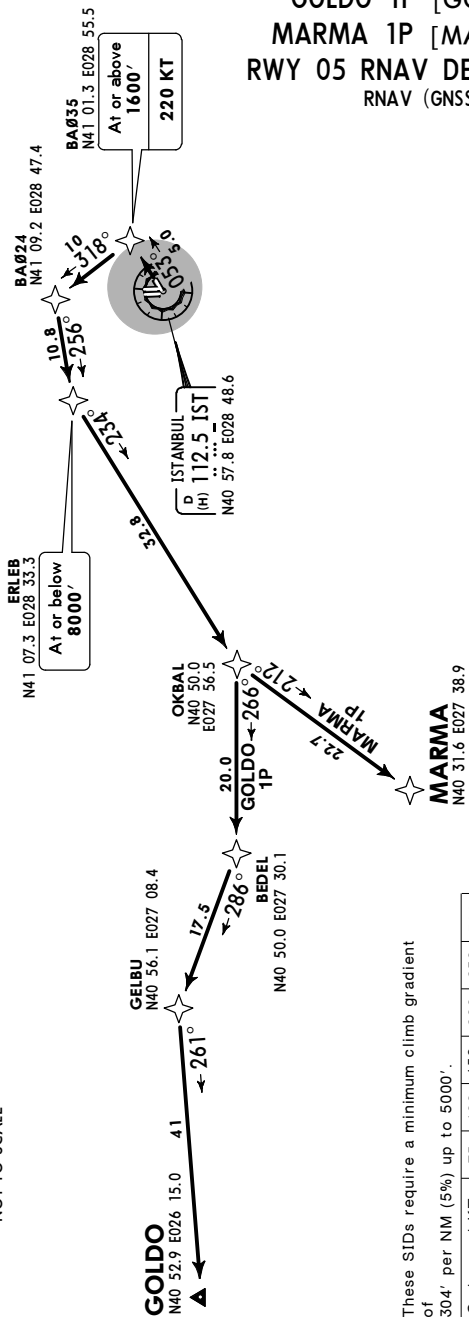

These SIDs require a minimum climb gradient of 304' per NM (5%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519


Initial climb clearance 5000'	
ROUTING	
STD	
GOLDO 1P	BA035 (1600' +; K220) - BA024 - ERLEB (8000' -) - OKBAL - BEDEL - GELBU - GOLDO.
MARMA 1P	BA035 (1600' +; K220) - BA024 - ERLEB (8000' -) - OKBAL - MARMA.

© JEPPESEN, 2012. ALL RIGHTS RESERVED.

LTBA/IST
ATATURK

JEPPesen
25 MAY 12 (10-3T3) Eff 31 May


ISTANBUL, TURKEY
RNAV SID

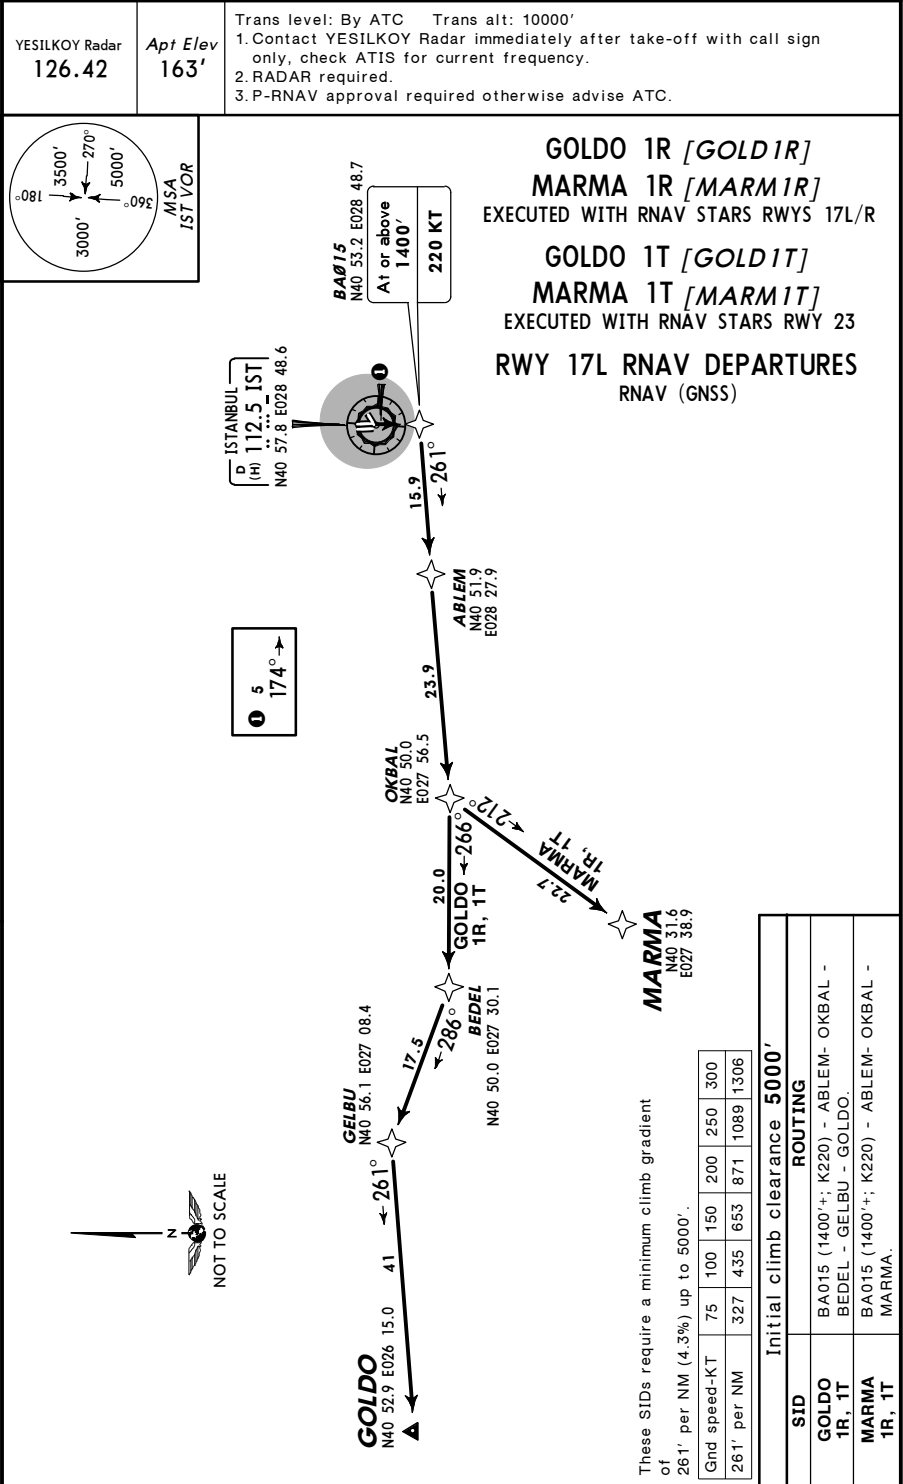



Initial climb clearance 5000'	
SID	ROUTING
GOLDO 1V	BA061 - ABLEM- OKBAL - BEDEL - GELBU - GOLDO.
MARMA 1V	BA061 - ABLEM- OKBAL - MARMA.

Trans level: By ATC Trans alt: 10000'

- 1.Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency.
- 2.RADAR required.
- 3.P-RNAV approval required otherwise advise ATC.



**GOLDO 1X [GOLD1X]
MARMA 1X [MARM1X]
RWY 35L RNAV DEPARTURES
RNAV (GNSS)
EXECUTED WITH RNAV STARS RWY 23**

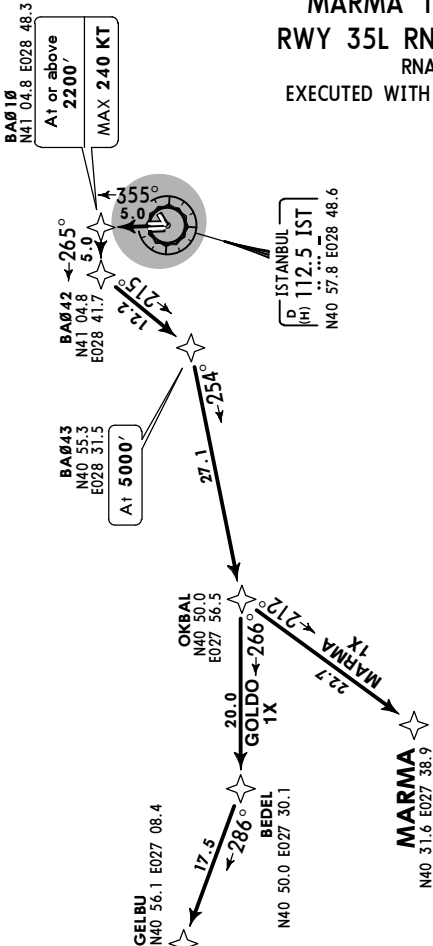

These SIDs require a minimum climb gradient of 413' per NM (6.8%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
413' per NM	516	689	1033	1377	1722	2066


Initial climb clearance 5000'	
ROUTING	
SID	
GOLDO 1X	BA010 (2200' +; K240-) - BA042 - BA043 (5000') - OKBAL - BEDEL - GOLDO.
MARMA 1X	BA010 (2200' +; K240-) - BA042 - BA043 (5000') - OKBAL - MARMA.

LTBA/IST
ATATURK


JEPPesen
7 AUG 15 (10-3T7) Eff 20 Aug

ISTANBUL, TURKEY
RNAV SID

YESILKOY Radar 126.425	Apt Elev 163'	Trans level: By ATC Trans alt: 10000' 1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency. 2. RADAR required. 3. P-RNAV approval required otherwise advise ATC.
---------------------------	------------------	--



GOLDO 1Y [GOLD1Y]
MARMA 1Y [MARM1Y]
RWY 35L RNAV DEPARTURES
RNAV (GNSS)

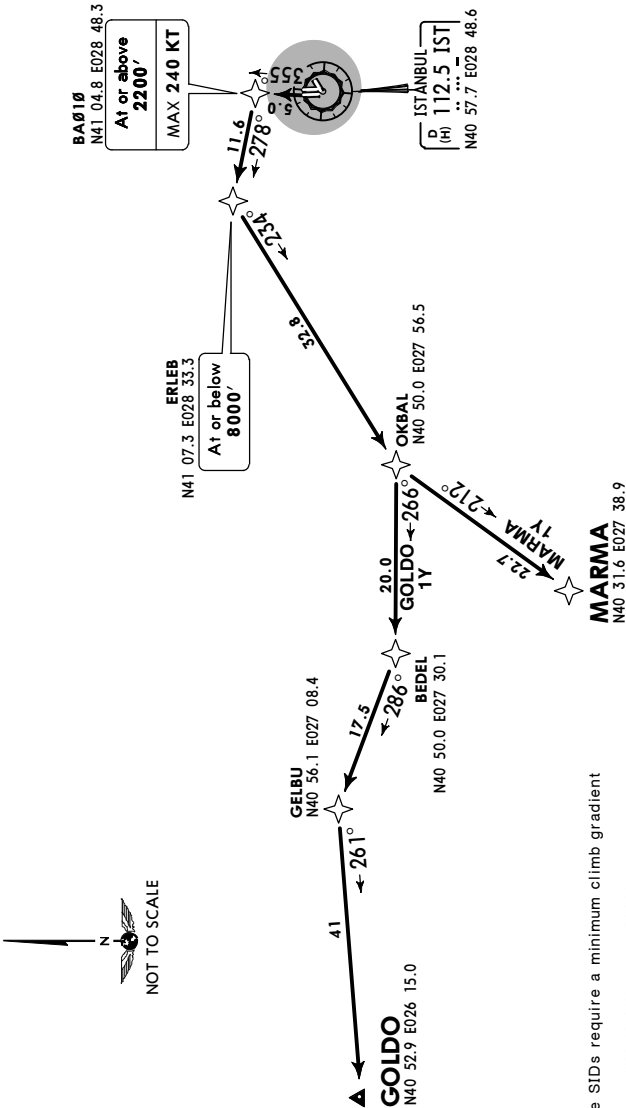

These SIDs require a minimum climb gradient of 413' per NM (6.8%) up to 5000'.

Grd speed-KT	75	100	150	200	250	300
413' per NM	516	689	1033	1377	1722	2066


Initial climb clearance 5000'	
ROUTING	
SID	
GOLDO 1Y	BA010 (2200'±; K240-) - ERLEB (8000'±) - OKBAL - BEDEL - GELBU - GOLDO.
MARMA 1Y	BA010 (2200'±; K240-) - ERLEB (8000'±) - OKBAL - MARMA.

LTBA/IST
ATATURK


JEPPesen
7 AUG 15 **(10-3T8)** Eff 20 Aug

ISTANBUL, TURKEY
RNAV SID

YESILKOY Radar 126.425	Apt Elev 163'	Trans level: By ATC Trans alt: 10000' 1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency. 2. RADAR required. 3. P-RNAV approval required otherwise advise ATC.
---------------------------	------------------	--



GOLDO 1Z [GOLD1Z]
MARMA 1Z [MARM1Z]
RWY 35R RNAV DEPARTURES
RNAV (GNSS)

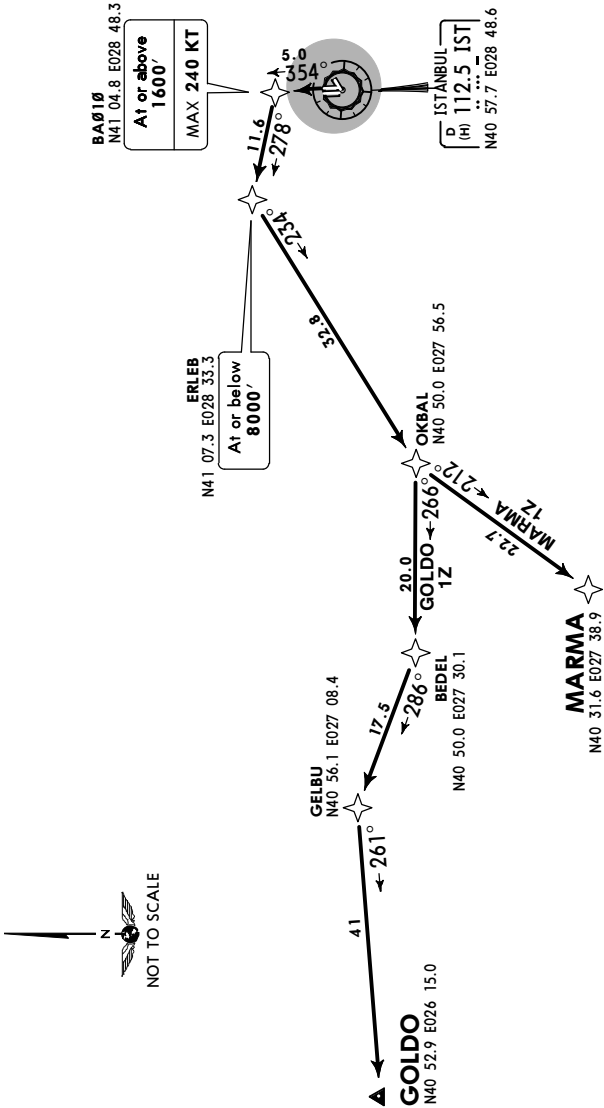

These SIDs require a minimum climb gradient of 304' per NM (5%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

Initial climb clearance 5000'	
ROUTING	
SID	
GOLDO 1Z	BA010 (1600'+; K240-) - ERLEB (8000'-) - OKBAL - BEDEL - GELBU - GOLDO.
MARMA 1Z	BA010 (1600'+; K240-) - ERLEB (8000'-) - OKBAL - MARMA.


LTBA/IST
ATATURK

 **JEPPESSEN**
7 AUG 15 **(10-3U)** **Eff 20 Aug**

ISTANBUL, TURKEY
RNAV SID

YESILKOY Radar 126.425	Apt Elev 163'	Trans level: By ATC Trans alt: 10000' 1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency. 2. RADAR required. 3. P-RNAV approval required otherwise advise ATC.
---------------------------	------------------	--

IBLAL 1E [IBLA1E]
TUDBU 1E [TUDB1E]
VADEN 1E [VADE1E]
RWY 35R RNAV DEPARTURES
RNAV (GNSS)
EXECUTED WITH RNAV STARS RWY 23



VADEN
N42 03.9
E027 13.0



TUDBU
N41 58.0
E027 46.6



IBLAL
N41 58.9
E028 00.1



AYFER
N41 29.2 E028 37.1
At or below
FL130

RIMBO
N41 22.9 E028 33.1
At or below
FL130

BA041
N41 09.1 E028 44.7
At or below
4000'

BA012
N41 16.8
E028 47.8

BA040
N41 10.6 E028 48.1
At or below
4000'

BA010
N41 04.8 E028 48.3
At or above
1600'
MAX 240 KT

ISTANBUL
D (H) 112.5 IST
N40 57.8 E028 48.6



These SIDs require a minimum climb gradient
of
304' per NM (5%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

Initial climb clearance **5000'**

SID	ROUTING
IBLAL 1E	BA010 (1600'+; K240-) - BA040 (4000'-) - BA012 - AYFER (FL130-) - IBLAL.
TUDBU 1E	BA010 (1600'+; K240-) - BA041 (4000'-) - RIMBO (FL130-) - TUDBU.
VADEN 1E	BA010 (1600'+; K240-) - BA041 (4000'-) - RIMBO (FL130-) - VADEN.

LTBA/IST
ATATURK



JEPPesen

7 AUG 15

10-3V

Eff 20 Aug

ISTANBUL, TURKEY

RNAV SID

YESILKOY Radar
126.425

Apt Elev
163'



Trans level: By ATC Trans alt: 10000'

1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency.

2. RADAR required.

3. P-RNAV approval required otherwise advise ATC.

IBLAL 1P [IBLA1P]
TUDBU 1P [TUDB1P]
VADEN 1P [VADE1P]
RWY 05 RNAV DEPARTURES
RNAV (GNSS)

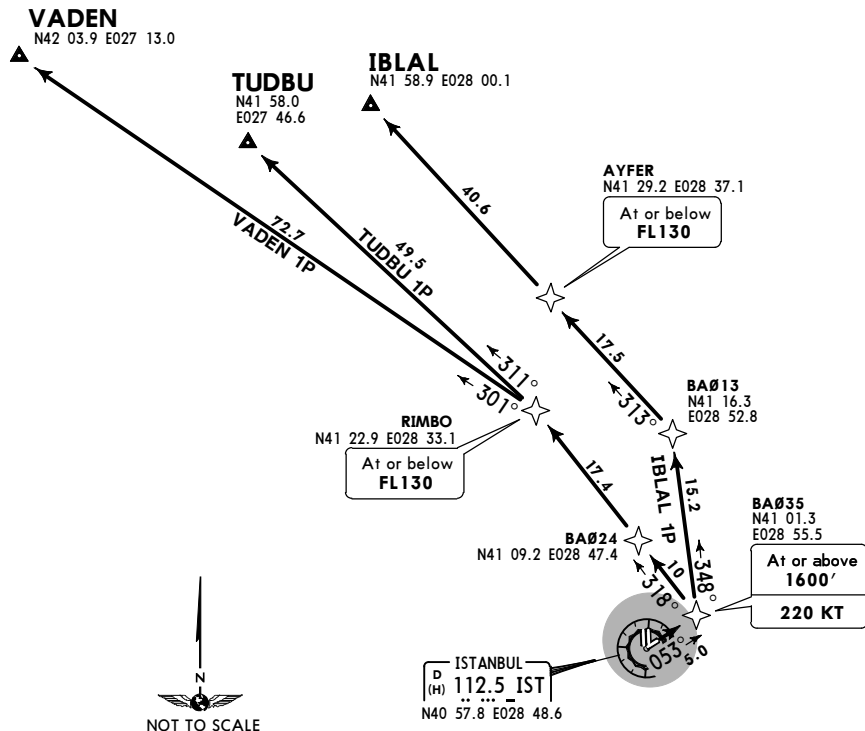

These SIDs require a minimum climb gradient
of
304' per NM (5%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

Initial climb clearance 5000'

SID	ROUTING
IBLAL 1P	BA035 (1600'+; K220) - BA013 - AYFER (FL130-) - IBLAL.
TUDBU 1P	BA035 (1600'+; K220) - BA024 - RIMBO (FL130-) - TUDBU.
VADEN 1P	BA035 (1600'+; K220) - BA024 - RIMBO (FL130-) - VADEN.

CHANGES: None.

© JEPPesen, 2012, 2015. ALL RIGHTS RESERVED.

LTBA/IST
ATATURK

JEPPesen
15 MAY 15 (10-3V1) Eff 28 May

ISTANBUL, TURKEY
RNAV SID

YESILKOY Radar
126.42

Apt Elev
163'

Trans level: By ATC Trans alt: 10000'
1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency.
2. RADAR required.
3. P-RNAV approval required otherwise advise ATC.

IBLAL 1R [IBLA1R], TUDBU 1R [TUDB1R]

VADEN 1R [VADE1R]

EXECUTED WITH RNAV STARS RWYS 17L/R


IBLAL 1T [IBLA1T], TUDBU 1T [TUDB1T]

VADEN 1T [VADE1T]

EXECUTED WITH RNAV STARS RWY 23

RWY 17L RNAV DEPARTURES

RNAV (GNSS)



VADEN

N42 03.9
E027 13.0

TUDBU

N41 58.0
E027 46.6

IBLAL

N41 58.9 E028 00.1

KOTEV
N41 28.7
E027 50.0

TOPLU
N41 28.7 E028 10.4

GEVLA
N40 59.4 E028 20.2

ISTANBUL
D (H) 112.5 IST
N40 57.8 E028 48.6

ABLEM
N40 51.9
E028 27.9

BA015
N40 53.2 E028 48.7



① 5
174° →

ISTANBUL
D (H) 112.5 IST
N40 57.8 E028 48.6

BA015
N40 53.2 E028 48.7

At or above
1400'
220 KT

These SIDs require a minimum climb gradient
of
261' per NM (4.3%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
261' per NM	327	435	653	871	1089	1306

Initial climb clearance 5000'

SID	ROUTING
IBLAL 1R, 1T	BA015 (1400'+; K220) - ABLEM- GEVLA (10000'-) - TOPLU - IBLAL.
TUDBU 1R, 1T	BA015 (1400'+; K220) - ABLEM- GEVLA (10000'-) - TOPLU - TUDBU.
VADEN 1R, 1T	BA015 (1400'+; K220) - ABLEM- GEVLA (10000'-) - KOTEV - VADEN.

LTBA/IST
ATATURK

JEPPesen
15 MAY 15 (10-3V2) Eff 28 May

ISTANBUL, TURKEY
RNAV SID

YESILKOY Radar
126.42


Apt Elev
163'

Trans level: By ATC Trans alt: 10000'
1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency.
2. RADAR required.
3. P-RNAV approval required otherwise advise ATC.

IBLAL 1S [IBLA1S], TUDBU 1S [TUDB1S]
VADEN 1S [VADE1S]
EXECUTED WITH RNAV STARS RWYS 17L/R

IBLAL 1U [IBLA1U], TUDBU 1U [TUDB1U]
VADEN 1U [VADE1U]
EXECUTED WITH RNAV STARS RWY 23

RWY 17R RNAV DEPARTURES
RNAV (GNSS)



VADEN
N42 03.9 E027 13.0

TUDBU
N41 58.0 E027 46.6

IBLAL
N41 58.9 E028 00.1

TOPLU
N41 28.7 E028 10.4

KOTEV
N41 28.7 E027 50.0

GEVLA
N40 59.4 E028 20.2

ISTANBUL
(H) 112.5 IST
N40 57.8 E028 48.6

ABLEM
N40 51.9 E028 27.9

BA015
N40 53.2 E028 48.7



These SIDs require a minimum climb gradient
of
261' per NM (4.3%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
261' per NM	327	435	653	871	1089	1306

Initial climb clearance 5000'

SID	ROUTING
IBLAL 1S, 1U	BA015 (1400'+; K220) - ABLEM - GEVLA (10000'-) - TOPLU - IBLAL.
TUDBU 1S, 1U	BA015 (1400'+; K220) - ABLEM - GEVLA (10000'-) - TOPLU - TUDBU.
VADEN 1S, 1U	BA015 (1400'+; K220) - ABLEM - GEVLA (10000'-) - KOTEV - VADEN.

LTBA/IST
ATATURK



JEPPESSEN

7 AUG 15

(10-3V3)

Eff 20 Aug

ISTANBUL, TURKEY


RNAV SID

YESILKOY Radar
126.425

Apt Elev
163'

Trans level: By ATC Trans alt: 10000'
1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency.
2. RADAR required.
3. P-RNAV approval required otherwise advise ATC.
4. No turns prior to DER.

IBLAL 1V [IBLA1V]
TUDBU 1V [TUDB1V]
VADEN 1V [VADE1V]
RWY 23 RNAV DEPARTURES
RNAV (GNSS)



VADEN

N42 03.9 E027 13.0



TUDBU

N41 58.0
E027 46.6



IBLAL

N41 58.9 E028 00.1



KOTEV
N41 28.7 E027 50.0



TOPLU
N41 28.7 E028 10.4




GEVLA
N40 59.4 E028 20.2

At or below
10000'



ISTANBUL
(H) 112.5 IST
N40 57.8 E028 48.6



ABLEM
N40 51.9
E028 27.9



BA061
N40 52.5 E028 36.8



These SIDs require a minimum climb gradient
of
261' per NM (4.3%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
261' per NM	327	435	653	871	1089	1306

Initial climb clearance 5000'

SID	ROUTING
IBLAL 1V	BA061 - ABLEM- GEVLA (10000'-) - TOPLU - IBLAL.
TUDBU 1V	BA061 - ABLEM- GEVLA (10000'-) - TOPLU - TUDBU.
VADEN 1V	BA061 - ABLEM- GEVLA (10000'-) - KOTEV - VADEN.

CHANGES: None.

© JEPPESSEN, 2012, 2015. ALL RIGHTS RESERVED.

LTBA/IST
ATATURK



JEPPESSEN

7 AUG 15

(10-3V4)

Eff 20 Aug

ISTANBUL, TURKEY


RNAV SID

YESILKOY Radar
126.425

Apt Elev
163'

Trans level: By ATC Trans alt: 10000'
1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency.
2. RADAR required.
3. P-RNAV approval required otherwise advise ATC.

IBLAL 1X [IBLA1X]
TUDBU 1X [TUDB1X]
VADEN 1X [VADE1X]
RWY 35L RNAV DEPARTURES
RNAV (GNSS)
EXECUTED WITH RNAV STARS RWY 23



VADEN
N42 03.9
E027 13.0

TUDBU
N41 58.0
E027 46.6

IBLAL
N41 58.9
E028 00.1

AYFER
N41 29.2 E028 37.1
At or below
FL130

RIMBO
N41 22.9 E028 33.1
At or below
FL130

BA012
N41 16.8
E028 47.8

BA040
N41 10.6 E028 48.1
At or below
4000'

BA041
N41 09.1 E028 44.7
At or below
4000'

BA010
N41 04.8 E028 48.3
At or above
2200'
MAX 240 KT



ISTANBUL
D
(H) 112.5 IST
N40 57.8 E028 48.6

These SIDs require a minimum climb gradient
of
413' per NM (6.8%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
413' per NM	516	689	1033	1377	1722	2066

Initial climb clearance 5000'

SID	ROUTING
IBLAL 1X	BA010 (2200'+; K240-) - BA040 (4000'-) - BA012 - AYFER (FL130-) - IBLAL.
TUDBU 1X	BA010 (2200'+; K240-) - BA041 (4000'-) - RIMBO (FL130-) - TUDBU.
VADEN 1X	BA010 (2200'+; K240-) - BA041 (4000'-) - RIMBO (FL130-) - VADEN.

CHANGES: BA010 speed restriction.

© JEPPESSEN, 2012, 2015. ALL RIGHTS RESERVED.

LTBA/IST
ATATURK

JEPPesen
7 AUG 15 (10-3V5) Eff 20 Aug



ISTANBUL, TURKEY
RNAV SID

YESILKOY Radar
126.425

Apt Elev
163'

Trans level: By ATC Trans alt: 10000'
1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency.
2. RADAR required.
3. P-RNAV approval required otherwise advise ATC.

IBLAL 1Y [IBLA1Y]
TUDBU 1Y [TUDB1Y]
VADEN 1Y [VADE1Y]
RWY 35L RNAV DEPARTURES
RNAV (GNSS)

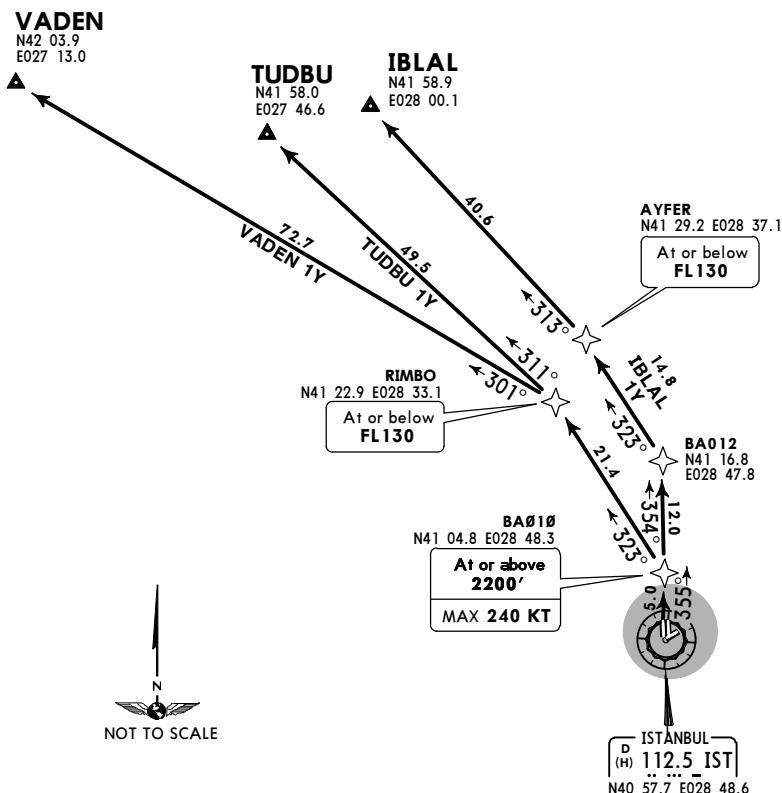

These SIDs require a minimum climb gradient of 413' per NM (6.8%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
413' per NM	516	689	1033	1377	1722	2066

Initial climb clearance **5000'**

SID	ROUTING
IBLAL 1Y	BA010 (2200'+; K240-) - BA012 - AYFER (FL130-) - IBLAL.
TUDBU 1Y	BA010 (2200'+; K240-) - RIMBO (FL130-) - TUDBU.
VADEN 1Y	BA010 (2200'+; K240-) - RIMBO (FL130-) - VADEN.

CHANGES: BA010 speed restriction.

© JEPPESEN, 2011, 2015. ALL RIGHTS RESERVED.

LTBA/IST
ATATURK



JEPPesen

7 AUG 15

(10-3V6)

Eff 20 Aug

ISTANBUL, TURKEY



RNAV SID

YESILKOY Radar
126.425

Apt Elev
163'

Trans level: By ATC Trans alt: 10000'
1. Contact YESILKOY Radar immediately after take-off with call sign only, check ATIS for current frequency.
2. RADAR required.
3. P-RNAV approval required otherwise advise ATC.

IBLAL 1Z [IBLA1Z]
TUDBU 1Z [TUDB1Z]
VADEN 1Z [VADE1Z]
RWY 35R RNAV DEPARTURES
RNAV (GNSS)

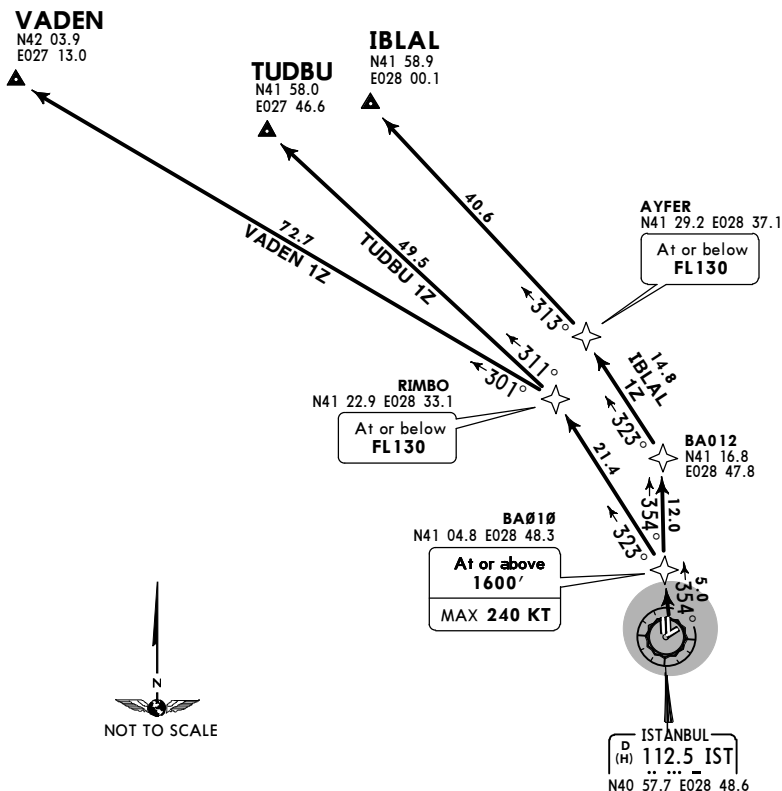

These SIDs require a minimum climb gradient
of
304' per NM (5%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

Initial climb clearance **5000'**

SID	ROUTING
IBLAL 1Z	BA010 (1600'+; K240-) - BA012 - AYFER (FL130-) - IBLAL.
TUDBU 1Z	BA010 (1600'+; K240-) - RIMBO (FL130-) - TUDBU.
VADEN 1Z	BA010 (1600'+; K240-) - RIMBO (FL130-) - VADEN.

CHANGES: BA010 speed restriction.

© JEPPesen, 2011, 2015. ALL RIGHTS RESERVED.


LTBA/IST
ATATURK

JEPPESSEN
30 NOV 12 (10-3V7) Eff 13 Dec


ISTANBUL, TURKEY
SID

Apt Elev
163'

Trans level: By ATC Trans alt: 10000'



ERTAS ONE MIKE (ERTAS 1M) [ERTA1M]
ERTAS ONE NOVEMBER (ERTAS 1N) [ERTA1N]
GAYEM ONE NOVEMBER (GAYEM 1N) [GAYE1N]
MOPIN ONE NOVEMBER (MOPIN 1N) [MOPI1N]
YALOVA ONE NOVEMBER (YAA 1N)
RWY 05 DEPARTURES

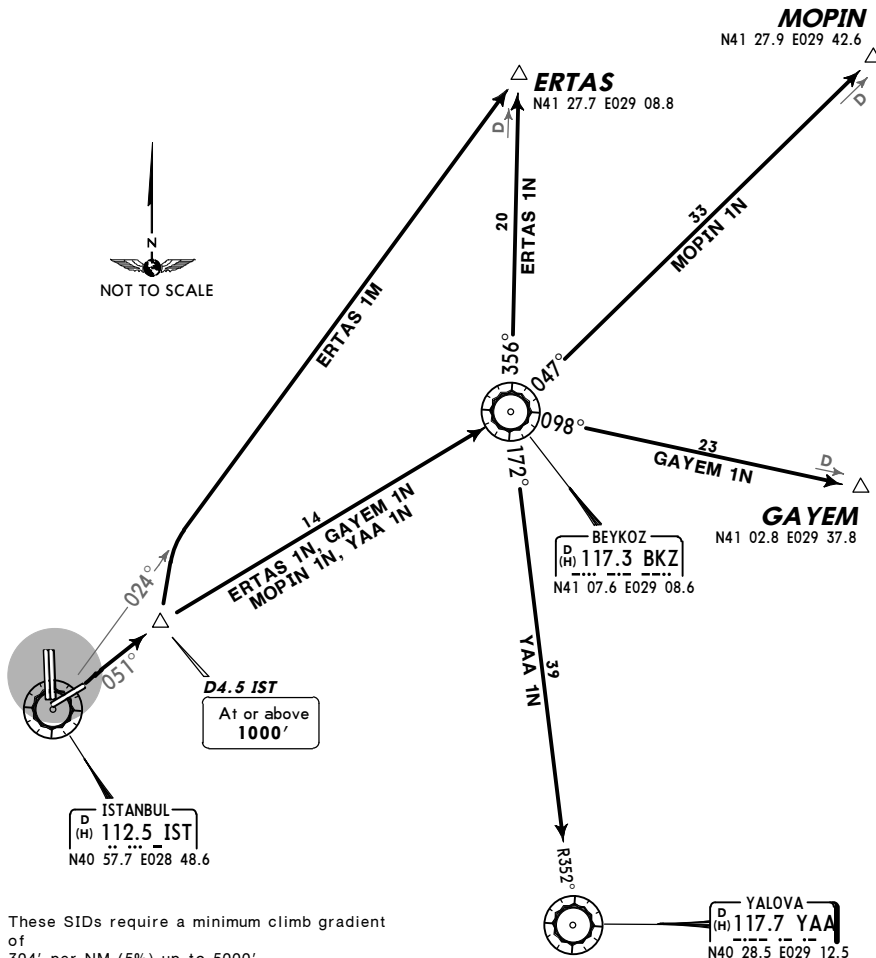

These SIDs require a minimum climb gradient
of
304' per NM (5%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

SID	INITIAL CLIMB/ROUTING
ERTAS 1M	Intercept IST R-051 to D4.5 IST, turn LEFT, intercept IST R-024 to ERTAS.
ERTAS 1N	Intercept IST R-051 to D4.5 IST, to BKZ, BKZ R-356 to ERTAS.
GAYEM 1N	Intercept IST R-051 to D4.5 IST, to BKZ, BKZ R-098 to GAYEM.
MOPIN 1N	Intercept IST R-051 to D4.5 IST, to BKZ, BKZ R-047 to MOPIN.
YAA 1N	Intercept IST R-051 to D4.5 IST, to BKZ, BKZ R-172 to YAA.

LTBA/IST
ATATURK


JEPPESSEN
30 NOV 12 (10-3V8) Eff 13 Dec

ISTANBUL, TURKEY


SID

Apt Elev
163'

Trans level: By ATC Trans alt: 10000'



BIG A ONE MIKE (BIG 1M)
BIG A ONE NOVEMBER (BIG 1N)
CORLU ONE NOVEMBER (CRL 1N)
FENER ONE NOVEMBER (FENER 1N) [FENE1N]
TEKIRDAG ONE NOVEMBER (EKI 1N)
RWY 05 DEPARTURES

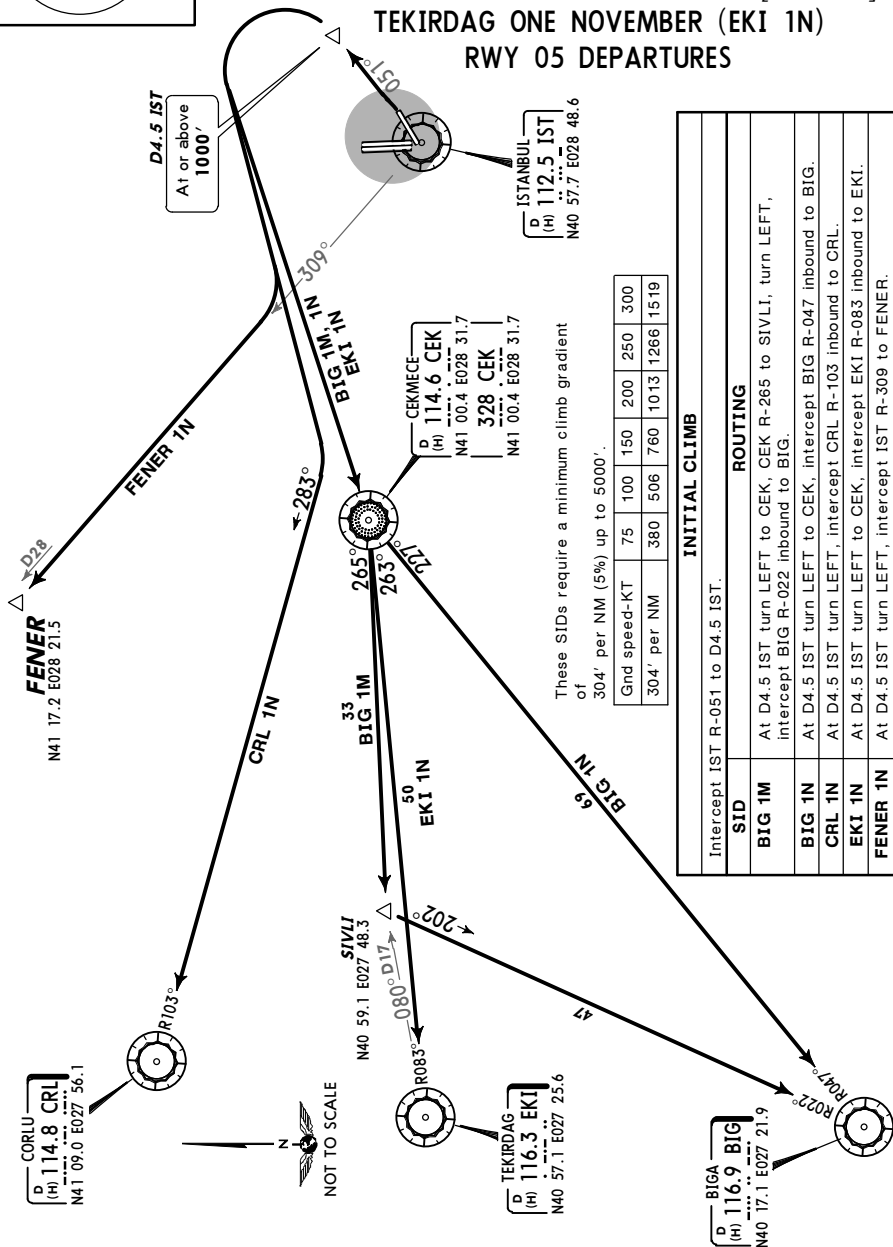

LTBA/IST
ATATURK


JEPPESSEN
30 NOV 12 (10-3W) Eff 13 Dec

ISTANBUL, TURKEY


SID

Apt Elev
163'

Trans level: By ATC Trans alt: 10000'



ERTAS ONE SIERRA (ERTAS 1S) [ERTA1S]
ERTAS ONE TANGO (ERTAS 1T) [ERTA1T]
GAYEM ONE SIERRA (GAYEM 1S) [GAYE1S]
MOPIN ONE ALFA (MOPIN 1A) [MOPI1A]
YALOVA TWO SIERRA (YAA 2S)
RWYS 17L/R DEPARTURES

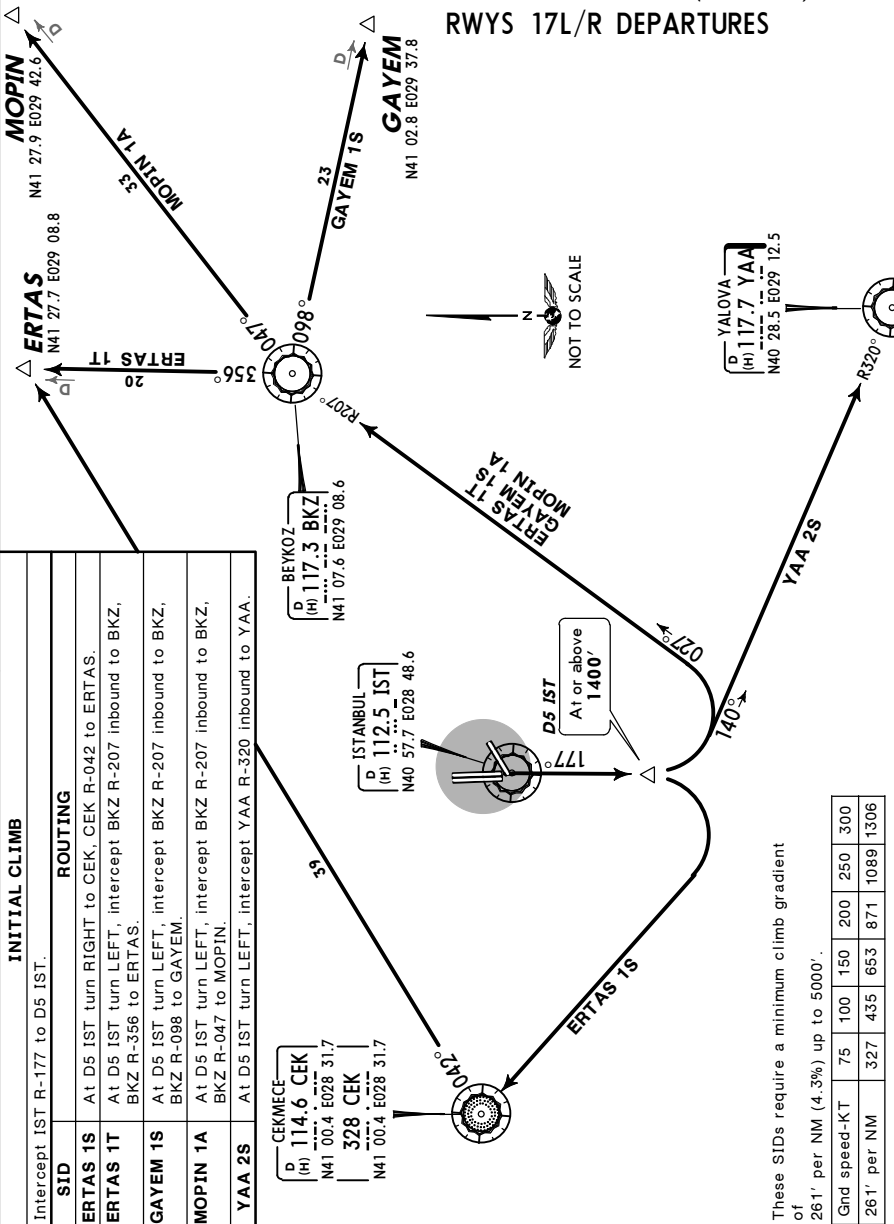

These SIDs require a minimum climb gradient of 261' per NM (4.3%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
261' per NM	327	435	653	871	1089	1306

LTBA/IST
ATATURK



JEPPESSEN
30 NOV 12 (10-3X) Eff 13 Dec

ISTANBUL, TURKEY
SID

Apt Elev
163'

Trans level: By ATC Trans alt: 10000'

BIGA TWO SIERRA (BIG 2S)
CORLU TWO SIERRA (CRL 2S)
FENER TWO SIERRA (FENER 2S) [FENE2S]
TEKIRDAG TWO SIERRA (EKI 2S)
RWYS 17L/R DEPARTURES

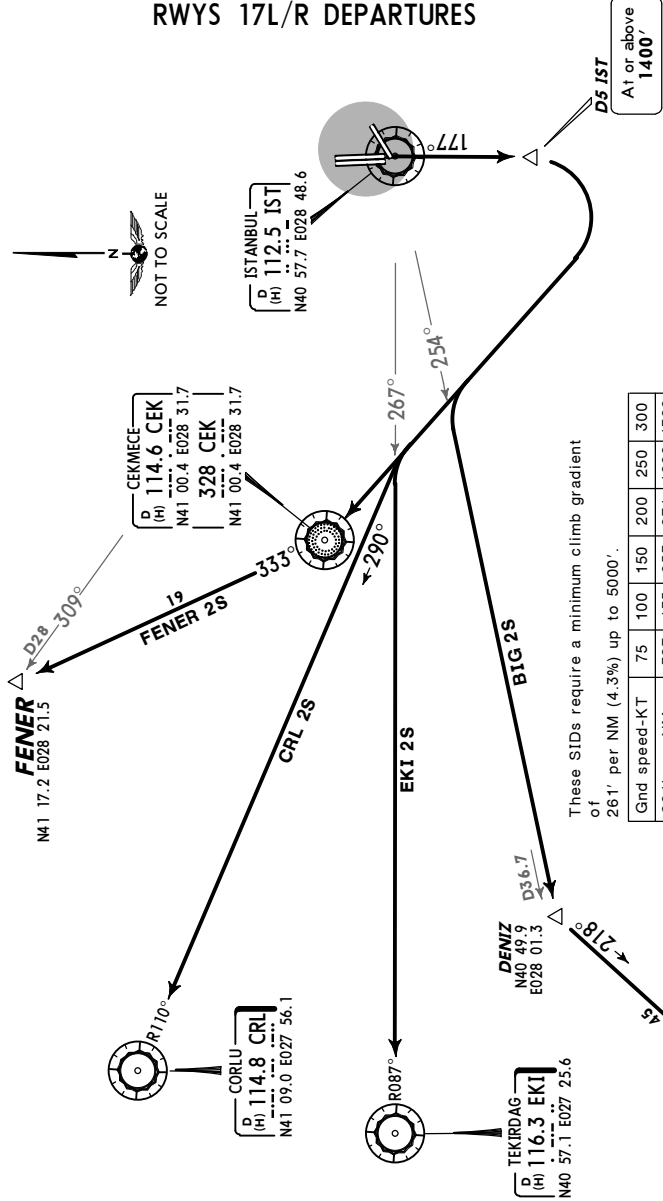

INITIAL CLIMB	
Intercept IST R-177 to D5 IST.	
SID	ROUTING
BIG 2S	At D5 IST turn RIGHT, intercept IST R-254 to DENIZ, turn LEFT, intercept BIG R-038 inbound to BIG.
CRL 2S	At D5 IST turn RIGHT, intercept CRL R-110 inbound to CRL.
EKI 2S	At D5 IST turn RIGHT, intercept IST R-267 to EKI.
FENER 2S	At D5 IST turn RIGHT to CEK, CEK R-333 to FENER.




LTBA/IST
ATATURK

JEPPESSEN
30 NOV 12 (10-3X2) Eff 13 Dec

ISTANBUL, TURKEY
SID

Apt Elev 163' Trans level: By ATC Trans alt: 10000'

BIGA TWO GOLF (BIG 2G)
CORLU TWO GOLF (CRL 2G)
FENER TWO HOTEL (FENER 2H) [FENE2H]
TEKIRDAG TWO GOLF (EKI 2G)
RWY 23 DEPARTURES

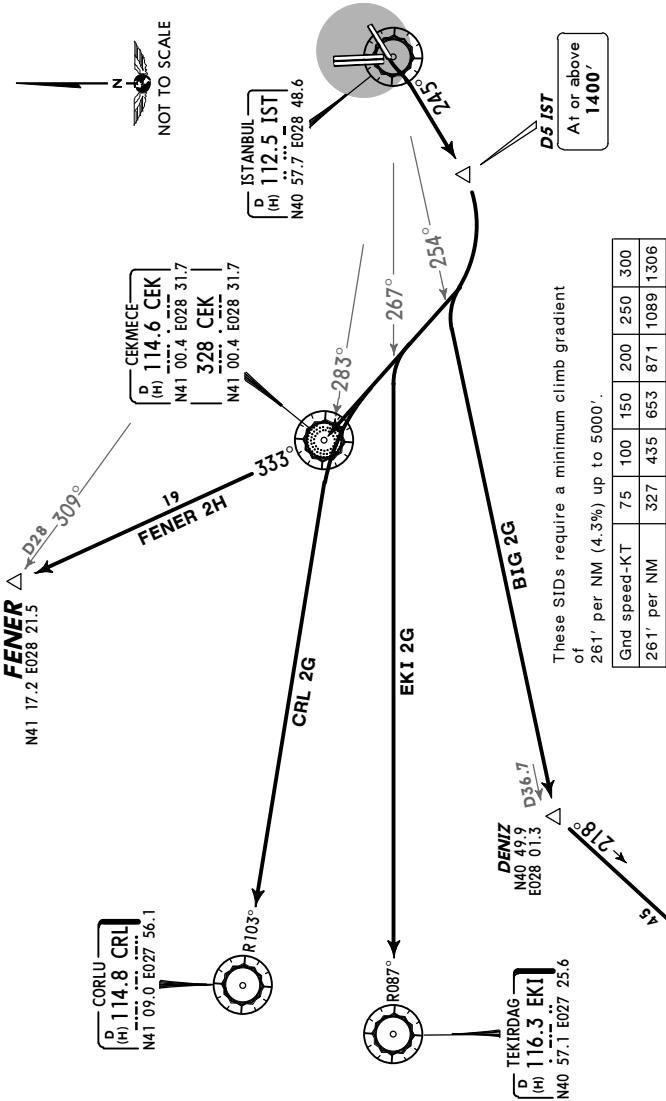

Gnd speed-KT	75	100	150	200	250	300
261' per NM	327	435	653	871	1089	1306

INITIAL CLIMB	
Intercept IST R-245 to D5 IST.	
SID	ROUTING
BIG 2G	At D5 IST turn RIGHT, intercept IST R-254 to DENIZ, turn LEFT, intercept BIG R-038 inbound to BIG.
CRL 2G	At D5 IST turn RIGHT, intercept IST R-283 to CRL.
EKI 2G	At D5 IST turn RIGHT, intercept IST R-267 to EKI.
FENER 2H	At D5 IST turn RIGHT to CEK, CEK R-333 to FENER.


LTBA/IST
ATATURK

JEPPESSEN
25 MAY 12 **(10-3X3)** **Eff 31 May**


ISTANBUL, TURKEY
SID

Apt Elev
163'

Trans level: By ATC Trans alt: 10000'



ERTAS ONE DELTA (ERTAS 1D) [ERTA1D]
ERTAS ONE UNIFORM (ERTAS 1U) [ERTA1U]
GAYEM ONE DELTA (GAYEM 1D) [GAYE1D]
MOPIN ONE DELTA (MOPIN 1D) [MOPI1D]
YALOVA ONE DELTA (YAA 1D)
RWY 35L DEPARTURES

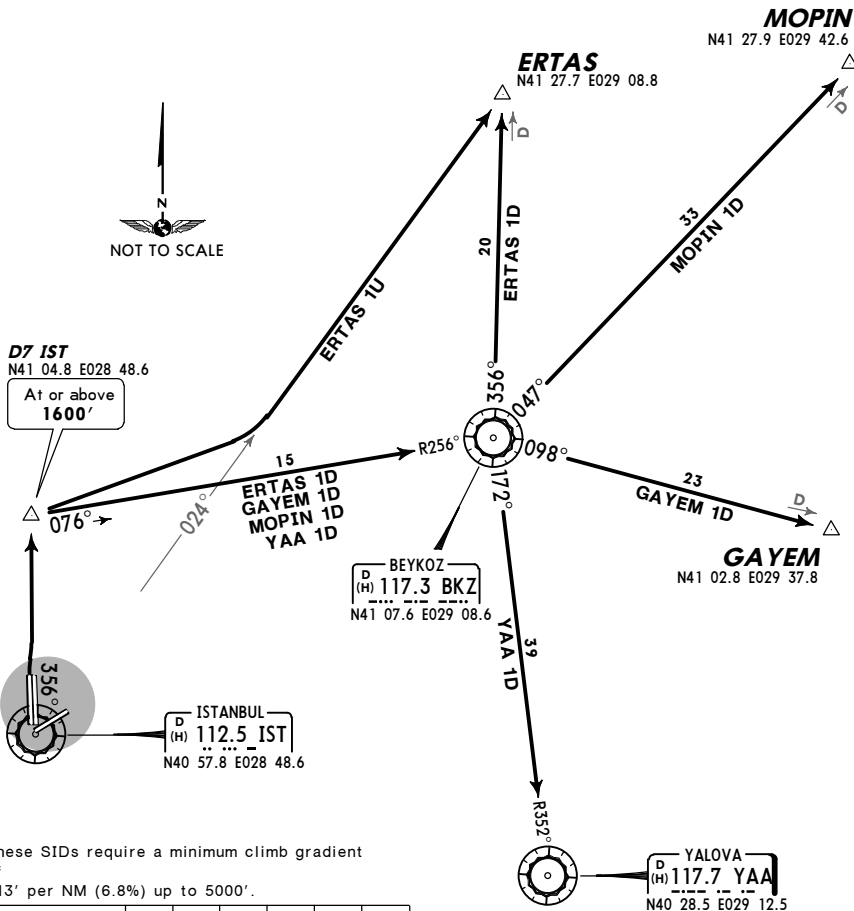

These SIDs require a minimum climb gradient of 413' per NM (6.8%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
413' per NM	516	689	1033	1377	1722	2066

INITIAL CLIMB

Intercept IST R-356 to D7 IST.

SID	ROUTING
ERTAS 1D	At D7 IST turn RIGHT, intercept BKZ R-256 inbound to BKZ, BKZ R-356 to ERTAS.
ERTAS 1U	At D7 IST turn RIGHT, intercept IST R-024 to ERTAS.
GAYEM 1D	At D7 IST turn RIGHT, intercept BKZ R-256 inbound to BKZ, BKZ R-098 to GAYEM.
MOPIN 1D	At D7 IST turn RIGHT, intercept BKZ R-256 inbound to BKZ, BKZ R-047 to MOPIN.
YAA 1D	At D7 IST turn RIGHT, intercept BKZ R-256 inbound to BKZ, BKZ R-172 to YAA.

LTBA/IST
ATATURK

JEPPESSEN
25 MAY 12 (10-3X4) Eff 31 May



ISTANBUL, TURKEY

SID

Apt Elev
163'

Trans level: By ATC Trans alt: 10000'

BIGA ONE DELTA (BIG 1D)
CORLU ONE DELTA (CRL 1D)
FENER ONE DELTA (FENER 1D) [FENE1D]
FENER ONE UNIFORM (FENER 1U) [FENE1U]
TEKIRDAG ONE DELTA (EKI 1D)
RWY 35L DEPARTURES

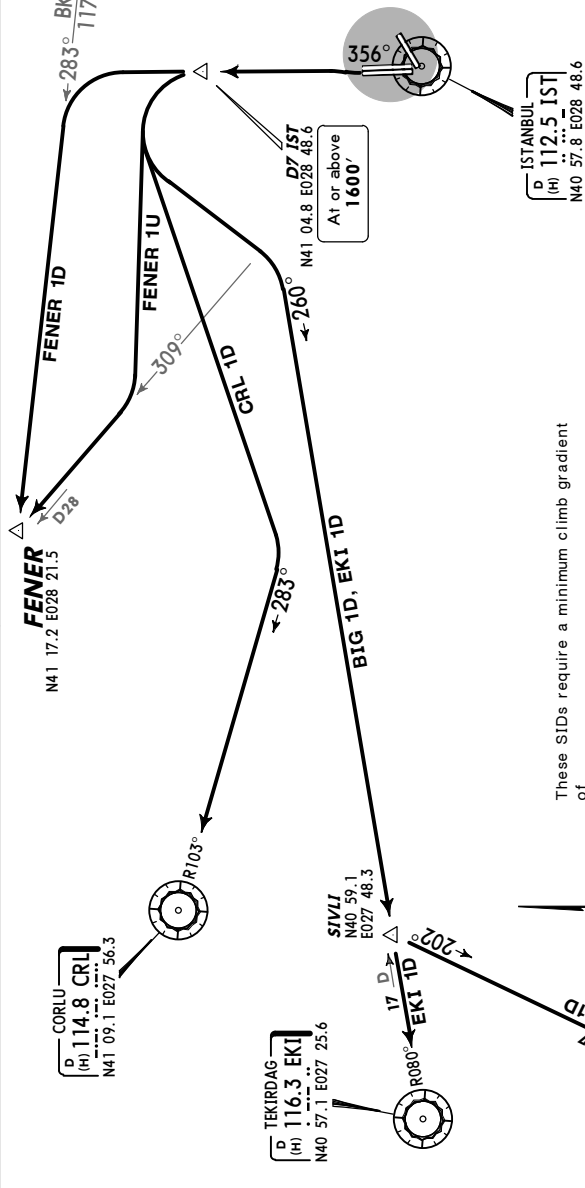

These SIDs require a minimum climb gradient of 413' per NM (6.8%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
413' per NM	516	689	1033	1377	1722	2066

INITIAL CLIMB

Intercept IST R-356 to D7 IST.

ROUTING

SID	ROUTING
BIG 1D	At D7 IST turn LEFT, intercept EKI R-080 inbound to SIVLI, turn LEFT, intercept BIG R-022 inbound to BIG.
CRL 1D	At D7 IST turn LEFT, intercept CRL R-103 inbound to CRL.
EKI 1D	At D7 IST turn LEFT, intercept EKI R-080 inbound to EKI.
FENER 1D	At D7 IST straight ahead, turn LEFT, intercept BKZ R-283 to FENER.
FENER 1U	At D7 IST turn LEFT, intercept IST R-309 to FENER.


LTBA/IST
ATATURK

JEPPESSEN
25 MAY 12 (10-3X5) Eff 31 May


ISTANBUL, TURKEY
SID

Apt Elev
163'

Trans level: By ATC Trans alt: 10000'



ERTAS ONE KILO (ERTAS 1K) [ERTA1K]
ERTAS ONE LIMA (ERTAS 1L) [ERTA1L]
GAYEM ONE KILO (GAYEM 1K) [GAYE1K]
MOPIN ONE BRAVO (MOPIN 1B) [MOP11B]
YALOVA ONE KILO (YAA 1K)
RWY 35R DEPARTURES

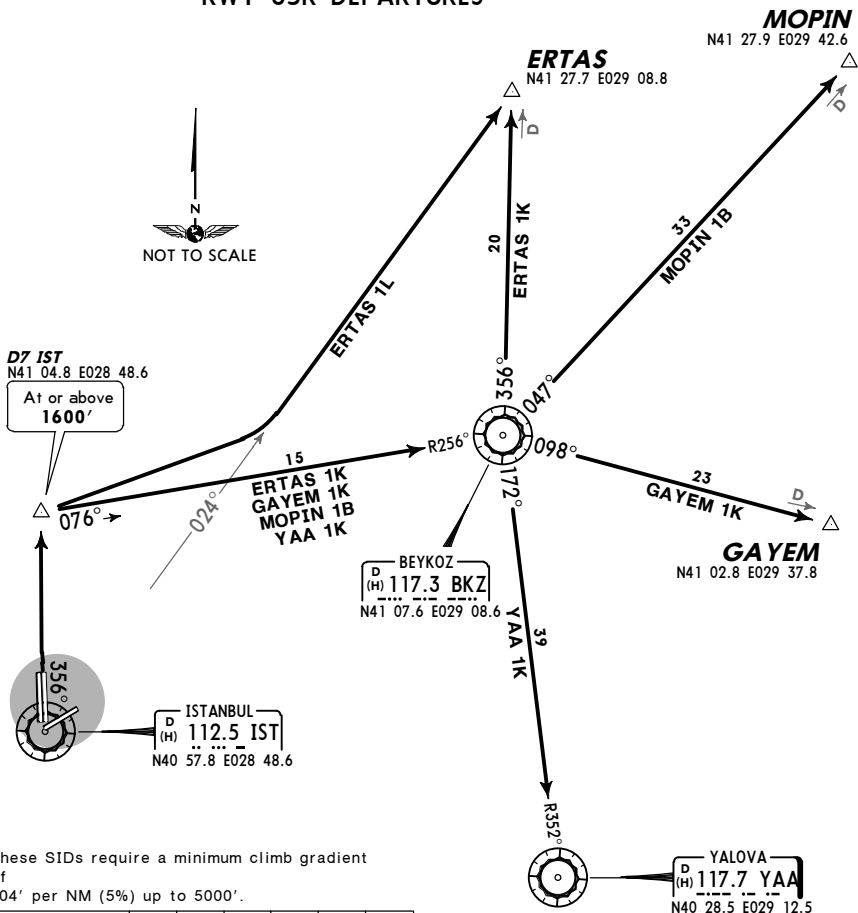

These SIDs require a minimum climb gradient of 304' per NM (5%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

INITIAL CLIMB

Intercept IST R-356 to D7 IST.

SID	ROUTING
ERTAS 1K	At D7 IST turn RIGHT, intercept BKZ R-256 inbound to BKZ, BKZ R-356 to ERTAS.
ERTAS 1L	At D7 IST turn RIGHT, intercept IST R-024 to ERTAS.
GAYEM 1K	At D7 IST turn RIGHT, intercept BKZ R-256 inbound to BKZ, BKZ R-098 to GAYEM.
MOPIN 1B	At D7 IST turn RIGHT, intercept BKZ R-256 inbound to BKZ, BKZ R-047 to MOPIN.
YAA 1K	At D7 IST turn RIGHT, intercept BKZ R-256 inbound to BKZ, BKZ R-172 to YAA.

CHANGES: Procedure notes.

© JEPPESSEN, 2011, 2012. ALL RIGHTS RESERVED.

LTBA/IST
ATATURK



JEPPESSEN
25 MAY 12 (10-3X6) Eff 31 May

ISTANBUL, TURKEY
SID

Apt Elev
163'

Trans level: By ATC Trans alt: 10000'

BIGA ONE KILO (BIG 1K)
CORLU ONE KILO (CRL 1K)
FENER ONE KILO (FENER 1K) [FENE1K]
FENER ONE LIMA (FENER 1L) [FENE1L]
TEKIRDAG ONE KILO (EKI 1K)
RWY 35R DEPARTURES

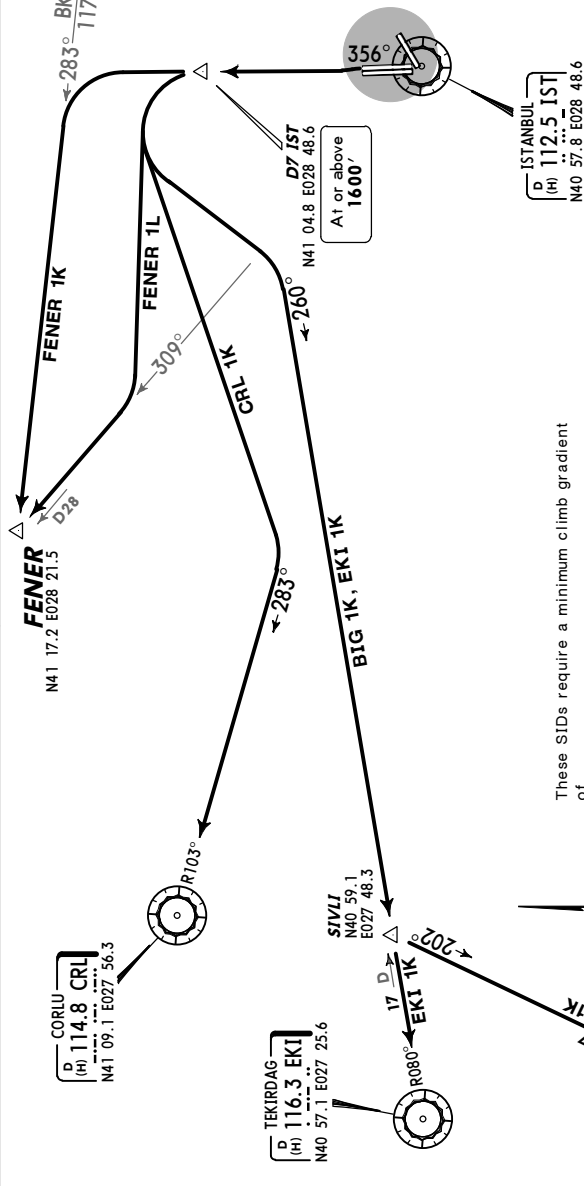

These SIDs require a minimum climb gradient of 304' per NM (5%) up to 5000'.

Gnd speed-KT	75	100	150	200	250	300
304' per NM	380	506	760	1013	1266	1519

INITIAL CLIMB

Intercept IST R-356 to D7 IST.

ROUTING

SID	ROUTING
BIG 1K	At D7 IST turn LEFT, intercept EKI R-080 inbound to SIVLI, turn LEFT, intercept BIG R-022 inbound to BIG.
CRL 1K	At D7 IST turn LEFT, intercept CRL R-103 inbound to CRL.
EKI 1K	At D7 IST turn LEFT, intercept EKI R-080 inbound to EKI.
FENER 1K	At D7 IST straight ahead, turn LEFT, intercept BKZ R-283 to FENER.
FENER 1L	At D7 IST turn LEFT, intercept IST R-309 to FENER.





NOT TO SCALE



LEGEND

A	Apron
J1	Taxiway
	De-icing area
	HOT SPOTS

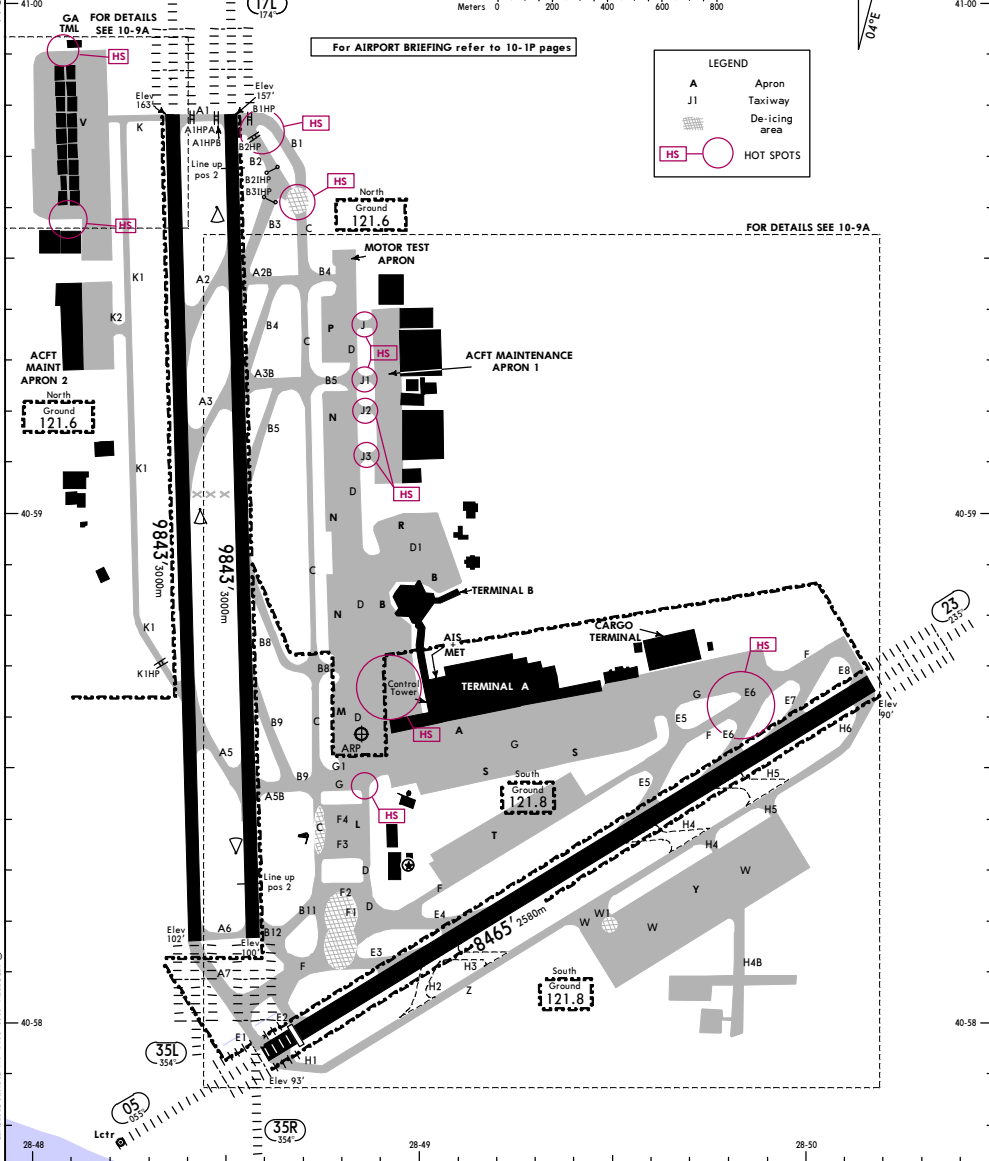

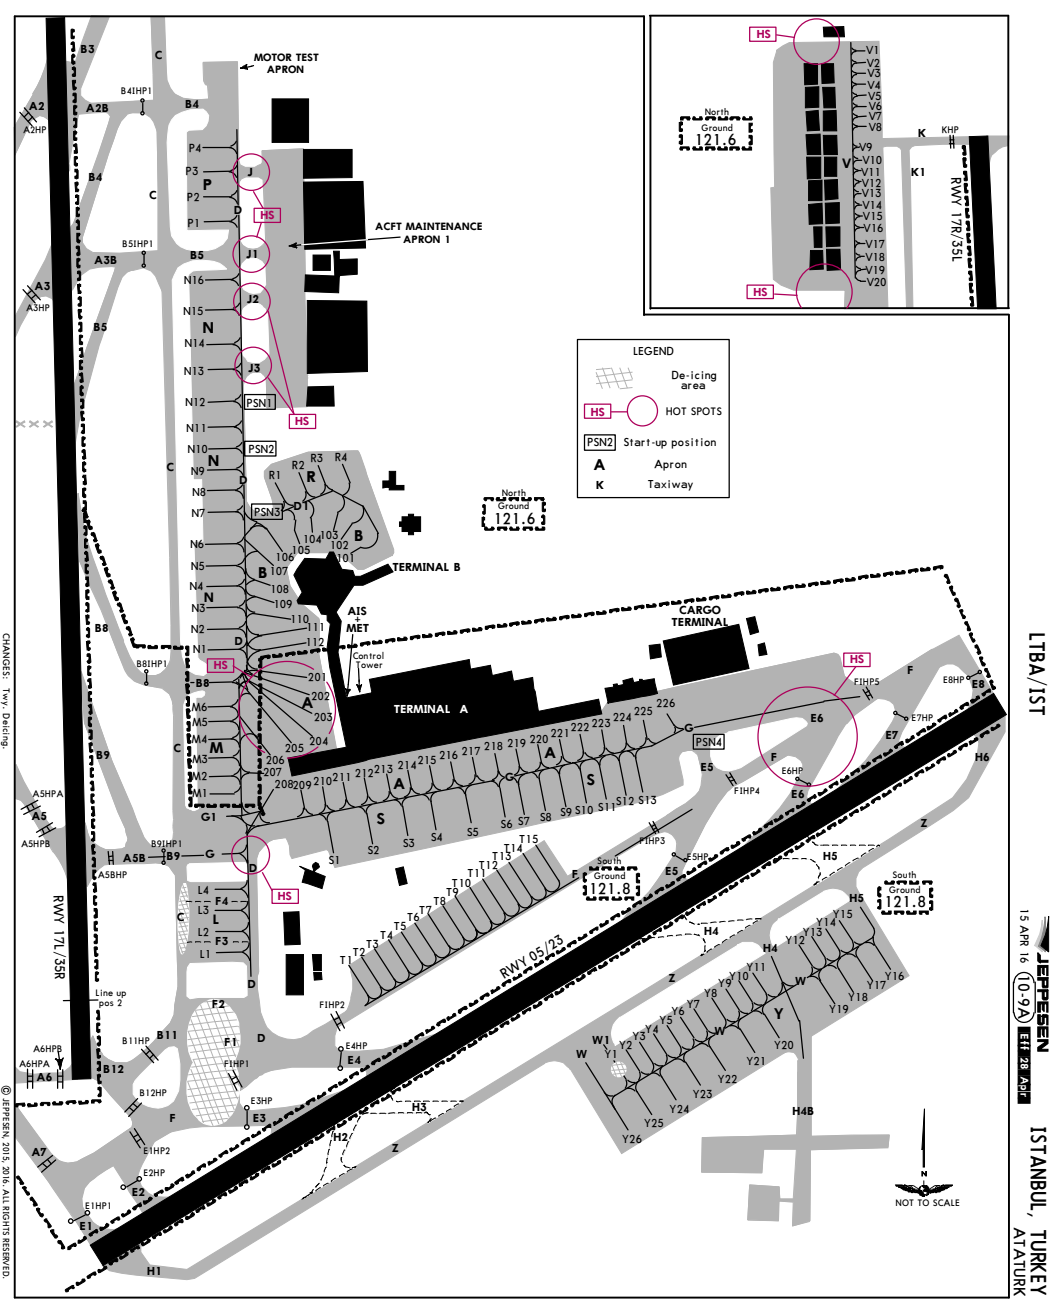

CHANGES: TWY, DITCHING

LTBA/IST
15 APR 16
JEPPESSEN
10-9A
IST 28 APR
ISTANBUL, TURKEY
ATATURK

LTBA/IST



JEPPesen

20 MAY 16

10-9B

Eff 26 May

ISTANBUL, TURKEY

ATATURK


ADDITIONAL RUNWAY INFORMATION									
RWY						USABLE LENGTHS		TAKE-OFF	WIDTH
						LANDING BEYOND			
						Threshold	Glide Slope		
05	HIRL (60m)	CL (15m)	HIALS-II SFL TDZ REIL	①	RVR	8038' 2450m	6884' 2098m	③	197'
23	HIRL (60m)	CL (15m)	HIALS-II SFL TDZ REIL	②	RVR		7493' 2284m		60m
① PAPI-R (3.0°) HSTIL-E5, E6 & E7. ② PAPI-L (3.2°) HSTIL-E4, E3 & E2. ③ TAKE-OFF RUN AVAILABLE RWY 05: From rwy head 8465' (2580m) twy E2 int 8038' (2450m)									
17L	HIRL ④CL ⑤	HIALS-II SFL TDZ REIL	⑥		RVR		8932' 2722m	⑧	148'
35R	HIRL ④CL ⑤	HIALS-II SFL TDZ REIL	⑦		RVR				45m
④ spacing 60m. ⑤ spacing 15m. ⑥ PAPI (3.0°) HSTIL-B8 & B9. ⑦ PAPI (3.0°) HSTIL-B5, B4 & B3. ⑧ TAKE-OFF RUN AVAILABLE RWY 17L: From rwy head 9843' (3000m) line up position 2 9186' (2800m) RWY 35R: From rwy head 9843' (3000m) line up position 2 9186' (2800m) twy A5 int 8038' (2450m) twy A5B int 8038' (2450m)									
17R	HIRL (60m)	CL (15m)	HIALS-II SFL TDZ REIL	⑨	RVR				148'
35L	HIRL (60m)	CL (15m)	HIALS-II SFL TDZ REIL	⑩	RVR		8932' 2722m	⑪	45m
⑨ PAPI (3.5°) HSTIL-A5. ⑩ PAPI (3.0°) HSTIL-A3 & A2. ⑪ TAKE-OFF RUN AVAILABLE RWY 35L: From rwy head 9843' (3000m) twy K1 int 6890' (2100m)									
Standard TAKE-OFF ①									
LVP must be in force									
	Approved Operators HIRL, CL & mult. RVR req	RL, CL & mult. RVR req	RL & CL	RCLM (DAY only) or RL	RCLM (DAY only) or RL	NIL (DAY only)			
A									
B	125m	150m	200m	250m	400m	500m			
C									
D	150m	200m	250m	300m					
① Operators applying U.S. Ops Specs: CL required below 300m; approved HUD required below 150m.									

LTBA/IST


JEPPESSEN
 20 MAY 16 (10-9C) Eff 26 May

ISTANBUL, TURKEY
 ATATURK

INS COORDINATES			
STAND No.	COORDINATES	STAND No.	COORDINATES
101 thru 104	N40 58.9 E028 49.0	S10 thru S12	N40 58.5 E028 49.5
105 thru 107	N40 58.9 E028 48.9	S13	N40 58.5 E028 49.6
108 thru 110	N40 58.8 E028 48.9	T1, T2	N40 58.3 E028 49.0
111	N40 58.8 E028 49.0	T3	N40 58.3 E028 49.1
112	N40 58.7 E028 49.0	T4 thru T6	N40 58.4 E028 49.1
201 thru 203	N40 58.7 E028 49.0	T7 thru T10	N40 58.4 E028 49.2
204	N40 58.6 E028 49.0	T11	N40 58.4 E028 49.3
205 thru 209	N40 58.6 E028 48.9	T12 thru T14	N40 58.5 E028 49.3
210, 211	N40 58.6 E028 49.0	T15	N40 58.5 E028 49.4
212 thru 214	N40 58.6 E028 49.1	V1 thru V4	N40 59.9 E028 48.2
215 thru 217	N40 58.6 E028 49.2	V5 thru V8	N40 59.8 E028 48.2
218, 219	N40 58.6 E028 49.3	V9 thru V14	N40 59.7 E028 48.2
220, 221	N40 58.6 E028 49.4	V15 thru V18	N40 59.6 E028 48.2
222 thru 224	N40 58.6 E028 49.5	V19, V20	N40 59.5 E028 48.2
225, 226	N40 58.7 E028 49.6	Y1, Y2	N40 58.2 E028 49.5
L1	N40 58.3 E028 48.8	Y3 thru Y6	N40 58.2 E028 49.6
L2 thru L4	N40 58.4 E028 48.8	Y7 thru Y10	N40 58.3 E028 49.7
M1	N40 58.5 E028 48.8	Y11	N40 58.3 E028 49.8
M2 thru M5	N40 58.6 E028 48.8	Y12	N40 58.3 E028 49.9
M6	N40 58.7 E028 48.8	Y13 thru Y15	N40 58.4 E028 49.9
N1	N40 58.7 E028 48.8	Y16, Y17	N40 58.3 E028 50.0
N2 thru N4	N40 58.8 E028 48.8	Y18, Y19	N40 58.3 E028 49.9
N5 thru N8	N40 58.9 E028 48.8	Y20, Y21	N40 58.2 E028 49.8
N9 thru N11	N40 59.0 E028 48.8	Y22	N40 58.2 E028 49.7
N12 thru N14	N40 59.1 E028 48.8	Y23	N40 58.1 E028 49.7
N15, N16	N40 59.2 E028 48.8	Y24, Y25	N40 58.1 E028 49.6
P1, P2	N40 59.3 E028 48.8	Y26	N40 58.1 E028 49.5
P3, P4	N40 59.4 E028 48.8		
R1, R2	N40 59.0 E028 48.9		
R3, R4	N40 59.0 E028 49.0		
S1	N40 58.4 E028 49.0		
S2, S3	N40 58.5 E028 49.1		
S4, S5	N40 58.5 E028 49.2		
S6	N40 58.5 E028 49.3		
S7 thru S9	N40 58.5 E028 49.4		

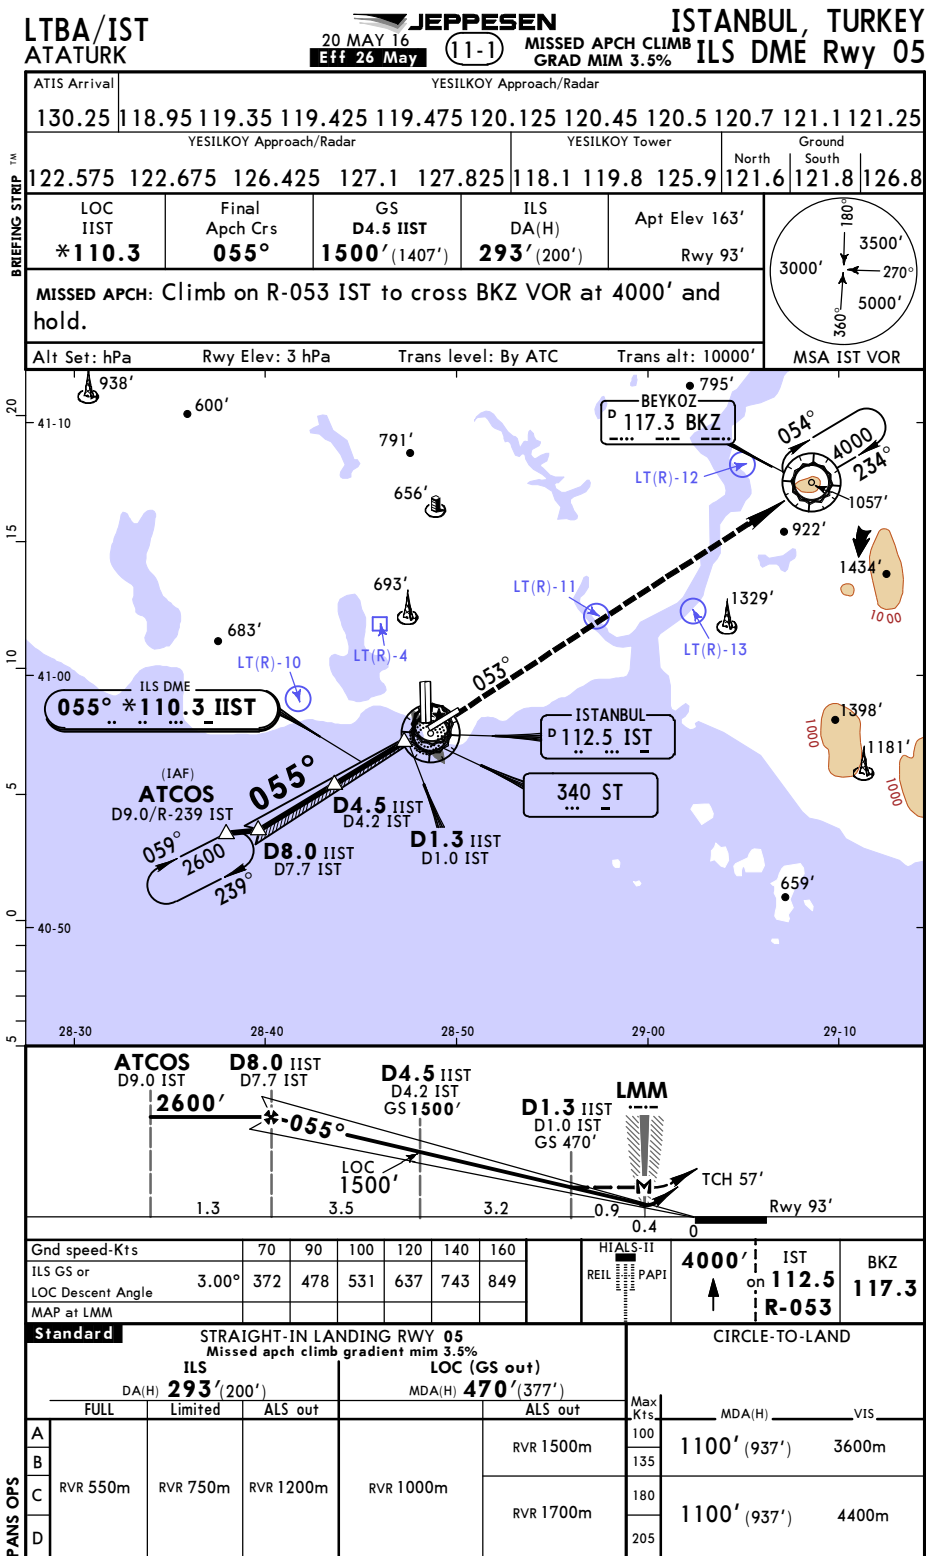

LTBA/IST
ATATURK

20 MAY 16
Eff 26 May



JEPPesen


11-1A

CAT II/III ILS DME Rwy 05

ISTANBUL, TURKEY

BREFFING STRIP™

ATIS Arrival		YESILKOY Approach/Radar													
130.25		118.95	119.35	119.425	119.475	120.125	120.45	120.5	120.7	121.1	121.25				
YESILKOY Approach/Radar						YESILKOY Tower			North	Ground	South				
122.575						122.675	126.425	127.1	127.825	118.1	119.8	125.9	121.6	121.8	126.8
LOC IIST		Final Apch Crs		GS D4.5 IIST		CAT II & IIIA ILS Refer to Minimums		Apt Elev 163'							
*110.3		055°		1500' (1407')				Rwy 93'							
MISSED APCH: Climb on R-053 IST to cross BKZ VOR at 4000' and hold.															
Alt Set: hPa		Rwy Elev: 3 hPa		Trans level: By ATC		Trans alt: 10000'		MSA IST VOR							

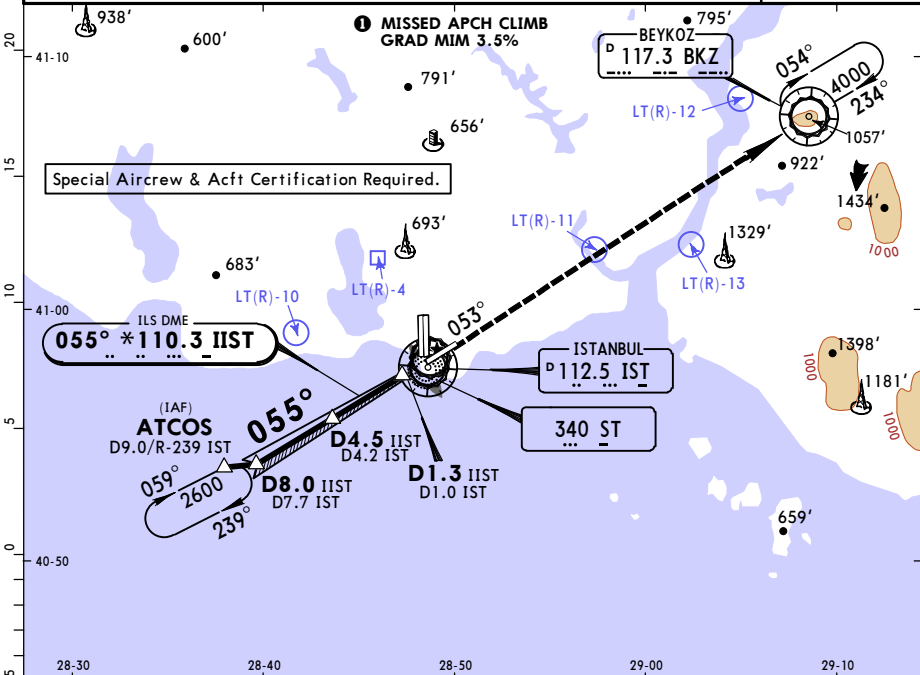

ATCOS D9.0 IST		D8.0 IIST D7.7 IST		D4.5 IIST D4.2 IST GS 1500'		D1.3 IIST D1.0 IST GS 470'		LMM		TCH 57'		Rwy 93'				
2600'		055°		1.3		3.5		3.2		0.9		0.4				
0																
Gnd speed-Kts		70	90	100	120	140	160	HIALS-II REIL PAPI		4000'		IST		BKZ		
GS		3.00°	372	478	531	637	743	849			↑ on 112.5		R-053		117.3	

LTBA/IST
ATATURK

JEPPESEN
20 MAY 16 **11-2** Eff 26 May

ISTANBUL, TURKEY
ILS DME Rwy 17L

BRIEFING STRIP™

ATIS Arrival		YESILKOY Approach/Radar									
130.25		118.95	119.35	119.425	119.475	120.125	120.45	120.5	120.7	121.1	121.25
YESILKOY Approach/Radar						YESILKOY Tower			Ground		
122.575						122.675	126.425	127.1	127.825	118.1	119.8
LOC IISB		Final Apch Crs		GS LOM		ILS DA(H)		Apt Elev 163'		Rwy 157'	
111.1		174°		1400' (1243')		360' (203')					
MISSED APCH: Climb on 174° to 2500', then turn RIGHT climbing to cross CEK VOR/NDB at 5000' and hold.											
Alt Set: hPa		Rwy Elev: 6 hPa		Trans level: By ATC				Trans alt: 10000'			

180°

3000'


360°

270°

3500'

5000'

MSA IST VOR

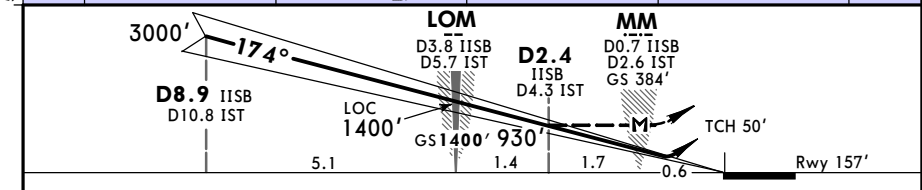

Gnd speed-Kts		70	90	100	120	140	160	ALSF-II		2500' ↑ on 174°
ILS GS or LOC Descent Angle 3.00°		372	478	531	637	743	849	REIL PAPI		
MAP at MM/D0.7 IISB/D2.6 IST										
Standard		STRAIGHT-IN LANDING RWY 17L						CIRCLE-TO-LAND		
ILS				LOC (GS out)						
DA(H)		360'(203')		MDA(H)		930'(773')				
FULL		Limited		ALS out		ALS out		Max Kts	MDA(H) _____ VTS _____	
A	RVR 550m	RVR 750m	RVR 1200m	RVR 1500m				100	1100' (937') 3600m	
B								135		
C								180	1100' (937') 4400m	
D						CMV 2400m				205



LTBA/IST
ATATURK

JEPPESEN
20 MAY 16 11-3 Eff 26 May

ISTANBUL, TURKEY
ILS DME 1 Rwy 23

BRIEFING STRIP™

ATIS Arrival		YESILKOY Approach/Radar																			
130.25		118.95		119.35		119.425		119.475		120.125		120.45		120.5		120.7		121.1		121.25	
YESILKOY Approach/Radar										YESILKOY Tower				North		Ground		South			
122.575		122.675		126.425		127.1		127.825		118.1		119.8		125.9		121.6		121.8		126.8	
LOC IATA 111.9		Final Apch Crs 235°		GS OM 1425' (1335')		ILS DA(H) 290' (200')		Apt Elev 163'		Rwy 90'											
MISSED APCH: Climb on 235° to 2500', then turn RIGHT climbing to cross CEK VOR/NDB at 4000' and hold.																					
Alt Set: hPa		Rwy Elev: 3 hPa		Trans level: By ATC				Trans alt: 10000'				MSA IST VOR									

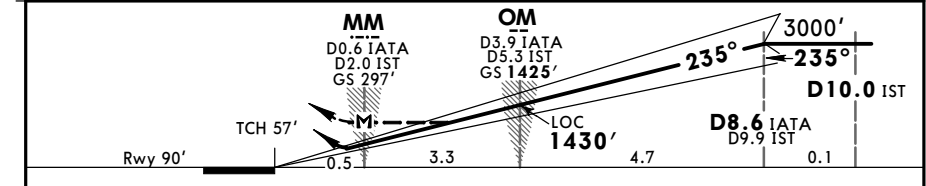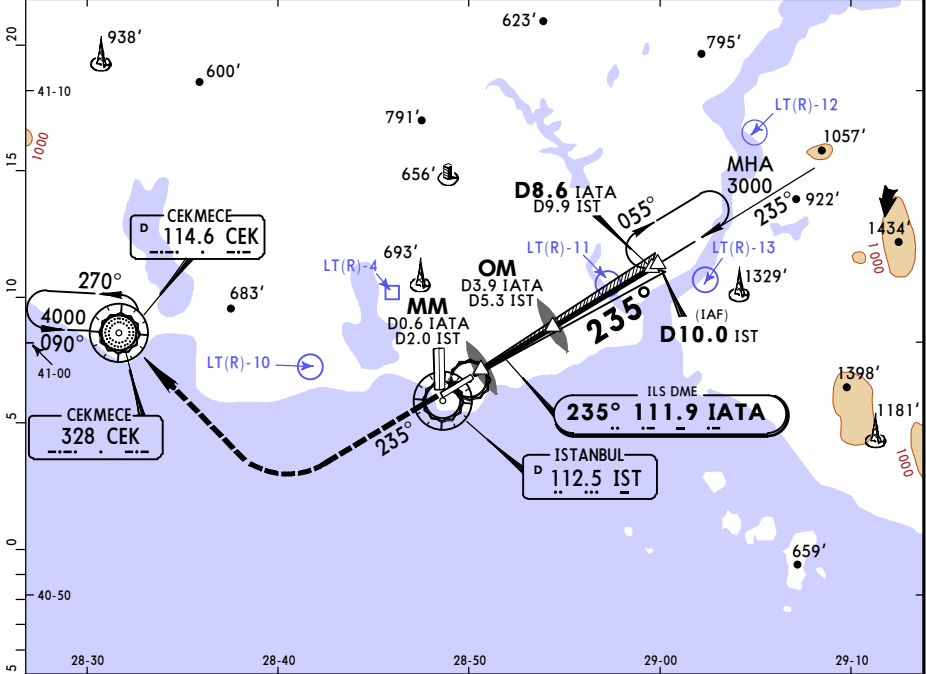

Gnd speed-Kts		70	90	100	120	140	160	HIALS-II		2500' on 235°	
ILS GS or								REIL			
LOC Descent Angle		3.20°	396	510	566	679	793	906	</		


LTBA/IST
ATATURK

JEPPESEN
20 MAY 16 **11-4** Eff 26 May

ISTANBUL, TURKEY
ILS Rwy 23

BREEFING STRIP™

ATIS Arrival		YESILKOY Approach/Radar									
130.25	118.95	119.35	119.425	119.475	120.125	120.45	120.5	120.7	121.1	121.25	
YESILKOY Approach/Radar					YESILKOY Tower			North		Ground South	
122.575	122.675	126.425	127.1	127.825	118.1	119.8	125.9	121.6	121.8	126.8	
LOC IATA 111.9	Final Apch Crs 235°		GS OM 1425' (1335')		ILS DA(H) 290' (200')		Apt Elev 163'		Rwy 90'		
MISSED APCH: Climb on 235° to 2500', then turn RIGHT climbing to cross CEK VOR/NDB at 4000' and hold.											
Alt Set: hPa		Rwy Elev: 3 hPa		Trans level: By ATC		Trans alt: 10000'		MSA IST VOR			

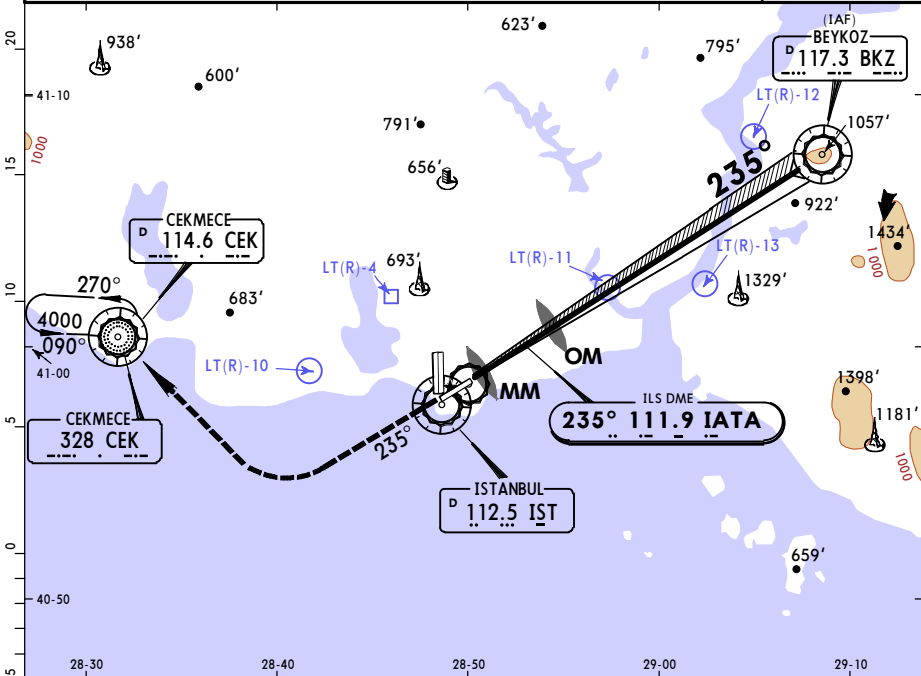

Rwy 90'	0	0.5	3.3	3.8	12.7	16.5	
Gnd speed-Kts	70	90	100	120	140	160	HIALS-II REIL PAPI 2500' on 235°
ILS GS or							
LOC Descent Angle	3.20°	396	510	566	679	793	
MAP at MM							

Standard

STRAIGHT-IN LANDING RWY 23

CIRCLE-TO-LAND

ILS		LOC (GS out)	
DA(H) 290' (200')		MDA(H) 710' (620')	
FULL/Limited	ALS out		ALS out

			Max Kts	MDA(H)	VIS
A			100	1100' (937')	3600m
B			135		
C	RVR 750m	RVR 1200m	180	1100' (937')	4400m
D			205		

PANS OPS


PANS OPS

LTBA/IST
ATATURK


JEPPesen
20 MAY 16 **11-6** Eff 26 May

ISTANBUL, TURKEY
ILS DME B Rwy 23

BRIEFING STRIP 1M


ATIS Arrival		YESILKOY Approach/Radar									
130.25	118.95	119.35	119.425	119.475	120.125	120.45	120.5	120.7	121.1	121.25	
YESILKOY Approach/Radar					YESILKOY Tower			North	Ground	South	
122.575	122.675	126.425	127.1	127.825	118.1	119.8	125.9	121.6	121.8	126.8	
LOC IATA 111.9	Final Apch Crs 235°	GS OM 1425' (1335')	ILS DA(H) 1270' (1180')	Apt Elev 163'		Rwy 90'					
MISSED APCH: Turn LEFT to intercept R-090 IST climbing to 3000', contact Approach. If unable to contact Approach until passing D12.0 IST turn LEFT on hdg 054° and intercept R-078 IST. After D26.0 IST climb to 4000' proceed to GAYEM and hold.											
Alt Set: hPa		Rwy Elev: 3 hPa		Trans level: By ATC		Trans alt: 10000'		MSA IST VOR			

WITH BALKED LANDING PROCEDURE

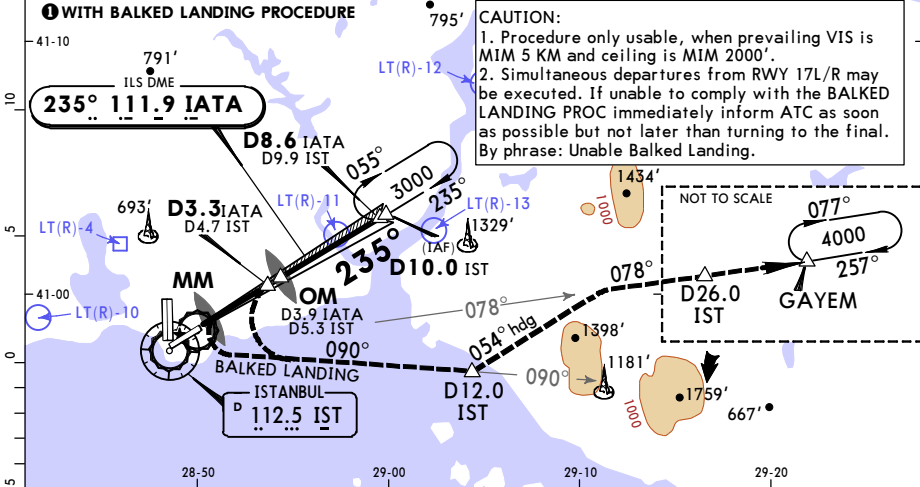

BALKED LANDING MISSED APPROACH PROCEDURE:

As early as practicable turn LEFT and intercept R-090 IST climbing to 3000' with MAX bank to avoid penetration of RWY 17L/R departure path. Contact Approach. Terrain clearance up to 2000' and avoidance of departure path and other traffic in the vicinity shall be under the responsibility of Pilot in Command. If unable to contact Approach until passing D12.0/R-090 IST, turn LEFT on hdg 054°. Intercept R-078 IST. After D26.0 IST climb to 4000' proceed GAYEM and hold. If pilots cleared to perform ILS DME B RWY 23 or LOC (GS out) RWY 23 proc cannot perform balked landing missed approach inform ATC on Approach and Istanbul TWR, by phrase Unable Balked Landing, at least before starting the approach. In this case, ATC guiding the traffic to safer point and takes the ACFT to hold for an appropriate period for ATC.

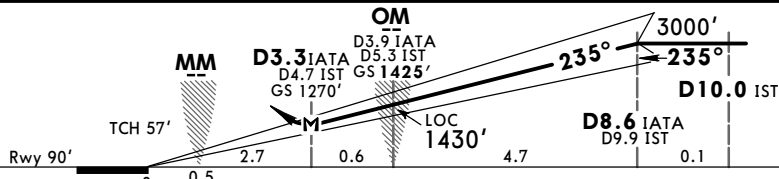

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II		3000'	IST
ILS GS or LOC Descent Angle	3.20°	396	510	566	679	793	906	REIL PAPI	112.5	R-090
MAP at D3.3 IATA/D4.7 IST										LT

Standard		STRAIGHT-IN LANDING RWY 23				CEILING REQUIRED	
ILS				LOC (GS out)			
DA(H) 1270' (1180')				MDA(H) 1270' (1180')			
FULL/Limited		ALS out				ALS out	
A	ceil 2000' - CMV 5000m			ceil 2000' - CMV 5000m			
B							
C							
D							



PANS OPS

LTBA/IST
ATATURK

JEPPESEN
20 MAY 16 11-7 Eff 26 May

ISTANBUL, TURKEY
ILS DME Rwy 35L

BRIEFING STRIP™	ATIS Arrival		YESILKOY Approach/Radar									
	130.25		118.95	119.35	119.425	119.475	120.125	120.45	120.5	120.7	121.1	121.25
	YESILKOY Approach/Radar						YESILKOY Tower			North	Ground	South
	122.575		122.675	126.425	127.1	127.825	118.1	119.8	125.9	121.6	121.8	126.8
	LOC ISEF		Final Apch Crs		GS D3.9 ISEF		ILS DA(H)		Apt Elev 163'			
	111.5		354°		1360' (1258')		360' (258')		Rwy 102'			
	MISSED APCH: Climb STRAIGHT AHEAD to cross IS NDB at or above 1500', then turn LEFT climbing to cross CEK VOR/NDB at 5000' and hold.											
Alt Set: hPa		Rwy Elev: 4 hPa		Trans level: By ATC			Trans alt: 10000'			MSA IST VOR		

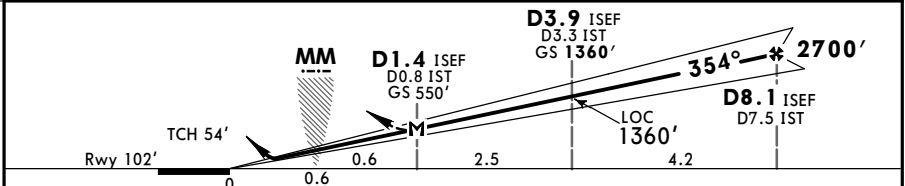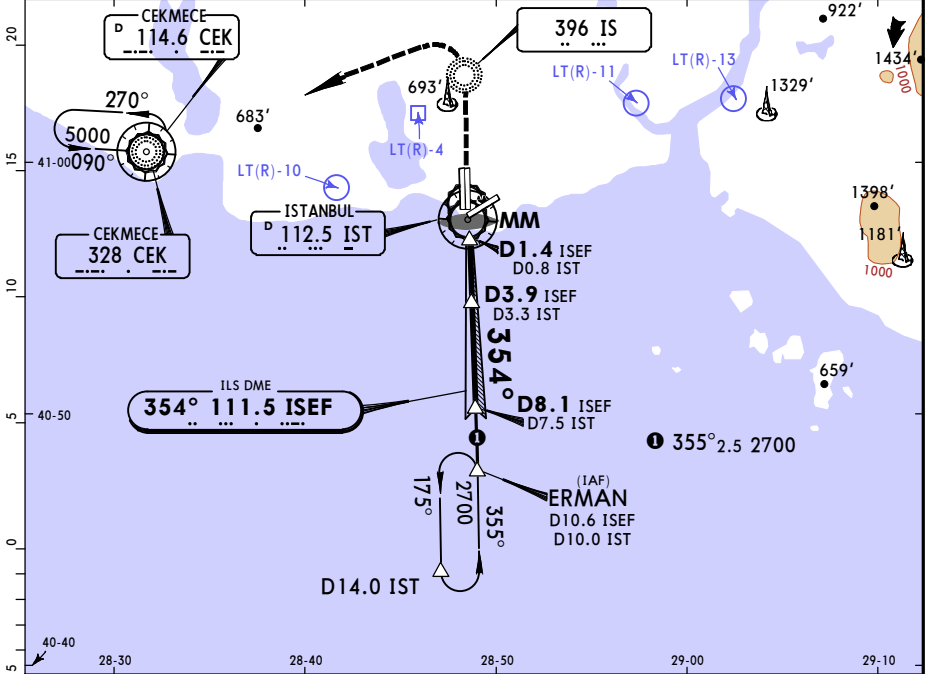


Gnd speed-Kts		70	90	100	120	140	160			HIALS-II		MIM 1500'		IS 396		
ILS GS or		3.00°	372	478	531	637	743	849			REIL PAPI		PAPI			
LOC Descent Angle																
MAP at D1.4 ISEF/D0.8 IST																
Standard		STRAIGHT-IN LANDING RWY 35L								CIRCLE-TO-LAND						
ILS				LOC (GS out)												
DA(H) 360'(258')				MDA(H) 550'(448')												
FULL/Limited		ALS out				ALS out		Max Kts		MDA(H)		VIS				
A					RVR 1500m				100		1100' (937')		3600m			
B									135							
C	RVR 800m		RVR 1300m						180		1100' (937')		4400m			
D					RVR 1700m		CMV 2100m		205							



LTBA/IST
ATATURK

JEPPESEN
20 MAY 16 11-8 Eff 26 May

ISTANBUL, TURKEY
ILS DME Rwy 35R

BRIEFING STRIP™

ATIS Arrival		YESILKOY Approach/Radar									
130.25	118.95	119.35	119.425	119.475	120.125	120.45	120.5	120.7	121.1	121.25	
YESILKOY Approach/Radar					YESILKOY Tower			North		Ground South	
122.575	122.675	126.425	127.1	127.825	118.1	119.8	125.9	121.6	121.8	126.8	
LOC IYES 111.3	Final Apch Crs 354°		GS D3.9 IYES 1335' (1235')		ILS DA(H) 313' (213')		Apt Elev 163' Rwy 100'				
MISSED APCH: Climb STRAIGHT AHEAD to cross IS NDB at or above 1500', then turn LEFT climbing to cross CEK VOR/NDB at 5000' and hold.											
Alt Set: hPa Rwy Elev: 4 hPa Trans level: By ATC Trans alt: 10000'											
ILS affected by FM radio broadcasting stations.											
MSA IST VOR											

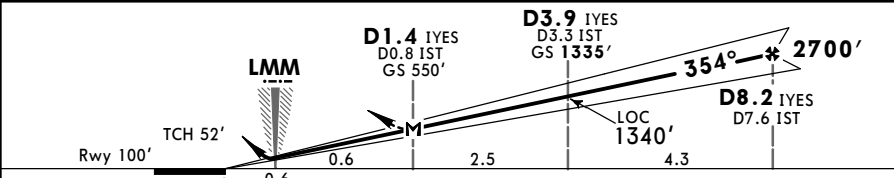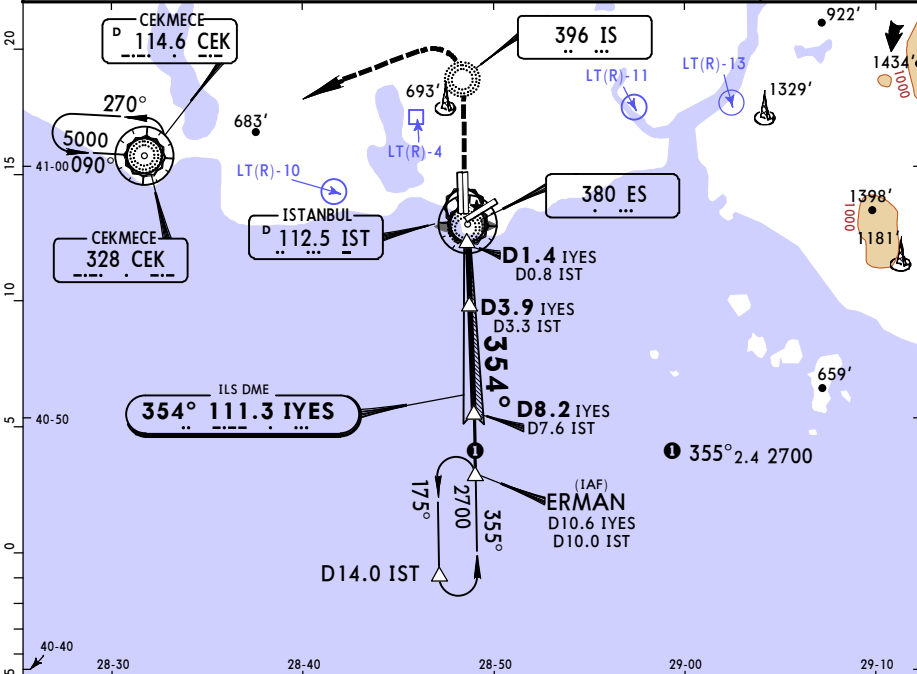

Gnd speed-Kts	70	90	100	120	140	160	ALSIF-II REIL PAPI PAPI		MIM 1500' ↑	IS 396
ILS GS or LOC Descent Angle	3.00°	372	478	531	637	743	849			
MAP at D1.4 IYES/D0.8 IST										


Standard		STRAIGHT-IN LANDING RWY 35R				CIRCLE-TO-LAND				
ILS				LOC (GS out)						
DA(H) 313' (213')				MDA(H) 550' (450')						
FULL		Limited		ALS out		Max Kts	MDA(H) VIS			
A	RVR 550m	RVR 750m	RVR 1200m	RVR 1400m	RVR 1500m	100	1100' (937')	3600m		
B						135				
C							CMV 2100m	180	1100' (937')	4400m
D								205		


LTBA/IST
ATATURK

20 MAY 16
Eff 26 May

JEPPesen
(11-8A)

ISTANBUL, TURKEY
CAT II ILS DME Rwy 35R

BRIEFING STRIP™	ATIS Arrival		YESILKOY Approach/Radar														
	130.25		118.95	119.35	119.425	119.475	120.125	120.45	120.5	120.7	121.1	121.25					
	YESILKOY Approach/Radar						YESILKOY Tower			Ground							
	122.575						122.675	126.425	127.1	127.825	118.1	119.8	125.9	121.6	121.8	126.8	
	LOC IYES		Final Apch Crs		GS D3.9 IYES		CAT II ILS RA 140' DA(H)		Apt Elev 163'								
	111.3		354°		1335' (1235')		230' (130')		Rwy 100'								
	MISSED APCH: Climb STRAIGHT AHEAD to cross IS NDB at or above 1500', then turn LEFT climbing to cross CEK VOR/NDB at 5000' and hold.																
Alt Set: hPa		Rwy Elev: 4 hPa		Trans level: By ATC		Trans alt: 10000'											
1. Special Aircrew & Acft Certification Required.																	
2. ILS affected by FM radio broadcasting stations.																	

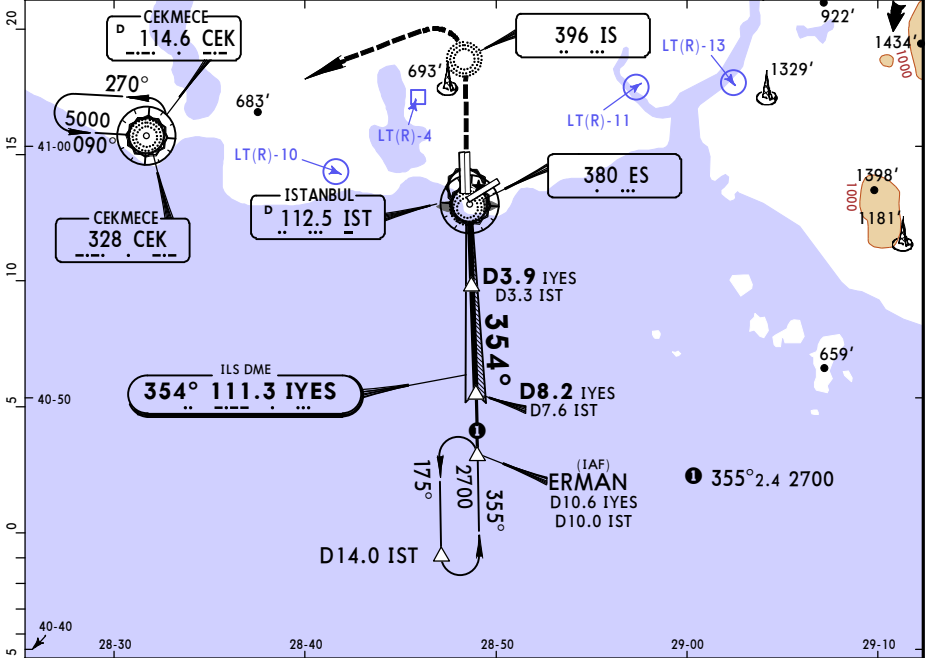

D3.9 IYES D3.3 IST GS 1335'		354°		2700'	
D8.2 IYES D7.6 IST					
Rwy 100'		0		0.6	
TCH 52'		3.1		4.3	
Gnd speed-Kts		70	90	100	120
GS		3.00°	372	478	531
			637	743	849
Standard		STRAIGHT-IN LANDING RWY 35R			
		CAT II ILS			
		ABCD			
		RA 140'			
		DA(H) 230' (130')			
		RVR 400m			

LTBA/IST
ATATURK


JEPPESEN
20 MAY 16
Eff 26 May




13-1

MISSED APCH CLIMB
GRAD MIM 3.5%

ISTANBUL, TURKEY
VORTAC Rwy 05

BRIEFING STRIP

ATIS Arrival		YESILKOY Approach/Radar									
130.25	118.95	119.35	119.425	119.475	120.125	120.45	120.5	120.7	121.1	121.25	
YESILKOY Approach/Radar					YESILKOY Tower			North		Ground South	
122.575	122.675	126.425	127.1	127.825	118.1	119.8	125.9	121.6	121.8	126.8	
VOR IST 112.5	Final Apch Crs 059°	Minimum Alt D4.5 IST 1600' (1507')		MDA(H) 470' (377')		Apt Elev 163'					
MISSED APCH: Climb on R-053 IST to cross D5.5 IST at or above 1500'. Proceed to cross BKZ VOR at 4000' and hold.											
Alt Set: hPa		Rwy Elev: 3 hPa		Trans level: By ATC		Trans alt: 10000'		MSA IST VOR			

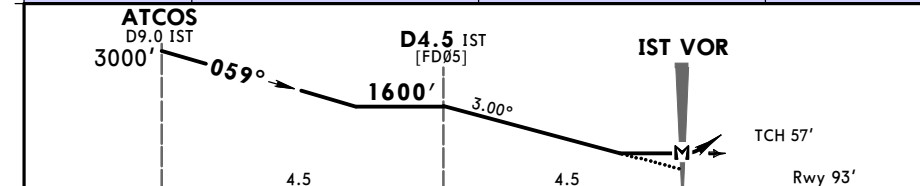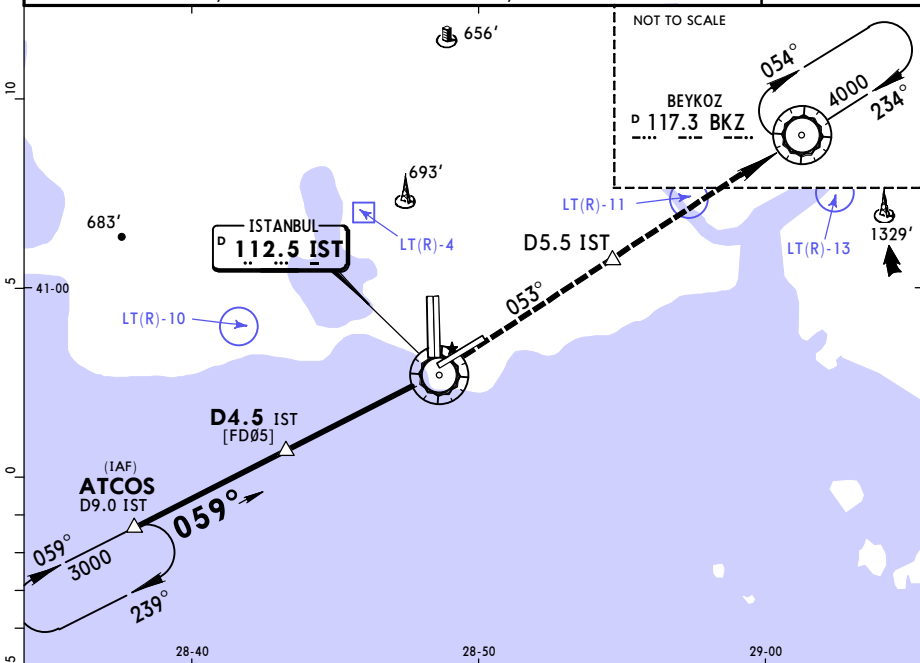

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II REIL PAPI	MIM 1500'	IST 112.5	D5.5 IST
Descent Angle	3.00°	372	478	531	637	743		on R-053		
MAP at IST VOR										

Standard						CIRCLE-TO-LAND				
STRAIGHT-IN LANDING RWY 05										
Missed apch climb gradient mim 3.5%										
MDA(H) 470' (377')										
						Max Kts				
						100				
						135				
						180				
						205				
							MDA(H)		VIS	
A	1000m		1500m				1100' (937')		3600m	
B										
C	1400m		1800m				1100' (937')		4400m	
D										

PANS OPS



LTBA/IST
ATATURK

JEPPesen
20 MAY 16
Eff 26 May 13-2

ISTANBUL, TURKEY
MISSED APCH CLIMB
GRAD MIM 3.5%
VOR Rwy 05

BRIEFING STRIP™

ATIS Arrival		YESILKOY Approach/Radar																				
130.25		118.95		119.35		119.425		119.475		120.125		120.45		120.5		120.7		121.1		121.25		
YESILKOY Approach/Radar										YESILKOY Tower					North		Ground		South			
122.575		122.675		126.425		127.1		127.825		118.1		119.8		125.9		121.6		121.8		126.8		
VOR IST 112.5		Final Apch Crs 059°		Minimum Alt No FAF		MDA(H) 470' (377')		Apt Elev 163' Rwy 93'		180° 3500' 3000' 270° 5000' 360° MSA IST VOR												
MISSED APCH: Climb on R-053 IST to cross BKZ VOR at 4000' and hold.																						
Alt Set: hPa Rwy Elev: 3 hPa Trans level: By ATC Trans alt: 10000' Procedure turn restricted to MAX 185 KT.																						

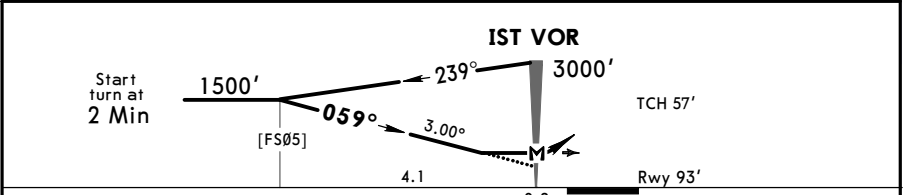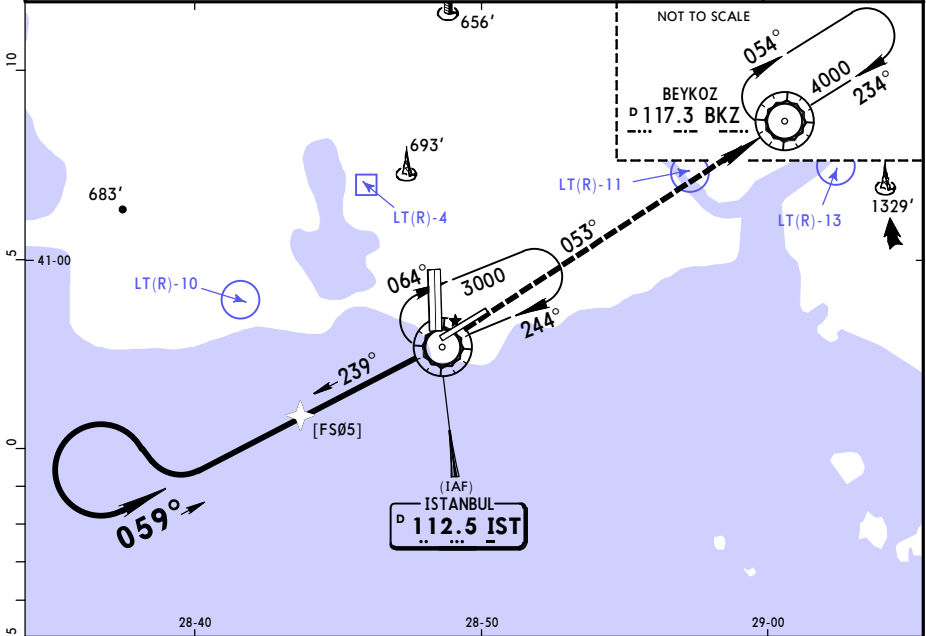

Gnd speed-Kts	70	90	100	120	140	160		4000' on 112.5 IST R-053
Descent Angle	3.00°	372	478	531	637	743		
MAP at IST VOR								

Standard				CIRCLE-TO-LAND			
STRAIGHT-IN LANDING RWY 05 CDFA Missed apch climb gradient mim 3.5%				non-CDFA			
MDA(H) 470' (377')		MDA(H) 470' (377')		Max Kts		MDA(H)	
ALS out		ALS out		100		VIS	
A	1000m	1500m	1200m	1900m	135	1100' (937')	3600m
B					180	1100' (937')	4400m
C					205		
D							


PANS OPS


LTBA/IST
ATATURK

JEPPESEN
20 MAY 16 13-3 Eff 26 May

ISTANBUL, TURKEY
VORTAC Rwy 17L

BRIEFING STRIP 1M

ATIS Arrival		YESILKOY Approach/Radar										
130.25	118.95	119.35	119.425	119.475	120.125	120.45	120.5	120.7	121.1	121.25		
YESILKOY Approach/Radar					YESILKOY Tower				North		Ground South	
122.575	122.675	126.425	127.1	127.825	118.1	119.8	125.9	121.6	121.8	126.8		
VOR IST 112.5		Final Apch Crs 174°		Minimum Alt VURAL 1800' (1643')		MDA(H) 1010' (853')		Apt Elev 163' Rwy 157'				
MISSED APCH: Climb on 174° to 2500', then turn RIGHT climbing to cross CEK VOR/NDB at 5000' and hold.												
Alt Set: hPa		Rwy Elev: 6 hPa		Trans level: By ATC		Trans alt: 10000'						
Racetack MAX 185 KT.												
										MSA IST VOR		

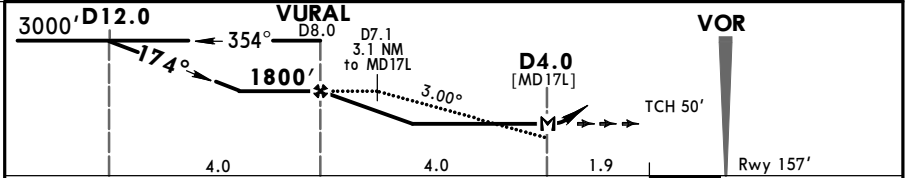

Gnd speed-Kts	70	90	100	120	140	160	ALSF-II		2500'	on	174°
Descent Angle	3.00°	372	478	531	637	743	849	REIL	PAPI	PAPI	
MAP at D4.0											


Standard				STRAIGHT-IN LANDING RWY 17L		CIRCLE-TO-LAND			
				MDA(H) 1010' (853')					
				ALS out		Max	MDA(H)	VTS	
A	2700m			3400m		100	1100'	(937')	3600m
B						135			
C	3500m			4200m		180	1100'	(937')	4400m
D						205			


LTBA/IST
ATATURK

JEPPesen
20 MAY 16 13-4 Eff 26 May

ISTANBUL, TURKEY
VOR DMÉ Rwy 23

BRIEFING STRIP™

ATIS Arrival		YESILKOY Approach/Radar									
130.25	118.95	119.35	119.425	119.475	120.125	120.45	120.5	120.7	121.1	121.25	
YESILKOY Approach/Radar					YESILKOY Tower			North		Ground South	
122.575	122.675	126.425	127.1	127.825	118.1	119.8	125.9	121.6	121.8	126.8	
VOR BKZ 117.3		Final Apch Crs 233°		Minimum Alt D9.0 BKZ 2500' (2410')		MDA(H) 800' (710')		Apt Elev 163' Rwy 90'			
MISSED APCH: Climb on 235° to 2500', then turn RIGHT climbing to cross CEK VOR/NDB at 4000' and hold.											
Alt Set: hPa		Rwy Elev: 3 hPa		Trans level: By ATC		Trans alt: 10000'		MSA IST VOR			

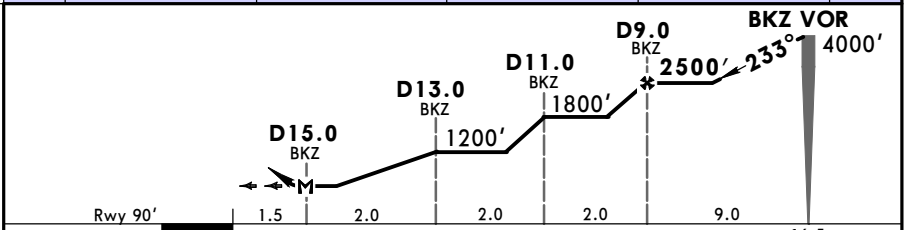

MAP at D15.0 BKZ					HIALS-II REIL PAPI		2500' on 235°	
------------------	--	--	--	--	-----------------------	--	---------------	--

STRAIGHT-IN LANDING RWY 23				CIRCLE-TO-LAND			
MDA(H) 800' (710')							
		ALS out		Max Kts			
A	3100m	3500m		100			
B				135	1100' (937') 3600m		
C	3300m	3700m		180			
D				205	1100' (937') 4400m		


PANS OPS



LTBA/IST
ATATURK

JEPPesen
20 MAY 16 **13-5** Eff 26 May

ISTANBUL, TURKEY
VORTAC Rwy 23

BRIEFING STRIP™

ATIS Arrival		YESILKOY Approach/Radar									
130.25	118.95	119.35	119.425	119.475	120.125	120.45	120.5	120.7	121.1	121.25	
YESILKOY Approach/Radar					YESILKOY Tower			North		Ground South	
122.575	122.675	126.425	127.1	127.825	118.1	119.8	125.9	121.6	121.8	126.8	
VOR IST 112.5	Final Apch Crs 230°		Minimum Alt D7.0 2000' (1910')		MDA(H) 710' (620')		Apt Elev 163' Rwy 90'				
MISSED APCH: Climb on 235° to 2500', then turn RIGHT climbing to cross CEK VOR/NDB at 4000' and hold.											
Alt Set: hPa		Rwy Elev: 3 hPa		Trans level: By ATC			Trans alt: 10000'		MSA IST VOR		

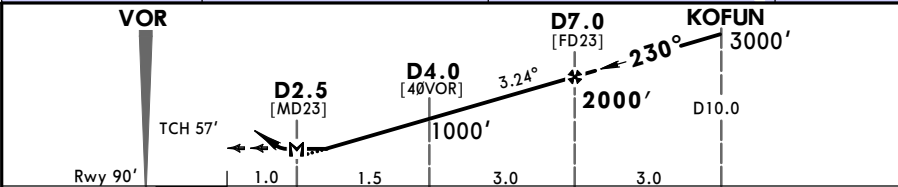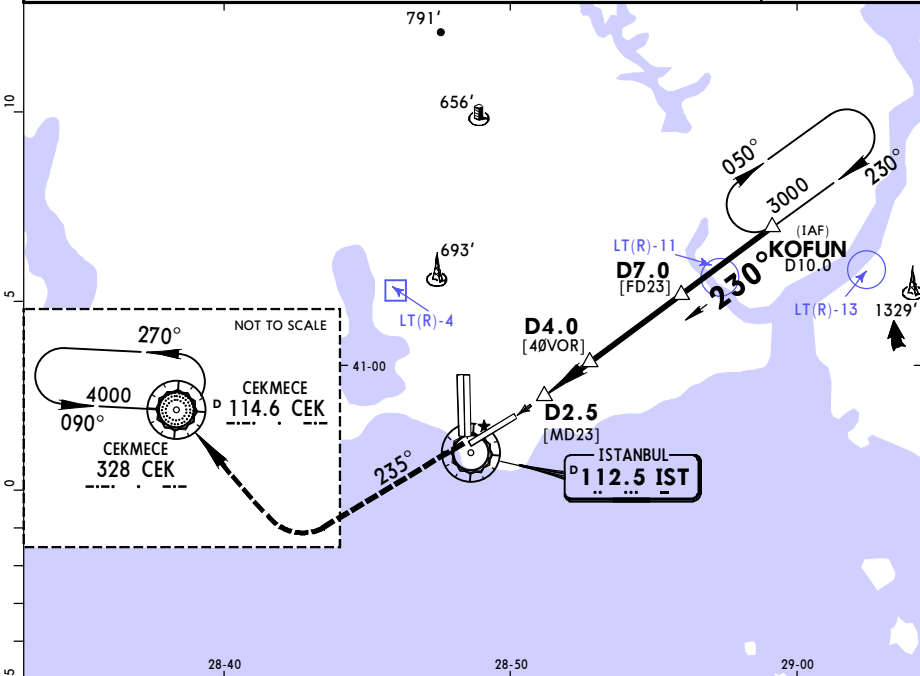

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II		2500' on 235°	
Descent Angle	3.24°	401	516	573	688	803	917	REIL		
MAP at D2.5										

Standard STRAIGHT-IN LANDING RWY 23					CIRCLE-TO-LAND				
MDA(H) 710' (620')									
ALS out					Max Kts	MDA(H)		VIS	
A	2200m		2600m		100	1100' (937')		3600m	
B					135				
C	2700m		3100m		180	1100' (937')		4400m	
D					205				



PANS OPS

LTBA/IST
ATATURK

JEPPESEN
20 MAY 16 13-7 Eff 26 May

ISTANBUL, TURKEY
VORTAC 2 Rwy 35L


BRIEFING STRIP™	ATIS Arrival		YESILKOY Approach/Radar																					
	130.25		118.95		119.35		119.425		119.475		120.125		120.45		120.5		120.7		121.1		121.25			
	YESILKOY Approach/Radar										YESILKOY Tower								North		Ground		South	
	122.575		122.675		126.425		127.1		127.825		118.1		119.8		125.9		121.6		121.8		126.8			
	VOR IST 112.5		Final Apch Crs 004°		Minimum Alt D5.0 1890' (1788')		MDA(H) 550' (448')		Apt Elev 163'															
	MISSED APCH: Climb on R-356 to 2500', then turn LEFT climbing to cross CEK VOR/NDB at 5000' and hold.																							
Alt Set: hPa		Rwy Elev: 4 hPa		Trans level: By ATC				Trans alt: 10000'				MSA IST VOR												

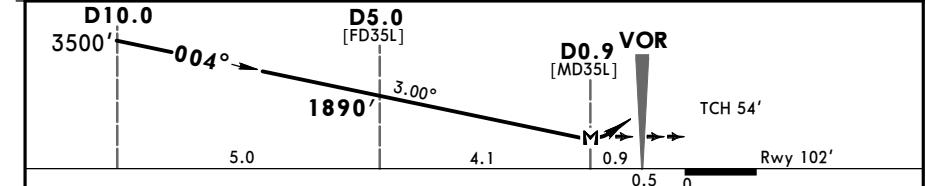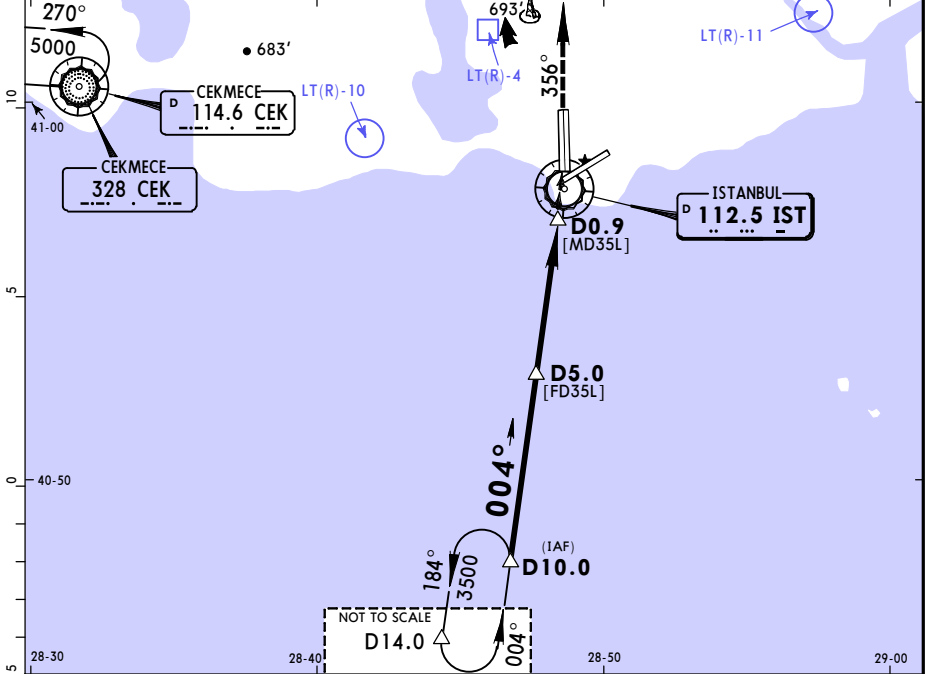

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II		2500' IST	
Descent Angle	3.00°	372	478	531	637	743	849	REIL	PAPI	R-356
MAP at D0.9										

Standard STRAIGHT-IN LANDING RWY 35L				CIRCLE-TO-LAND			
MDA(H) 550' (448')							
		ALS out		Max Kts	MDA(H)		VIS
A	1600m	2000m		100	1100' (937')		3600m
B				135			
C	2100m	2500m		180	1100' (937')		4400m
D				205			

10



MIM 1500' ▲	IS 396
--------------------------	------------------

CIRCLE-TO-LAND


PANS OPS



LTBA/IST
ATATURK

JEPPESEN
20 MAY 16 **13-9** Eff 26 May

ISTANBUL, TURKEY
VOR Rwy 35R

BRIEFING STRIP™

ATIS Arrival		YESILKOY Approach/Radar									
130.25	118.95	119.35	119.425	119.475	120.125	120.45	120.5	120.7	121.1	121.25	
YESILKOY Approach/Radar					YESILKOY Tower				North		Ground
122.575	122.675	126.425	127.1	127.825	118.1	119.8	125.9	121.6	South	121.8	126.8
VOR IST 112.5	Final Apch Crs 355°		Minimum Alt No FAF		MDA(H) 550' (450')		Apt Elev 163' Rwy 100'				
MISSED APCH: Climb STRAIGHT AHEAD to cross IS NDB at or above 1500', then turn LEFT climbing to cross CEK VOR/NDB at 5000' and hold.											
Alt Set: hPa		Rwy Elev: 4 hPa		Trans level: By ATC		Trans alt: 10000'					
Racetack MAX 185 KT.											
MSA IST VOR											

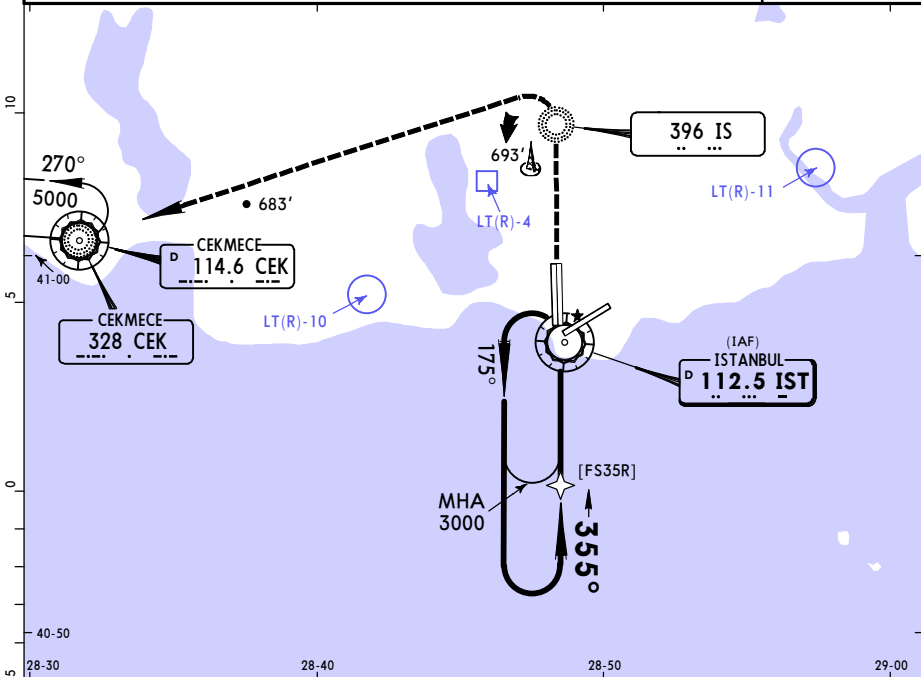

VOR		3000'	175°	1500'	2 Min
TCH 52'					
Rwy 100'		0.5	3.8	3.00°	355° [FS35R]
Gnd speed-Kts		70	90	100	120
Descent Angle		3.00°	372	478	531
MAP at VOR					
Standard		STRAIGHT-IN LANDING RWY 35R			
		CDFA		non-CDFA	
		MDA(H) 550' (450')		MDA(H) 550' (450')	
		ALS out		ALS out	
A		1400m	1800m	1600m	2300m
B		1600m	2300m	1800m	2500m
C		1600m	2300m	1800m	2500m
D		1600m	2300m	1800m	2500m
		Max Kts		MDA(H)	
		100		1100' (937')	
		135		3600m	
		180		1100' (937')	
		205		4400m	



PANS OPS



LTBA/IST
ATATURK

JEPPesen
20 MAY 16 (13-10) Eff 26 May

ISTANBUL, TURKEY
VORTAC

BRIEFING STRIP

ATIS Arrival		YESILKOY Approach/Radar									
130.25	118.95	119.35	119.425	119.475	120.125	120.45	120.5	120.7	121.1	121.25	
YESILKOY Approach/Radar					YESILKOY Tower			North	Ground South		
122.575	122.675	126.425	127.1	127.825	118.1	119.8	125.9	121.6	121.8	126.8	
VOR IST 112.5	Final Apch Crs 174°	Minimum Alt VURAL 1800' (1637')	MDA(H) 1100' (937')		Apt Elev 163'						
MISSED APCH: Climb on 174° to 2500', then turn RIGHT climbing to cross CEK VOR/NDB at 5000' and hold.											
Alt Set: hPa		Apt Elev: 6 hPa		Trans level: By ATC		Trans alt: 10000'					
Racetrack MAX 185 KT.											

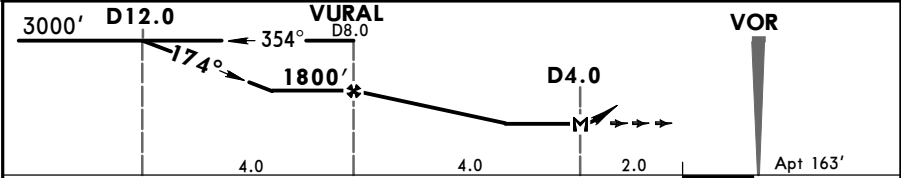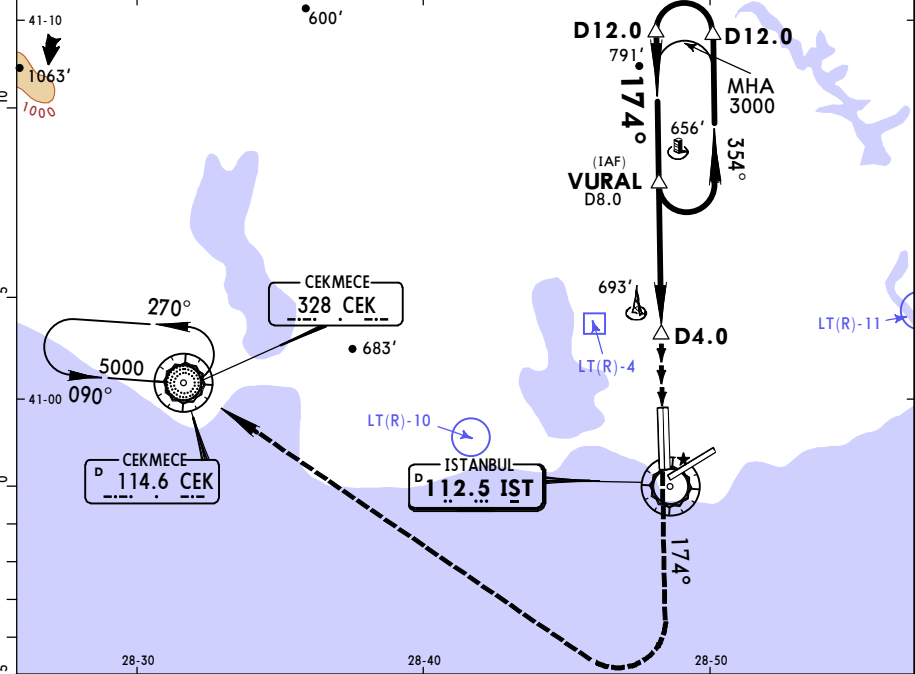

					Lighting - Refer to Airport Chart		2500' on 174°
MAP at D4.0							



Standard		STRAIGHT-IN LANDING	CIRCLE-TO-LAND	
			Max Kts	MDA(H) VIS
A			100	1100' (937') 3600m
B			135	
C		NOT AUTHORIZED	180	1100' (937') 4400m
D			205	

LTBA/IST
ATATURK

JEPPesen
20 MAY 16 **16-1** Eff 26 May

ISTANBUL, TURKEY
NDB DME Rwy 17L

ATIS Arrival		YESILKOY Approach/Radar													
130.25		118.95	119.35	119.425	119.475	120.125	120.45	120.5	120.7	121.1	121.25				
YESILKOY Approach/Radar						YESILKOY Tower			North		Ground				
122.575						122.675	126.425	127.1	127.825	118.1	119.8	125.9	121.6	121.8	126.8
NDB IS 396		Final Apch Crs 174°		Minimum Alt D10.7 IST 3000' (2843')		MDA(H) 1010' (853')		Apt Elev 163' Rwy 157'							
MISSED APCH: Climb on 174° from IS NDB to 2500', then turn RIGHT climbing to cross CEK VOR/NDB at 5000' and hold.															
Alt Set: hPa		Rwy Elev: 6 hPa		Trans level: By ATC		Trans alt: 10000'									

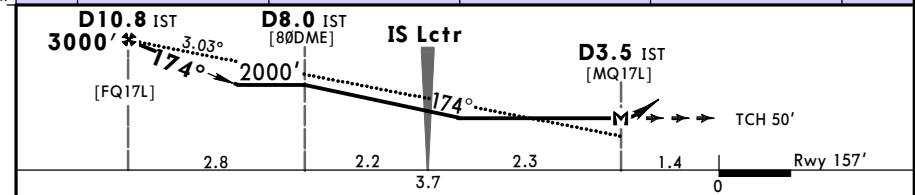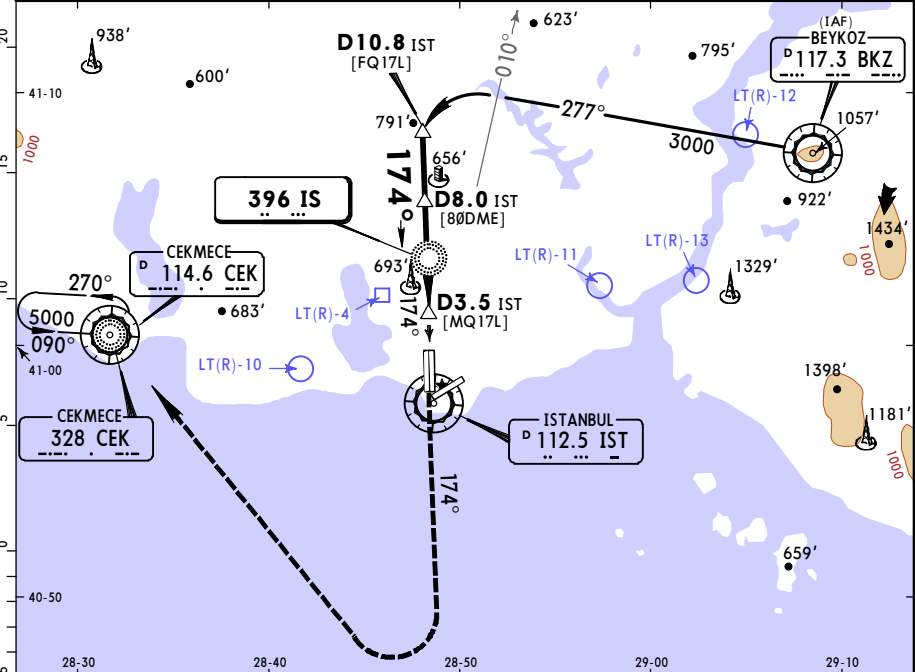

Gnd speed-Kts		70	90	100	120	140	160	ALSF-II REIL PAPI 2500' on 174°	
Descent Angle		3.03°	375	482	536	643	750		
MAP at D3.5 1ST									
Standard								STRAIGHT-IN LANDING RWY 17L	
								MDA(H) 1010' (853')	
								ALS out	
								Max Kts	
								100	
								135	
								180	
								205	
								MDA(H)	
								VIS	
A								2700m	
B								3400m	
C								1100' (937')	
D								3600m	
								1100' (937')	
								4400m	

Chart changes since cycle 12-2016

ADD = added chart, REV = revised chart, DEL = deleted chart.

ACT	PROCEDURE IDENT	INDEX	REV DATE	EFF DATE
ISTANBUL, (ATATURK - LTBA)				

TERMINAL CHART CHANGE NOTICES

No Chart Change Notices for Airport LTBA