AERODROME GROUND MOVEMENT AND PARKING CHART - ICAO

APRON 1 ELEV *677m*
APRON 2 ELEV *673m*

TWR	119.4
GROUND	121.7

ALMATY

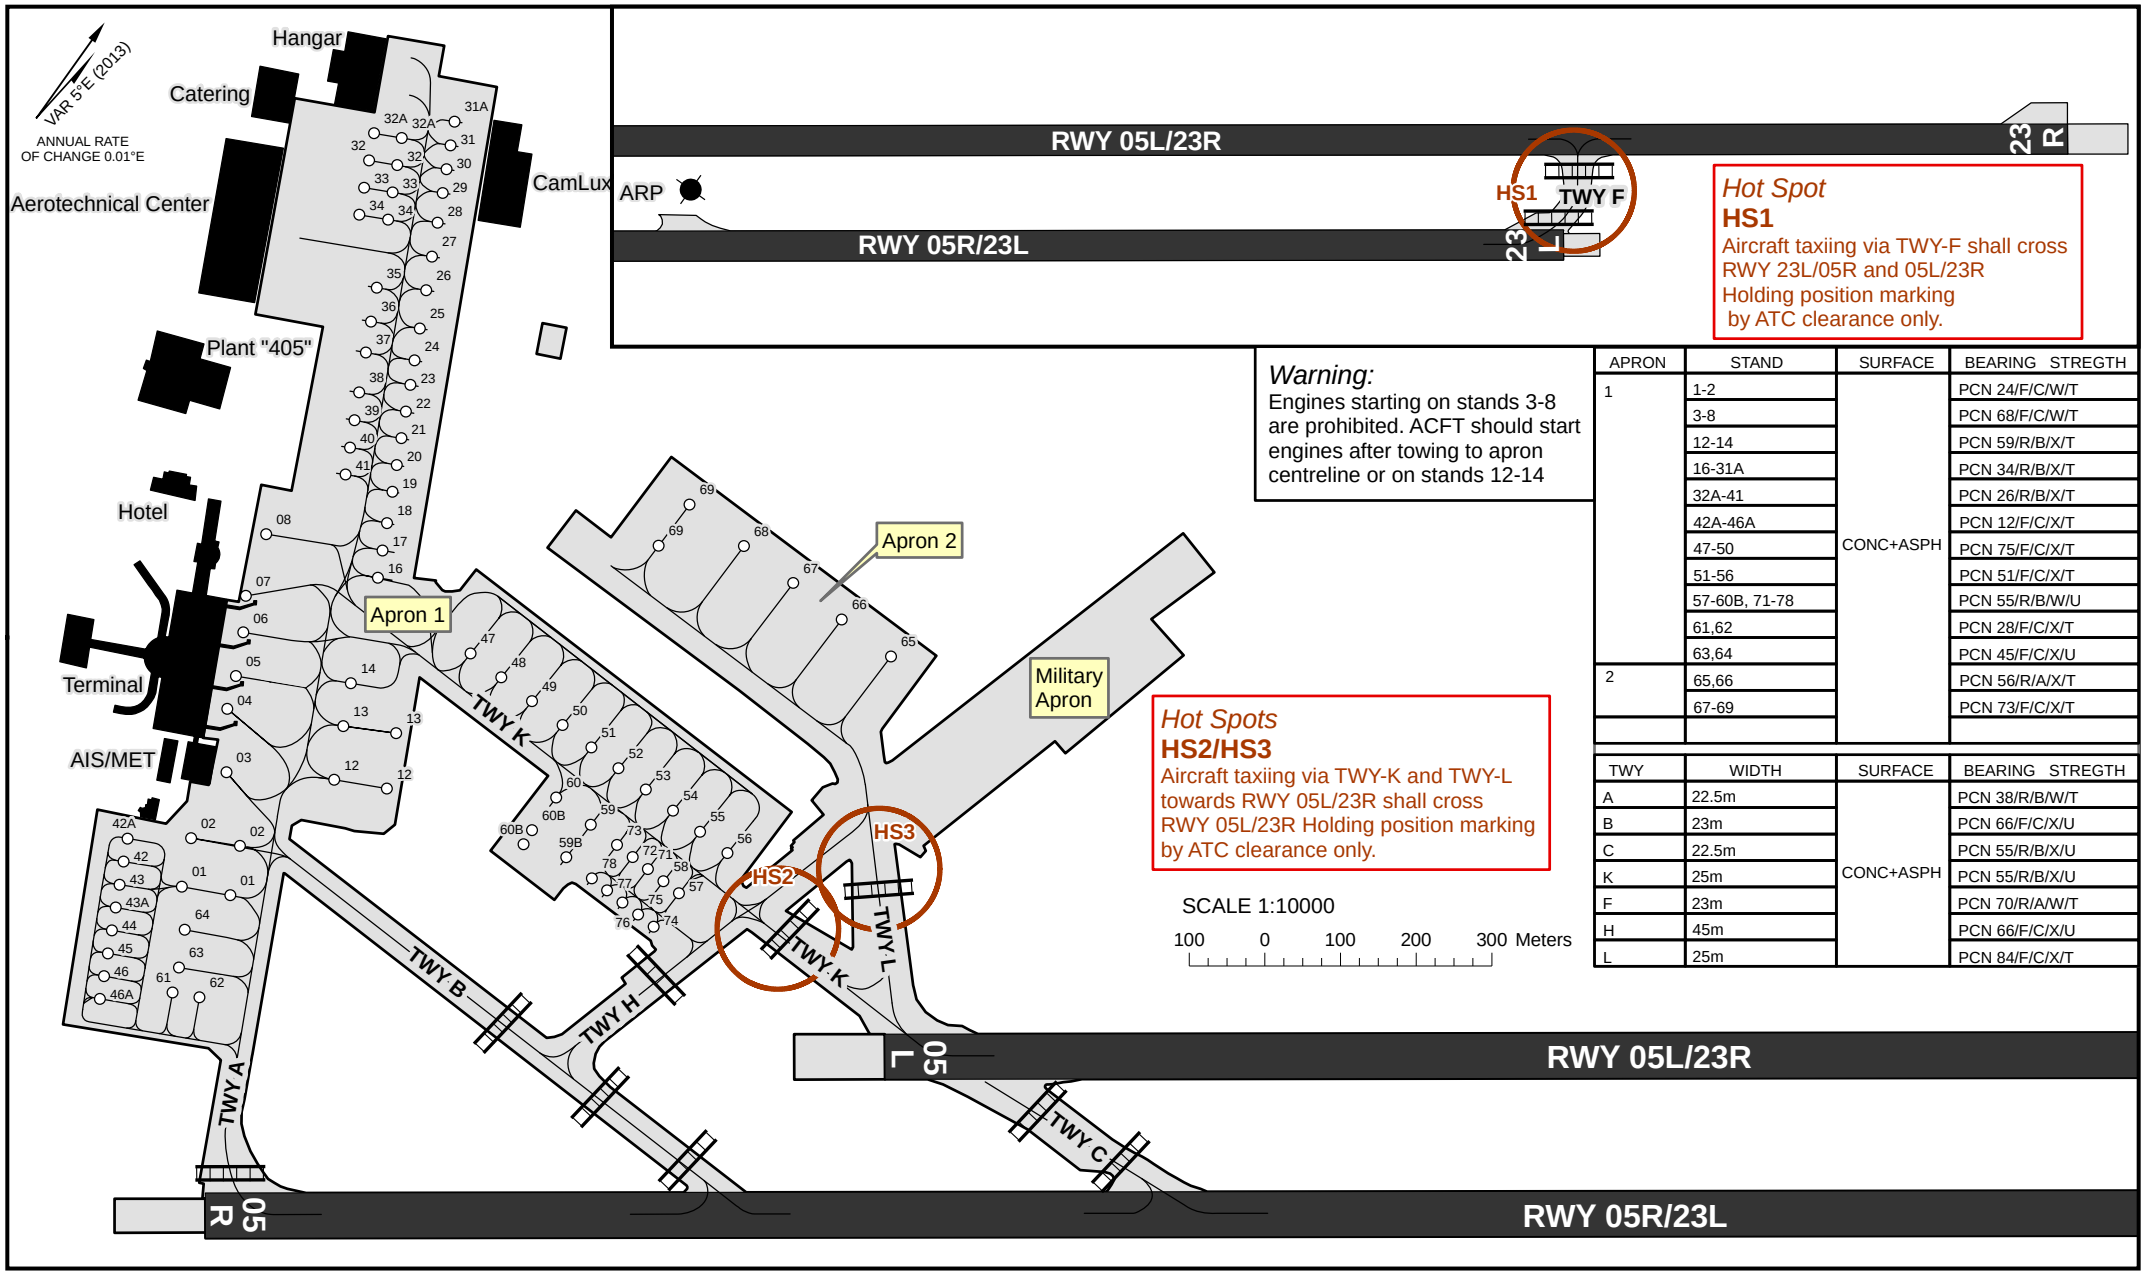

Warning:
Engines starting on stands 3-8 are prohibited. ACFT should start engines after towing to apron centreline or on stands 12-14

APRON	STAND	SURFACE	BEARING STREGTH
1	1-2	CONC+ASPH	PCN 24/F/C/W/T
	3-8		PCN 68/F/C/W/T
	12-14		PCN 59/R/B/X/T
	16-31A		PCN 34/R/B/X/T
	32A-41		PCN 26/R/B/X/T
	42A-46A		PCN 12/F/C/X/T
	47-50		PCN 75/F/C/X/T
	51-56		PCN 51/F/C/X/T
	57-60B, 71-78		PCN 55/R/B/W/U
	61,62		PCN 28/F/C/X/T
	63,64		PCN 45/F/C/X/U
2	65,66		PCN 56/R/A/X/T
	67-69		PCN 73/F/C/X/T

TWY	WIDTH	SURFACE	BEARING STREGTH
A	22.5m	CONC+ASPH	PCN 38/R/B/W/T
B	23m		PCN 66/F/C/X/U
C	22.5m		PCN 55/R/B/X/U
K	25m		PCN 55/R/B/X/U
F	23m		PCN 70/R/A/W/T
H	45m		PCN 66/F/C/X/U
L	25m		PCN 84/F/C/X/T

CHANGE: Editorial, Hot Spots