

ADD = Added chart, REV = Revised chart, DEL = Deleted chart.

No revision activity since Disc 22-2010

TERMINAL CHART NOTAMs

No Chart NOTAMs for Airport LROD

General Info

Oradea, ROU

N 47° 01.5' E 21° 54.1' Mag Var: 3.3°E

Elevation: 465'

Public, IFR, Control Tower, Customs, Landing Fee

Time Zone Info: GMT+2:00 uses DST

Runway Info

Runway 01-19 5906' x 98' concrete

Runway 01 (8.0°M) TDZE 465'

Lights: Edge, ALS

Runway 19 (188.0°M) TDZE 450'

Lights: Edge, ALS

Communications Info

Oradea Tower **120.2**


Oradea Tower Approach Control **120.2**

Notebook Info

LROD/OMR
Apt Elev **465'**
N47 01.5 E021 54.2

JEPPESEN
12 MAY 06 **(10-9)**

ORADEA, ROMANIA
ORADEA

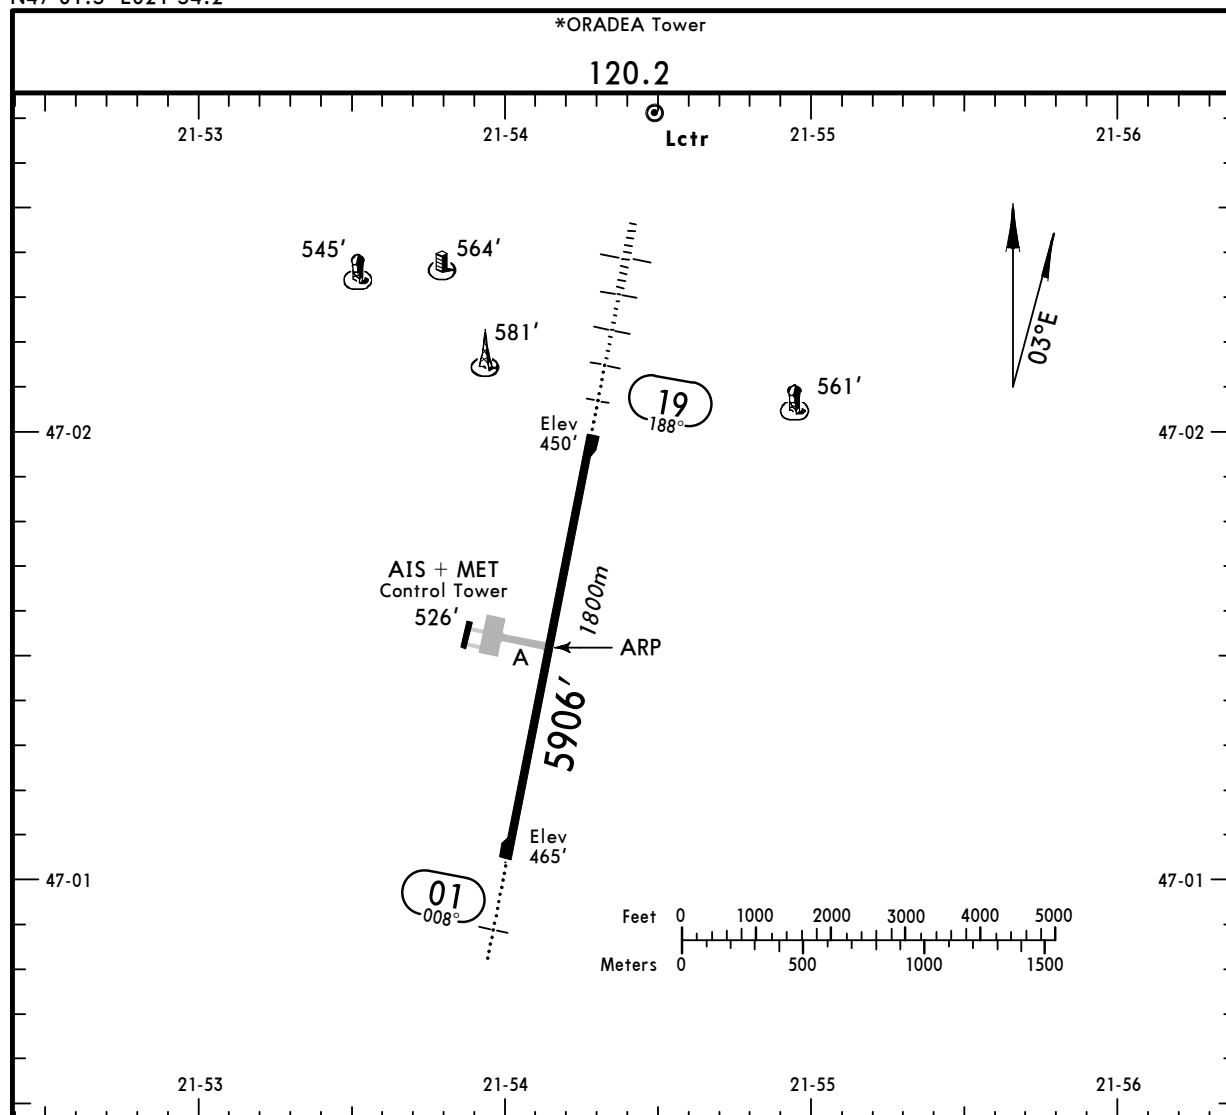

ADDITIONAL RUNWAY INFORMATION					
RWY				USABLE LENGTHS	
				LANDING BEYOND	WIDTH
				Threshold	
01	HIRL (60m) MIALS PAPI-L (2.7°)				98'
19	HIRL (60m) HIALS PAPI-L (2.7°)			4873' 1485m	30m


JAR-OPS			
TAKE-OFF 1			
All Rwys			
	LVP must be in force		
	RCLM (DAY only) or RL	RCLM (DAY only) or RL	NIL (DAY only)
A			
B	250m	400m	500m
C			
D	300m		
1 Operators applying U.S. Ops Specs: CL required below 300m.			



LROD/OMR
ORADEA


JEPPESEN
9 JUN 06 (11-1)

ORADEA, ROMANIA
ILS Rwy 19

BRIEFING STRIP

Approach Control through Tower *ORADEA Tower 120.2					
LOC IOD	Final Apch Crs	GS LOM	ILS DA(H)	Apt Elev	
109.5	188°	1680' (1230')	650' (200')	465' RWY 450'	
MISSED APCH: Climb STRAIGHT AHEAD to 1500', then turn RIGHT to ORA NDB and join holding at 3000'.					
Alt Set: hPa/MB (MM on req) Rwy Elev: 16 hPa Trans level: By ATC Trans alt: 3000'					MSA ORA NDB

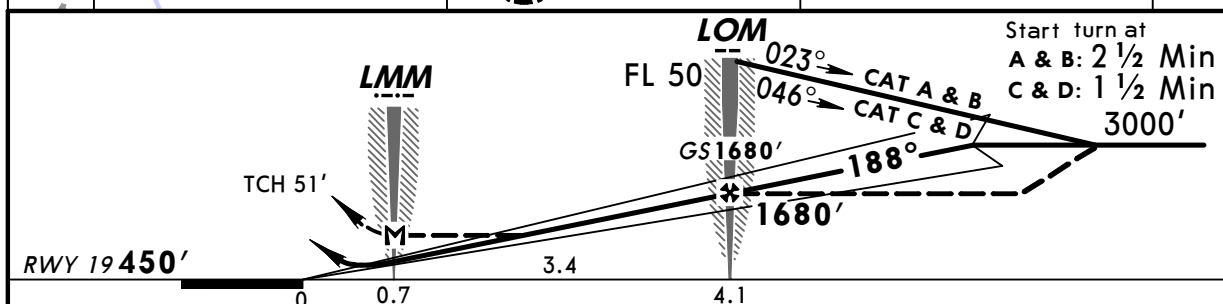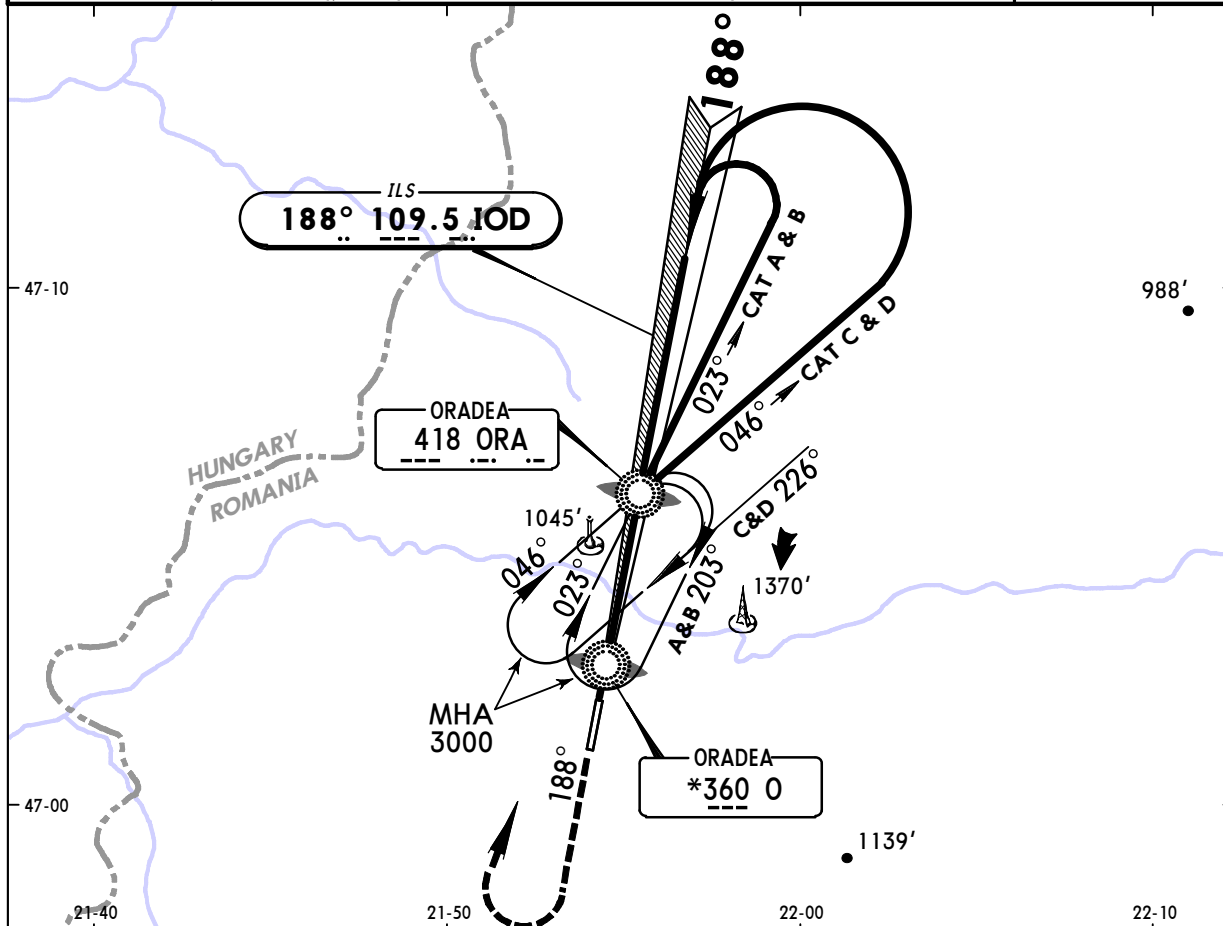

Gnd speed-Kts	70	90	100	120	140	160		1500'	3000'	ORA 418
ILS GS 2.70° or LOC Descent Gradient 4.7%	340	437	486	583	680	777				
MAP at LMM										

JAR-OPS STRAIGHT-IN LANDING RWY 19					CIRCLE-TO-LAND		
ILS		LOC (GS out)					
DA(H) 650' (200')		MDA(H) 990' (540')					
FULL	ALS out		LMM out	ALS out	Max Kts	MDA(H)	VIS
A		RVR 1000m	NOT AUTH	RVR 1500m	100	910' (445')	1500m
B					135	1000' (535')	1600m
C	RVR 550m	RVR 1000m		RVR 2000m	180	1770' (1305')	2400m
D					205	1770' (1305')	3600m

After LOC (GS out) apch: MDA(H) 990' (525').

CHANGES: Circling minimums.


© JEPPESEN SANDERSON, INC., 2003, 2006. ALL RIGHTS RESERVED.



LROD/OMR
ORADEA

JEPPESEN
9 JUN 06 **(16-1)**

ORADEA, ROMANIA
NDB Rwy 19

BRIEFING STRIP

Approach Control through Tower *ORADEA Tower 120.2					
NDB ORA 418	Final Apch Crs 188°	Minimum Alt LOM 1680' (1230')	MDA(H) 990' (540')	Apt Elev 465' RWY 450'	
MISSED APCH: Climb STRAIGHT AHEAD to 1500', then turn RIGHT to ORA NDB and join holding at 3000'.					
Alt Set: hPa/MB (MM on req) Rwy Elev: 16 hPa Trans level: By ATC Trans alt: 3000'					MSA ORA NDB

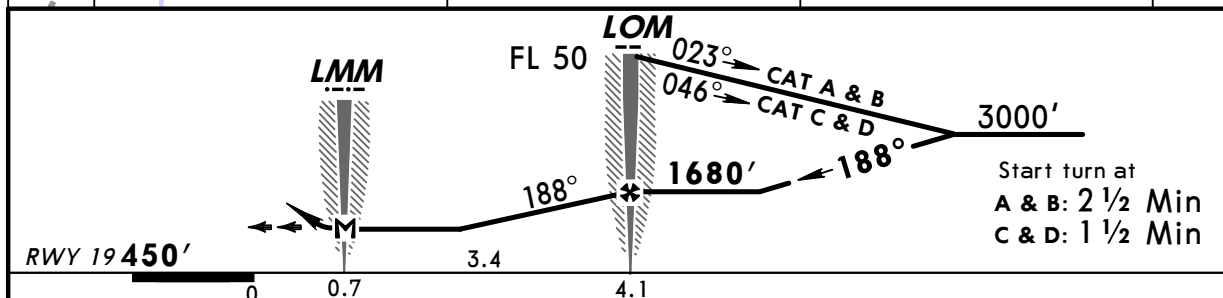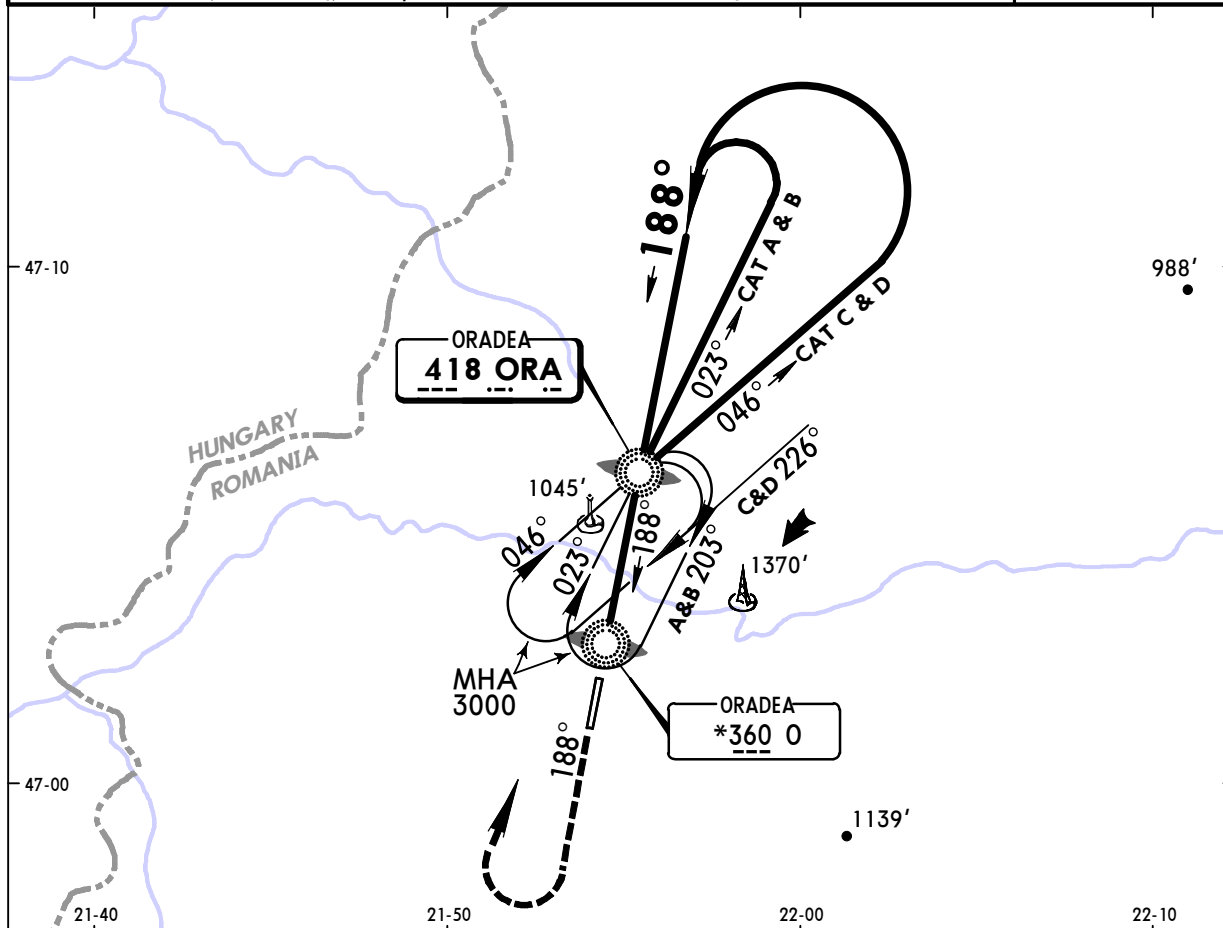

Gnd speed-Kts	70	90	100	120	140	160	HIALS			1500'	3000'	ORA 418
Descent Gradient 4.7%	333	428	476	571	666	762	PAPI			↑	RT	
MAP at LMM												

JAR-OPS STRAIGHT-IN LANDING RWY 19				CIRCLE-TO-LAND			
MDA(H) 990' (540')				Max Kts	MDA(H)	VIS	
A	RVR 1000m	ALS out		100	990' (525')	1500m	
B	RVR 1200m	RVR 1500m		135	1000' (535')	1600m	
C	RVR 1600m	RVR 2000m		180	1770' (1305')	2400m	
D	RVR 1600m			205	1770' (1305')	3600m	

PANS OPS 4