

List of pages in this Trip Kit

Trip Kit Index

Airport Information For LTAF

Terminal Charts For LTAF

Revision Letter For Cycle 15-2013

Change Notices

Notebook

General Information

Location: Adana Tur
IATA Code: ADA
Lat/Long: N36° 58.9' E035° 16.8'
Elevation: 65 ft

Airport Use: Public
Magnetic Variation: 5.0°E

Fuel Types: 100-130 Octane, Jet A-1
Repair Types: Minor Airframe, Minor Engine
Customs: Yes
Airport Type: IFR
Landing Fee: Yes
Control Tower: Yes
Jet Start Unit: No
LLWS Alert: No
Beacon: Yes

Sunrise: 0235 Z
Sunset: 1655 Z,

Runway Information

Runway: 05
Length x Width: 9022 ft x 148 ft
Surface Type: asphalt
TDZ-Elev: 54 ft
Lighting: Edge, ALS, REIL

Runway: 23
Length x Width: 9022 ft x 148 ft
Surface Type: asphalt
TDZ-Elev: 65 ft
Lighting: Edge, ALS, REIL

Communication Information


ATIS 119.225
Adana Ground Tower 121.9
Adana Tower 131.1 Air-Ground
Adana Tower 121.1
Incirlik Approach Control 126.5 Military
Incirlik Approach Control 36.23 Military


ATIS
119.22


Apt Elev
65'

Alt Set: hPa
Trans level: By ATC Trans alt: 10000'

KEMER ONE DELTA
(KEMER 1D) [KEME1D]
MANAZ ONE DELTA
(MANAZ 1D) [MANA1D]
MILBA ONE DELTA
(MILBA 1D) [MILB1D]
TARSU ONE DELTA
(TARSU 1D) [TARS1D]
RWY 23 ARRIVALS

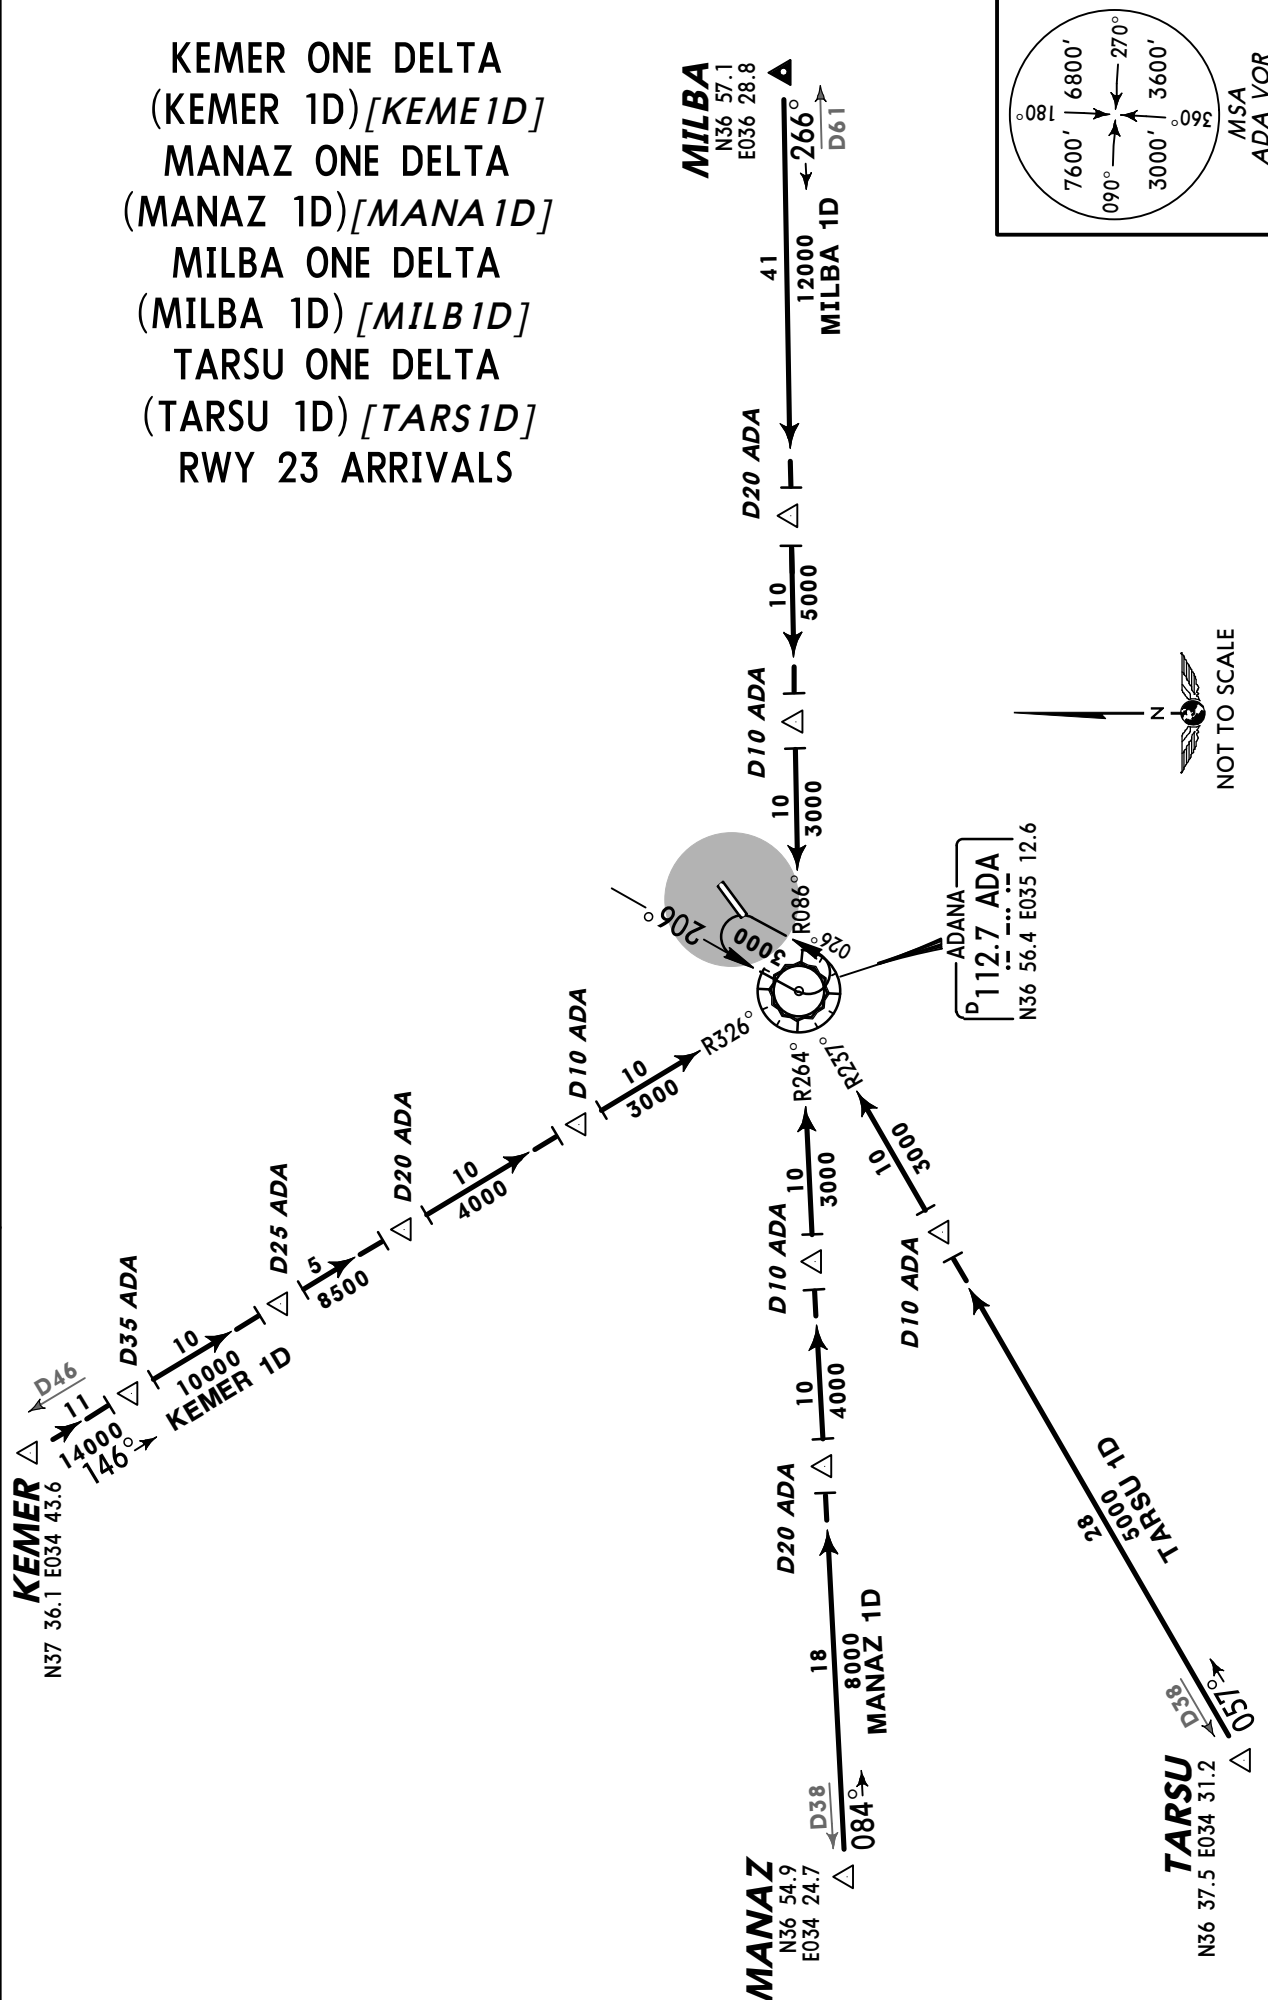

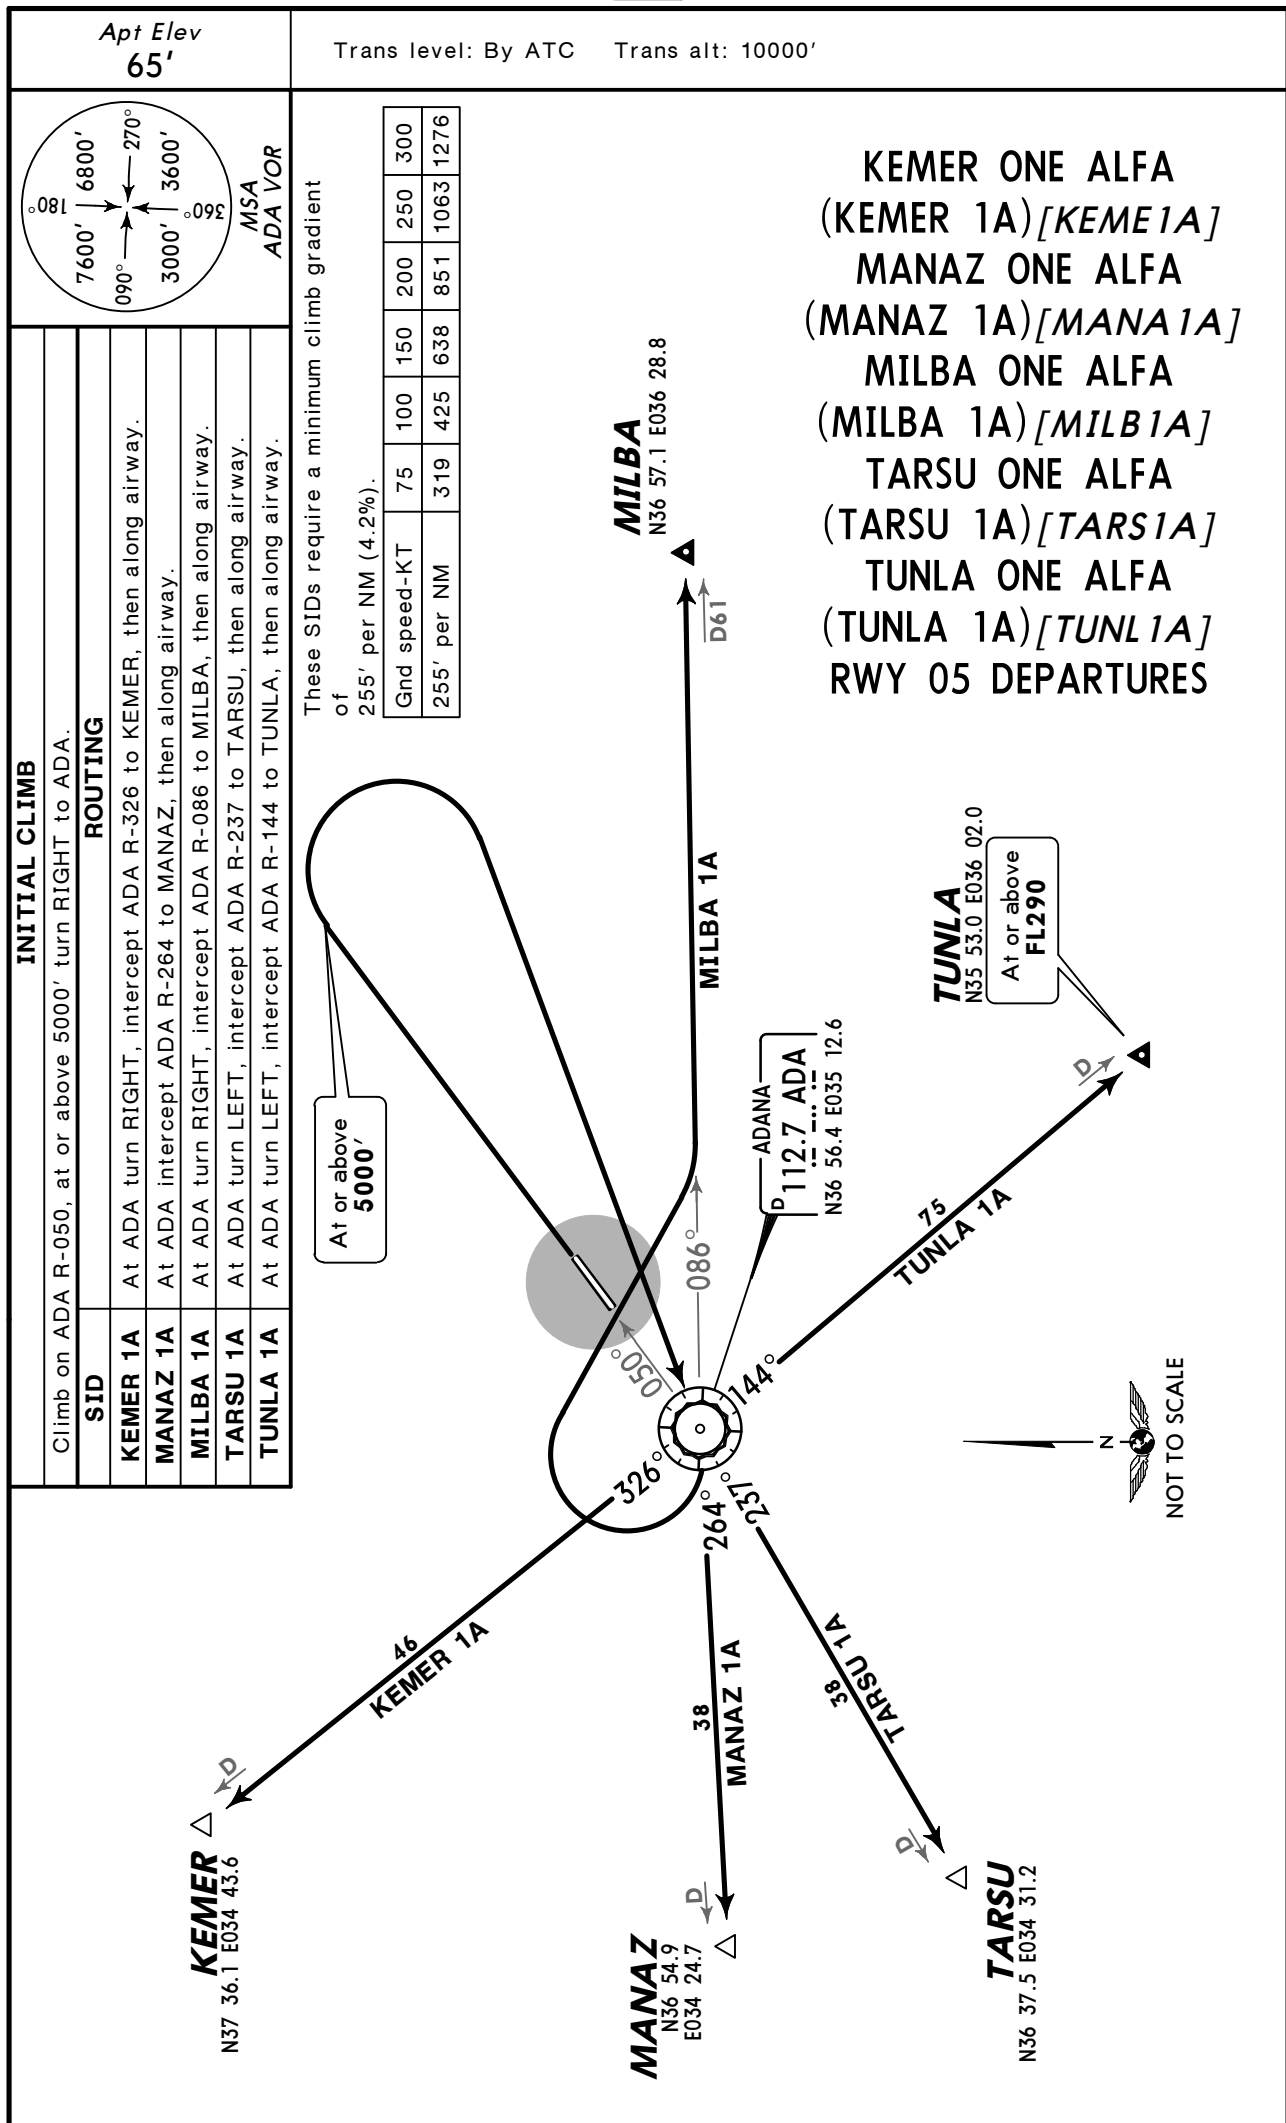


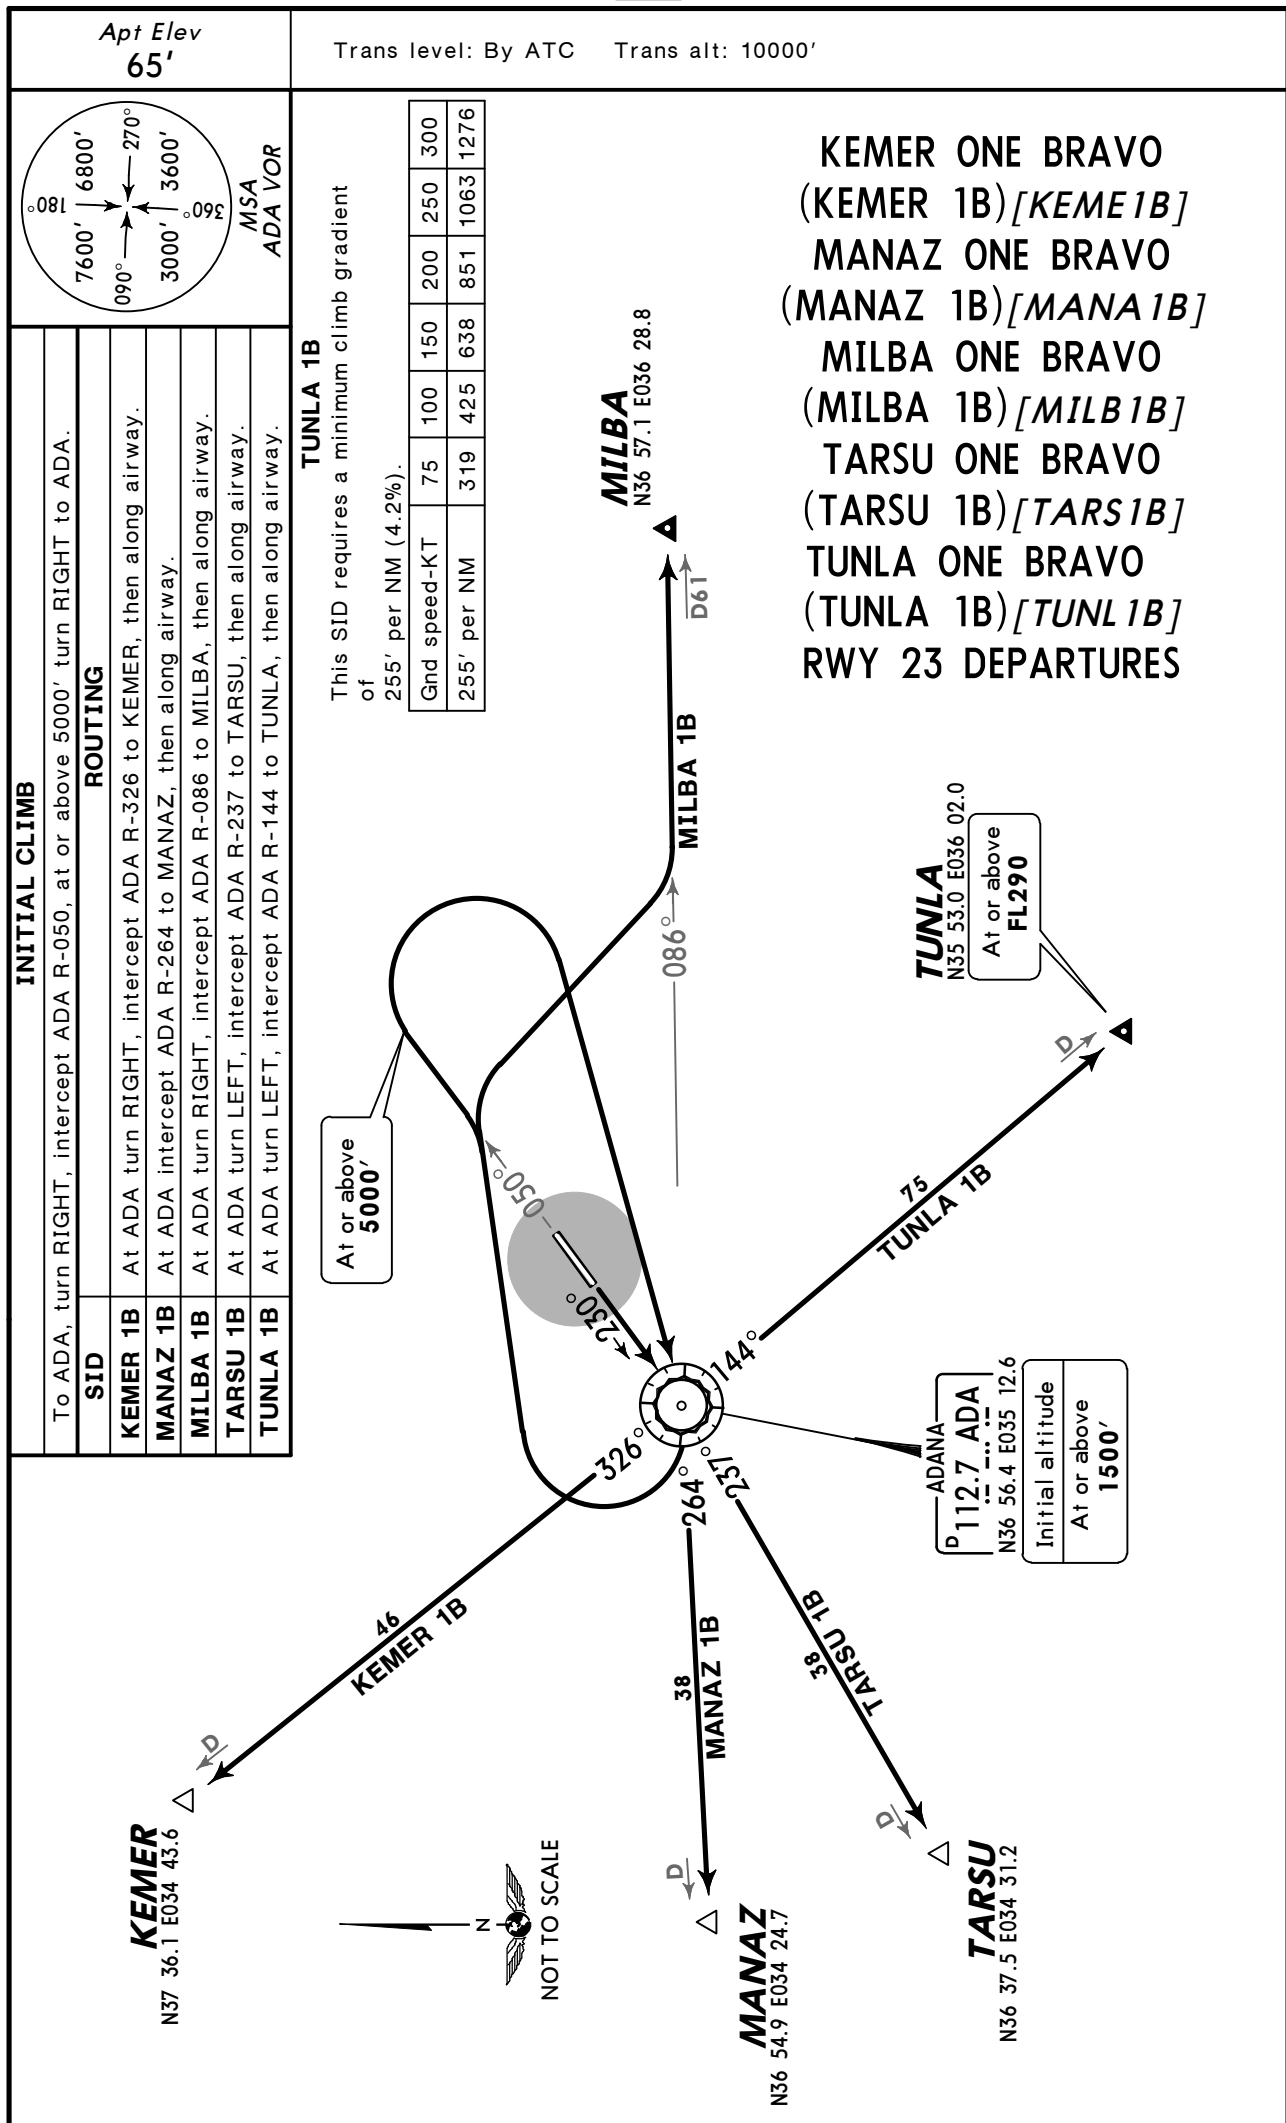

LTAF/ADA
Apt Elev 65'
N36 58.9 E035 16.8

JEPPesen
8 MAR 13 (20-9)

ADANA, TURKEY
ADANA

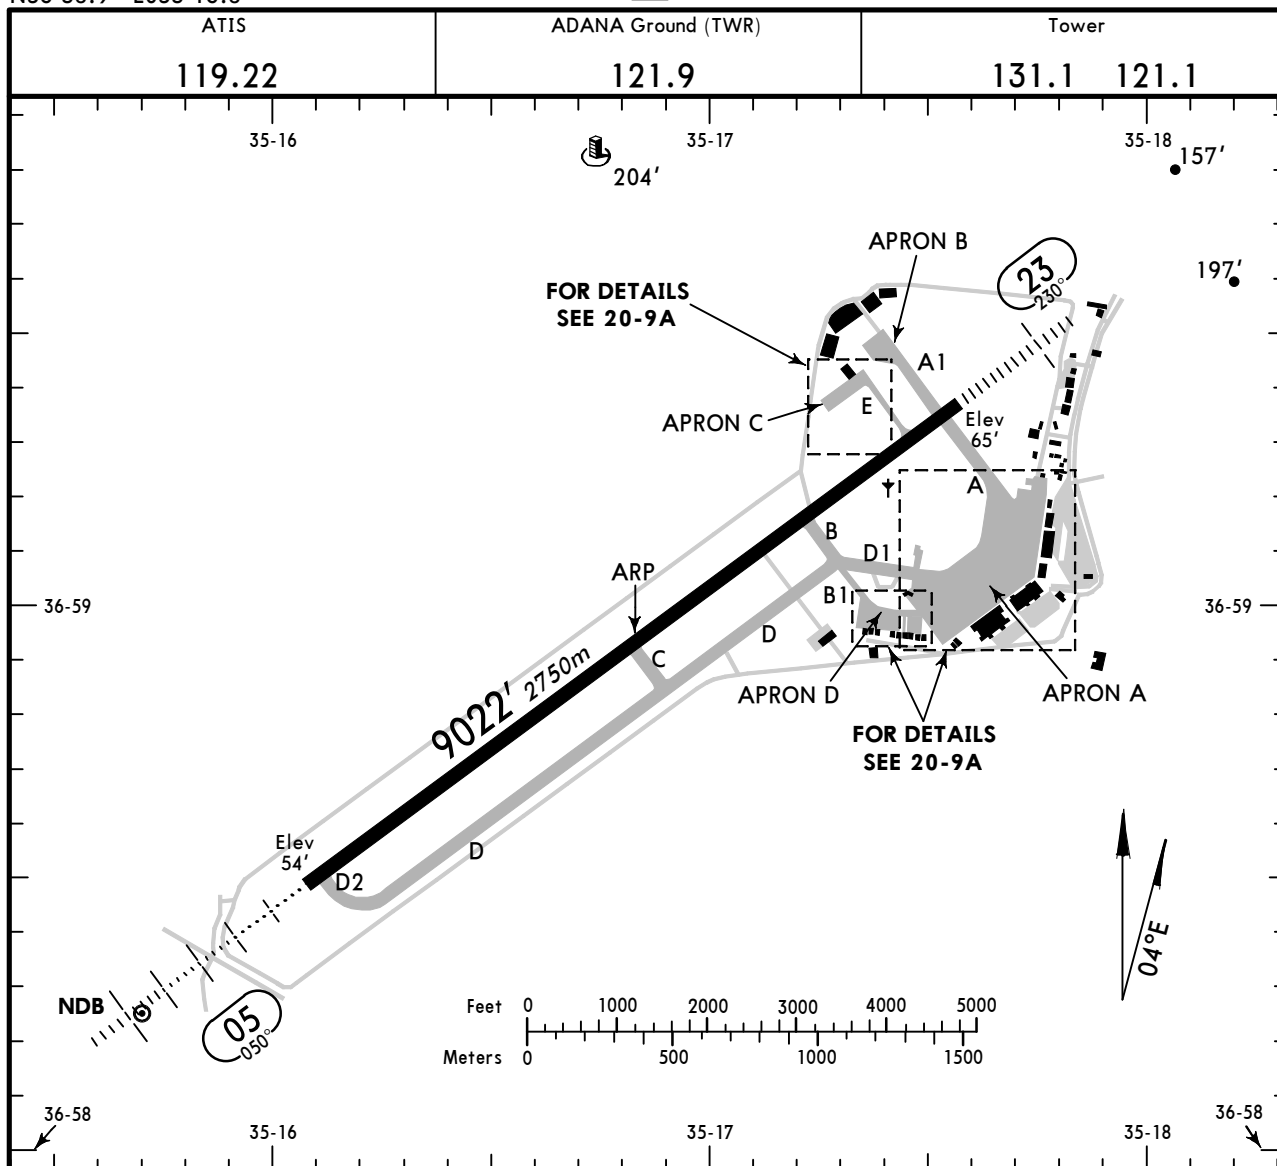

ADDITIONAL RUNWAY INFORMATION

RWY					USABLE LENGTHS		TAKE-OFF	WIDTH
					LANDING BEYOND			
					Threshold	Glide Slope		
05	HIRL (50m)	HIALS REIL PAPI (angle 3.0°)	RVR			8111' 2472m		147'
23	HIRL (50m)	ALS REIL PAPI (angle 3.0°)	RVR					45m

Standard




TAKE-OFF 1

	LVP must be in Force RCLM (Day only) or RL	RCLM (Day only) or RL	NIL (Day only)
A			
B	250m	400m	500m
C			
D	300m		

1 Operators applying U.S. Ops Specs: CL required below 300m.

CHANGES: Tower frequency.

© JEPPesen, 1997, 2013. ALL RIGHTS RESERVED.

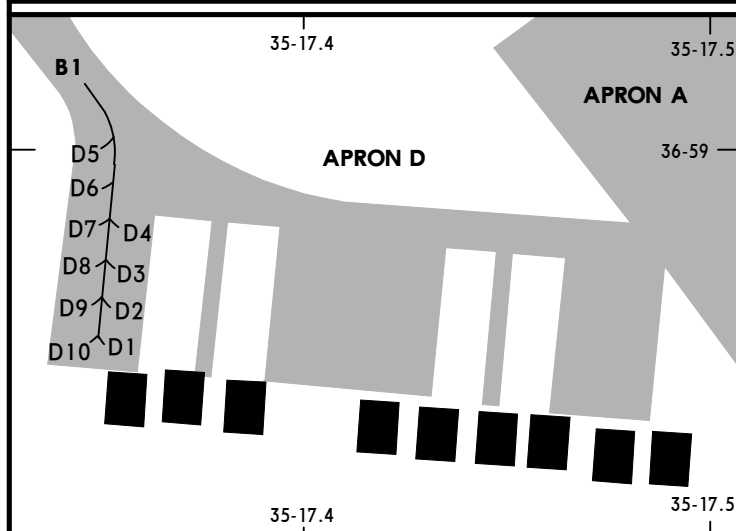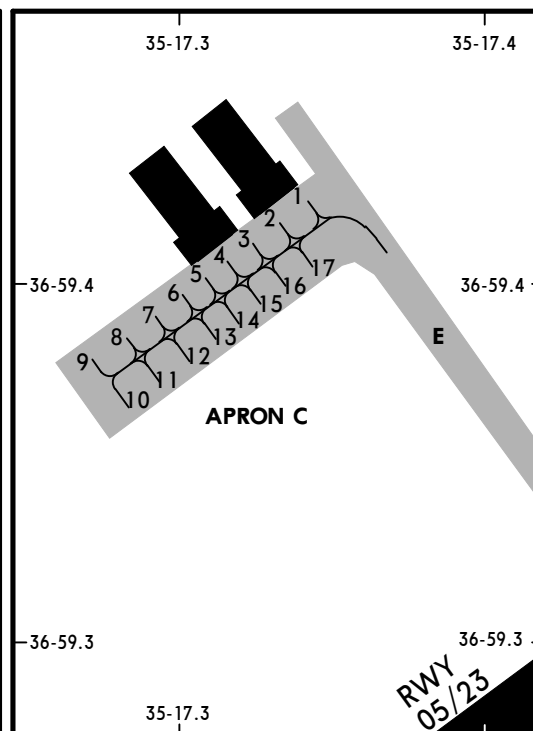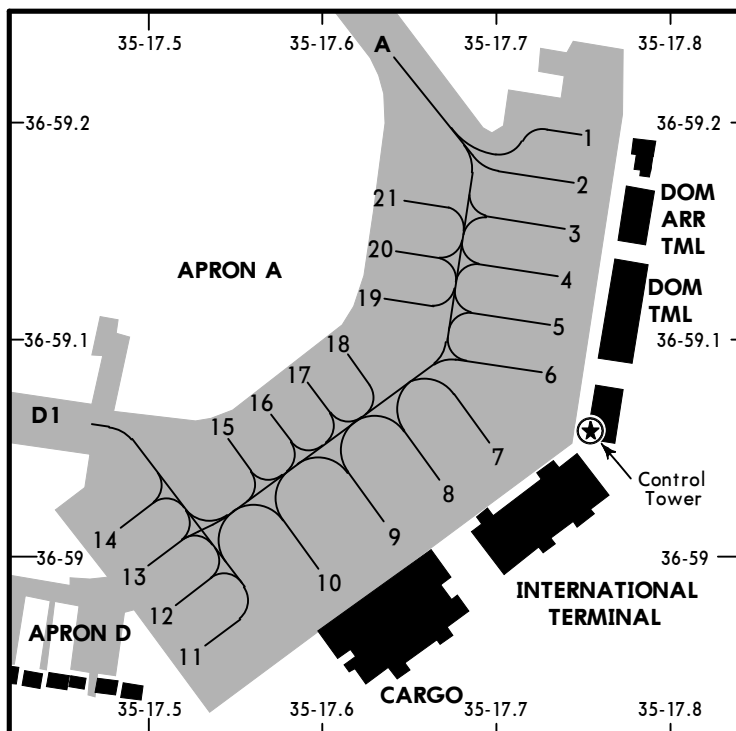

INS COORDINATES




STAND No.	COORDINATES	STAND No.	COORDINATES
APRON A		APRON C	
1 thru 3	N36 59.2 E035 17.8	1 thru 3	N36 59.4 E035 17.4
4 thru 6	N36 59.1 E035 17.8	4 thru 14	N36 59.4 E035 17.3
7 thru 9	N36 59.0 E035 17.7	15 thru 17	N36 59.4 E035 17.4
10, 11	N36 58.9 E035 17.6	APRON D	
12 thru 14	N36 59.0 E035 17.5	D1 thru D10	N36 59.0 E035 17.4
15 thru 18	N36 59.1 E035 17.6		
19, 20	N36 59.1 E035 17.7		
21	N36 59.2 E035 17.7		

LTAF/ADA
ADANA

JEPPESEN
12 APR 13 (21-1)

ADANA, TURKEY
ILS DME-1 Rwy 05

ATIS 119.22	INCIRLIK Approach (R) 126.5 118.0	ADANA Tower 131.1 121.1	Ground 121.9
LOC IADA 108.7	Final Apch Crs 050°	GS VOR 1210' (1156')	ILS DA(H) 304' (250')
Apt Elev 65' RWY 54'			
MISSED APCH: Climb on R-051 to 1000' within D10.0 ADA, then turn LEFT and climb to cross VOR at 3000' and hold.			
Alt Set: hPa	Rwy Elev: 2 hPa	Trans level: By ATC	Trans alt: 10000'

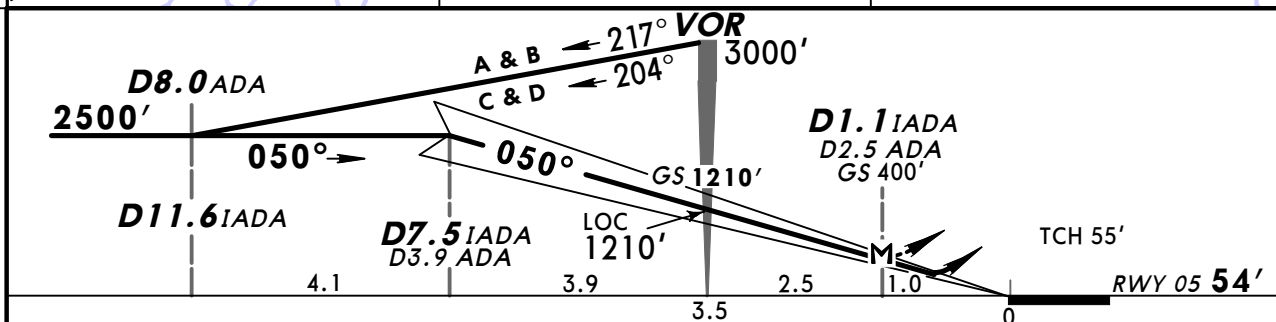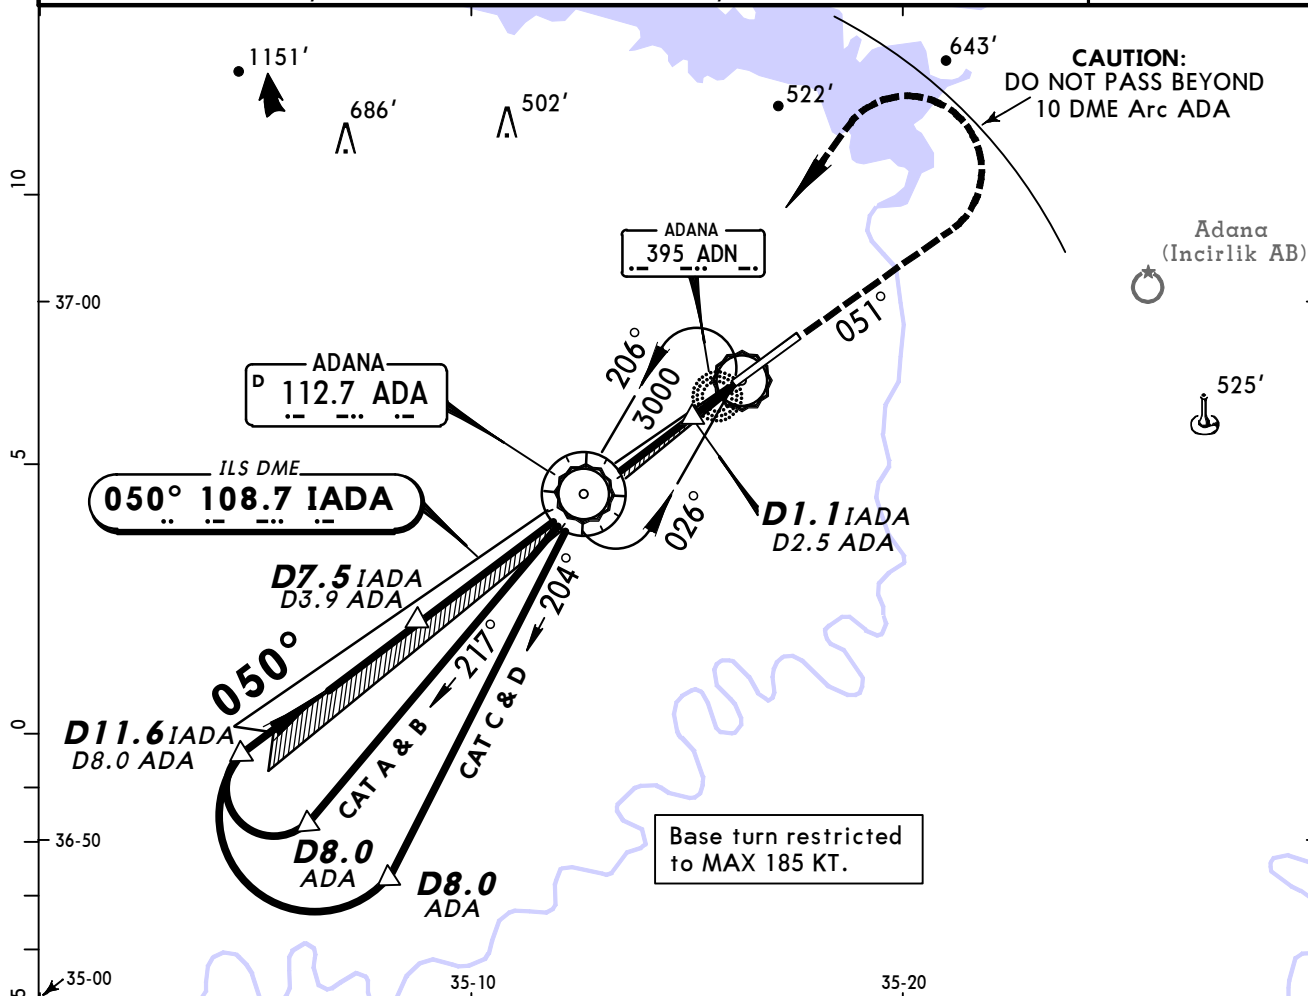

Gnd speed-Kts	70	90	100	120	140	160	HIALS	1000'	ADA	D10.0
ILS GS or							REIL PAPI	↑	on 112.7	within
LOC Descent Angle 3.00°	372	478	531	637	743	849	PAPI		R-051	ADA
MAP at D1.1 IADA/D2.5 ADA										

STRAIGHT-IN LANDING RWY 05					CIRCLE-TO-LAND	
ILS			LOC (GS out)		CAUTION:	
DA(H) 304' (250')			MDA(H) 400' (346')		Not authorized South of airport, or by ATC	
FULL	Limited	ALS out	ALS out		Max Kts	MDA(H) VIS
A			RVR 1500m		100	1200' (1135') 4800m
B			RVR 1600m		135	
C	RVR 550m	RVR 750m	RVR 1300m	RVR 900m	180	1200' (1135') 5000m
D					205	

CHANGES: Minimums.


© JEPPESEN, 1998, 2013. ALL RIGHTS RESERVED.

LTAF/ADA ADANA



12 APR 13 (21-2)

ADANA, TURKEY
ILS DME-2 Rwy 05

ATIS 119.22	INCIRLIK Approach (R) 126.5 118.0	ADANA Tower 131.1 121.1	Ground 121.9
LOC IADA 108.7	Final Apch Crs 050°	GS VOR 1210' (1156')	ILS DA(H) 304' (250')
Apt Elev 65' RWY 54'			
MISSED APCH: Climb on R-051 to 1000' within D10.0 ADA, then turn LEFT and climb to cross VOR at 3000' and hold.			
Alt Set: hPa	Rwy Elev: 2 hPa	Trans level: By ATC	Trans alt: 10000'



MSA
ADA VOR

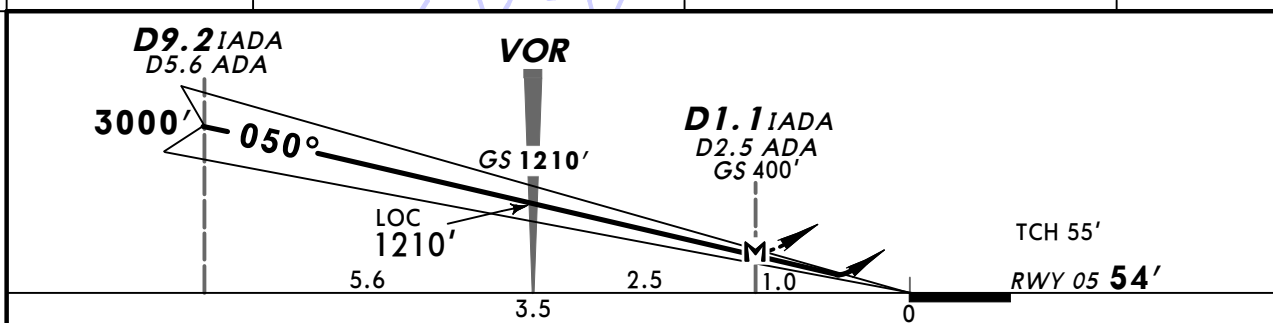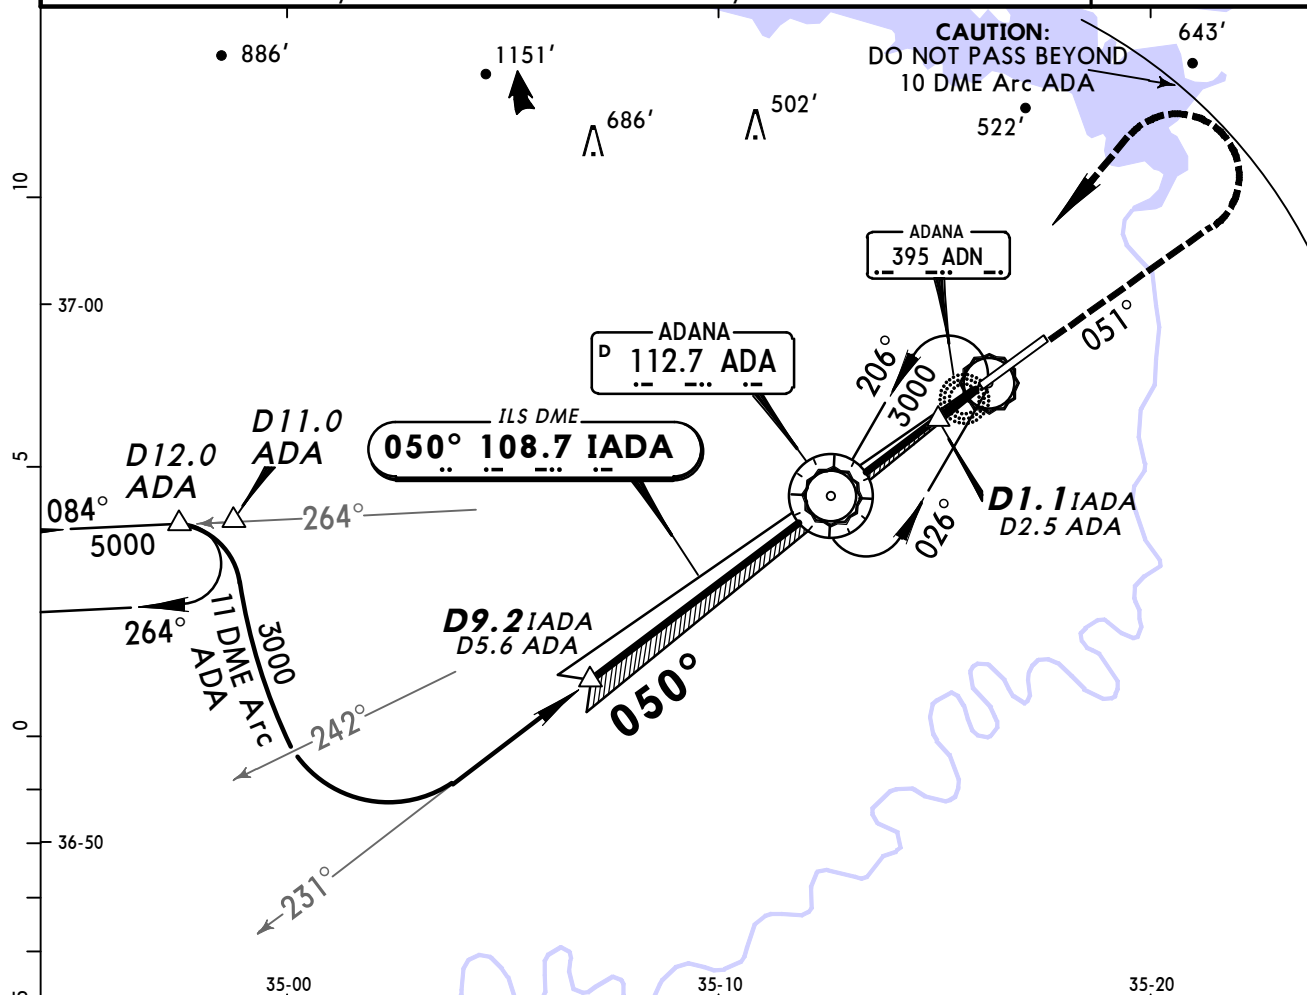

Gnd speed-Kts	70	90	100	120	140	160	HIALS REIL PAPI PAPI	1000' ADA D10.0
ILS GS or LOC Descent Angle 3.00°	372	478	531	637	743	849		on 112.7 within
MAP at D1.1 IADA/D2.5 ADA								R-051 ADA

STRAIGHT-IN LANDING RWY 05					CIRCLE-TO-LAND CAUTION: Not authorized South of airport, or by ATC	
ILS DA(H) 304' (250')			LOC (GS out) MDA(H) 400' (346')		Max Kts	
FULL	Limited	ALS out		ALS out		
A				RVR 1500m	100	1200' (1135') 4800m
B					135	
C	RVR 550m	RVR 750m	RVR 1300m	RVR 900m	180	1200' (1135') 5000m
D				RVR 1600m	205	

CHANGES: Minimums.




© JEPPESEN, 1998, 2013. ALL RIGHTS RESERVED.

LTAF/ADA
ADANA

JEPPESEN
8 MAR 13 (23-1)

ADANA, TURKEY
VOR DME-1 Rwy 05

ATIS 119.22	INCIRLIK Approach (R) 126.5 118.0	ADANA Tower 131.1 121.1	Ground 121.9
VOR ADA 112.7	Final Apch Crs 051°	Minimum Alt D5.0 2000' (1946')	MDA(H) 360' (306')
Apt Elev 65' RWY 54'			
MISSED APCH: Climb on R-051 to 1000' within D10.0, then turn LEFT and climb to cross VOR at 3000' and hold.			
Alt Set: hPa	Rwy Elev: 2 hPa	Trans level: By ATC	Trans alt: 10000'

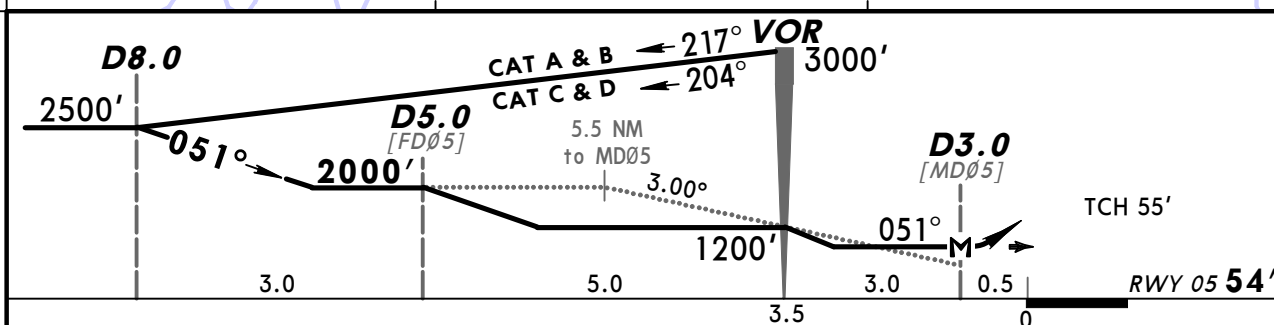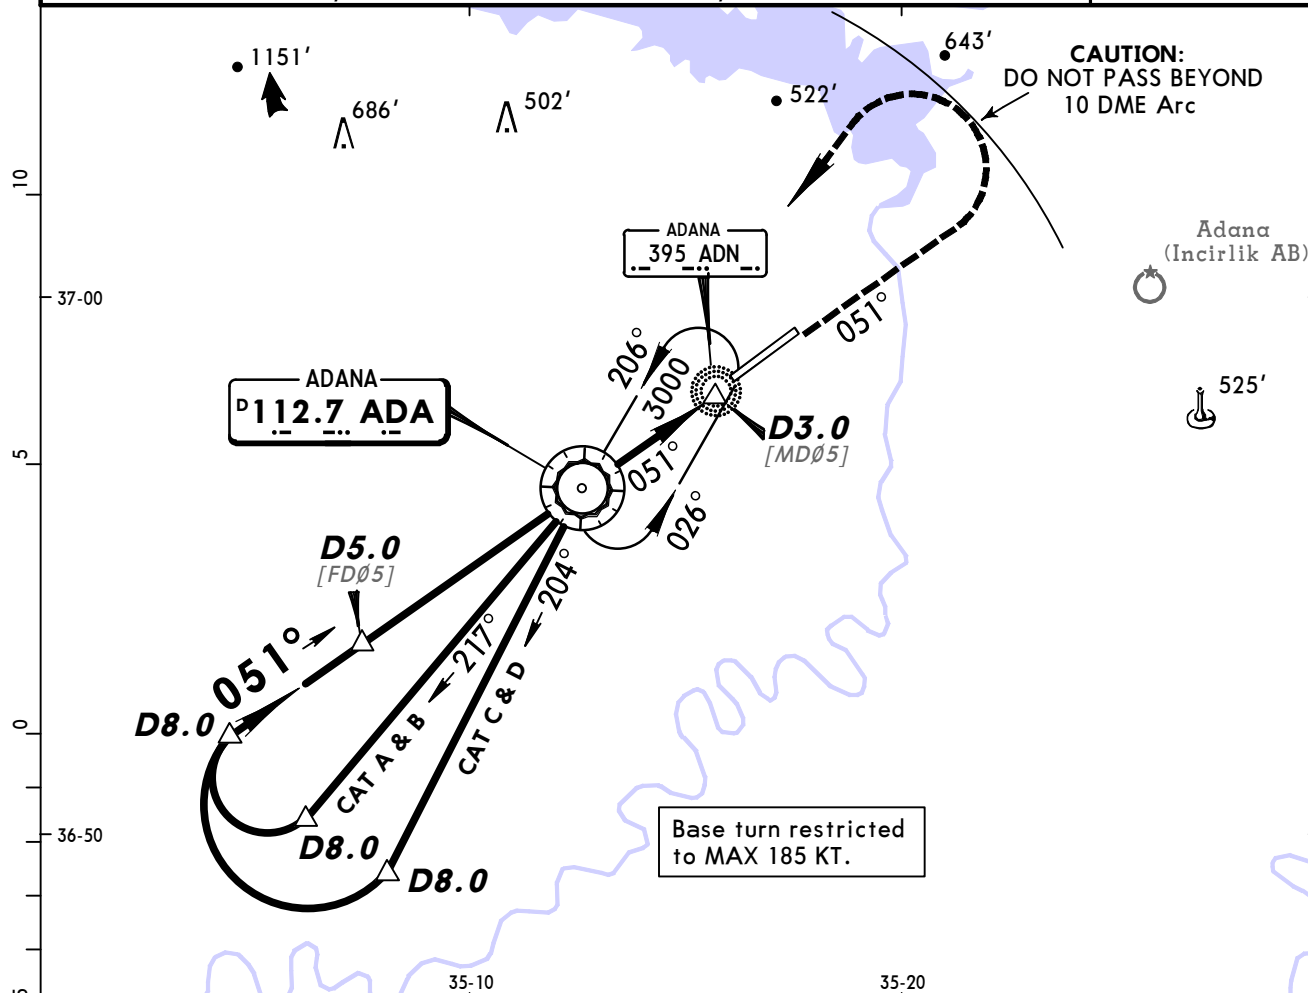

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 3.00°	372	478	531	637	743	849
MAP at D3.0						

Standard			STRAIGHT-IN LANDING RWY 05			CIRCLE-TO-LAND		
			CDFA/non-CDFA			CAUTION:		
			MDA(H) 360' (306')			Not authorized South of airport, or by ATC		
			ALS out			Max Kts		
A	1000m		1700m			100	1200' (1135')	
B						135	4800m	
C	1200m		1900m			180	1200' (1135')	
D						205	5000m	

CHANGES: Tower frequency.




© JEPPESEN, 1997, 2013. ALL RIGHTS RESERVED.

LTAF/ADA ADANA

JEPPesen
8 MAR 13 (23-2)

ADANA, TURKEY
VOR DME-2 Rwy 05

ATIS 119.22	INCIRLIK Approach (R) 126.5 118.0	ADANA Tower 131.1 121.1	Ground 121.9
VOR ADA 112.7	Final Apch Crs 051°	Minimum Alt D5.0 2000' (1946')	MDA(H) 360' (306')
Apt Elev 65' RWY 54'			
MISSED APCH: Climb on R-051 to 1000' within D10.0, then turn LEFT to VOR at 3000' and hold.			
Alt Set: hPa	Rwy Elev: 2 hPa	Trans level: By ATC	Trans alt: 10000'

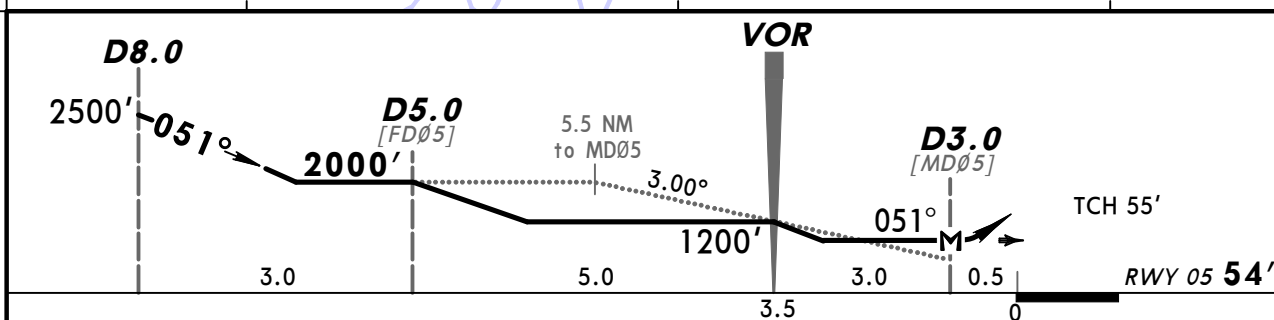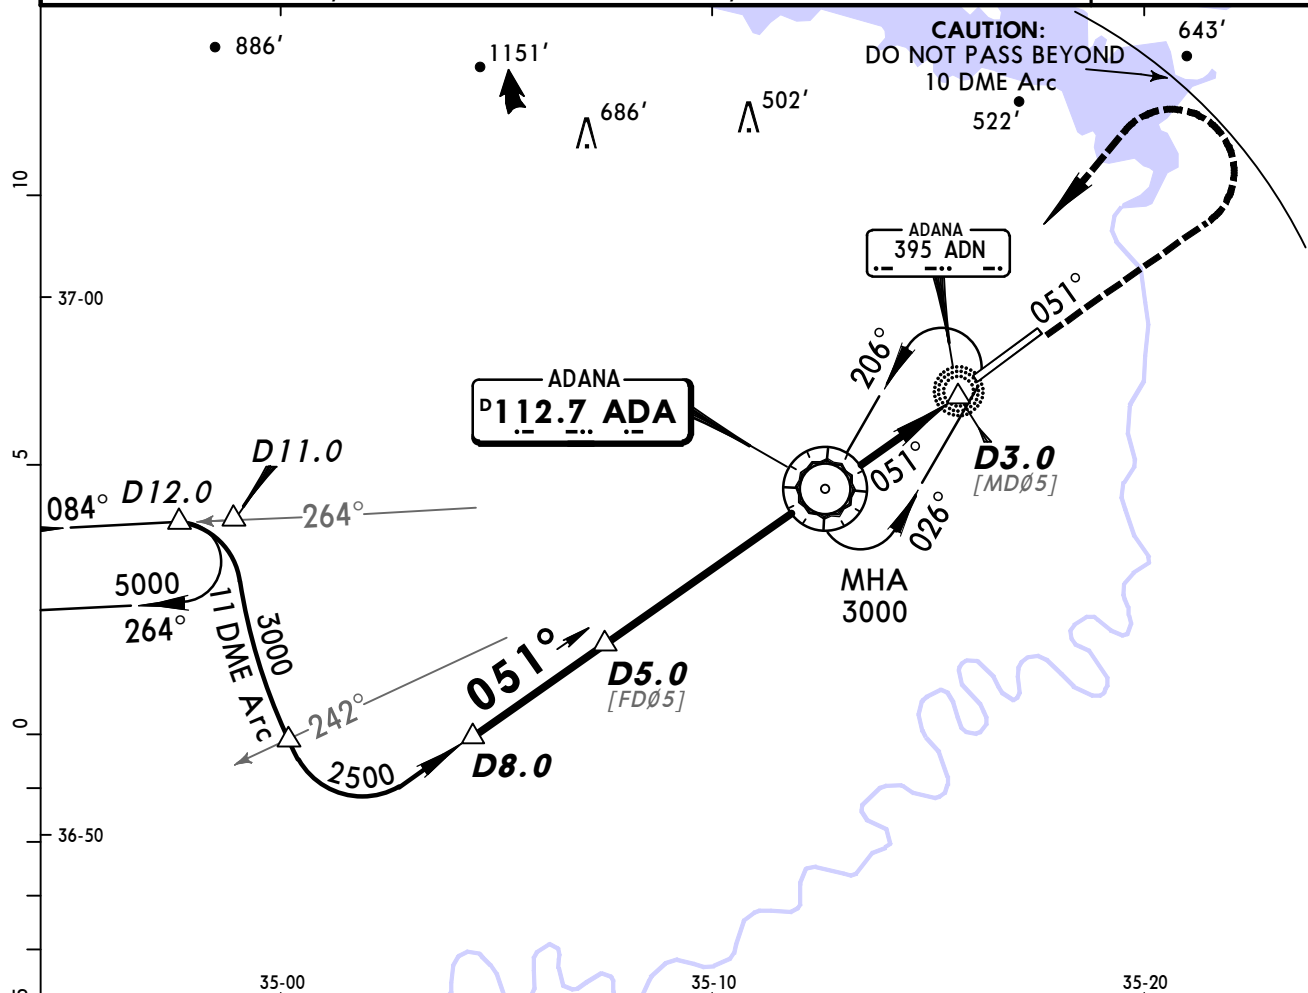




Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 3.00°	372	478	531	637	743	849
MAP at D3.0						

Standard			STRAIGHT-IN LANDING RWY 05			CIRCLE-TO-LAND CAUTION: Not authorized South of airport, or by ATC		
			CDFA/non-CDFA					
			MDA(H) 360' (306')					
			ALS out			Max Kts	MDA(H)	VIS
A	1000m		1700m			100	1200' (1135')	4800m
B						135		
C	1200m		1900m			180	1200' (1135')	5000m
D						205		


CHANGES: Tower frequency.

© JEPPESEN, 1998, 2013. ALL RIGHTS RESERVED.

ATIS 119.22	INCIRLIK Approach (R) 126.5 118.0	ADANA Tower 131.1 121.1	Ground 121.9
VOR ADA 112.7	Final Apch Crs 051°	Minimum Alt No FAF	MDA(H) 1200' (1135')
Apt Elev 65'			
MISSED APCH: Climb on R-051 to 2000', then climbing turn LEFT to VOR at 3000' and hold.			
Alt Set: hPa	Apt Elev: 2 hPa	Trans level: By ATC	Trans alt: 10000'

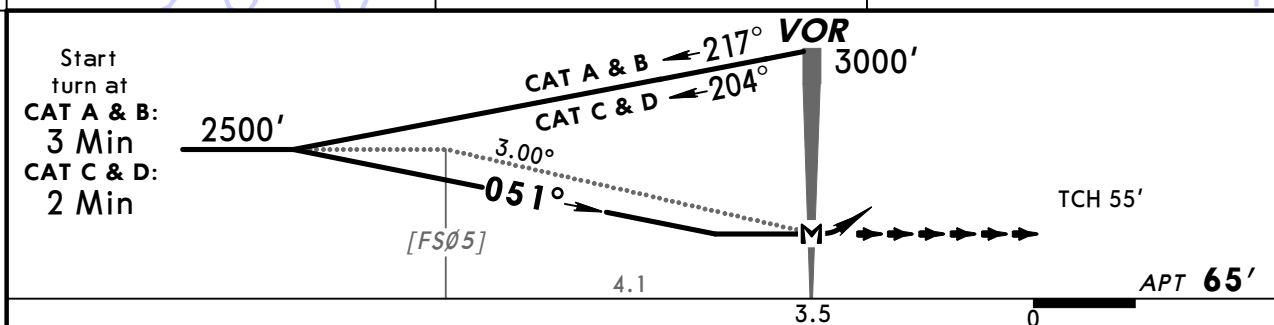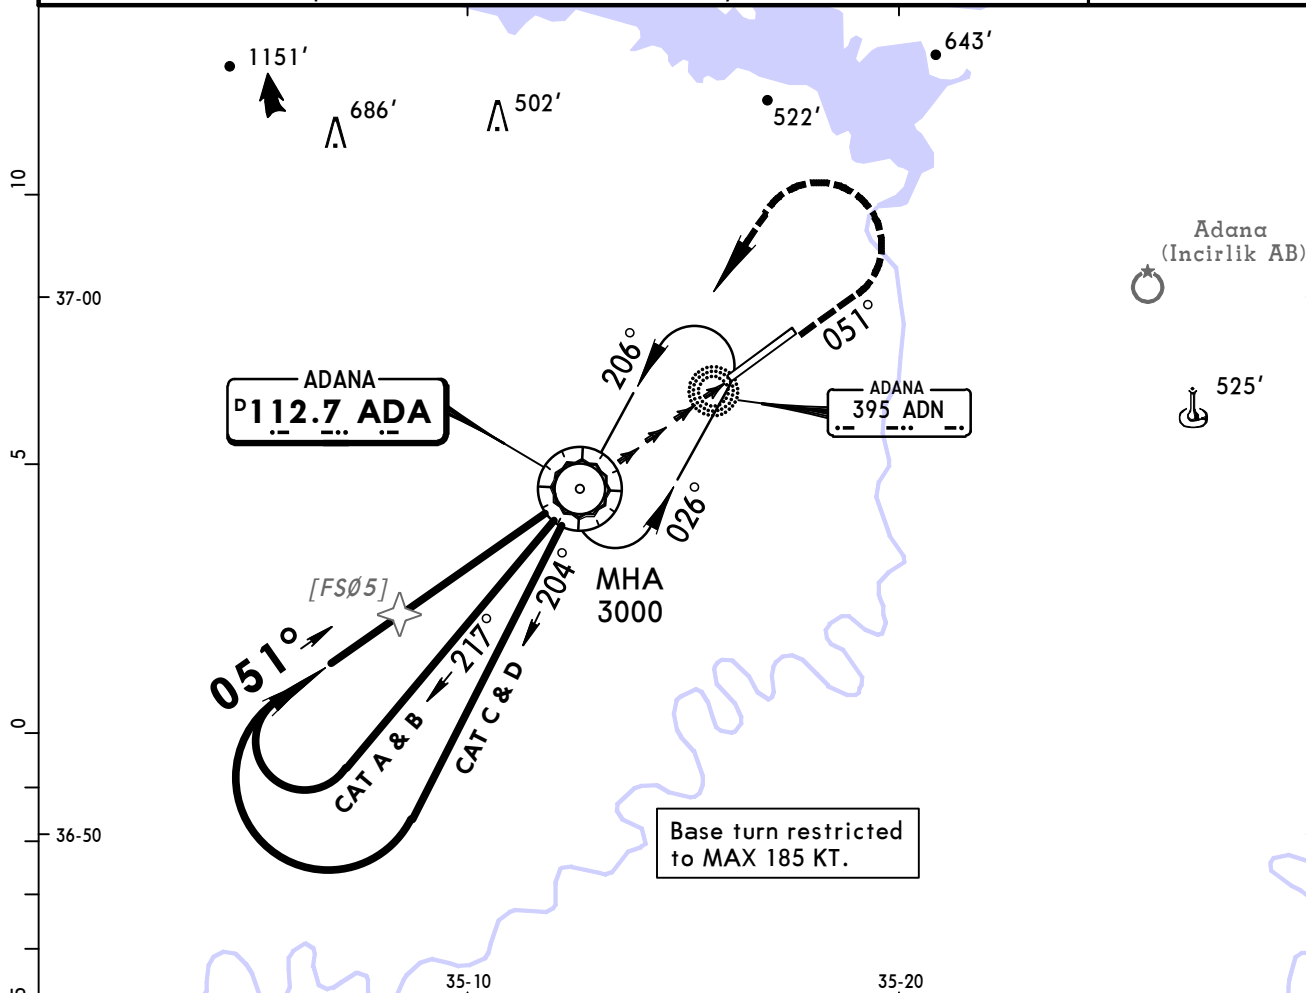

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 3.00°	372	478	531	637	743	849
MAP at VOR						





STRAIGHT-IN LANDING RWY 05				CIRCLE-TO-LAND CAUTION: Not authorized South of airport, or by ATC	
CDFA		non-CDFA		MDA(H) _____ VIS _____	
MDA(H) 1200' (1135')		MDA(H) 1200' (1135')		1200' (1135') 5000m	
ALS out		ALS out			
A	3700m	4400m	4800m	5000m	
B					
C	4800m	5000m	5000m		
D					

PANS OPS

BRIEFING STRIP

ATIS		INCIRLIK Approach (R)		ADANA Tower		Ground	
119.22		126.5 118.0		131.1 121.1		121.9	
VOR ADA 112.7	Final Apch Crs 228°	Minimum Alt D12.0 2500' (2435')	MDA(H) 1200' (1135')	Apt Elev 65'			
MISSED APCH: Proceed to VOR climbing to 3000' and hold. If unable to reach 3000' at VOR intercept R-228 and climbing to 2500', then turn LEFT and proceed to VOR climbing to 3000' and hold.							
Alt Set: hPa		Apt Elev: 2 hPa		Trans level: By ATC		Trans alt: 10000'	




MSA
ADA VOR

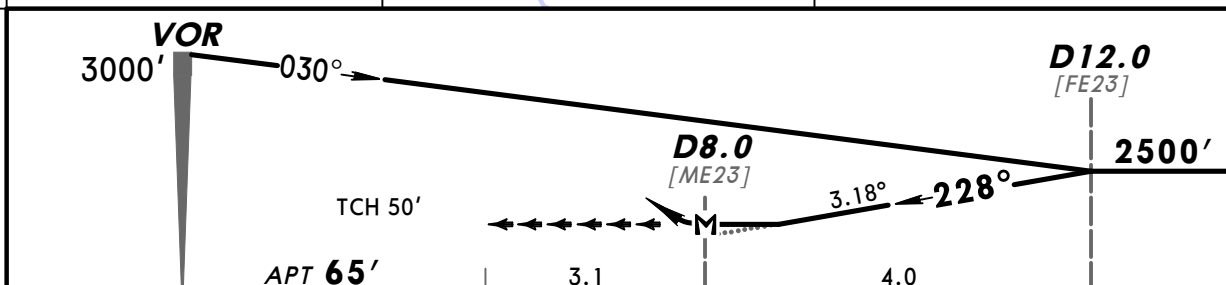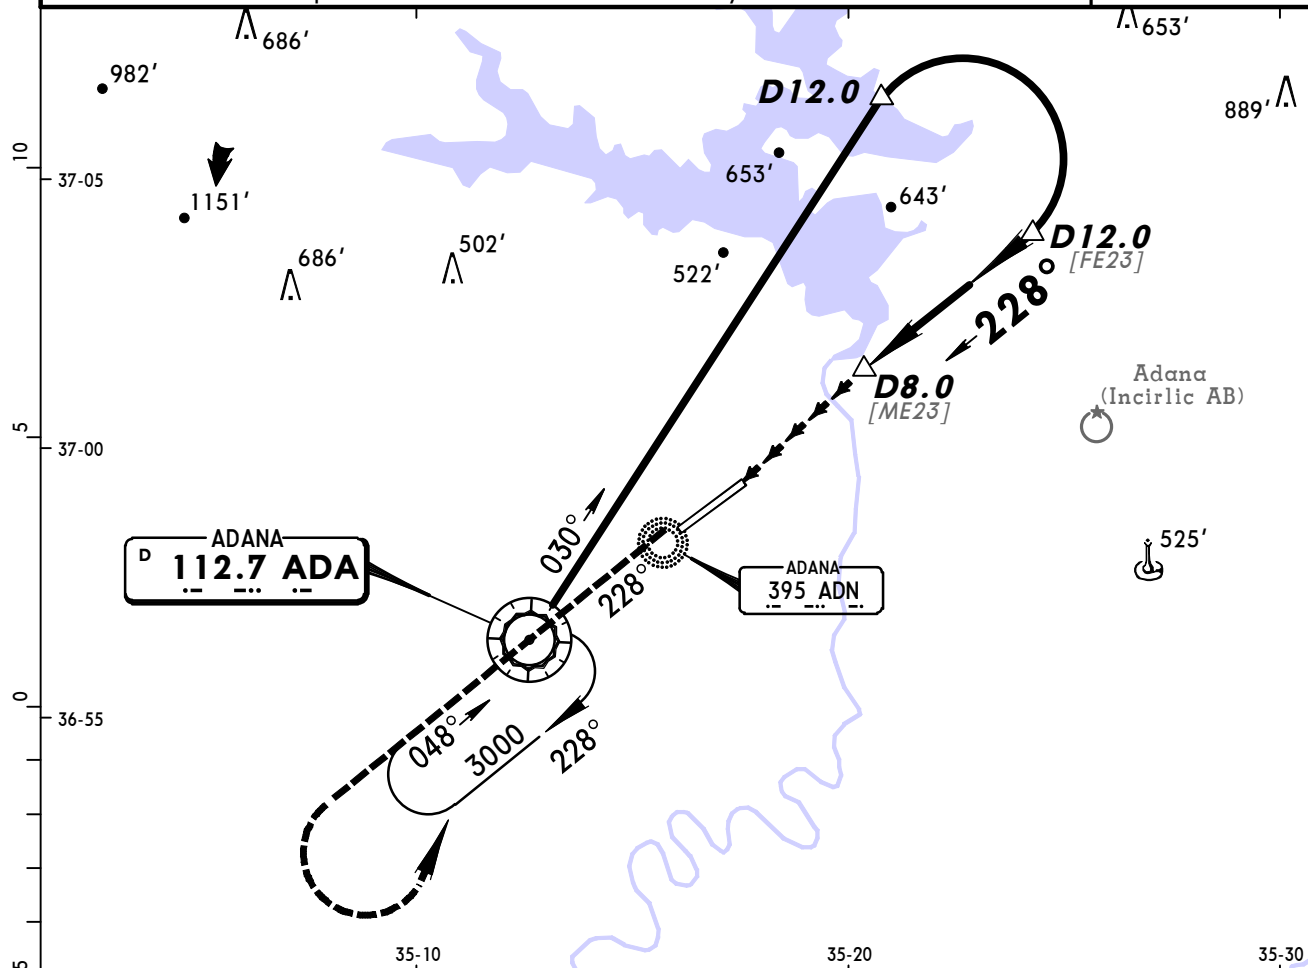



Gnd speed-Kts	70	90	100	120	140	160	Lighting - Refer to Airport Chart	3000' ↑	ADA 112.7
Descent Angle 3.18°	394	506	563	675	788	900			
MAP at D8.0									

Standard STRAIGHT-IN LANDING						CIRCLE-TO-LAND CAUTION: Not authorized South of airport, or by ATC			
NOT AUTHORIZED						Max Kts	MDA(H)	VIS	
						100	1200' (1135')	4800m	
						135			
						180	1200' (1135')	5000m	
						205			

ATIS 119.22	INCIRLIK Approach (R) 126.5 118.0	ADANA Tower 131.1 121.1	Ground 121.9
NDB ADN 395	Final Apch Crs 050°	Minimum Alt No FAF	MDA(H) 480' (426')
Apt Elev 65' RWY 54'			
MISSED APCH: Climb on 050° from NDB to 1000', then climbing turn LEFT to NDB at 3000' and hold.			
Alt Set: hPa	Rwy Elev: 2 hPa	Trans level: By ATC	Trans alt: 10000'

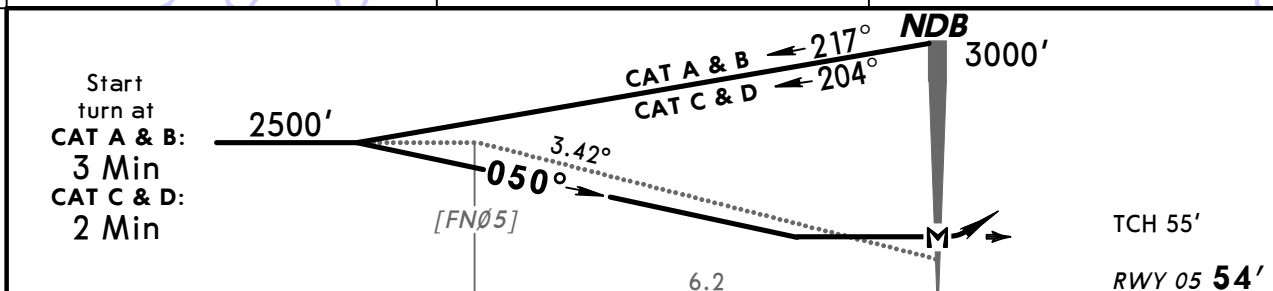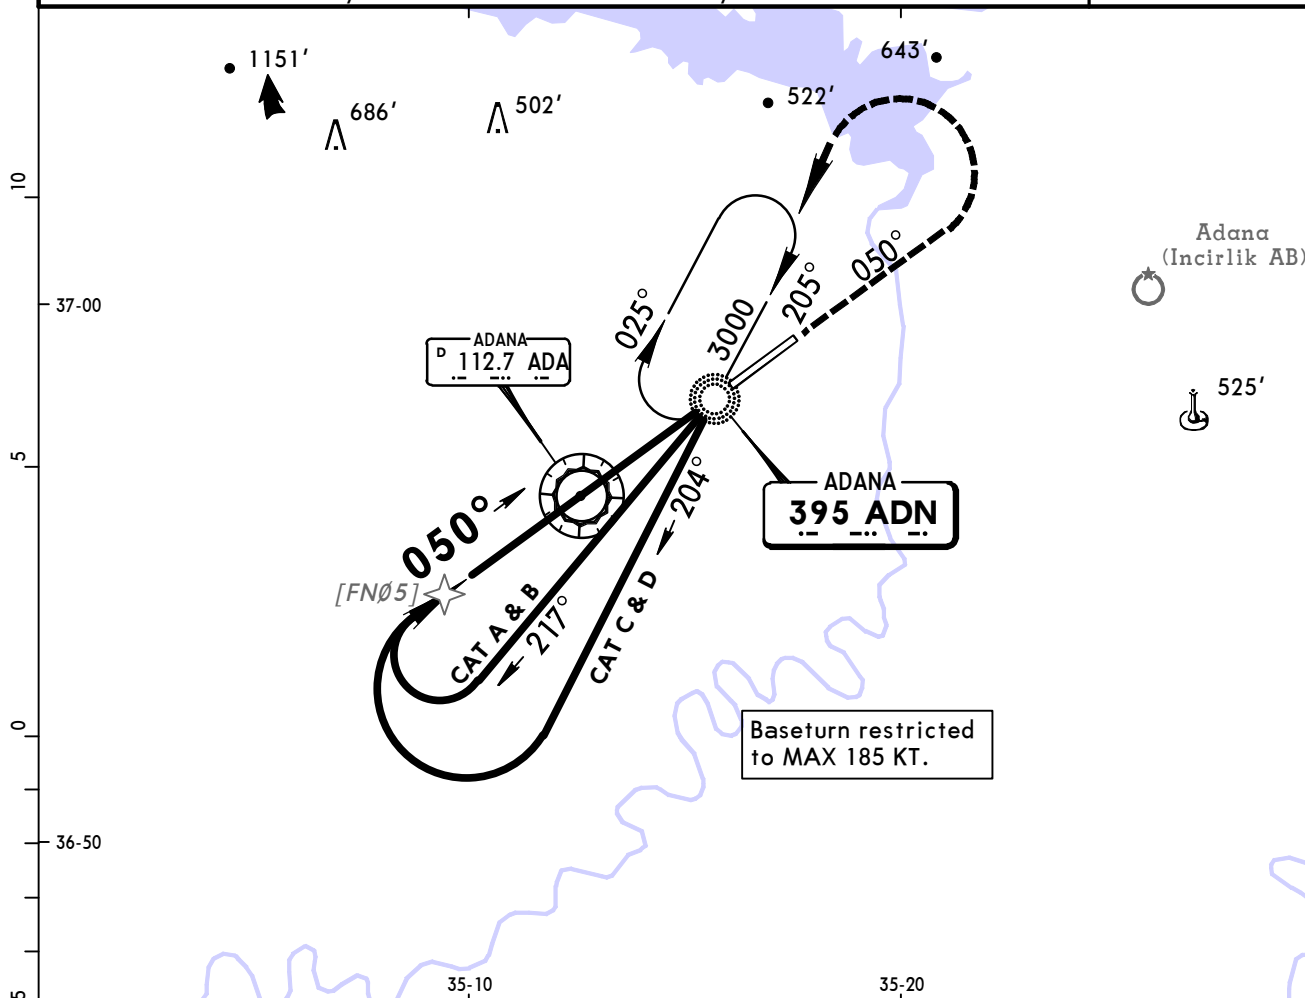

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 3.42°	424	545	605	726	847	968
MAP at NDB						



STRAIGHT-IN LANDING RWY 05				CIRCLE-TO-LAND CAUTION: Not authorized South of airport, or by ATC	
CDFA		non-CDFA		Max Kts	
MDA(H) 480' (426')		MDA(H) 480' (426')			
	ALS out		ALS out		
A	1300m	1700m	1500m	100	1200' (1135') 4800m
B				135	
C	1500m	2200m	1700m	180	1200' (1135') 5000m
D				205	

PANS OPS

Chart changes since cycle 14-2013

ADD = added chart, REV = revised chart, DEL = deleted chart.

ACT	PROCEDURE IDENT	INDEX	REV DATE	EFF DATE
ADANA, (ADANA - LTAF)				

TERMINAL CHART CHANGE NOTICES

No Chart Change Notices for Airport LTAF